

EGGS: A Flexible Approach to Relational Modeling of Social Network Spam

Jonathan Brophy and Daniel Lowd

Department of Computer Science
University of Oregon
{jbrophy,lowd}@uoregon.edu

Abstract

Social networking websites face a constant barrage of spam, unwanted messages that distract, annoy, and even defraud honest users. These messages tend to be very short, making them difficult to identify in isolation. Furthermore, spammers disguise their messages to look legitimate, tricking users into clicking on links and tricking spam filters into tolerating their malicious behavior. Thus, some spam filters examine relational structure in the domain, such as connections among users and messages, to better identify deceptive content. However, even when it is used, relational structure is often exploited in an incomplete or ad hoc manner.

In this paper, we present Extended Group-based Graphical models for Spam (EGGS), a general-purpose method for classifying spam in online social networks. Rather than labeling each message independently, we group related messages together when they have the same author, the same content, or other domain-specific connections. To reason about related messages, we combine two popular methods: stacked graphical learning (SGL) and probabilistic graphical models (PGM). Both methods capture the idea that messages are more likely to be spammy when related messages are also spammy, but they do so in different ways – SGL uses sequential classifier predictions and PGMs use probabilistic inference. We apply our method to four different social network domains. EGGS is more accurate than an independent model in most experimental settings, especially when the correct label is uncertain. For the PGM implementation, we compare Markov logic networks to probabilistic soft logic and find that both work well with neither one dominating, and the combination of SGL and PGMs usually performs better than either on its own.

Introduction

Social spam (Chu, Widjaja, and Wang 2012) is any unsolicited or unwanted action by a user in a social network. Many methods have been developed to detect spam based on the content of the messages themselves (Blanzieri and Bryl 2008; Costa et al. 2013; Ferragina, Piccinno, and Santoro 2015; Liu et al. 2016; Ma, Sun, and Cong 2013; Wang and Pu 2015; Xu, Sun, and Javaid 2016;

Copyright © 2020, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

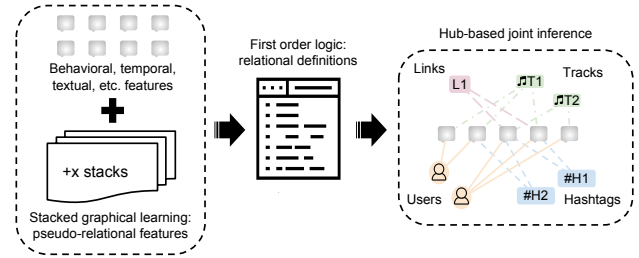


Figure 1: EGGS workflow, with example relational rules (right).

Zhang, Zhu, and Liang 2012), the graph structure among users and messages (Akoglu, Chandy, and Faloutsos 2013; Boykin and Roychowdhury 2005; Fakhraei et al. 2015; Ghosh et al. 2012; O’Callaghan et al. 2012; Rayana and Akoglu 2015), the timing of user actions (Fei et al. 2013; Stringhini, Kruegel, and Vigna 2010; Tan et al. 2013; Viswanath et al. 2014; Wang and Pu 2015; Zhu et al. 2012), and more. This works well when there are clear patterns that distinguish spam from non-spam, but can fail when spammers obfuscate their behavior. A complementary approach is to exploit relationships among different users and messages, so that known spammers and spam can be used to identify other spammers and spam (Akoglu, Chandy, and Faloutsos 2013; Fakhraei et al. 2015; Li et al. 2014a; Rayana and Akoglu 2015; Laorden et al. 2011; Chen, Tan, and Jain 2009; Wu et al. 2015). This works well when there are strong predictive relationships linking entities, such as textual similarity among messages or friendship in a social network, but can fail when spammers start new campaigns that are not connected to previously known ones.

In this paper, we integrate these ideas into a flexible method for classifying social spam: Extended Group-based Graphical models for Spam (EGGS). EGGS begins with predictions from an independent classifier, which can use any number of domain-appropriate features. To incorporate relationships among different messages, EGGS defines groups of related messages that have the same author, the same text, or other domain-specific similarities such as the same hashtags. A message can be in multiple groups represent-

ing different types of relationships. Related messages are more likely to have the same label, although this probability may depend on the type of relationship. EGGS models these relationships with a probabilistic graphical model, using one of four different approaches: stacked graphical learning (SGL) (Kou and Cohen 2007), Markov logic networks (MLNs) (Richardson and Domingos 2006), probabilistic soft logic (PSL) (Bach et al. 2015), or a new combination of SGL with either MLNs or PSL (Figure 1). We show that this integrated approach can accurately detect spam on large real-world datasets for multiple domains, requiring very few modifications.

In spite of the breadth of prior work in this area, most other methods fall short in one of three ways:

- They’re *specialized for another domain*, such as detecting fake reviews or auction fraud. Social spam has its own structures which are distinct from other adversarial domains. Nonetheless, we can still generalize among different social spam domains. In Section , we introduce a general framework for social spam and apply it to SoundCloud, Twitter, YouTube, and Wikipedia.
- They *ignore content and other features*, and only use the relational structure plus a small number of known labels. In Section , we show that new social spam is often unconnected to previously seen spam, and that social spam forms many distinct connected components. This means that labels on the training data or a small number of labels in the test data will not cover most spam.
- They *ignore relational structure* and make predictions for each message independently. Our empirical results show that exploiting relational structure can lead to substantially improved performance over independent predictions.

Our primary contributions are EGGS, a flexible method for social network spam that overcomes all three of the above limitations, and the application and evaluation of EGGS on three different domains. As secondary contributions, we show that stacked graphical learning can be combined with other probabilistic models for improved performance, and that relational modeling can scale to large domains using simple methods.

Related Work

We give a brief overview of the many techniques used to detect spam from both independent and relational perspectives.

Spam Detection

Much of the work done on social spam filtering involves an analysis of some narrow set of specific independent features. Bag-of-words models have been popular ever since the rise of email spam, and continue to see use in Youtube and Twitter models (Song, Lau, and Yin 2014; Mateen et al. 2017; Xu, Sun, and Javaid 2016). Word embeddings (Savigny and Purwarianti 2017) and LDA topic modeling (Song, Lau, and Yin 2014) have also been effective. Numerous works focus on URLs (Benevenuto et al. 2010; Mateen et al. 2017; Ghosh et al. 2012; Wang and Pu 2015; Gao et al. 2012;

Stringhini, Kruegel, and Vigna 2010; Wang 2010; Chu, Widjaja, and Wang 2012), while others look at hashtags (Mateen et al. 2017; Ferragina, Piccinno, and Santoro 2015; Ma, Sun, and Cong 2013; Sedhai and Sun 2015; Wang 2010; Chu, Widjaja, and Wang 2012) and mentions (Mateen et al. 2017; Wang 2010; Chu, Widjaja, and Wang 2012). Each of these have unique advantages, but they can all be seen as content-related features, derived directly from the messages themselves.

User-based features attempt to characterize the behavior of a user in the network with the hope that this will distinguish normal users from malicious ones. A popular approach is to capture the ‘burstiness’ of user activity (Fei et al. 2013; Gao et al. 2012; KC and Mukherjee 2016; Li et al. 2017; Song, Lau, and Yin 2014; Viswanath et al. 2014). Other approaches look at the number of follows (Mateen et al. 2017; Benevenuto et al. 2010), the types and sequences of user actions (Fakhraei et al. 2015; Viswanath et al. 2014), the ratio of different types of messages users send (Gao et al. 2012), and account profiles (Mateen et al. 2017; Chu, Widjaja, and Wang 2012). Graph-based features are conceptually a subset of user-based features, and are derived specifically from a directed graph built using user interactions (e.g. one user following another) on which graph features such as pagerank, betweenness, in/out degree, etc. are computed (Mateen et al. 2017; Fakhraei et al. 2015; Gao et al. 2012; Wang and Pu 2015; Wang 2010). Similarly, works such as *CopyCatch* (Beutel et al. 2013), *CatchSync* (Jiang et al. 2014), *Fraudar* (Hooi et al. 2016), and *Gang* (Wang 2010) use the subgraph density of the graph topology to detect anomalous behavior.

Many of these works use a combination of approaches mentioned above, and Mateen et al. (Mateen et al. 2017) investigate a more comprehensive hybrid approach combining features from all three categories to detect spam on Twitter.

Collective Filtering

The works by Pandit et al. and Akoglu et al. (Pandit et al. 2007; Akoglu, Chandy, and Faloutsos 2013), *NetProbe* and *FraudEagle*, use Markov random fields (MRFs) with belief propagation (BP) to detect fraudsters on eBay and the Software Market App Store using only the network structure of users and products, with the edges between them representing positive or negative reviews (Jindal and Liu 2007); Akoglu et al. (Rayana and Akoglu 2015) expand upon this with *SpEagle*, generating unsupervised priors for users and products to propagate in the network structure. Li et al. (Li et al. 2014a) use iterative classification (ICA) between review, user, and IP nodes to detect spammers on Dianping, a network similar to Yelp. These are all unsupervised methods, which are especially useful for detecting opinion spam (Jindal and Liu 2007) because true labels are often difficult to obtain for this problem domain; this has the added benefit of not having to train an additional supervised classifier on separate data to generate priors to propagate. For social spam, labeled training data is more prevalent, allowing us to build more powerful priors using supervised classifiers, which are then propagated by our relational methods.

Works on social spam, such as Duan et al. (Duan et al.

2012), experiment using ICA, BP, and relaxation labeling on the message-message graph connected by similar URLs and hashtags to classify topics on a small Twitter dataset. Li et al. (Li et al. 2014b) use typed MRFs, connecting users with URLs and tweet bursts to spot spam campaign promoters on Twitter. Fakhraei et al. (Fakhraei et al. 2015) leverage user reports using PSL to find spammers in the on-line dating network IfWe; however, the relational rules were only relevant to a small proportion of users, reducing the effectiveness of joint reasoning. Castillo et al. (Castillo et al. 2007) use stacked graphical learning (SGL) to introduce one new relational feature in addition to their original features to better detect spam hosts on the *Webspam-UK2006* dataset.

Matrix factorization methods are a complementary approach. Zhu et al. (Zhu et al. 2012) encode user-user relations from different user interaction types using collective matrix factorization (Singh and Gordon 2008) to detect spammers on RenRen. Shen et al. (Shen and Liu 2015) extend this by adding a social interaction coefficient to spot spammers on Twitter. Chen et al. (Chen, Tan, and Jain 2009) tackle the spam and spammer problems simultaneously using relations between users and bookmarks on the website: delicious.com. Wu et al. (Wu et al. 2015) take the same approach but use different relations (user-user, user-message, and message-message connected by URLs and hashtags) to work on the platform Sina Weibo.

Methodology

We now introduce Extended Group-based Graphical models for Spam (EGGS), our framework for detecting social network spam. The basic approach is to predict the label of each message using standard classification methods, and then refine those predictions using relational reasoning methods on groups of related messages. EGGS is not a single, monolithic method, but a general approach that can incorporate any domain-specific features and relations, any type of classifier, and any type of probabilistic graphical model. In the following, we describe a set of features and methods that work well for detecting social network spam in several domains.

Independent Modeling

We begin with a standard classifier, which we refer to as the “independent model,” since it makes predictions for each message separately. We highlight engineered features shown to work well for spam classification in social networks based on previous research. In addition to the features listed here, it is easy to extend our method to add others for different domains.

Content-based Features We use the text of each message to generate content-based features such as: the number of characters, hashtags, links, and the top 10,000 tri-grams (selected based on term frequency) used as binary features (Table 1: Content).

User-based Features We aggregate user actions (although any relevant entity in the domain may be used: users,

URLs, tracks, videos, hashtags) to create user-based features (Table 1: User). Features are computed in sequential order of messages based on their timestamp. For example, when computing the feature *UserUploads* for message #100 posted by user x , we record the number of tracks uploaded by user x up until message #100. This creates a more realistic scenario as features are computed only based on previous messages.

Graph-based Features As done in prior work (e.g., (Fakhraei et al. 2015)), we create graph features using a list of follower actions. We can represent this list of affiliations as a graph, where we construct a node for every user in the list, and add a directed edge from user x to user y whenever user x starts to follow user y . Then we compute the following features on the resulting graph: *Pagerank* (Page et al. 1999), *Triangle count* (Schank and Wagner 2005), *K-core* (Alvarez-Hamelin et al. 2006), *In/Out-degree* (Newman, Strogatz, and Watts 2001) (Table 1: Graph). Each feature represents a different aspect of connectivity for a user to the community, and capitalizes on the assumption that spammers tend to be less connected than non-spammers (Fakhraei et al. 2015), or more connected with other suspicious users.

Table 1: Independent Model Features

Content	
<i>NumChars</i>	# chars in msg (Sanchez et al. 2011)
<i>NumHashtags</i>	# hashtags in msg (Mateen et al. 2017)
<i>NumLinks</i>	# links in msg (Gao et al. 2012).
<i>NumMentions</i>	# mentions in msg (Chu et al. 2012).
<i>IsRetweet</i>	1 if msg is a retweet (Jiang et al. 2011).
<i>Polarity</i>	Msg. polarity (Sanchez et al. 2011).
<i>Subjectivity</i>	Msg. subjectivity (Sanchez et al. 2011).
<i>N-grams</i>	Top 10,000 tri-grams (Song et al. 2014).
User	
<i>UMsgs</i>	# msgs posted per user (Mateen et al. 2017).
<i>UHRatio</i>	Frac. user msgs w/ a # (Mateen et al. 2017).
<i>UMRatio</i>	Frac. user msgs w/ a @ (Chu et al. 2012).
<i>ULRatio</i>	Frac. user msgs w/ a URL (Gao et al. 2012).
<i>UBlacklist</i>	1 if user posts 3+ spam (Chu et al. 2012).
<i>UWhitelist</i>	1 if user posts 10+ ham (Chu et al. 2012).
<i>UMsgMax</i>	Max msg len by user (Sanchez et al. 2011).
<i>UMsgMin</i>	Min msg len by user (Sanchez et al. 2011).
<i>UMsgMean</i>	Avg msg len by user (Sanchez et al. 2011).
<i>TMsgs</i>	# msgs per track.
Graph	
<i>Pagerank</i>	Pagerank of each node in the follower graph G (Page et al. 1999).
<i>TriCnt</i>	# triangles per node (Schank et al. 2005).
<i>KCore</i>	Iteration node is pruned (Alvarez et al 2006).
<i>InDegree</i>	# edges entering node (Newman et al. 2001).
<i>OutDegree</i>	# edges leaving node (Newman et al. 2001).

Relational Modeling

EGGS uses several types of relational modeling, separately or in combination, to improve on the independent model.

Table 2: Stacking Features

<i>MMSRatio</i>	Fraction of spammy matching messages.
<i>USRatio</i>	Fraction of spammy messages per user.
<i>TSRatio</i>	Fraction of spammy messages per track.
<i>HSRatio</i>	Fraction of spammy messages per hashtag.
<i>MSRatio</i>	Fraction of spammy messages per mention.
<i>LSRatio</i>	Fraction of spammy messages per link.
<i>HSRatio</i>	Fraction of spammy messages per user hashtag.

Stacked Graphical Learning SGL (Kou and Cohen 2007) is a simple approach for performing collective classification, in which the label of each entity depends on the labels of its neighbors. Since the true labels of the neighbors are often unknown, SGL first uses an independent classifier to predict the label of every entity. The predicted labels can then be used to derive features for a second classifier, which makes a refined prediction for each entity. This process can be repeated multiple times, “stacking” classifiers on top of classifiers to any depth.

We apply this idea to social network spam by defining “pseudo-relational” features, each of which summarizes the predicted labels of related messages (Table 2). For example, “USRatio” is the fraction of messages written by the same user which are predicted to be spam. Since most spammers send multiple spam messages, a higher value of USRatio indicates that the message is more likely to be spam. We create pseudo-relational features based on each relation, contrary to the previous application of SGL on web-spam where they create only one additional feature: the average predicted label of its neighbors. The learning procedure is similar to previous approaches (Castillo et al. 2007; Kou and Cohen 2007), except we use a holdout method instead of cross-validation when building the sub-model for each stack (Figure 2).

Using K stacks, we evenly split the training data $D = \bigcup_{k=0}^K D^k$, and train a base model f^0 on $D^0 = (X_g^0, y^0)$, where X_g^0 are the original features for D^0 . Each subsequent submodel f^k trains on D^k with additional pseudo-relational features:

$$f^k = \begin{cases} \text{train}(X_g^k, y^k) & k = 0 \\ \text{train}(X_g^k + X_{p_{k-1}}^k, y^k) & k > 1 \end{cases}$$


$X_{p_k}^j$ are pseudo-relational features for D^j using predictions from f^k , which we can define as a function of X_g^j and $\hat{y}_k^j$ (predictions for D^j from f^k):

$$X_{p_k}^j = S(X_g^j, \hat{y}_k^j)$$

where

$$\hat{y}_k^j = \begin{cases} f^k(X_g^j) & j > 0, k = 0 \\ f^k(X_g^j + S(X_g^j, \hat{y}_{k-1}^j)) & j > 1, k > 0, k < j \end{cases}$$

Then given test data, X' , inference is the same as the original SGL (Kou and Cohen 2007):

Figure 2: Stacked graphical learning with K stacks using the holdout method.

$$\hat{y}_0' = f^0(X_g')$$

For $k = 1 \dots K$:

$$X_{p_k}' = S(X_g', \hat{y}_{k-1}')$$

$$\hat{y}_k' = f^k(X_g' + X_{p_k}')$$

return $\hat{y}_k'$

This holdout method builds submodels in sequential order of the data, while also computing the pseudo-relational features in sequential order. This makes the problem more realistic since we do not ignore the temporal component of the data, contrary to the cross-validation technique. However, this comes with a cost; the cross-validation technique (Castillo et al. 2007; Kou and Cohen 2007) trains each submodel on the entire training set. Thus, more stacks generally does not decrease performance. In our case, the higher K becomes, the less data each submodel has to train on, introducing the possibility of underfit models. In practice, we find that 1-2 stacks works best, which is consistent with previous works (Castillo et al. 2007; Kou and Cohen 2007; Fast and Jensen 2008).

Flexible Joint Inference Statistical relational learning (SRL) has developed various methods for doing collective classification (Getoor 2007), most promisingly using probabilistic graphical models (PGMs). We experiment with Markov logic networks (MLNs) (Richardson and Domingos 2006) and probabilistic soft logic (PSL) (Bach et al. 2015), both of which use weighted formulas in first-order logic to define a template for a PGM. Like stacking, the goal is to improve the predicted label for each message by reasoning about the labels of related messages. However, instead of a sequential pipeline of classifiers, MLNs and PSL define a joint distribution over all possible labelings and perform probabilistic inference to reason about that distribution.

We use the formulas to capture our intuition about how information should propagate among related messages, and then describe how we use Markov logic and PSL to turn these formulas into a full probabilistic model. Our relational model contains two main components: priors (negative and positive) and relations. The negative prior assumes that all messages are non-spam, while the positive prior gives the model information to propagate (Figure 3 (a,b)). We focus on connecting messages to one another using any relation, but our model may connect entities of any type together, such as users, hashtags, URLs, etc.

The second part defines the relations to exploit from the

$\neg spam(e)$	(a)
$prior(e) \rightarrow spam(e)$	(b)
$hasRel(r, e) \wedge spam(e) \rightarrow spamRel(r)$	(c)
$hasRel(r, e) \wedge spamRel(r) \rightarrow spam(e)$	(d)

Figure 3: Generalized relational model represented as first order logical rules. (a) Negative prior, (b) positive prior, (c, d) hub-based relational rules; e is short for entity (typically messages or users), r is short for relation.

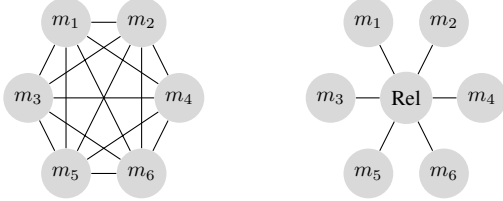


Figure 4: Pairwise connections between related messages (left). Hub approach connecting related messages (right).

network structure, grouping related messages together (Figure 3 (c,d)). Previous work using Markov networks for joint reasoning over a set of related entities typically do so in a direct fashion (Tan et al. 2013). For example, we could have written rules (c) and (d) as:

$$spamRel(e_1, e_2) \wedge spam(e_1) \rightarrow spam(e_2) \quad (1)$$

This type of modeling provides propagation directly from one message to another, but makes it difficult to scale for large groups of related entities. For example, a group of 100 related messages would need $\binom{100}{2}$ edges to take care of every possible interaction. Our concept of a ‘hub node’ essentially creates a hyper-edge from one entity to all related entities (Figure 4). This significantly reduces the number of edges to be linear in the number of related entities. As information starts to propagate, these ‘hub nodes’ become more or less ‘spammy’, which in turn propagates to entities that are difficult to detect at first, but become clear as their connections to other entities are exploited.

We use the outputs of the supervised classifier as positive priors for our joint prediction model, but it is important to note that a message with no relations to any other messages in the dataset will not be affected by this model.

MLN Implementation We first implement our relational model as an MLN, and then convert our MLN into an MRF using the Libra toolkit (Lowd and Rooshenas 2015) since belief propagation in Libra is better optimized than inference in existing MLN implementations. We can convert our MLN formulas into equivalent MRF factor potentials between a message node and a hub node (Table 3), where ϵ is tuned separately for each relation and inference is done using loopy belief propagation, similar to prior work on fraud detection (Pandit et al. 2007; Rayana and Akoglu 2015).

Table 3: Factor Potential Definition per Relation

Hub State	Message State	
	spam	non-spam
spam	$1 - \epsilon$	ϵ
non-spam	ϵ	$1 - \epsilon$

PSL Implementation The second implementation of our relational rules is as a PSL model, which builds a hinge-loss Markov random field (HL-MRF)(Bach et al. 2015): a type of log-linear model that uses hinge loss functions of the variable states as features and can be modeled as a conditional probability distribution as follows (Fakhraei et al. 2015):

$$P(Y|X) = \frac{1}{Z(\omega)} \exp \left(- \sum_{i=1}^n \omega_i \phi_i(X, Y) \right) \quad (2)$$

where ϕ_i is the set of n continuous potentials:

$$\phi_i(X, Y) = [\max\{0, \ell_i(X, Y)\}]^{p_j}, \quad (3)$$

ℓ is a linear function of X and Y , and $p_j \in \{1, 2\}$. We can learn the weights to these rules from data using gradient descent and expectation maximization (Bach et al. 2015).

Both of these models propagate information among the same sets of related messages, but there is an important difference: loopy belief propagation in MLNs can combine uncertain prior probabilities to arrive at more confident posterior probabilities. For example, if n messages all have the same prior of 0.85, their posterior scores can be ‘pushed’ beyond 0.85, and this effect increases as n increases. On the contrary, spam scores in the PSL model stop increasing once their distance to satisfaction specified in (3) reaches zero.

Evaluation

We evaluate the effectiveness of EGGS at finding spam in four social network domains. We use the area under the precision-recall curve (AUPR) as our main metric. AUPR measures the ability to find most of the positive examples (spam) without too many negative examples (non-spam). With highly imbalanced classes, as in our SoundCloud dataset (1.6% spam), AUPR is usually a better way to differentiate between classifiers than alternatives such as area under the ROC curve.

Spam Detection

We evaluate our methods on spam data from three social networks: SoundCloud, YouTube, and Twitter. SoundCloud is an online music sharing network where users can upload original tracks that other users can listen to and comment on. This dataset includes all comments posted from 10/10/2012 to 9/30/2013 on approximately 8M tracks (Table 4). YouTube is a video sharing service similar to SoundCloud. The data¹ was collected from 10/31/2011 to 1/17/2012 with a focus on the most viewed and top-rated videos (O’Callaghan et al. 2012). This dataset contains no user subscription attributes (analogous to followers

¹<http://mlg.ucd.ie/yt/>

Table 4: Basic Statistics per Domain

Entity	SoundCloud	YouTube	Twitter
messages	42,783,305	6,431,471	8,845,979
spam	684,338	481,334	1,722,144
users	5,505,634	2,860,264	4,831,679
spammers	128,016	177,542	843,002
follows	335,000,000	N/A	128,000,000

in SoundCloud and Twitter), as the data collectors were often restricted from this information (O’Callaghan et al. 2012). We use the Twitter *HSpam14 Dataset*², curated from 1/5/2013 to 6/31/2013 with a hashtag-oriented focus (Sedhai and Sun 2015).

Social network spam evolves rapidly, so a method that works well one month may work poorly the next. We incorporate this into our experiments by creating ten test sets for each domain, partitioned chronologically. Predictions from each test set are concatenated into one large test set, on which the AUPR is computed. Different test sets may reflect different spam campaigns, user policy changes for the network, and changing usage patterns among legitimate users over time. For each test set, we use data from the preceding time period for training³. This ensures that each prediction is only made using data from the past, never the future.

SoundCloud is evenly split into ten non-overlapping subsets of roughly 4M messages each (70% training, 1.25% validation, and 28.75% testing). We exploit the following relations between messages: *users* (messages posted by the same user), *text* (messages with similar text), and *links* (messages with similar links). YouTube is split into ten overlapping subsets of roughly 2M messages each (75% training, 2.5% validation, and 28.5% testing). Since this dataset only contains 6.4M messages, these subsets contain some overlap, but the test sets remain mutually exclusive, and we use the following relations: *users* and *text*. Twitter is evenly split into ten non-overlapping subsets of roughly 880K messages (70% training, 6% validation, and 24% testing); we use the following relations: *users*, *text*, and *user hashtags* (hashtags posted by a given user). We learn the weights for our PSL model on the validation data, and pre-tune ϵ in the MRF model for each relation.

Independent Model Performance

We use logistic regression as our independent classifier, since it generally outperformed other methods such as tree ensembles during development. Before testing our relational methods, we perform ablation tests on the independent model to determine which feature sets contribute the most. We test each feature set in isolation and in combination with each other on the first 10% of the data for each domain using 70% for training and tuning, and the remaining 30% for testing (Figure 5). The effectiveness of differ-

ent feature types varies from domain to domain. For SoundCloud, a combination of content, graph, and user features (c+g+u) yields the best results; n-gram features are not very helpful. For YouTube and Twitter, the opposite is true: n-gram features on their own work almost as well as all feature types put together.

Relational Modeling Performance

We perform four sets of experiments to test our relational models’ capability of detecting spam. The ‘full’ experiments use all available features when learning and making predictions. The ‘limited’ experiments exclude some of the most informative features: we remove n-gram features from YouTube and Twitter, and graph features from SoundCloud. This makes the prediction problem more challenging, testing the ability of our relational methods to compensate for limited information. In adversarial settings like spam, it’s common to only have limited or noisy information, since spammers quickly adapt their messages and networks to evade detection.

We also evaluate our models for test instances that have no relational connections to any messages in the training sets (Inductive), in addition to evaluating all test instances (Inductive + Transductive). For SoundCloud, a small number of connected components covers a significant portion of ham and spam messages (Figure 6), but this is less so for YouTube and Twitter, where transductive methods would need more and more known labels to propagate to the increasingly disconnected pockets of related messages.

In all settings, we compare against predictions from the independent model (top row). Then we start to incorporate relational structure, applying our joint inference models to the outputs of the independent model as well as to the relationally augmented independent models, which use up to two levels of stacked learning.

We find that not only can relational modeling improve performance for these domains (Table 5), but in many cases stacked learning and joint reasoning work well together, achieving the best performance in many of the experiments. In the case of the limited feature set, relational modeling is able to improve performance for all three domains; in the fully featured case, relational modeling improves performance for the SoundCloud and YouTube domains. For Twitter, the independent model is already very effective when trained with n-grams (AUPR=0.95); stacked learning and joint inference offer no additional benefit. Against an evasive adversary that changes text to avoid detection, the independent model would be less effective and relational modeling more likely to help.

Comparing the different relational methods, we find that no one method dominates; thus, when applying EGGS to a new spam domain, we recommend testing several methods on validation data before committing to a single model. Having more layers in stacking sometimes helps a lot, especially in the Inductive + Transductive setting. For example, on the limited Twitter dataset, SGL goes from 0.494 to 0.612 AUPR with the addition of a second layer, SGL+PSL goes from 0.523 to 0.594, and SGL+MRF goes from 0.513 to 0.630. In other cases, such as the full SoundCloud dataset

²<http://www.ntu.edu.sg/home/axsun/datasets.html>

³For the Twitter dataset, time information was not available, so the tweets were ordered based on tweet ID.

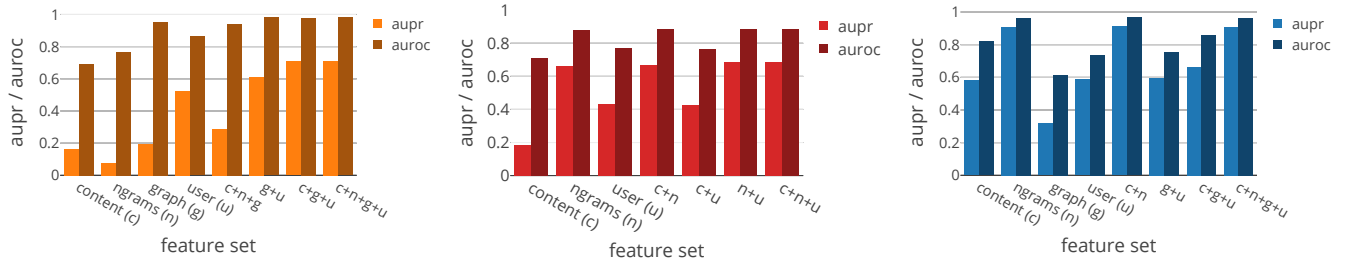


Figure 5: Feature set performance for SoundCloud (left), YouTube (middle), and Twitter (right).

Table 5: Spam Detection Performance (AUPR)

	Model	Inductive			Inductive + Transductive		
		SoundCloud	YouTube	Twitter	SoundCloud	YouTube	Twitter
Limited	Independent	0.396	0.148	0.260	0.352	0.387	0.466
	SGL(1)	0.396	0.221	0.281	0.444	0.453	0.494
	SGL(2)	0.342	0.263	0.275	0.364	0.478	0.612
	PSL	0.363	0.225	0.249	0.332	0.438	0.498
	MRF	0.431	0.164	0.264	0.547	0.404	0.483
	SGL(1) + PSL	0.284	0.268	0.258	0.521	0.471	0.523
	SGL(1) + MRF	0.412	0.239	0.285	0.578	0.473	0.513
	SGL(2) + PSL	0.243	0.282	0.270	0.562	0.489	0.594
	SGL(2) + MRF	0.404	0.276	0.280	0.583	0.493	0.630
Full	Independent	0.409	0.321	0.860	0.460	0.539	0.950
	SGL(1)	0.434	0.440	0.848	0.530	0.614	0.946
	SGL(2)	0.369	0.439	0.838	0.483	0.617	0.942
	PSL	0.458	0.337	0.823	0.469	0.569	0.927
	MRF	0.487	0.347	0.857	0.579	0.557	0.948
	SGL(1) + PSL	0.289	0.433	0.817	0.602	0.588	0.925
	SGL(1) + MRF	0.489	0.439	0.845	0.604	0.609	0.944
	SGL(2) + PSL	0.324	0.426	0.813	0.582	0.581	0.923
	SGL(2) + MRF	0.435	0.438	0.835	0.604	0.614	0.939

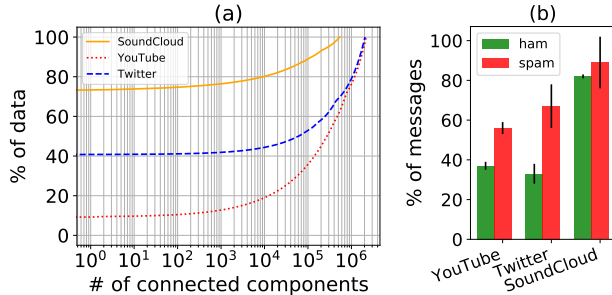


Figure 6: (a) The number of connected components it takes to cover the first 5M messages for each domain. (b) Percentage of ham/spam test set messages with at least one connection to any training messages.

in the Inductive setting, performance can drop: SGL goes from 0.434 to 0.369, and SGL+MRF goes from 0.489 to 0.435. With more layers, each classifier in SGL is trained on less data, which may explain why performance sometimes decreases.

MRF usually achieves better AUPR than PSL: out of the 12 combinations of datasets and inductive or transductive

settings, MRF outperforms PSL on 8, SGL(1)+MRF outperforms SGL(1)+PSL on 10, and SGL(2)+MRF outperforms SGL(2)+PSL on 11.⁴ However, PSL usually achieves better AUROC, outperforming the MRF models in 25 out of 36 cases.

Conclusion

We have shown how to flexibly incorporate relational structure from multiple separate domains using several approaches to build EGGS, a spam detection system that attacks the problem from as many angles as possible. Two of these approaches share a general relational framework that provides full joint inference over related messages, while the pseudo-relational features can be added to any independent model without the need for more complexity. We see that these methods are effective on real-world large-scale datasets in isolation and in combination with one another. Furthermore, if these specific techniques are a poor fit to a new domain, EGGS can easily be adapted to include other features, other types of classifiers, and other relational reasoning methods.

⁴This would be statistically significant under a binomial test (29 successes out of 36 trials), but the trials are not independent.

Acknowledgements

This research was supported by ARO grant W911NF-15-1-0265.

References

- [Akoglu, Chandy, and Faloutsos 2013] Akoglu, L.; Chandy, R.; and Faloutsos, C. 2013. Opinion fraud detection in on-line reviews by network effects. *ICWSM* 13:2–11.
- [Alvarez-Hamelin et al. 2006] Alvarez-Hamelin, J. I.; Dall’Asta, L.; Barrat, A.; and Vespignani, A. 2006. Large scale networks fingerprinting and visualization using the k-core decomposition. In *Advances in neural information processing systems*, 41–50.
- [Bach et al. 2015] Bach, S. H.; Broecheler, M.; Huang, B.; and Getoor, L. 2015. Hinge-loss markov random fields and probabilistic soft logic. *arXiv preprint arXiv:1505.04406*.
- [Benevenuto et al. 2010] Benevenuto, F.; Magno, G.; Rodrigues, T.; and Almeida, V. 2010. Detecting spammers on twitter. In *Collaboration, electronic messaging, anti-abuse and spam conference (CEAS)*, volume 6, 12.
- [Beutel et al. 2013] Beutel, A.; Xu, W.; Guruswami, V.; Palow, C.; and Faloutsos, C. 2013. Copycatch: stopping group attacks by spotting lockstep behavior in social networks. In *Proceedings of the 22nd international conference on World Wide Web*, 119–130. ACM.
- [Blanzieri and Bryl 2008] Blanzieri, E., and Bryl, A. 2008. A survey of learning-based techniques of email spam filtering. *Artificial Intelligence Review* 29(1):63–92.
- [Boykin and Roychowdhury 2005] Boykin, P. O., and Roychowdhury, V. P. 2005. Leveraging social networks to fight spam. *Computer* 38(4):61–68.
- [Castillo et al. 2007] Castillo, C.; Donato, D.; Gionis, A.; Murdock, V.; and Silvestri, F. 2007. Know your neighbors: Web spam detection using the web topology. In *Proceedings of the 30th annual international ACM SIGIR conference on Research and development in information retrieval*, 423–430. ACM.
- [Chen, Tan, and Jain 2009] Chen, F.; Tan, P.-N.; and Jain, A. K. 2009. A co-classification framework for detecting web spam and spammers in social media web sites. In *Proceedings of the 18th ACM conference on Information and knowledge management*, 1807–1810. ACM.
- [Chu, Widjaja, and Wang 2012] Chu, Z.; Widjaja, I.; and Wang, H. 2012. Detecting social spam campaigns on twitter. In *International Conference on Applied Cryptography and Network Security*, 455–472. Springer.
- [Costa et al. 2013] Costa, J.; Silva, C.; Antunes, M.; and Ribeiro, B. 2013. Defining semantic meta-hashtags for twitter classification. In *International Conference on Adaptive and Natural Computing Algorithms*, 226–235. Springer.
- [Duan et al. 2012] Duan, Y.; Wei, F.; Zhou, M.; and Shum, H.-Y. 2012. Graph-based collective classification for tweets. In *Proceedings of the 21st ACM international conference on Information and knowledge management*, 2323–2326. ACM.
- [Fakhraei et al. 2015] Fakhraei, S.; Foulds, J.; Shashanka, M.; and Getoor, L. 2015. Collective spammer detection in evolving multi-relational social networks. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 1769–1778. ACM.
- [Fast and Jensen 2008] Fast, A., and Jensen, D. 2008. Why stacked models perform effective collective classification. In *Data Mining, 2008. ICDM’08. Eighth IEEE International Conference on*, 785–790. IEEE.
- [Fei et al. 2013] Fei, G.; Mukherjee, A.; Liu, B.; Hsu, M.; Castellanos, M.; and Ghosh, R. 2013. Exploiting burstiness in reviews for review spammer detection. *Icwsn* 13:175–184.
- [Ferragina, Piccinno, and Santoro 2015] Ferragina, P.; Piccinno, F.; and Santoro, R. 2015. On analyzing hashtags in twitter. In *International Conference on Web and Social Media (ICWSM)*, 110–119. AAAI Press.
- [Gao et al. 2012] Gao, H.; Chen, Y.; Lee, K.; Palsetia, D.; and Choudhary, A. N. 2012. Towards online spam filtering in social networks. In *NDSS*, volume 12, 1–16.
- [Getoor 2007] Getoor, L. 2007. *Introduction to statistical relational learning*. MIT press.
- [Ghosh et al. 2012] Ghosh, S.; Viswanath, B.; Kooti, F.; Sharma, N. K.; Korlam, G.; Benevenuto, F.; Ganguly, N.; and Gummadi, K. P. 2012. Understanding and combating link farming in the twitter social network. In *Proceedings of the 21st international conference on World Wide Web*, 61–70. ACM.
- [Hooi et al. 2016] Hooi, B.; Song, H. A.; Beutel, A.; Shah, N.; Shin, K.; and Faloutsos, C. 2016. Fraudar: Bounding graph fraud in the face of camouflage. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 895–904. ACM.
- [Jiang et al. 2011] Jiang, L.; Yu, M.; Zhou, M.; Liu, X.; and Zhao, T. 2011. Target-dependent twitter sentiment classification. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, 151–160. Association for Computational Linguistics.
- [Jiang et al. 2014] Jiang, M.; Cui, P.; Beutel, A.; Faloutsos, C.; and Yang, S. 2014. Catchsync: catching synchronized behavior in large directed graphs. In *Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining*, 941–950. ACM.
- [Jindal and Liu 2007] Jindal, N., and Liu, B. 2007. Analyzing and detecting review spam. In *icdm*, 547–552. IEEE.
- [KC and Mukherjee 2016] KC, S., and Mukherjee, A. 2016. On the temporal dynamics of opinion spamming: Case studies on yelp. In *Proceedings of the 25th International Conference on World Wide Web*, 369–379. International World Wide Web Conferences Steering Committee.
- [Kou and Cohen 2007] Kou, Z., and Cohen, W. W. 2007. Stacked graphical models for efficient inference in markov random fields. In *Proceedings of the 2007 SIAM International Conference on Data Mining*, 533–538. SIAM.

- [Laorden et al. 2011] Laorden, C.; Sanz, B.; Santos, I.; Galán-García, P.; and Bringas, P. G. 2011. Collective classification for spam filtering. In *Computational Intelligence in Security for Information Systems*. Springer. 1–8.
- [Li et al. 2014a] Li, H.; Chen, Z.; Liu, B.; Wei, X.; and Shao, J. 2014a. Spotting fake reviews via collective positive-unlabeled learning. In *Data Mining (ICDM), 2014 IEEE International Conference on*, 899–904. IEEE.
- [Li et al. 2014b] Li, H.; Mukherjee, A.; Liu, B.; Kornfield, R.; and Emery, S. 2014b. Detecting campaign promoters on twitter using markov random fields. In *Data Mining (ICDM), 2014 IEEE International Conference on*, 290–299. IEEE.
- [Li et al. 2017] Li, H.; Fei, G.; Wang, S.; Liu, B.; Shao, W.; Mukherjee, A.; and Shao, J. 2017. Bimodal distribution and co-bursting in review spam detection. In *Proceedings of the 26th International Conference on World Wide Web*, 1063–1072. International World Wide Web Conferences Steering Committee.
- [Liu et al. 2016] Liu, L.; Lu, Y.; Luo, Y.; Zhang, R.; Itti, L.; and Lu, J. 2016. Detecting “smart” spammers on social network: A topic model approach. *arXiv preprint arXiv:1604.08504*.
- [Lowd and Rooshenas 2015] Lowd, D., and Rooshenas, A. 2015. The libra toolkit for probabilistic models. *Journal of Machine Learning Research* 16:2459–2463.
- [Ma, Sun, and Cong 2013] Ma, Z.; Sun, A.; and Cong, G. 2013. On predicting the popularity of newly emerging hashtags in twitter. *Journal of the American Society for Information Science and Technology* 64(7):1399–1410.
- [Mateen et al. 2017] Mateen, M.; Iqbal, M. A.; Aleem, M.; and Islam, M. A. 2017. A hybrid approach for spam detection for twitter. In *Applied Sciences and Technology (IB-CAST), 2017 14th International Bhurban Conference on*, 466–471. IEEE.
- [Newman, Strogatz, and Watts 2001] Newman, M. E.; Strogatz, S. H.; and Watts, D. J. 2001. Random graphs with arbitrary degree distributions and their applications. *Physical review E* 64(2):026118.
- [O’Callaghan et al. 2012] O’Callaghan, D.; Harrigan, M.; Carthy, J.; and Cunningham, P. 2012. Network analysis of recurring youtube spam campaigns. In *ICWSM*.
- [Page et al. 1999] Page, L.; Brin, S.; Motwani, R.; and Winograd, T. 1999. The pagerank citation ranking: bringing order to the web.
- [Pandit et al. 2007] Pandit, S.; Chau, D. H.; Wang, S.; and Faloutsos, C. 2007. Netprobe: a fast and scalable system for fraud detection in online auction networks. In *Proceedings of the 16th international conference on World Wide Web*, 201–210. ACM.
- [Rayana and Akoglu 2015] Rayana, S., and Akoglu, L. 2015. Collective opinion spam detection: Bridging review networks and metadata. In *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 985–994. ACM.
- [Richardson and Domingos 2006] Richardson, M., and Domingos, P. 2006. Markov logic networks. *Machine learning* 62(1-2):107–136.
- [Sanchez and Kumar 2011] Sanchez, H., and Kumar, S. 2011. Twitter bullying detection. *ser. NSDI* 12:15–15.
- [Savigny and Purwarianti 2017] Savigny, J., and Purwarianti, A. 2017. Emotion classification on youtube comments using word embedding. In *Advanced Informatics, Concepts, Theory, and Applications (ICAICTA), 2017 International Conference on*, 1–5. IEEE.
- [Schank and Wagner 2005] Schank, T., and Wagner, D. 2005. Finding, counting and listing all triangles in large graphs, an experimental study. In *International Workshop on Experimental and Efficient Algorithms*, 606–609. Springer.
- [Sedhai and Sun 2015] Sedhai, S., and Sun, A. 2015. Hspam14: A collection of 14 million tweets for hashtag-oriented spam research. In *Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 223–232. ACM.
- [Shen and Liu 2015] Shen, H., and Liu, X. 2015. Detecting spammers on twitter based on content and social interaction. In *Network and Information Systems for Computers (ICNISC), 2015 International Conference on*, 413–417. IEEE.
- [Singh and Gordon 2008] Singh, A. P., and Gordon, G. J. 2008. Relational learning via collective matrix factorization. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*, 650–658. ACM.
- [Song, Lau, and Yin 2014] Song, L.; Lau, R. Y.; and Yin, C. 2014. Discriminative topic mining for social spam detection. In *PACIS*, 378.
- [Stringhini, Kruegel, and Vigna 2010] Stringhini, G.; Kruegel, C.; and Vigna, G. 2010. Detecting spammers on social networks. In *Proceedings of the 26th annual computer security applications conference*, 1–9. ACM.
- [Tan et al. 2013] Tan, E.; Guo, L.; Chen, S.; Zhang, X.; and Zhao, Y. 2013. Unik: Unsupervised social network spam detection. In *Proceedings of the 22nd ACM international conference on Information & Knowledge Management*, 479–488. ACM.
- [Viswanath et al. 2014] Viswanath, B.; Bashir, M. A.; Crovella, M.; Guha, S.; Gummadi, K. P.; Krishnamurthy, B.; and Mislove, A. 2014. Towards detecting anomalous user behavior in online social networks. In *USENIX Security Symposium*, 223–238.
- [Wang and Pu 2015] Wang, D., and Pu, C. 2015. Bean: A behavior analysis approach of url spam filtering in twitter. In *2015 IEEE International Conference on Information Reuse and Integration*, 403–410.
- [Wang 2010] Wang, A. H. 2010. Don’t follow me: Spam detection in twitter. In *Security and cryptography (SECURITY), proceedings of the 2010 international conference on*, 1–10. IEEE.
- [Wu et al. 2015] Wu, F.; Shu, J.; Huang, Y.; and Yuan, Z. 2015. Social spammer and spam message co-detection

in microblogging with social context regularization. In *Proceedings of the 24th ACM International on Conference on Information and Knowledge Management*, 1601–1610. ACM.

[Xu, Sun, and Javaid 2016] Xu, H.; Sun, W.; and Javaid, A. 2016. Efficient spam detection across online social networks. In *Big Data Analysis (ICBDA), 2016 IEEE International Conference on*, 1–6. IEEE.

[Zhang, Zhu, and Liang 2012] Zhang, X.; Zhu, S.; and Liang, W. 2012. Detecting spam and promoting campaigns in the twitter social network. In *Data Mining (ICDM), 2012 IEEE 12th International Conference on*, 1194–1199. IEEE.

[Zhu et al. 2012] Zhu, Y.; Wang, X.; Zhong, E.; Liu, N. N.; Li, H.; and Yang, Q. 2012. Discovering spammers in social networks. In *AAAI*.