

Finding path motifs in large temporal graphs using algebraic fingerprints*

Suhas Thejaswi[†]

Aristides Gionis[‡]

Juho Lauri

Abstract

We study a family of pattern-detection problems in *vertex-colored temporal* graphs. In particular, given a vertex-colored temporal graph and a multiset of colors as a query, we search for *temporal paths* in the graph that contain the colors specified in the query. These types of problems have several applications, for example in recommending tours for tourists or detecting abnormal behavior in a network of financial transactions.

For the family of pattern-detection problems we consider, we establish complexity results and design an algebraic-algorithmic framework based on *constrained multilinear sieving*. We demonstrate that our solution scales to massive graphs with up to a billion edges for a multiset query with five colors and up to hundred million edges for a multiset query with ten colors, despite the problems being **NP-hard**. Our implementation, which is publicly available, exhibits practical edge-linear scalability and is highly optimized. For instance, in a real-world graph dataset with more than six million edges and a multiset query with ten colors, we can extract an optimum solution in less than eight minutes on a *Haswell* desktop with four cores.

1 Introduction

Pattern mining in graphs has become increasingly popular due to applications in analyzing and understanding structural properties of data originating from information networks, social networks, transportation networks, and many more. Searching for patterns in graphs is a fundamental graph-mining task that has applications in computational biology and analysis of metabolic networks [42], discovery of controversial discussions in social media [16], and understanding the connectivity of the brain [31], among others. At the same time, real-world data are inherently complex. To accurately represent the heterogeneous and dynamic nature of real-world graphs, we need to enrich the basic graph model with additional features. Thus, researchers have considered *labeled graphs* [60], or *heterogeneous graphs* [46], where vertices and/or edges are associated with additional information represented with labels, and *temporal graphs* [29], where edges are associated with timestamps that indicate when interactions between pairs of vertices took place.

In this paper we study a family of pattern-detection problems in graphs that are both *labeled* and *temporal*. In particular, we consider graphs in which each vertex is associated with one (or more)

*An earlier version of this work appeared in the SIAM International Conference on Data Mining (SDM20) titled “Pattern detection in large temporal graphs using algebraic fingerprints”. A final version of this work will appear in the Big Data journal special issue titled “Best of SDM 2020”.

[†]Department of Computer Science, Aalto University, Finland.

[‡]Department of Computer Science, KTH Royal Institute of Technology, Sweden, and Department of Computer Science, Aalto University, Finland.

labels, to which we refer as *colors*, and each edge is associated with a timestamp. We then consider a *motif query*, which is a multiset of colors. The problem we consider is to decide whether there exists a *temporal path* whose vertices contain exactly the colors specified in the motif query. A temporal path in a temporal graph refers to a path in which the timestamps of consecutive edges are strictly increasing. If such a path exists, we also want to find it and return it as output.

The family of problems we consider have several applications. One application is in the domain of tour recommendations [18] for travelers or tourists in a city. In this case, vertices correspond to locations. The colors associated with each location represent different activities that can be enjoyed in that particular location. For example, activity types may include items such as museums, archaeological sites, or restaurants. Edges correspond to transportation links between different locations, and each transportation link is associated with a timestamp indicating departure time and duration. Furthermore, for each location we may have information about the amount of time recommended to spent in that location, e.g., minimum amount of time required to enjoy a meal or appreciate a museum. Finally, the multiset of colors specified in the motif query represents the multiset of activities that a user is interested in enjoying. In the tour-recommendation problem we would like to find a temporal path, from a starting location to a destination, which satisfies temporal constraints (e.g., feasible transportation links, visit times, and total duration) as well as the activity requirements of the user, i.e., what kind of places they want to visit.

Another application is in the domain of analyzing networks of financial transactions. Here, the vertices represent financial entities, the vertex colors represent features of the entities, and the temporal edges represent financial transactions between entities, annotated with the time of the transaction, amount, and possibly other features. An analyst may be interested in finding long chains of transactions among entities that have certain characteristics, for example, searching for money laundering activities may require querying for paths that involve public figures, companies with certain types of contracts, and banks in offshore locations.

The use cases outlined above, as well as similar applications, can be abstracted and formulated as problems of finding paths in vertex-colored (vertex-labeled) and temporal graphs. More concretely, in this paper we consider the following problems:

- k -TEMPATH: decide if there exists a temporal path of length $k - 1$;
- PATHMOTIF: decide if there exists a temporal path whose vertices contain the set of colors specified by a motif query;
- COLORFULPATH: decide if there exists a temporal path of length $k - 1$ whose vertices have all the colors precisely once;
- (s, d) -COLORFULPATH: decide if there exists a temporal path of length $k + 1$, whose internal vertices have all the colors precisely once, and with a given source s and destination d ;
- RAINBOWPATH: decide if there exists a temporal path of length $k - 1$ having k distinct colors in a graph with $q > k$ colors;
- EC-TEMPATH: decide if there exists a temporal path of length $k - 1$ with specific edge timestamps;
- EC-PATHMOTIF: decide if there exists a temporal path with specific edge timestamps and vertices containing the set of colors specified by a motif query;
- VC-PATHMOTIF: decide if there exists a temporal path whose vertices contain the set of colors specified by motif query in the specified order; and

- **VC-COLORFULPATH**: decide if there exists a temporal path of length $k - 1$, whose vertices have distinct colors in the specified order.

These problem variants can be useful in different scenarios of our application domain, depending on the user constraints and/or requirements. To motivate some of the different problem variants we presented above, consider again the tour-recommendation use-case in which the vertices correspond to locations and vertex labels correspond to location types, e.g., museum, restaurant, café, etc. The temporal edges between vertices correspond to travel connections at specific timestamps. The tour-recommendation problem asks to find an itinerary by taking into consideration the tourist’s preferences with respect to the locations which they want to visit. The case that a tourist prefers not to visit more than one location of the same type can be modeled as a **COLORFULPATH** problem. The case that, in addition to the previous constraint, a tourist knows their start and end location (for example, starting at the hotel they stay and ending at a favorite restaurant) can be modeled as an (s, d) -**COLORFULPATH** problem. Finally, the case that a tourist wants to maximize the number of different types of locations they visit can be modeled as a **RAINBOWPATH** path.

Most of the problems we consider are **NP-hard**;¹ thus, there is no known efficient algorithm to find an exact solution. In such cases most algorithmic solutions resort to heuristics or approximation schemes for the reason of scalability. In this paper we present an (exact) *algebraic approach* based on *constrained multilinear sieving* for pattern detection in temporal graphs and demonstrate that our approach is scalable to large graphs.

The algorithms based on constrained multilinear detection offer the theoretically best-known results for a set of fundamental combinatorial problems including k -path [5], Hamiltonian path [6], and many variants of the graph motif problem [8]. The implementations based on multilinear sieving are known to saturate the empirical arithmetic and memory bandwidth on modern CPU and GPU micro-architectures. Furthermore, these implementations can scale to large graphs as well as large query sizes [9, 32].

Even though these algebraic techniques have been studied extensively in the algorithms community, they have not been applied to data-mining problems to the best of our knowledge. As such, this is the first work to do so and also to apply these techniques for pattern detection in temporal graphs.

Our key contributions are as follows:

- We introduce a set of pattern-detection problems that originate in the *vertex-colored* and *temporal* graphs. For the problems we consider we present **NP-hardness** results, while showing that they are *fixed-parameter tractable* [17], meaning that if we restrict the size of the motif query the problems are solvable in polynomial time in the size of the host graph.
- We present a general algebraic-algorithmic framework based on constrained multilinear sieving. Our solution exhibits edge-linear scalability. The algorithmic approach described in this work is not limited to temporal paths, but rather it can be extended to study information cascades, temporal arborescences and temporal subgraphs. An overview of our key results is given in Table 1.
- We extend the vertex-localization variant of the constrained multilinear sieving to solve path problems in temporal graphs. In this approach, we work with a family of polynomials one for each vertex, rather than a single polynomial, there by isolating the vertices which are part of

¹**VC-COLORFULPATH** problem is solvable in polynomial time (see § 7.5).

Table 1: An overview of our key results. Here, n is the number of vertices, m is the number of edges, t is the maximum timestamp, $k - 1$ is the length of path and q is the number of colors in the graph.

Problem	Hardness	Time complexity	Space complexity
k -TEMPPATH	NP -complete (Lemma 5.1)	$\mathcal{O}(2^k k(nt + m))$	$\mathcal{O}(nt)$
PATHMOTIF	NP -complete (Lemma 5.2)	$\mathcal{O}(2^k k(nt + m))$	$\mathcal{O}(nt)$
COLORFULPATH	NP -complete (Lemma 5.3)	$\mathcal{O}(2^k k(nt + m))$	$\mathcal{O}(nt)$
(s, d) -COLORFULPATH	NP -complete (Lemma 5.4)	$\mathcal{O}(2^k k(nt + m))$	$\mathcal{O}(nt)$
RAINBOWPATH	NP -complete (Lemma 5.5)	$\mathcal{O}(q^k 2^k k(nt + m))$	$\mathcal{O}(nt)$
EC-TEMPPATH	NP -complete (Lemma 5.6)	$\mathcal{O}(2^k (nk + m))$	$\mathcal{O}(n)$
EC-PATHMOTIF	NP -complete (Lemma 5.7)	$\mathcal{O}(2^k (nk + m))$	$\mathcal{O}(n)$
VC-PATHMOTIF	NP -complete (Lemma 5.8)	$\mathcal{O}(2^k k(nt + m))$	$\mathcal{O}(nt)$
VC-COLORFULPATH	Polynomial	$\mathcal{O}(mt)$	$\mathcal{O}(nt)$

a match. Most importantly, vertex-localization comes with no additional cost with respect to either space or time. This approach is effective for preprocessing the graph and extracting a solution for many variants of the temporal-path problem.

- We engineer a memory-efficient implementation of the algebraic algorithm and demonstrate with extensive experiments that our implementation can scale to graphs with up to a billion edges for multiset query with five colors and up to one hundred million edges for multiset query with ten colors.
- Open-source release: our implementations and datasets are released as open source [51, 53].

2 Related work

Pattern detection and pattern counting are fundamental problems in data mining. In the context of paths and trees, pattern matching problems have been extensively studied in non-temporal graphs both in theory [5, 8, 14, 22, 25, 40] as well as applications [4, 15, 30, 48]. For many restricted variants of path problems Kowalik and Lauri [40] presented complexity results and deterministic algorithms with runtime bounds that are optimal under plausible complexity-theoretic assumptions. Most of these problems are known to be fixed-parameter tractable and the best known randomized algorithms for a subset of path and subgraph pattern detection problems is due to Björklund et al. [5, 8]. An algorithmic technique known as color coding can be used to approximately count the patterns in $\mathcal{O}^*(2^k)$ time, however, these algorithms require $\mathcal{O}^*(2^k)$ memory [1].² A practical implementation of color coding using adaptive sampling and succinct encoding was demonstrated by Bressan et al. [11] for a pattern counting problem. However, the techniques based on color coding are mostly used to detect and count patterns in graphs with no vertex labels.

Algebraic algorithms based on multilinear and constrained multilinear sieving are due to the pioneering work of Koutis [34, 35, 36], Williams [57], Koutis and Williams [37, 38]. The approach has been extended to various combinatorial problems using a multivariate variant of the sieve by Björklund et al. [5]. The authors introduced decision oracles which were used by Dell et al. [20] to approximately count motifs. A practical implementation of multilinear sieving and its scalability to large graphs has been demonstrated by Björklund et al. [9]. Furthermore, its parallelizability to

²The notation \mathcal{O}^* hides factors bounded polynomially in the input size.

vector-parallel architectures and scalability to large multiset sizes was shown by Kaski et al. [32].

In the recent years there has been a lot of progress with respect to mining temporal graphs. The most relevant work includes methods for efficient computation of network measures, such as centrality, connectivity, density, and motifs [19, 28, 29, 33, 43], as well as mining frequent subgraphs in temporal networks [47, 49, 56]. Path problems in temporal graphs are well studied [24, 58]. In fact, many variants of these path problems are known to be solvable in polynomial-time [58, 59]. Perhaps surprisingly, a simple variant where one wants to check the existence of a temporal path with waiting time constraints was shown to be **NP**-complete by Casteigts et al. [12]. A known variant of the temporal-path problem is finding top- k shortest paths, which not only asks us to find a shortest path, but also the next $k - 1$ shortest paths; which may be longer than the shortest path [27]. Here by shortest path we mean that the total elapsed time of the temporal path is minimized. Note that the top- k shortest path is different from the k -TEMPPATH problem studied in our work.

With the availability of social media data in the recent years there has been growing interest to study pattern mining problems in temporal graphs. Paranjape et al. [49] presented efficient algorithms for counting small temporal patterns. Liu et al. [47] presented complexity results and approximation methods for counting patterns in temporal graphs. However, they mainly study temporal graphs with no vertex-labels (colors). Kovanen et al. [39] studied a general variant of the temporal subgraph problem in temporal graphs with vertex labels. Aslay et al. [2] presented methodologies for counting frequent patterns with vertex and edge labels in streaming graphs. However, most of these approaches were limited to small pattern sizes of up to three vertices.

To the best of our knowledge, there is no existing work related to detecting and extracting temporal patterns with vertex labels. The problems considered in this paper are closely related to variants of classical problems such as the orienteering problem, TSP and Hamiltonian path [55, 23]. A motivating application for the problems can be traced to the context of tour recommendations [18, 26].

3 Method overview

Our method relies on the *algebraic-fingerprinting* technique [37, 57]. As this technique is not well known in the data-mining community, we provide a bird’s eye view. The approach is described in more detail in Section 6.

In a nutshell, the problem is to decide the existence of a pattern, or a structure in the data. The idea is to encode the pattern-discovery problem as a polynomial over a set of variables. The variables represent entities of the problem instance (e.g., vertices and/or edges), and their values represent possible solutions (e.g., whether a vertex belongs to a path). The challenge is to find a polynomial encoding that has the property that a solution to our problem exists if and only if the polynomial evaluates to a non-zero term. We can then verify the existence of a solution, using *polynomial identity testing*, in particular, by evaluating random substitutions of variables: if one of them does not evaluate to zero, then the polynomial is not identically zero. Thus, the method can give false negatives, but the error probability can be brought arbitrarily close to zero.

It should also be noted that an explicit representation of the polynomial can be exponentially large. However, we do not need to represent the polynomial explicitly, since we only need to be able to evaluate the variable substitutions fast.

This paper is organized as follows. In the next section we will introduce the terminology. In Section 5 we introduce the path problems in temporal graphs and in Section 6 we present an algebraic algorithm to solve the temporal-path problems. In Section 7, we extend our algebraic framework to solve temporal path problems with additional constraints. In Sections 8, 9, and 10 we discuss implementation, experimental setup and experimental evaluation, respectively. Finally, we conclude in Section 11.

4 Terminology

In this section we introduce the basic terminology used in the paper.

A *graph* G is a tuple (V, E) where V is a set of *vertices* and E is a set of unordered pairs of vertices called *edges*. We denote the number of vertices $|V| = n$ and the number of edges $|E| = m$. Vertices u and v are *adjacent* if there exists an edge $(u, v) \in E$. The set of vertices adjacent to vertex u excluding u itself is the *neighborhood* of vertex u and it is denoted by $N(u)$. A *walk* between any two vertices is an alternating sequence of vertices and edges $u_1 e_1 u_2 \dots e_k u_{k+1}$ such that there exists an edge $e_i = (u_i, u_{i+1}) \in E$ for each $i \in [k]$.³ We call the vertices u_1 and u_{k+1} the *start* and *end* vertices of the walk, respectively. The vertices v_2, \dots, v_k are called *internal vertices*. The *length* of a walk is the number of edges in the walk. A *path* is a walk with no repetition of vertices.

A *temporal graph* G^τ is a tuple (V, E^τ) , where V is a set of vertices and E^τ is a set of temporal edges. A *temporal edge* is a triple (u, v, j) where $u, v \in V$ and $j \in \mathbb{Z}_+$ is a *timestamp*. The *maximum timestamp* in G^τ is denoted by t . The total number of edges at time instance $j \in [t]$ is denoted by m_j and the total number of edges in a temporal graph is $m = \sum_{j \in [t]} m_j$. A vertex u is adjacent to vertex v at timestamp j if there exists an edge $(u, v, j) \in E^\tau$. The set of vertices adjacent to vertex u at time step j is denoted by $N_j(u)$. The set of vertices adjacent to vertex u excluding u itself is denoted by $N(u) = \bigcup_{j \in [t]} N_j(u)$. A temporal graph can also be defined as $G^\tau = \bigcup_{j \in [t]} G^j$, where $G^j = (V, E^j)$ is a *snapshot* of the graph at time instance $j \in [t]$, where t is the maximum time instance. In our discussions we mostly use the former definition of a temporal graph.

A *temporal walk* W^τ between any two vertices in a temporal graph is an alternating sequence of vertices and temporal edges $u_1 e_1 u_2 e_2 \dots e_k u_{k+1}$ such that there exists an edge $e_i = (u_i, u_{i+1}, j) \in E^\tau$ for all $i \in [k]$ and for any two edges $e_i = (u_i, u_{i+1}, j)$, $e_{i+1} = (u_{i+1}, u_{i+2}, j')$ in the walk W^τ , it is $j < j'$. In other words, the timestamps of the edges should always be in strictly increasing order. We call the vertices v_1 and v_{k+1} the *start* and *end* vertices, respectively. The vertices v_2, \dots, v_k are called *internal vertices*. The *length* of a temporal walk is the number of edges in the temporal walk. A *temporal path* is a temporal walk with no repetition of vertices.

To distinguish a graph from a temporal graph sometimes we explicitly refer to a graph as *non-temporal* graph or *static* graph.

5 Path problems in temporal graphs

In this section we will introduce a set of path problems in temporal graphs. An exact algorithm based on *multilinear sieving* is presented in the next section.

³For convenience, we write $[k] = \{1, 2, \dots, k\}$ for a positive integer k .

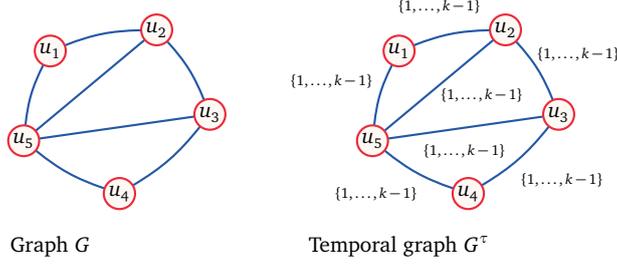


Figure 1: An illustration of graph construction G^τ .

Before proceeding, we note that in all our hardness proofs it is straightforward to establish membership to **NP**. Thus, to streamline the presentation, we explicitly omit showing this part in all subsequent proofs. Let us begin our discussion with the k -path problem for non-temporal graphs before continuing to path problems in temporal graphs.

5.1 k -path problem in non-temporal graphs (k -PATH)

Given a graph $G = (V, E)$ and an integer $k \leq n$ the k -PATH problem asks to decide whether there exists a path of length at least $k - 1$ in G .

The k -PATH problem is **NP**-complete [23, ND29] with the fastest known randomized fixed-parameter algorithm for the problem is due to Björklund et al. [5] and has complexity $\mathcal{O}^*(1.66^k)$. The fastest known deterministic algorithm for the problem is due to Fomin et al. [21] and has complexity $\mathcal{O}^*(2.62^k)$.

5.2 k -path problem in temporal graphs (k -TEMPPATH)

Given a temporal graph $G^\tau = (V, E^\tau)$ and an integer $k \leq n$ the k -TEMPPATH problem asks to decide whether there exists a *temporal path* of length at least $k - 1$ in G^τ . An example of the k -PATH problem is illustrated in Figure 1.

For the **NP**-hardness, we reduce the k -PATH problem to k -TEMPPATH problem.

Lemma 5.1. *Problem k -TEMPPATH is **NP**-complete.*

Proof. To prove our claim, we proceed by giving a polynomial-time reduction from the k -PATH problem.

Given an instance $\langle G = (V, E), k \rangle$ of k -PATH, we construct a temporal graph $G^\tau = (V^\tau, E^\tau)$ such that $V^\tau = V$ and $E^\tau = \bigcup_{i \in [k]} E^i$, where $E^i = \bigcup_{(u,v) \in E} (u, v, i)$. The construction is illustrated in Figure 1. We claim that there exists a k -PATH in G if and only if there exists a k -TEMPPATH in G^τ .

Assume that there exists a path $P = u_1 e_1 u_2 \dots e_{k-1} u_k$ of length k in G . By construction of G^τ , we know that all edges in E are present in E^τ for every timestamp in $[k - 1]$. Thus, we can construct a temporal path P^τ such that for all vertices in $u_i \in P$ we keep it as it is in P^τ and for each edge $e_i = (u_i, u_{i+1}) \in P$ we replace it by $e_i^* = (u_i, u_{i+1}, i)$ in P^τ (by construction such an edge always exist in G^τ). So $P^\tau = u_1 e_1^* u_2 \dots e_{k-1}^* u_k$ is a temporal path of length $k - 1$ in G^τ .

Conversely, assume that there exists a temporal path $P^\tau = u_1 e_1^* u_2 \dots e_{k-1}^* u_k$ of length k in G^τ . We construct a path $P = u_1 e_1 u_2 \dots e_{k-1} u_k$ by replacing $e_i^* = (u_i, u_{i+1}, i)$ by $e_i = (u_i, u_{i+1})$ (such an

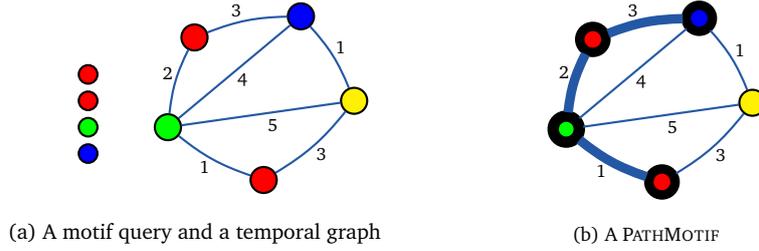


Figure 2: An example of PATHMOTIF problem in temporal graphs.

edge always exist in G by construction). Evidently, P is a path of length $k - 1$ in G , completing the proof. \square

5.3 Path motif problem in temporal graphs (PATHMOTIF)

Given a vertex-colored temporal graph $G^\tau = (V, E^\tau)$ and a multiset M of colors the PATHMOTIF problem asks to decide whether there exists a temporal path P^τ in G^τ such that the vertex colors of P^τ agree with M . An example of the PATHMOTIF problem is illustrated in Figure 2.

The PATHMOTIF problem is **NP**-complete and a reduction from k -TEMPPATH to PATHMOTIF is straightforward.

Lemma 5.2. *Problem PATHMOTIF is **NP**-complete.*

Proof. Given an instance of a k -TEMPPATH with the input temporal graph $G^\tau = (V, E^\tau)$ we reduce it, in polynomial time, to PATHMOTIF as follows. We build a vertex-colored temporal graph such that all its vertices have the same color and the multiset M comprises the color 1 exactly k times. More precisely, we let $G_c^\tau = (V_c, E_c^\tau)$ with the vertex set $V_c = V$, the edge set $E_c^\tau = E^\tau$, the color mapping $c : V \rightarrow \{1\}$ and the multiset $M = \{1^k\}$. This finishes the construction. We claim that there exists a k -TEMPPATH in G^τ if and only if there exists a PATHMOTIF in G_c^τ .

Let P be a temporal path of length $k - 1$ in G^τ . We choose $P_c = P$ as a PATHMOTIF of length k in G_c^τ since all vertices have the same color and the multiset M agree with the colors of vertices in P_c . In the other direction, it suffices to observe that any PATHMOTIF of length $k - 1$ in G_c^τ is also a temporal path in G . By Lemma 5.1 we have that k -TEMPPATH is **NP**-hard, so by our construction PATHMOTIF is **NP**-complete, which is what we wanted to show. \square

5.4 Colorful path problem in temporal graphs (COLORFULPATH)

Given a temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, and a coloring function $c : V \rightarrow [k]$, the COLORFULPATH problem asks us to decide whether there exists a temporal path P^τ of length $k - 1$ such that all vertex colors of P^τ are different.

In [52], we introduced the colorful path problem as the rainbow path problem, nevertheless to keep the problem definition concurrent with non-temporal graphs we rename the problem as the colorful path problem.

The COLORFULPATH problem is a special case of the PATHMOTIF problem, where all the colors in the multiset M are different, that is $M = [k]$. It is easy to see that the COLORFULPATH problem in static graphs can be reduced to the COLORFULPATH problem in temporal graphs by replacing each

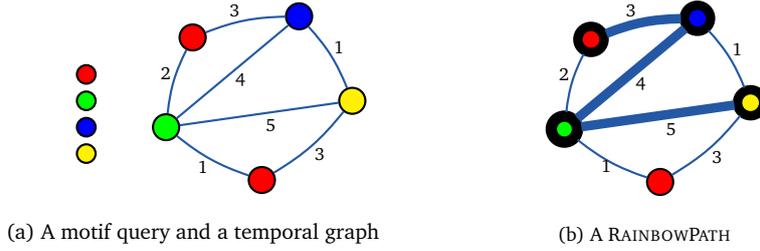


Figure 3: An example of COLORFULPATH problem in temporal graphs.

static edge with $k - 1$ temporal edges. So, the COLORFULPATH problem is NP-complete. We skip the proof as the construction is similar to that of Lemma 5.1.

The COLORFULPATH problem in static graphs is defined as follows: given a static graph $G = (V, E)$ and a coloring function $c : V \rightarrow [k]$, the problem asks us to find a path P of length $k - 1$ such that all vertex colors of P are different. The COLORFULPATH problem in static graphs is known to be NP-complete [13, 54]; however, it can be noted that these works consider a variant in which one requires the *internal* vertices of a path not to repeat colors. Nevertheless, this variant is computationally equivalent to COLORFULPATH (see e.g., [40]).

Lemma 5.3. *Problem COLORFULPATH is NP-complete.*

5.5 Colorful (s, d) -connectivity in temporal graphs $((s, d)$ -COLORFULPATH)

Given a temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a source vertex $s \in V$, a destination vertex $d \in V$, and a coloring function $c : V \setminus \{s, d\} \rightarrow [k]$, the (s, d) -COLORFULPATH problem is to decide whether there exists a temporal path P^τ of length $k + 1$ between vertices s and d such that the colors of internal vertices in P^τ are different.

The (s, d) -COLORFULPATH problem is NP-hard. The proof, obtained by a reduction from COLORFULPATH problem is presented in Lemma 5.4.

Lemma 5.4. *Problem (s, d) -COLORFULPATH is NP-complete.*

Proof. We proceed via a polynomial-time reduction from COLORFULPATH. Specifically, given an instance $\langle G^\tau, k, c \rangle$ of COLORFULPATH, we construct an instance $\langle G^{\tau'}, k', c' \rangle$ of (s, d) -COLORFULPATH, where $G^{\tau'} = (V', E^{\tau'})$, $V' = V \cup \{s, d\}$, $E^{\tau'} = \bigcup_{(u,v,i) \in E^\tau} (u, v, i + 1) \cup \bigcup_{u \in V} (s, u, 1) \cup \bigcup_{u \in V} (u, d, t + 2)$, $c'(v) = c(v)$ for all $v \in V$, $c(s) = k + 1$, $c(d) = k + 2$, and $k' = k + 2$. Here, t is the maximum timestamp in G^τ . We claim that there exists a COLORFULPATH of length $k - 1$ in G^τ if and only there exists a (s, d) -COLORFULPATH of length $k + 1$ between vertices s and d in $G^{\tau'}$.

Let $P^\tau = v_1 e_1 v_2 \dots e_{k-1} v_k$ be a COLORFULPATH in G^τ . We construct a path $P^{\tau'} = s e_0^* v_1 e_1^* \dots e_{k-1}^* v_k e_k^* d$ such that $e_0^* = (s, v_1, 1)$, $e_{k+1}^* = (v_{k+1}, d, t + 2)$ and $e_i^* = \{(u, v, j + 1) : e_i = (u, v, j)\}$ for all $i \in [k]$. Since the colors of $v_i \in V(P^\tau)$ are all different, the vertices in path $P^{\tau'}$ will also have different colors. So $P^{\tau'}$ is a colorful path of length $k + 1$ between vertices s and d .

Let $P^{\tau'} = s e_0^* v_1 e_1^* \dots e_{k-1}^* v_k e_k^* d$ be a temporal path of length $k + 1$ in $G^{\tau'}$. We construct a path $P^\tau = v_1 e_1 \dots e_{k-1} v_k$ such that $e_i = \{(u, v, j - 1) : e_i^* = (u, v, j)\}$ for all $i \in [k - 1]$. Since the colors of vertices in $P^{\tau'}$ are all different which means the colors of vertices in P^τ will also be different. So P^τ is a COLORFULPATH of length $k - 1$ in G^τ . \square

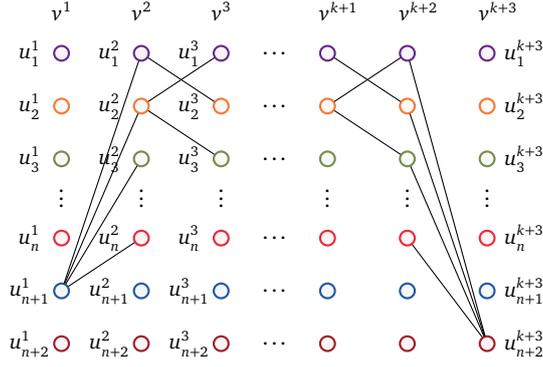


Figure 4: Construction of G^τ .

5.6 Rainbow path problem in temporal graphs (RAINBOWPATH)

Given a vertex-colored temporal graph $G^\tau = (V, E^\tau)$, an integer k and a coloring function $c : V \rightarrow [q]$ with $k < q \leq n$, the RAINBOWPATH problem is to decide whether there exists a temporal path P^τ of length $k - 1$ in G^τ such that the vertex colors of P^τ are different.

For the NP-hardness, we reduce the k -PATH problem in non-temporal graphs to the RAINBOWPATH problem in temporal graphs. The proof is presented in Lemma 5.5.

Lemma 5.5. *Problem RAINBOWPATH is NP-complete.*

Proof. We reduce the k -PATH problem in general graphs to the RAINBOWPATH problem in temporal graphs. Given an instance of a k -path problem on a graph $G = (V, E)$, we construct a vertex-colored temporal graph $G^\tau = (V^\tau, E^\tau)$ such that the vertex set $V^\tau = \bigcup_{i=1}^{k+3} V^i$, where $V^i = \bigcup_{j=1}^{n+2} u_j^i$ for all $i \in [k+3]$, and the edge set $E^\tau = \bigcup_{i=1}^{k+2} E^i$ where for all $i \in \{2, 3, \dots, k+1\}$ and for each edge $(u_x, u_y) \in E$ we add edges $(u_x^i, u_y^{i+1}, i), (u_x^{i+1}, u_y^i, i)$ to E^i . Additionally, add edges $(u_{n+1}^1, u_2^1, 1)$ and $(u_j^{k+2}, u_{n+2}^{k+3}, k+2)$ for all $j \in [n]$. The edges between V^i and V^{i+1} are the temporal edges in E^i at time instance i for all $i \in [k+2]$. Finally, for all $i \in [n+2]$ $j \in [k+3]$ the vertex u_j^i is assigned color i . The construction of graph G^τ is illustrated in Figure 4.

We claim that there exists a path of length k in G if and only if there exists a RAINBOWPATH of length $k+2$ in G^τ . So the RAINBOWPATH problem in temporal graphs is at least as hard as the k -PATH problem in graphs.

Let us assume that there exists a path $P = u_1 e_1 u_2 \dots e_k u_{k+1}$ of length k in G . We construct a temporal path $P^\tau = u_1^* e_1^* u_2^* \dots e_{k+2}^* u_{k+3}^*$ in G^τ as follows. For all $i \in \{2, \dots, k+2\}$ we have $u_{i-1} \in P$ so $u_i^* = u_{i-1}^i$ and $u_1^* = u_{n+1}^1$, $u_{k+3}^* = u_{n+2}^{k+3}$. The edges in P^τ are constructed as follows: $e_i^* = (u_{i-1}^i, u_i^{i+1}, i+1)$ for all $i \in \{2, \dots, k+2\}$ where the original edge in the path P is $e_i = (u_{i-1}, u_i)$ (such a temporal edge always exists by construction of G^τ). Finally, $e_1^* = (u_{n+1}^1, u_2^1, 1)$ where u_1 is the first vertex in P , $e_{k+2}^* = (u_{k+1}^{k+2}, u_{n+2}^{k+3}, k+2)$ where u_{k+1} is the end vertex of path P . Since P is a path there exists no two vertices $u_i, u_j \in P$ such that $u_i = u_j$, so no two vertices $u_i^*, u_j^* \in P^\tau$ have the same color. Consequently, P^τ is a RAINBOWPATH of length $k+2$ in G^τ .

Let us assume that $P^\tau = u_1^1 e_1^1 u_2^2 \dots e_{k+2}^{k+2} u_{k+1}^{k+2}$ is a RAINBOWPATH of length $k+2$ in G^τ . We construct a path $P = u_1^* e_1^* u_2^* \dots e_k^* u_{k+1}^*$ such that for all $i \in \{2, \dots, k+2\}$ $u_{i-1}^* = u_i$ such that $u_{i+1} i+1 \in P^\tau$ and for each edge $e_i^i = (u_i^i, u_{i+1}^{i+1}, i) \in P^\tau$ such that $i \in \{2, \dots, k+2\}$ we replace $e_{i-1}^* = (u_i, u_{i+1})$ in

P . Since P^τ is a rainbow path there exists no two vertices in P^τ that have the same color, implying that there exist no two vertices $v_i, v_j \in P$ such that $v_i = v_j$. Thus, P is a path of length k in G and we are done. \square

5.7 Temporal path problem with edge constraints (EC-TEMPPATH)

Given a temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a tuple $T = (j_1, \dots, j_{k-1})$ of timestamps such that $j_i < j_{i+1}$ for all $i \in [k-2]$, the problem asks us to decide the existence of a temporal path P^τ such that the timestamps in P^τ agree with the timestamps in T in the specified order.

To establish the **NP**-hardness we reduce the k -PATH problem in non-temporal graphs to the EC-TEMPPATH problem in temporal graphs. The proof of the reduction is presented in Lemma 5.6.

Lemma 5.6. *Problem EC-TEMPPATH is **NP**-complete.*

Proof. We proceed by a polynomial-time reduction from k -PATH (in non-temporal graphs) to TEMPPATH with edge constraints.

Given an instance $\langle G = (V, E), k \rangle$ of k -PATH, we construct an instance of EC-TEMPPATH problem such that $G^\tau = (V, E^\tau)$, where $V^\tau = V$ and $E^\tau = \bigcup_{(u,v) \in E, i \in [k]} (u, v, i)$, and the set time constraints on edges $T = \{1, 2, \dots, k\}$. We claim that there exists a solution for the k -PATH problem in G if and only if there exists a solution for EC-TEMPPATH problem in G^τ .

Let $P = \{v_1, e_1, v_2, \dots, e_k, v_{k+1}\}$ be a solution for the k -PATH problem in G . We construct a temporal path $P^\tau = \{v_1, e'_1, v_2, \dots, e'_k, v_{k+1}\}$ such that $e'_i = (v_i, v_{i+1}, i)$ for each $i \in [k]$. By construction, we have that such an edge always exists in E^τ . The proof in other direction is analogous to the previous. The claim follows. \square

5.8 Path motif problem with edge constraints (EC-PATHMOTIF)

Given a vertex-colored temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a multiset M of colors and a tuple $T = (j_1, \dots, j_{k-1})$ of timestamps such that $j_i < j_{i+1}$ for all $i \in [k-2]$. The problem asks us to decide the existence of a temporal path P^τ such that the timestamps of P^τ agree to that of timestamps in T in the specified order and the vertex colors of P^τ agree to that of colors in M .

A reduction from COLORFULPATH problem in non-temporal graphs to EC-PATHMOTIF problem in temporal graphs is straightforward. The construction is similar to that of Lemma 5.1, so we omit a detailed proof.

Lemma 5.7. *Problem EC-PATHMOTIF is **NP**-complete.*

5.9 Path motif problem with vertex constraints (VC-PATHMOTIF)

Given a vertex-colored temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a tuple M of colors. The problem asks us to find a temporal path of length $k-1$ such that the vertex colors of the path match to that of colors in M in the specified order.

A reduction from the k -TEMPPATH problem to VC-PATHMOTIF problem with multiset $M = \{1^k\}$ is straightforward. The hardness follows.

Lemma 5.8. *Problem VC-PATHMOTIF is **NP**-complete.*

5.10 Colorful path problem with vertex constraints (VC-COLORFULPATH)

Given a temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a coloring function $c : V \rightarrow [k]$ and a tuple M of k different colors. The problem asks us to decide the existence of a temporal path P^τ of length $k - 1$ such that the vertex colors of P^τ agree to that of M in the order specified.

The VC-COLORFULPATH problem is solvable in polynomial time. We present a dynamic programming algorithm in Section 7.5.

6 Algebraic algorithm for temporal paths

We now present an algorithm for the k -TEMPPATH and PATHMOTIF problems. Our algorithm relies on a *polynomial encoding* of temporal walks and the *algebraic fingerprinting* technique [8, 34, 37, 57]. The algorithm is presented in three steps:

- (i) a dynamic programming recursion to generate a polynomial encoding of temporal walks;
- (ii) an algebraic algorithm to detect the existence of a multilinear monomial in the polynomial generated using the recursion in (i) — furthermore, we prove that the existence of a multilinear monomial implies the existence of a temporal path; and
- (iii) finally, an extension of the approach to detect temporal paths with additional color constraints via constrained multilinear detection.

Let us begin our discussion with the concept of polynomial encoding of walks and continue to polynomial encoding of temporal walks.

Let P be a multivariate polynomial such that every monomial M is of the form

$$x_1^{d_1} x_2^{d_2} \dots x_q^{d_q} y_1^{f_1} y_2^{f_2} \dots y_r^{f_r}.$$

A monomial is *multilinear* if $d_i \in \{0, 1\}$ for all $i \in [q]$, and $f_j \in \{0, 1\}$ for all $j \in [r]$. A monomial is *x -multilinear* if $d_i \in \{0, 1\}$ for all $i \in [q]$ — in other words, we do not take into account the degrees of the y -variables. The *degree* of a monomial M is the sum of the degrees of all its variables. More restrictively, the *x -degree* of M is the sum of the degrees of all its x -variables.

6.1 Monomial encoding of a walk

Let $W = v_1 e_1 v_2 \dots e_{k-1} v_k$ be walk in a temporal graph $G = (V, E)$ for any integer $k > 1$. Let $\{x_{v_1}, \dots, x_{v_n}\}$ be a set of variables corresponding to the vertices in $V = \{v_1, \dots, v_n\}$ and let $\{y_{uv, \ell} : (u, v) \in E, \ell \in [k]\}$ be a set of variables such that $y_{uv, \ell}$ corresponds to an edge $(u, v) \in E$ that appears at position ℓ in W . A monomial encoding of W is represented as

$$x_{v_1} y_{v_1 v_2, 1} x_{v_2} y_{v_1 v_2, 2} \dots y_{v_{k-1} v_k, k-1} x_{v_k}.$$

It is easy to see that this encoding of W is multilinear if and only if W is a path for in a path no vertex repeats. Moreover, for the later discussion, the reader should expect a convention where x -variables correspond to vertices and y -variables to edges of a graph in question.

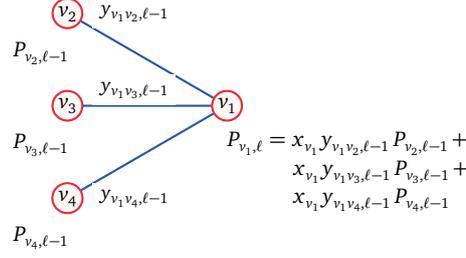


Figure 5: An illustration of the polynomial encoding of walks.

6.2 Generating polynomial for walks

Consider an example illustrated in Figure 5. Here, let $P_{v_2, \ell-1}$, $P_{v_3, \ell-1}$, and $P_{v_4, \ell-1}$ denote the polynomial encoding of all walks of length $\ell - 1$ ending at v_2 , v_3 , and v_4 , respectively. We construct the polynomial encoding denoting all walks with length ℓ and ending at vertex v_1 by writing

$$P_{v_1, \ell} = x_{v_1} y_{v_1 v_2, \ell-1} P_{\ell-1, v_2} + x_{v_1} y_{v_1 v_3, \ell-1} P_{\ell-1, v_3} + x_{v_1} y_{v_1 v_4, \ell-1} P_{\ell-1, v_4}.$$

The intuition is that we can construct a walk of length ℓ for the vertex v_1 using the walks of length $\ell - 1$ for its neighbors in $N(v_1) = \{v_2, v_3, v_4\}$. Further, the intuition is that such a setup is appealing algorithmically for an application of dynamic programming as we will see later on.

In general, we write $P_{u, \ell}$ to denote the polynomial encoding of all walks of length $\ell - 1$ ending at vertex u . As such, a generating function $P_{u, \ell}$ for each $u \in V$ and $\ell \in \mathbb{Z}_+$ can be written as

$$P_{u, 1} = x_u,$$

for each $u \in V$, and then

$$P_{u, \ell} = x_u \sum_{v \in N(u)} y_{uv, \ell-1} P_{v, \ell-1}, \quad (1)$$

for each $u \in V$ and $\ell \in \{2, \dots, k\}$.

Finally, we denote the polynomial $\mathcal{P}_\ell = \sum_{u \in V} P_{u, \ell}$ for each $\ell \in [k]$. In other words, \mathcal{P}_ℓ is the polynomial encoding of all walks of length $\ell - 1$.

We demonstrate the polynomial encoding of walks in a non-temporal graph using a toy example. Let $G = (V, E)$ be a graph with vertex set $V = \{v_1, v_2, v_3\}$ and edge set $E = \{(v_1, v_2), (v_2, v_3)\}$. Figure 6 (a), (b) and (c) illustrate the encoding of all walks with length zero, one and two, respectively. Observe that monomials that correspond to paths are multilinear and they are highlighted in bold.

6.3 Monomial encoding of a temporal walk

Let $W^\tau = v_1 e_1 v_2 \dots e_{k-1} v_k$ be a temporal walk in a temporal graph $G^\tau = (V, E^\tau)$. Let $\{x_{v_1}, \dots, x_{v_n}\}$ be a set of variables corresponding to the vertices in $V = v_1, \dots, v_n$ and let $\{y_{uv, \ell, i} : (u, v, i) \in E^\tau, \ell \in [k]\}$ be a set of variables where $y_{uv, \ell, i}$ corresponds to an edge $(u, v, i) \in E^\tau$ that appears at position ℓ in W^τ . A monomial encoding of W^τ is represented as

$$x_{v_1} y_{v_1 v_2, 1, i_1} x_{v_2} y_{v_1 v_2, 2, i_2} \dots y_{v_{k-1} v_k, k-1, i_{k-1}} x_{v_k},$$

where i_1, \dots, i_{k-1} denote the timestamps on the edges e_1, \dots, e_{k-1} , respectively.

We make the following observation regarding the monomial encoding of a temporal walk.

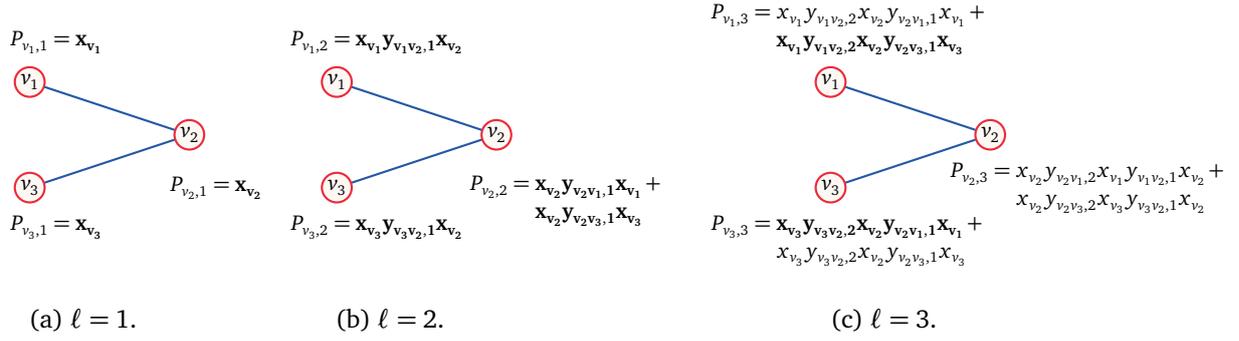


Figure 6: An example demonstrating the polynomial encoding of walks of length zero (a), one (b) and two (c) in a non-temporal graph. Observe that monomials corresponding to paths are multilinear (highlighted in bold).

Lemma 6.1. *The monomial encoding of a temporal walk W^τ is multilinear if and only if W^τ is a temporal path.*

Proof. Suppose that the temporal walk W^τ is a temporal path. By definition, each vertex of W^τ appears exactly once, so all x terms in its monomial encoding are unique. From this, it is also evident that the y terms are unique. Thus, the monomial encoding of W^τ is multilinear.

For the other direction, suppose that W^τ is not a temporal path. Because at least one vertex in W^τ repeats, there is at least one x term in the monomial encoding of W^τ of degree at least two. It follows that the encoding is not multilinear, concluding the proof. \square

6.4 Generating polynomial for temporal walks

In this section, we present a dynamic programming recursion to generate temporal walks.

Let $P_{u,\ell,i}$ denote the encoding of all walks of length $\ell - 1$ ending at vertex u at latest time $i \in [t]$.

Again, consider the example illustrated in Figure 7, where v_1 is a vertex such that $N_i(v_1) = \{v_2, v_3, v_4\}$. Following our notation, $P_{v_2,\ell-1,i-1}$, $P_{v_3,\ell-1,i-1}$ and $P_{v_4,\ell-1,i-1}$ represent the polynomial encoding of walks ending at vertices v_2 , v_3 and v_4 , respectively, such that all walks have length $\ell - 2$ and end at latest time $i - 1$. Further, $P_{v_1,\ell,i-1}$ denotes the polynomial encoding of all walks of length $\ell - 1$, ending at v_1 at latest time $i - 1$.

The polynomial encoding to represent walks of length $\ell - 1$ ending at v_1 and at latest time i can be written as

$$\begin{aligned}
P_{v_1,\ell,i} &= x_{v_1}y_{v_1v_2,\ell-1,i}P_{v_2,\ell-1,i-1} + \\
& x_{v_1}y_{v_1v_3,\ell-1,i}P_{v_3,\ell-1,i-1} + \\
& x_{v_1}y_{v_1v_4,\ell-1,i}P_{v_4,\ell-1,i-1} + P_{v_1,\ell,i-1}.
\end{aligned}$$

Intuitively, the above equation says that we can reach vertex v_1 at time step i if we have already reached any of its neighbors in $N_i(v_1)$ by latest time $i - 1$. Notice that the term $P_{v_1,\ell,i-1}$ is included so that if we have reached v_1 at latest time $i - 1$ we can choose to stay at v_1 for time i .

By generalizing the above idea, a generating function is obtained by setting

$$P_{u,1,i} = x_u,$$

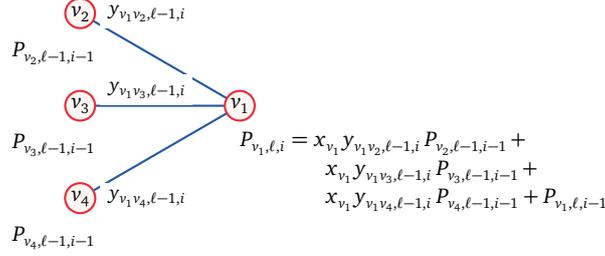


Figure 7: An illustration of the polynomial encoding of temporal walks.

for each $u \in V$ and $i \in [t]$, and

$$P_{u, \ell, i} = x_u \sum_{v \in N_i^-(u)} y_{uv, \ell-1, i} P_{v, \ell-1, i-1} + P_{u, \ell, i-1}, \quad (2)$$

for each $u \in V$, $\ell \in \{2, \dots, k\}$, and $i \in [t]$.

Furthermore, let us form the polynomial $\mathcal{P}_{\ell, i} = \sum_{u \in V} P_{u, \ell, i}$, for each $\ell \in [k]$ and $i \in [t]$. Put differently, $\mathcal{P}_{\ell, i}$ denotes the polynomial encoding of all walks of length $\ell - 1$ ending at latest time i .

Now, we observe that the problem of detecting a k -TEMPPATH is equivalent to finding an x -multilinear monomial in $\mathcal{P}_{k, t}$. From the construction of the generating function (2) it is clear that the y variables are always distinct, so detecting an x -multilinear monomial is equivalent to detecting a multilinear monomial.

We demonstrate the polynomial encoding of temporal walks using a small example graph. Consider a temporal graph $G^\tau = (V, E^\tau)$ with vertex set $V = \{v_1, v_2, v_3\}$ and edges $E^\tau = \{(v_1, v_2, 1), (v_1, v_2, 2), (v_2, v_3, 1), (v_2, v_3, 2)\}$. The polynomial encoding of temporal walks of length zero, one and two is illustrated in Figure 8 (a,b), (c,d) and (e,f), respectively. Again, observe that multilinear monomials highlighted in bold correspond to temporal paths in the graph.


Lemma 6.2. *The polynomial encoding $P_{u, \ell, i}$ in Equation (2) contains an x -multilinear monomial of x -degree ℓ if and only if there exists a temporal path W^τ of length $\ell - 1$ ending at vertex u at latest time i .*

Proof. Suppose that there exists an x -multilinear monomial M of x -degree ℓ in $P_{u, \ell, i}$. By Lemma 6.1, we know that M corresponds to a temporal path W^τ . Because M has x -degree ℓ , we have that W^τ has length $\ell - 1$. Moreover, by the construction of the generating function, all the walks end at vertex u meaning W^τ also ends at vertex u . Finally, all the monomial encodings of walks of length $\ell - 1$ reaching u before time i are preserved using the term $P_{u, \ell, i-1}$, so the time of reaching u can be at most i for W^τ , as required.


For the other direction, we have again by Lemma 6.1 that there exists a multilinear monomial M in $P_{u, \ell, i}$. Since the length of W^τ is $\ell - 1$, we have that M has ℓ unique x terms. In other words, the x -degree of M is ℓ and our claim follows. \square

6.5 Multilinear sieving


From Lemma 6.2 the problem of deciding the existence of a k -TEMPPATH in G^τ reduces to detecting the existence of a multilinear monomial term in $\mathcal{P}_{k, t}$.




(a) $\ell = 1, i = 1$.

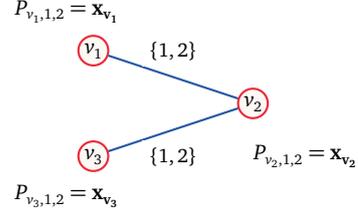


(b) $\ell = 1, i = 2$.

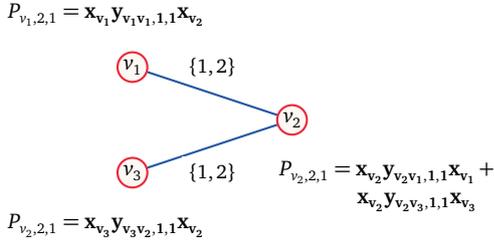


(c) $\ell = 2, i = 1$.

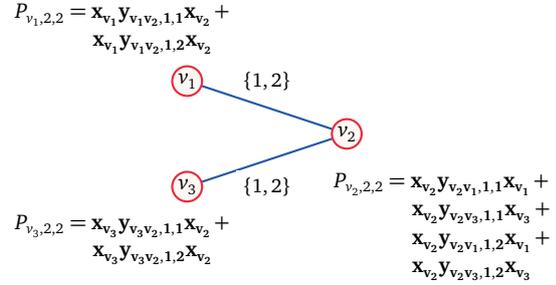

(d) $\ell = 2, i = 2$.



(e) $\ell = 3, i = 1$.

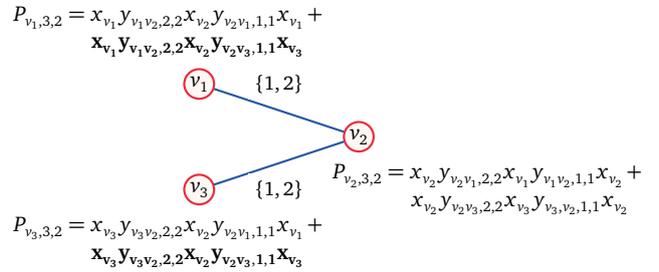

(f) $\ell = 3, i = 2$.

Figure 8: An example to demonstrate the polynomial encoding denoting temporal walks of length zero (a, b), one (c, d) and two (e, f) in a temporal graph. Observe that monomials corresponding to a temporal path are multilinear (highlighted in bold).

Let L be the set of k labels and $[n]$ the set of vertices in V . We express L and $[n]$ in terms of a set of new variables. More precisely, for each vertex $i \in [n]$ and label $j \in L$ we introduce a new variable $z_{i,j}$. The vector of all variables of $z_{i,j}$ is denoted as \mathbf{z} and the vector of all y -variables as \mathbf{y} . At this point, we turn to the multilinear sieving technique of Björklund, Kaski and Kowalik [6].

Lemma 6.3 (Multilinear sieving [6]). *The polynomial $\mathcal{P}_{k,t}$ has at least one multilinear monomial if and only if the polynomial*

$$Q(\mathbf{z}, \mathbf{y}) = \sum_{A \subseteq L} \mathcal{P}_{k,t}(z_1^A, \dots, z_n^A, \mathbf{y}) \quad (3)$$

is not identically zero, where $z_i^A = \sum_{j \in A} z_{i,j}$ for all $i \in [n]$ and $A \subseteq L$.

From the lemma, we can determine the existence of a multilinear monomial in $\mathcal{P}_{k,t}$ by making 2^k substitutions of the new variables in \mathbf{z} in Equation (3). In fact, as detailed in [6], these substitutions can be *random* for a low-degree polynomial which is not identically zero has only few roots. Indeed, if one evaluates the said polynomial at a random point, one is likely to witness that it is not identically zero (see e.g., Schwartz [50], Zippel [61]). Therefore, the algorithmic framework this approach gives rise to is randomized with a false negative probability $(2k-1)/2^b$ where the arithmetic is over the finite field $\text{GF}(2^b)$ (for full technical details, see [8]).⁴ This result can be used to design an algorithm for the k -TEMPPATH problem.

Lemma 6.4. *There exists an algorithm for solving the k -TEMPPATH problem in $\mathcal{O}(2^k k(nt+m))$ time and $\mathcal{O}(nt)$ space.*

Proof. The algorithm will first construct the polynomial $\mathcal{P}_{k,t}$ representing all temporal walks of length $k-1$ using the recursion in Equation (2). Afterwards, it checks if there exists an x -multilinear monomial term in $\mathcal{P}_{k,t}$ via Lemma 6.3. Then, by Lemma 6.2, the existence of an x -multilinear monomial term of size k implies the existence of a k -TEMPPATH of length $k-1$ and vice versa.

In more detail, for $\ell \in [k]$, computing $\mathcal{P}_{\ell,i}$ requires $\mathcal{O}(n+m_i)$ additions and multiplications in the field $\text{GF}(2^b)$, where m_i is the number of edges at time instance $i \in [t]$. Furthermore, computing the polynomial for all $i \in [t]$ requires $\mathcal{O}(nt+m)$ additions and multiplications. Finally, we need to iterate the computations over $\ell \in [k]$, so, we have $\mathcal{O}(k(nt+m))$ additions and multiplications. The overall complexity of the algorithm is $\mathcal{O}(2^k k(nt+m)(A(2^b) + M(2^b)))$, where $A(2^b)$ and $M(2^b)$ are the complexities of addition and multiplication in the field $\text{GF}(2^b)$, respectively. Asymptotically, it is known that $M(2^b) = \mathcal{O}(b \log b)$ and $A(2^b) = \mathcal{O}(\log b)$ (see [45]). Therefore, the overall complexity of the algorithm is $\mathcal{O}(2^k k(nt+m)b \log b)$.

In order to compute $\mathcal{P}_{\ell,i}$ we need to remember the computations of $P_{u,\ell,i-1}$ and $\mathcal{P}_{\ell-1,i-1}$ for all $v \in V \setminus u$ and for all $i \in [t]$. However, we can reuse space since computing the ℓ -th polynomial encoding only depends on the $(\ell-1)$ -th polynomial encoding. For each vertex $v \in V$ we need a field variable and we need to compute this for all $i \in [t]$ (this is also required for even staying at the vertex without moving). Thus, the memory requirement is $\mathcal{O}(nt)$. \square

As a corollary, one can also observe that the given algorithm establishes that k -TEMPPATH is fixed-parameter tractable in polynomial space.

⁴In practice, to make the probability of a false negative very low one can choose b to be large enough, say $b = 64$.

6.6 Constrained multilinear sieving

We now move on to extending the previous approach to detect PATHMOTIF using the *constrained* multilinear sieving technique due to [8].

If we observe carefully, to obtain a PATHMOTIF we need to find a multilinear monomial term in the polynomial $\mathcal{P}_{k,t}$ such that the vertex colors corresponding to the x -variables with degree one agree with that of the multiset M . This can be done by imposing additional constraints while evaluating the sieve.

Let C be a set of n colors and $c : [n] \rightarrow C$ a function that associates each $i \in [n]$ to a color in C . For each color $s \in C$, let us denote the number of occurrences of color s by $\mu(s)$. A monomial $x_1^{d_1} \dots x_q^{d_q} y_1^{f_1} \dots y_r^{f_r}$ is properly colored if for all $s \in C$ it holds that $\mu(s) = \sum_{i \in c^{-1}(s)} d_i$, i.e., the number of occurrences of color s is equal to the total degree of x -variables representing the vertices with color s .

For each $s \in C$, let S_s be the set of $\{\mu(s)\}$ with color s such that $S_s \cap S_{s'} = \emptyset$ for all $s \neq s'$. For $i \in [n]$ and $d \in S_{c(i)}$ we introduce a new variable $v_{i,d}$. Let L be a set of k labels. For each $d \in \cup_{s \in C} S_s$ and each label $i \in L$ we introduce a new variable $w_{i,d}$.

Lemma 6.5 (Constrained multilinear sieving [8]). *The polynomial $\mathcal{P}_{k,t}$ has at least one monomial that is both x -multilinear and properly colored if and only if the polynomial*

$$Q(\mathbf{z}, \mathbf{w}, \mathbf{y}) = \sum_{A \subseteq L} \mathcal{P}_{k,t}(z_1^A, \dots, z_n^A, \mathbf{y}) \quad (4)$$

is not identically zero, where

$$z_i^A = \sum_{j \in A} z_{i,j}, \text{ and } z_{i,j} = \sum_{d \in S_{c(i)}} v_{i,d} w_{d,j}. \quad (5)$$

To obtain an algorithm running time $\mathcal{O}(2^k k(nt + m))$ using $\mathcal{O}(nt)$ space for PATHMOTIF we proceed similarly to the proof of Lemma 6.4, but instead apply Lemma 6.5 to the constructed polynomial. Further and similarly, it follows that PATHMOTIF problem is fixed-parameter tractable.

6.7 Vertex-localization

The idea of vertex-localization was introduced by Kaski et al. [32] while engineering the multilinear sieving approach to scale for large *query* sizes (for non-temporal graphs). The approach is effective to sieve out the vertices that are not incident to at least one match, thus reducing the graph size. We extend their idea of vertex-localization to temporal graphs. More precisely, we extend the sieve construction to identify the set of vertices that have at least one temporal path agreeing with specific constraints and end at these vertices.

In this approach instead of working with the polynomial encoding of temporal walks $\mathcal{P}_{k,t}$ for all vertices, we operate on a family of multivariate polynomials $P_{u,k,t}$ for each individual $u \in V$ simultaneously. We localize our evaluation to each individual vertex u by performing 2^k random evaluations of the variable z on the localized polynomial $P_{u,k,t}$, independently. Furthermore, the polynomial $P_{u,k,t}$ has at least one monomial that is both x -multilinear and properly colored if and only if the polynomial

$$Q_u(\mathbf{z}, \mathbf{w}, \mathbf{y}) = \sum_{A \subseteq L} P_{u,k,t}(z_1^A, \dots, z_n^A, \mathbf{y}) \quad (6)$$

is not identically zero, where

$$z_i^A = \sum_{j \in A} z_{i,j}, \text{ and } z_{i,j} = \sum_{d \in S_{c(i)}} v_{i,d} w_{d,j}. \quad (7)$$

Thus, if the polynomial $Q_u(z, \mathbf{w}, \mathbf{y})$ evaluates to a non-zero term, it follows from Lemma 6.2 that there exists at least one temporal path of length $k - 1$ ending at vertex u satisfying the constraints. By independently evaluating the set of polynomials $Q_u(z, \mathbf{w}, \mathbf{y})$ for each $u \in V$, one can obtain a set of vertices for which there exists at least one temporal path satisfying the constraints and ending at these vertices. Most importantly, this redesign of the sieve comes with no change in the asymptotic time and space complexity. It is to be noted that there is a per-vertex false negative probability of $(2k - 1)/2^b$ where the arithmetic is over the finite field $\text{GF}(2^b)$. Again, in practice we can choose a large enough field size (say $b = 64$) to keep the error probability very low.

For the full technical details of multilinear sieving with vertex-localization, we refer the reader to the work of Kaski et al. [32, §2]

6.8 Finding optimum timestamp

In this section we describe a procedure to obtain an optimum timestamp. By optimum we mean that the maximum timestamp of the edges in the temporal path is minimized. We refer to our algorithm for the decision variant as *decision oracle*.

To find the minimum (optimum) timestamp $t' \in [t]$, we make $\mathcal{O}(\log t)$ queries to the decision oracle using binary search on range $\{1, \dots, t\}$. More precisely, we construct a polynomial encoding of all walks of length $k - 1$ which end at latest time t' and query the oracle for the existence of a path. Thus, we need at most $\log t$ queries to the decision oracle to find the minimum timestamp t' for which there exists a match. As such, the overall complexity of finding the optimum timestamp is $\mathcal{O}(2^k k (nt + m) \log t)$.

6.9 Extracting a solution

In the previous sections we described an algebraic solution for the decision version of the PATHMOTIF problem. That is, the described algorithm strictly answers YES/NO to the question of whether a solution exists. However, in many cases, we need to extract an explicit solution if such exists. We propose two approaches to extract an optimal solution. Our first approach uses the self-reducibility of the problem while the second approach uses vertex-localization.

Using self-reducibility. The extraction process works in two steps:

- (i) extract a k -vertex temporal subgraph that contains a temporal path matching the multiset query;
- (ii) extract a temporal path in the subgraph from (i) using temporal DFS.

Extracting a subgraph. We use the decision oracle as a subroutine to find a solution in $\mathcal{O}(n)$ queries as follows: for each vertex $v \in V$, we remove the vertex v and the edges incident to it and query the oracle. If there is a solution (i.e., the oracle returns YES), then we continue to next vertex; otherwise we put back v and the edges incident to it, and continue to next vertex. In this way, we can obtain a subgraph with k vertices in at most $n - k$ queries to the oracle. However, the number of queries to the decision oracle can be reduced to $\mathcal{O}(k \log n)$ queries in expectation by recursively dividing the graph in to two halves [6].

Table 2: A summary of algorithm runtimes for the PATHMOTIF and k -TEMPPATH problems.

Algorithm	Time complexity
<u>Deciding the existence of a solution</u>	
Deciding existence	$\mathcal{O}(2^k k(nt + m))$
Finding optimum timestamp	$\mathcal{O}(2^k k(nt + m) \log t)$
<u>Extracting an optimum solution</u>	
Self-reducibility + Temporal-DFS	$\mathcal{O}(2^k k(nt + m)(k \log n + \log t) + k!)$
Vertex-localization + Temporal-DFS	$\mathcal{O}((2^k k(nt + m) \log(t)) + \Delta^k)$

Extracting a temporal path. We pick an arbitrary start vertex in the subgraph obtained from step (i) and find a temporal path connecting all the k vertices using temporal DFS. If such a path does not exist, then we continue to the next vertex. Even though the worst case complexity of this approach is $\mathcal{O}(k!)$, we will demonstrate later that it is highly practical. In contrast, extracting a solution can be done using $\mathcal{O}(k)$ queries to the decision oracle using vertex-localized sieving. However, we leave a vertex-localization variant of sieving for future work.

In summary, the overall complexity of extracting an optimum solution using self-reducibility is

$$\mathcal{O}((2^k (nt + m)(k \log n + \log t)) + k!).$$

Using vertex-localization. Again, the process works in two steps: (i) we identify the set of vertices for which there exists at least one temporal path satisfying the constraints and end at the vertex, (ii) we choose a vertex from the set of vertices obtained from step (i) and perform a reverse temporal-DFS (with decreasing order of the timestamps) such that the path ends at the chosen vertex.

As described earlier (cf. §6.7), vertex-localization comes with no additional cost with respect either space or time. The temporal DFS takes $\mathcal{O}(\Delta^k)$ time, where Δ is the maximum degree of the temporal graph. The details of the algorithm and its runtime analysis is described in Section 9.1. So, the overall complexity of extracting an optimum solution using vertex-localization is

$$\mathcal{O}((2^k k(nt + m) \log(t)) + \Delta^k).$$

To summarize, the runtimes of the decision and extraction variants of the algorithm are reported in Table 2.

7 Extending the framework

Our multilinear sieving method is not limited to solving the k -TEMPPATH and PATHMOTIF problems. In this section, to demonstrate this, we describe extensions of our method to solve many similar variants of these problems.

7.1 Solving COLORFULPATH and (s, d) -COLORFULPATH problems

The COLORFULPATH problem is a special case of the PATHMOTIF problem with a multiset query of different colors. As such, one can use the algorithm described to solve the PATHMOTIF problem to solve the COLORFULPATH problem. Furthermore, to adapt the algorithm for the (s, d) -COLORFULPATH

problem, it suffices to assign unique colors to the source and the destination vertices, and include these colors in the multiset. More precisely, given an instance of (s, d) -COLORFULPATH, we extend the given vertex-coloring function c by also setting $c(s) = k + 1$ and $c(d) = k + 2$, where $k + 1$ and $k + 2$ are new unique colors. Further, we set $M' = M \cup \{k + 1, k + 2\}$ and apply the algorithm described for PATHMOTIF on the produced instance $(G^\tau, c, M', k + 2)$.

7.2 Solving the RAINBOWPATH problem

Given a RAINBOWPATH problem with coloring function $c : V \rightarrow [q]$, we query the decision oracle of the PATHMOTIF problem with k combinations of q colors. In total we need at most $\binom{q}{k}$ queries to decide the existence of a RAINBOWPATH. So the overall complexity to decide the existence of a RAINBOWPATH is $\mathcal{O}(q^k 2^k k(nt + m))$.

Note that the algorithm is practical for small values of q .

7.3 Solving the EC-PATHMOTIF problems

Recall that in the EC-PATHMOTIF problem we are given a temporal-graph $G^\tau = (V, E^\tau)$, a tuple $T = (j_1, \dots, j_{k-1})$ of timestamps such that $j_i < j_{i+1}$ for all $i \in [k-2]$ and a multiset M of colors, and the goal is to decide whether there exists a temporal path matching T in the specified order with vertex colors agreeing with M . We construct a generating polynomial for EC-PATHMOTIF such that

$$P_{u,1,j_0} = x_u,$$

for each $u \in V$ and $j_0 = 1$; and

$$P_{u,\ell,j_{\ell-1}} = x_u \sum_{(v,j_{\ell-1}) \in E^\tau} y_{uv,\ell-1,j_{\ell-1}} P_{v,\ell-1,j_{\ell-2}}$$

for each $u \in V$, $\ell \in \{2, \dots, k\}$.

From Lemmas 6.2 and 6.5, it follows that existence of a multilinear monomial in the polynomial $\mathcal{P}_{k,j_{k-1}} = \sum_{u \in V} P_{u,k,j_{k-1}}$ would imply the existence of a EC-PATHMOTIF of length $k - 1$ and satisfying the constraints. The algorithm requires $\mathcal{O}(2^k(nk + m))$ time and $\mathcal{O}(n)$ space. In more detail, computing $\mathcal{P}_{\ell,j_{\ell-1}}$ requires $n + m_{\ell-1}$ additions and multiplications. Furthermore, for all $\ell \in [k - 1]$ we require $n(k - 1) + \sum_{\ell=1}^{k-1} m_{j_\ell} = \mathcal{O}(nk + m)$ additions and multiplications. So the overall time complexity of the algorithm is $\mathcal{O}(2^k(nk + m))$. For computing $\mathcal{P}_{\ell,j_{\ell-1}}$, we only need $\mathcal{P}_{\ell-1,j_{\ell-2}}$. So the space complexity is $\mathcal{O}(n)$.

Note that EC-TEMPPATH problem is a special case of EC-PATHMOTIF problem such that the motif query has a single color i.e, $M = \{1^k\}$. Likewise, we use the algorithm described above to solve the EC-TEMPPATH problem and the complexity results of the algorithm follow from EC-PATHMOTIF problem.

7.4 Solving the VC-PATHMOTIF problem

Recall that in the VC-PATHMOTIF problem we are given a temporal graph $G^\tau = (V, E^\tau)$, a coloring function $c : V \rightarrow [q]$, a tuple $M = (c_1, \dots, c_k)$ of colors, and the goal is to decide whether there exists a temporal path P^τ such that the vertex colors of P^τ match with M in the specified order. We construct a generating polynomial for the VC-PATHMOTIF problem such that

$$P_{u,1,i} = x_u,$$

for all $u \in V$, $i \in [t]$ and $c(u) = c_1$; and

$$P_{u,\ell,i} = x_u \sum_{v \in N_i(u)} y_{uv,\ell-1,i} P_{v,\ell-1,i-1} + P_{u,\ell,i-1}$$

for all $u \in V$, $\ell \in \{2, \dots, k\}$, $i \in [t]$, and $c(u) = c_\ell$, $c(v) = c_{\ell-1}$.

From Lemmas 6.2 and 6.5, it follows that the existence of a multilinear monomial in the polynomial generated above would imply the existence of a EC-PATHMOTIF and vice versa. The runtime and space complexity results follow.

7.5 Solving the VC-COLORFULPATH problem

The VC-COLORFULPATH problem in temporal graphs is solvable in polynomial time. Indeed, we present a dynamic programming algorithm for solving the problem in $\mathcal{O}(mt)$ time and $\mathcal{O}(nt)$ space.

Again, recall that in the VC-COLORFULPATH problem we are given a temporal graph $G^\tau = (V, E^\tau)$, an integer $k \leq n$, a coloring function $c : V \rightarrow [k]$, and a tuple M of k different colors. The problem asks us to decide whether there exists a temporal path P^τ of length $k - 1$ such that the vertex colors of P^τ match with M in the specified order.

Without loss of generality, let $M = (1, \dots, k)$. Let $V_i \subseteq V$ denote the set of vertices with color $i \in [k]$. Define an indicator variable $I_{u,i}$ for each $u \in V$ and $i \in [t]$ to indicate the existence of an VC-COLORFULPATH. Our dynamic programming recursion works as follows: for all $u \in V_1$ and $i \in [t]$, initialize $I_{u,i} = 1$. Iterate over $\ell \in \{2, \dots, k\}$. For each $u \in V_\ell$ set $I_{u,j} = 1$ for all $j \in \{i + 1, \dots, t\}$ if there exists an edge $(u, v, i) \in E^\tau$ such that $v \in V_{\ell-1}$ and $I_{v,i} = 1$. Finally, if $I_{u,i} = 1$ for any vertex $u \in V_k$ and timestamp $i \in [t]$, it implies that there exists a VC-COLORFULPATH ending at vertex u at time i .

As we have a total of nt indicator variables, the space complexity is $\mathcal{O}(nt)$. For each edge $e \in E^\tau$ we update at most t indicator variables, so the algorithm takes $\mathcal{O}(mt)$ time.

7.6 Path motif problem with delays

In a transport network a transition between any two locations may involve a *transition time* and a minimum *delay time* at a location before continuing the journey, for example a minimum time to visit a museum. In this section, we introduce a problem setting with transition and delay times, and present generating polynomials to solve the problems.

For a temporal graph $G^\tau = (V, E^\tau)$, an edge $e \in E^\tau$ is a tuple (u, v, i, ϵ) where $u, v \in V$, $i \in [t]$ is the edge timestamp and $\epsilon \in \mathbb{Z}_+$ is the transition time from u to v . Additionally, each vertex has a delay time $\delta : V \rightarrow \mathbb{Z}_{\geq 0}$.

We consider the following cases.

Encoding only with delay:

$$P_{u,\ell,i} = x_u \sum_{(u,v,i,\epsilon) \in E} y_{uv,\ell-1,i} P_{v,\ell-1,i-\delta(v)} + P_{u,\ell,i-1}.$$

Encoding only with transition time:

$$P_{u,\ell,i+\epsilon} = x_u \sum_{(u,v,i,\epsilon) \in E} y_{uv,\ell-1,i} P_{v,\ell-1,i-1} + P_{u,\ell,i-1}.$$

Encoding with transition time and delay:

$$P_{u,\ell,i+\epsilon} = x_u \sum_{(u,v,i,\epsilon) \in E} y_{uv,\ell-1,i} P_{v,\ell-1,i-\delta(v)} + P_{u,\ell,i-1}.$$

From Lemmas 6.2 and 6.5, it follows that existence of a multilinear monomial in the polynomial generated above would imply the existence of a PATHMOTIF (or k -TEMPPATH). The time and space complexity of the algorithm follow.

7.7 Including wildcard entries

We now describe how to extend our framework to include wildcard entries. We can extend the PATHMOTIF problem so that each vertex is colored with a set of colors instead of a single color. This extension enables us to have wildcard entry matches, which can be desirable in scenarios where vertices are not immediately adjacent but rather some uncertain distance away.

Let $c : V \rightarrow [q]$ be the color mapping defined in the original problem instance. We introduce an additional color $q + 1$ and associate it with each vertex in the graph. More precisely, $c' : V \rightarrow \{c(v), q + 1\}$. In other words, each vertex $v \in V$ is mapped to two colors; one of which is defined by c and the other is $q + 1$. In the modified problem instance each vertex can either match to the original color defined by c or the color $q + 1$.

We discuss the approach for solving the PATHMOTIF problem with wildcard entries, however, for other variants of the problem the method is similar. Given a PATHMOTIF instance (G^τ, c, M, k) with $c : V \rightarrow [q]$, we construct an instance (G^τ, c', M', k') such that $c' : V \rightarrow \{c(v), q'\}$, $M' = M$, $k' = k$, $q' = q + 1$ and query the decision oracle. Now if the oracle returns a YES, we report the existence of a match. Otherwise, we increment $k' = k' + 1$, add a color q' to the multiset i.e, $M' = M' \cup \{q'\}$ and query the decision oracle with instance (G^τ, c', M', k') . Again, if the decision oracle returns a YES, we report the existence of a match with $k' - k$ wildcard entries, otherwise we repeat the procedure of adding color q' to M' , incrementing k' and querying the decision oracle up to some maximum value of k' .

8 Implementation

We use the design of Björklund et al. [9] as a starting point for our implementation, in particular we make use of their fast finite-field arithmetic implementation.

Intuition. A high-level intuition of the approach is as follows: we assign each variable in a monomial a value in the field $GF(2^b)$. The multiplication between any two field variables is defined as a XOR operation. Likewise, if we multiply two variables with the same value they cancel out each other and the resulting monomial has a zero value. So, even though the generating polynomial has monomials that are not x -multilinear, the contributions from such monomials will cancel out during the evaluation. It is to be noted that the actual implementation is not identical to this description,

but the high-level idea is similar. For the implementation details of the finite-field arithmetic, we refer the reader to the work of Björklund et al. [9, § 3.3].

A natural challenge in implementation engineering is to saturate the arithmetic bandwidth of the hardware, while simultaneously keeping the memory pipeline busy. Modern computing architectures have high memory bandwidth, however, the increase in bandwidth comes at the cost of latency. More precisely, after the processor issues a memory fetch instruction it takes many clock cycles to fetch the data from the main memory and make it available on the registers. Often the memory latency is orders of magnitude greater than the latency of arithmetic operations. Now, the challenge is to keep the processor busy with enough arithmetic instructions for computation meanwhile the memory pipeline is busy fetching the data for subsequent computations. The memory interface can be effectively utilized using coalesced memory accesses, by arranging the memory layout such that the data used for consecutive computation is available in consecutive memory addresses. The arithmetic bandwidth can be saturated by enabling parallel executions of the same arithmetic operations, which are enabled using vector extensions. More precisely, if we are executing the same arithmetic operation on different operands, then we can group the operands using vector extensions to execute arithmetic operations in parallel, thereby increasing the arithmetic throughput. The combination of memory coalescence and vector extensions are often used to speedup the computation in the algorithm-engineering community [3].

Our engineering effort boils down to implementing the generating function (2) and evaluating the recurrence at 2^k random points. Specifically, we introduce a domain variable x_v for each $v \in V$ and a support variable $y_{uv,\ell,i}$ for each $\ell \in [k]$ and $(u, v, i) \in E^\tau$. In total, there are $\mathcal{O}(n)$ domain variables and $\mathcal{O}(mk)$ support variables. The values of variables x_v are computed using Equation (7) and the values of variables $y_{uv,\ell,i}$ are assigned uniformly at random using a pseudorandom number generator, on the fly without storing in memory. Observe that the variables x_v and $y_{uv,\ell,i}$ are used exactly once during the computation of $\mathcal{P}_{k,t}$. Recall that in theory our algorithm has a false negative probability of $\frac{2^k-1}{2^b}$, however, in practice the false negative probability depend on the quality of the random number generator. Our implementation of the recurrence in Equation (2) loops over three variables: the outermost loop is over $[k]$, second loop over $[t]$ and final loop over V . So we compute the value of $P_{u,\ell,i}$ for all $u \in V$ with ℓ and i fixed. Precisely, for each iteration of inner most loop we compute the value of $P_{u,\ell,i}$.

The implementation borrowed from our earlier work [52] uses $\mathcal{O}(ntk)$ memory, nevertheless, in our current work we improve the memory footprint of the implementation to $\mathcal{O}(nt)$ memory, as claimed in theory. For simplicity, we refer our implementations of using $\mathcal{O}(ntk)$ and $\mathcal{O}(nt)$ memory as *genf-1* and *genf-2*, respectively. Recall that computing the ℓ -th polynomial encoding $\mathcal{P}_{\ell,i}$ would require only the $(\ell - 1)$ -th polynomial encodings $\mathcal{P}_{\ell-1,i-1}$ and $P_{u,\ell,i-1}$. Storing $\mathcal{P}_{\ell,i}$ and $\mathcal{P}_{\ell-1,i}$ for all $i \in [t]$ requires $2nt$ memory. However, computing $\mathcal{P}_{\ell+1,i}$ for all $i \in [t]$ does not require $\mathcal{P}_{\ell-1,i}$, so we can reuse the memory used to store $\mathcal{P}_{\ell-1,i}$. This is achieved by swapping the array pointers and initializing the array at each iteration of the outermost loop over $[k]$.

If we observe carefully, the dynamic programming recursion (2), computing $P_{u,\ell,i}$ is independent for each vertex. More precisely, computing $P_{u,\ell,i}$ is independent for each $u \in V$, provided that we fix the values of ℓ and i . So the algorithm is thread-parallelizable up to n threads. Likewise, we employ OpenMP API using the “omp parallel for” construct with default scheduling over the vertices in V to achieve thread-level parallelism. Furthermore, we need to evaluate at 2^k random points, that is, we need 2^k random substitutions of the variables in \mathbf{z} to evaluate $\mathcal{P}_{k,t}$ and these

substitutions are independent of each other. More precisely, vector parallelization is achieved on 2^k random points of evaluation, since we perform the same arithmetic operation on different set of data. So the algorithm is vector-parallelizable up to $2^k n$. In order to reduce the memory access latency we organize our memory layout as $k \times t \times n$ and $t \times n$ for *genf-1* and *genf-2*, respectively; furthermore, we employ hardware pre-fetching [9, § 3.6] to saturate the memory bandwidth.

Our implementation is written in the C programming language with OpenMP constructs to achieve thread-level parallelism. The source code is compiled using `-march=native` and `-O5` optimization flags to enable architecture-specific optimization and instruction set extensions. The running time is measured using OpenMP time interface `omp_get_wtime` and memory usage is tracked using wrapper functions around standard C memory allocation subroutines `malloc` and `free`. We support extracting an optimum solution using two approaches: the first approach uses self-reducibility of the interval oracles, based on the work of Björklund et al. [7]; and our second approach makes use of vertex-localization and temporal-DFS. We support both directed and undirected graphs.

8.1 Preprocessing

We take advantage of two preprocessing steps to reduce the size of the input graph: (i) we remove all vertices whose vertex color do not match with the multiset colors; (ii) we merge the temporal graph instance to a non-temporal graph, build a vertex-localized sieve on the non-temporal instance and reconstruct a temporal graph using the list of vertices, which are incident to at least one match in the vertex-localized sieve.

Recall that in the vertex-localized sieving instead of working with polynomial encoding of all walks for all vertices, we localize the generating polynomial to each vertex. More precisely, we construct polynomial encoding of all walks ending at each vertex, independently and perform 2^k random evaluations for the localized polynomial. If the sieve evaluates to a non-zero value, it indicates that there exists at least one path ending at vertex satisfying the constraints. However, in case of non-temporal graphs, the sieve evaluates to a non-zero if the vertex is incident to (part of) at least one match, this helps us to obtain a list of vertices that are incident at least one match, furthermore helps us to remove all vertices that are not incident to a match. We suggest the reader to refer the work of Kaski et al. [32] for a detailed discussion of vertex-localization in non-temporal graphs.

For preprocessing using vertex-localization, we engineer an implementation of the generating function (1) and evaluate the recurrence at 2^k random points. Specifically, we compute a set of polynomials $\{P_{u,k}: \text{for each } u \in V\}$ and evaluate them independently. Finally, we obtain a set of vertices for which the polynomial $P_{u,k}$ evaluates to a non-zero term. We introduce a domain variable x_v for each $v \in V$ and a support variable $y_{uv,\ell}$ for each $\ell \in [k]$ and $(u, v) \in E$. In total, there are $\mathcal{O}(n)$ domain variables and $\mathcal{O}(m)$ support variables. The values of variables x_v are computed using Equation (7) and the values of variables $y_{uv,\ell}$ are assigned uniformly at random using a pseudorandom number generator, on the fly without storing in memory. Our implementation of the recurrence in Equation (1) loops over two variables: the outer loop is over $[k]$ and the inner loop over V . We compute the value of $P_{u,\ell}$ for all $u \in V$ in the inner loop for each iteration of $\ell \in [k]$. Precisely, for each iteration of the inner most loop we evaluate a family of polynomials $P_{u,\ell}: \text{for each } u \in V$, independently. The generating function (1) has an asymptotic memory complexity of $\mathcal{O}(n)$. More precisely, we need $2 \cdot n$ memory to store \mathcal{P}_ℓ and $\mathcal{P}_{\ell-1}$.

The first preprocessing step is trivial, however, the approach is ineffective for COLORFULPATH,

(s, d) -COLORFULPATH problem and also if a vertex matches to more than one color (for example, while using wildcard entries). The second approach is non-trivial and unique to our generating function construction, which can be employed to further reduce the graph size even after applying the trivial first step. We make use of the fact that if there exists a temporal path in a temporal graph it implies that there exist a path in the corresponding non-temporal instance of the graph, however, the vice versa is not always true. To take advantage of this fact, we build a vertex-localized sieve on the non-temporal instance, which return a list of vertices that are incident to at least one match. Furthermore, we reconstruct a temporal graph using the vertices that are incident to at least one match on the static graph. In practice, it is expected that there most likely will not be many matches, as a consequence, the size of the input graph could reduce significantly depending on the number of incident vertices. The runtime of our algorithm rely on the number of target matches in the graph only if the preprocessing step is applied. Recall that our algorithm is randomized and has a per-vertex false negative probability of $\frac{2^{k-1}}{2^b}$ [32], for most of our experiments we use field size of $GF(2^{64})$, which makes the false negative probability very close to zero and a single run of vertex-localized sieve construction is sufficient. However, for smaller field size multiple repetition of the experiment is required to avoid false negatives.

Our software is available as open source [51, 53].

9 Experimental setup

In this section we discuss our experimental setup.

9.1 Baseline

For the problems considered in this paper we are not aware of any known baselines that provide an exact or approximate solution. Thus, to compare our techniques with non-algebraic methods, we implement two naive baselines:

- (i) an *exhaustive-search* algorithm using temporal DFS, and
- (ii) a *brute-force* algorithm based on random walks.

Exhaustive-search. In this technique, we pick a vertex $v \in V$ and perform temporal DFS starting from v by restricting the depth of the DFS to k . Every time we reach depth k , we check if the set of vertices in the path satisfies the multiset colors. If it does, we update the solution to our optimal solution only if the maximum timestamp in the temporal path is less than the current solution, otherwise we continue. We repeat the process for each vertex.

The runtime of the exhaustive-search algorithm is bounded by $\mathcal{O}(n\Delta^k)$, where Δ is the maximum degree of the graph. The runtime analysis is as follows: as a worst case let us assume that each vertex has degree Δ . While performing temporal DFS each vertex has one incoming edge and $\Delta - 1$ outgoing edges. So the temporal DFS tree of depth k has at most $\mathcal{O}(\Delta^k)$ vertices to visit.⁵ Furthermore we perform temporal DFS starting from each vertex in the graph making the overall complexity of the algorithm $\mathcal{O}(n\Delta^k)$. Observe carefully that a temporal DFS on each vertex is independent and it can be parallelized up to n -threads. So we use thread-level parallelism to speedup the computation. Note that the runtime bound of exhaustive search is loose, in practice the algorithm

⁵More precisely, the number of vertices in the temporal DFS tree is $\frac{(\Delta-1)^{k-1} + \Delta - 3}{\Delta - 2}$.

performs much faster than the theoretical bounds. A more tighter bound can be obtained with an assumption on degree and timestamp distribution, for example, d -regular or power-law distribution for graph degrees.

Random-walk. In this approach we pick a vertex v uniformly at random and perform a random temporal walk by restricting its length to $k - 1$. We check if the random walk is a path and the vertex colors of the walk matches the multiset. If it does, we update the solution to the optimal solution provided that the maximum timestamp in the current solution is less than the optimal solution, otherwise we continue to the next random walk. The runtime of the algorithm is bounded by the number of random walk iterations. This approach is also thread parallelizable since each random walk is independent.

It is to be noted that, our random-walk implementation failed to report an optimal solution even for small graph instances with $m = 10^4$ and $k = 5$ even after hundred million random iterations. For this reason, we experiment only with the exhaustive-search baseline.

Our baselines are implemented in the C programming language. Furthermore, they are optimized for architecture-specific instruction set and parallelized to achieve thread-level parallelism.

9.2 Hardware

To evaluate our algorithm implementations we experiment with two hardware configurations.

Workstation: A Fujitsu Esprimo E920 with 1×3.2 GHz Intel Core i5-4570 CPU, 4 cores, 16 GB memory, Ubuntu, and gcc v5.4.0.

Computenode: A Dell PowerEdge C4130 with 2×2.5 GHz Intel Xeon 2680 V3 CPU, 24 cores, 12 cores/CPU, 128 GB memory, Red Hat, and gcc v6.3.0.

Our executions make use of all the cores, advanced vector extensions (AVX-2) and PCMLQDQ instruction set for fast finite field arithmetic. All the experiments are executed on the workstation configuration with the only exception for the experiments with *scaling to large graphs*, which are executed on the computenode.

9.3 Input graphs

We evaluate our methods using both synthetic and real-world graphs.

Synthetic graphs. We use two types of synthetic graphs: (a) random d -regular graphs and (b) power-law graphs. The regular graphs are generated using the *configuration model* [10, § 2.4]. The configuration model for power-law graphs is as follows: given non-negative integers D , n , w , and $\alpha < 0$, we generate an n -vertex graph such the following properties roughly hold: (i) the sum of vertex degrees is Dn ; (ii) the distribution of degrees is supported at w distinct values with geometric spacing; and (iii) the frequency of vertices with degree d is proportional to d^α . The edge timestamps are assigned uniformly at random in range $\{1, \dots, t\}$. Both directed and undirected graphs are generated using the same configuration model, however, for directed graphs the orientation is preserved. We ensure that the graph generator produces identical graph instances in all the hardware configurations. Our graph generator is available as open source [51].

Real-world graphs. For the real-world graphs, we make use of temporal graphs from Koblenz Network Collection [41], SNAP [44], and transport networks of Helsinki and Madrid [51].

Transport. We use the bus, interurban bus, metro, train, tram networks of Madrid and bus network of Helsinki. In these datasets, each row is a temporal edge between two locations, i.e., an unique identifier describing origin and destination, starting time and duration of travel; origin and destination locations.

Koblenz. We use Chess (chess), DNC emails (dnc-emails), Elections (wikipedia-elections), and Epinions (epinions-trust) temporal graphs from Koblenz Network Collection.

SNAP. We make use of Bitcoin alpha (bitcoin-alpha), Bitcoin otc (bitcoin-otc), College messages (college-msg), and Email EU core (email-eu) temporal graphs from SNAP

For a detailed description of the datasets used from Koblenz [41] and SNAP [44], we refer the reader check the webpages of the corresponding dataset collections. We preprocess the datasets to generate a graph by renaming the location identifiers (or vertices) in the range from 1 to the maximum number of locations (or vertices) available in the dataset. We assign an unique identifier for each discrete timestamp beginning with 1 and incrementing the identifier by one for each next available timestamp. By doing so we are avoiding the timestamps for which there are no temporal edges, thereby reducing the maximum timestamp value. If the time values in dataset are unix timestamps, then we approximate the value to the closest (floor) second before assigning an unique timestamp identifier. The vertex colors are assigned uniformly at random in range $\{1, \dots, 30\}$ and the multiset colors are chosen uniformly at random in the range $\{1, \dots, 30\}$.

10 Experimental evaluation

We will now describe our results and key findings. We define *decision time* to be the time required to decide the existence of one solution, and *extraction time* the time required to extract such a solution. As discussed previously, extracting a solution requires multiple calls to the decision oracle. Our baseline and scalability experiments are performed on the COLORFULPATH problem. Recall that in the COLORFULPATH problem the set of vertex colors is equal to the colors in the query multiset. As a result, the trivial preprocessing step of removing vertices with colors not matching the motif query cannot be employed.

10.1 Baseline

Our first set of experiments compares the *extraction* time to obtain an optimum solution using our algebraic algorithm and the exhaustive search baseline. In Table 3, we report extraction times of the algebraic algorithm and the baseline for extracting an optimum solution for: (i) five independent *d-regular* random graphs with $n = 10^2, \dots, 10^5$ and fixed values of $d = 20$, $t = 100$, $k = 5$; (ii) five independent *power-law* graphs with $n = 10^2, \dots, 10^5$, $D = 20$, $w = 100$, $k = 5$, $\alpha = -0.5$; and (iii) same as the previous setting but $\alpha = -1.0$. Vertex colors are assigned randomly in the range $\{1, \dots, k\}$ and the query multiset is $\{1, \dots, k\}$. Each graph has at least ten target occurrences agreeing with the query multiset colors with different timestamps chosen uniformly at random. For the baseline we report the *minimum* time of five independent runs, however, for the algebraic algorithm we report the *maximum*. *Speedup* is the ratio of the runtime of the baseline by the runtime of the algebraic algorithm. The experiments are executed on the *workstation* configuration using all cores. All runtimes are shown in seconds.

Table 3: Comparison of extraction time for baseline and algebraic algorithms.

No. of edges (m)	Regular			Powlaw $d^{-0.5}$			Powlaw $d^{-1.0}$		
	Baseline	Algebraic	Speedup	Baseline	Algebraic	Speedup	Baseline	Algebraic	Speedup
1 040	0.05 s	0.04 s	1.2	0.05 s	0.04 s	1.2	0.05 s	0.04 s	1.2
10 040	0.48 s	0.12 s	4.1	1.03 s	0.11 s	9.4	10.82 s	0.10 s	103.6
100 040	5.62 s	1.06 s	5.3	30.38 s	1.07 s	28.5	20 430.16 s	0.92 s	22 306.1
1 000 040	74.01 s	12.02 s	6.2	808.24 s	11.18 s	72.3	–	10.03 s	–

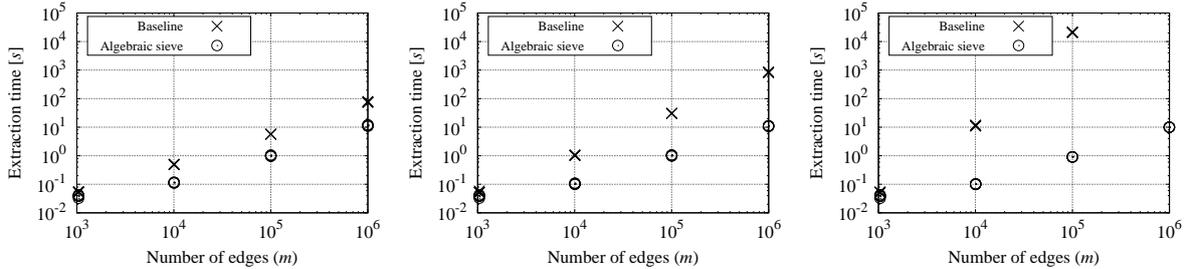


Figure 9: Comparison of extraction time of baseline and algebraic algorithms. We report the decision time as a function of the number of edges for d -regular random graph (left), power-law graph with $d = -0.5$ (center), and power-law graph with $d = -1.0$ (right).

Surprisingly, the baseline can compete with the algebraic algorithm in the case of d -regular random graphs, however, the runtimes have high variance across different graph topologies. On the other hand, the algebraic algorithm is very stable. For the power-law graphs with $m = 10^5$ edges and query multiset size $k = 5$, the algebraic algorithm is at least *twenty thousand* times faster than the baseline. Our exhaustive-search implementation fails to report a solution in small graphs $m = 10^3$ with query multiset size $k = 10$.

In Figure 9, we report the extraction time for baseline and algebraic algorithms to obtain an optimum solution for five independent d -regular random graphs with $n = 10^2, \dots, 10^5$ and fixed values of $d = 20$, $t = 100$, $k = 5$ (left); five independent power-law graphs with $n = 10^2, \dots, 10^5$, $D = 20$, $w = 100$, $t = 100$, $k = 5$, $\alpha = -0.5$ (center); and $\alpha = -1.0$ (right). The vertex colors are assigned uniformly at random in the range $\{1, \dots, k\}$ and the query multiset is $\{1, \dots, k\}$. Each graph instance has at least ten target instances satisfying the query multiset colors with different timestamps chosen uniformly at random. The experiments are executed on the *workstation* configuration.

The runtimes of both the baseline and the algebraic algorithms are consistent with very little variance across independent graph inputs of the same graph topology. However, the exhaustive-search baseline has high variance in runtime depending on the graph topology. For instance, for a power-law graph of size $m = 10^5$ with $\alpha = -1.0$, the runtime of the exhaustive-search approach is at least three thousand times greater than the runtime on a d -regular graph of same size.

10.2 Scalability

Our second set of experiments studies scalability with respect to: (i) number of edges, (ii) query multiset size, (iii) number of timestamps, and (iv) vertex degree.

Figure 10 (top-left) reports decision and extraction times for d -regular random graphs with $n =$

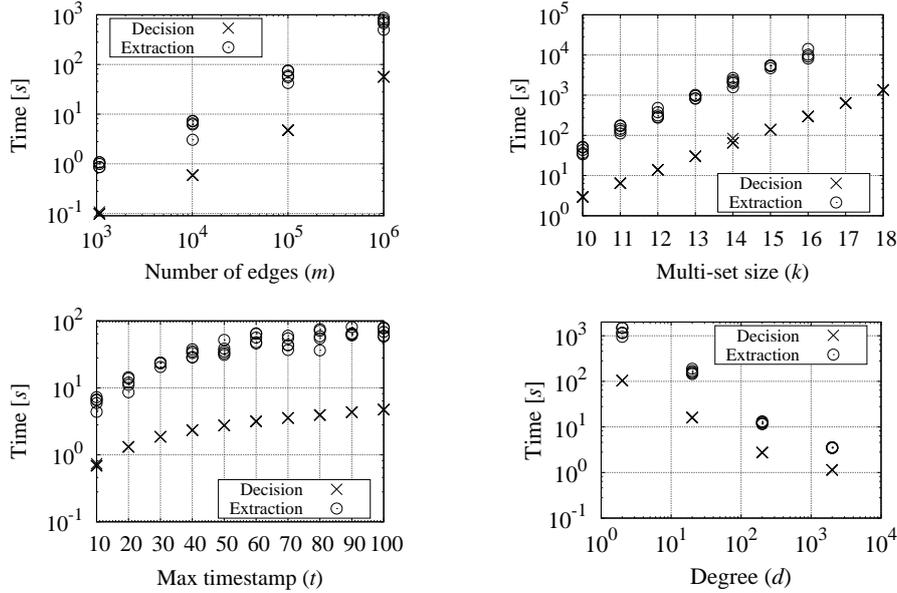


Figure 10: Scalability results. Runtime as a function of the number of edges (top-left); query multiset size (top-right); number of timestamps (bottom-left); and degree (bottom-right).

$10^2, \dots, 10^5$ and fixed values of $d = 20, k = 8, t = 100$. Figure 10 (top-right) shows decision time for d -regular random graphs with $k = 10, \dots, 18$ and fixed values of $n = 10^3, d = 20, t = 100$. Vertex colors are assigned randomly in the range $\{1, \dots, k\}$ and the query multiset is $\{1, \dots, k\}$. We observe linear scaling with increasing the number of edges and exponential scaling with increasing the query multiset size, as expected by the theory. The variance in decision time is very small for different inputs, however, it is higher for extraction time. The algorithm is able to decide the existence of a solution in less than two minutes for graphs up to one million edges with query multiset size $k = 8$ and extract a solution in less than sixteen minutes.

Next we study the effect of graph density on scalability. Figure 10 (bottom-left) shows decision and extraction times for d -regular random graphs with $t = 10, \dots, 100$ and fixed values of $n = 10^4, d = 20, k = 8$. Figure 10 (bottom-right) shows decision and extraction times for d -regular random graphs with $d = 2, 20, 200, 2000$ and corresponding values of $n = 10^6, \dots, 10^3$, with fixed $m = 10^6$ and $t = 100$. We observe that the algebraic algorithm performs better for dense graphs. A possible explanation is that for sparse graphs there is not enough work to keep both the arithmetic and the memory pipeline busy, simultaneously.

All experiments are executed on the *workstation* configuration using all cores with undirected graphs. Additionally, we make sure that each input instance has at least ten solutions agreeing with the multiset of colors, with different timestamps chosen uniformly at random. We also verified the correctness of our implementation with graph instances having an unique solution and no solution.

10.3 Using thread-level parallelism

In our third set of experiments we compare the decision and extraction times for single and multi-threaded variants of our implementation. We display the decision and extraction times for five independent d -regular random graph instances for each configuration of $n = 10^3, \dots, 10^5, t = 100$,

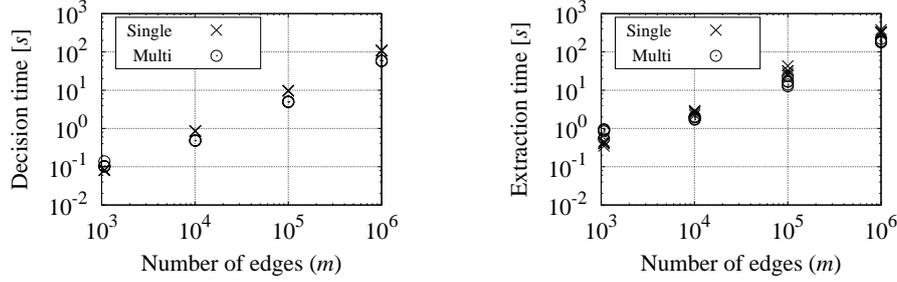


Figure 11: Using thread-level parallelism. Decision time (left) and extraction time (right) as a function of number of edges for sparse graphs with degree $d = 20$.

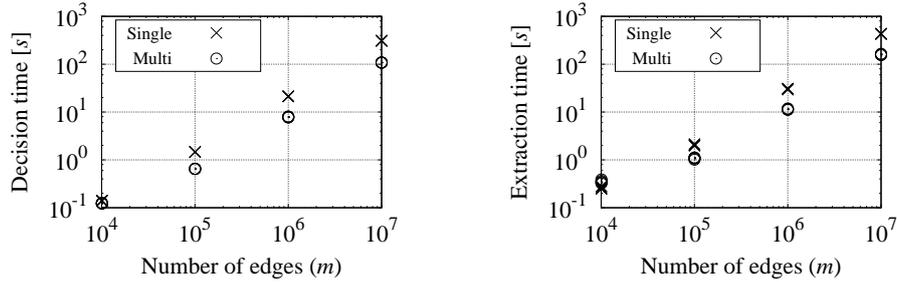


Figure 12: Using thread-level parallelism. Decision time (left) and extraction time (right) as a function of number of edges (m) for dense graphs with degree $d = 200$.

$k = 8$ with $d = 20$ (sparse graphs) in Figure 11 and $d = 200$ (dense graphs) in Figure 12. Table 4 reports the decision and extraction time along with the *speedup*, which is the ratio of single and multi-threaded runtimes. The reported runtime is the *maximum* of five independent repetitions and all runtimes are shown in seconds. When scaled to four threads in the *workstation* configuration, we achieved up to factor 2.7 speedup for the dense graphs. However, for the sparse graphs the speedup is modest with up to factor 1.9 improvement in the runtime.

Note that for the dense graphs in our experiments, for each vertex there exists at least one edge at every timestamp with high probability. Conversely, there exists a set of vertices with no edges at each timestamp. However, in our current implementation it is not guaranteed that the vertices with no edges are distributed evenly across the threads while scheduled using the OpenMP default scheduling. A possible explanation for not achieving a perfect speedup of factor four is due to the inefficiency in the load-balancing mechanism. This presents us with a challenge to achieve perfect load balancing by dynamically redistributing the set of vertices with no edges uniformly across the threads at each timestamp. Additionally, since the graph instances are sparse, there is not enough load on the threads to keep the arithmetic pipeline busy.

10.4 Memory footprint

Recall from §8 that we have presented two variants of the generating-function implementation: (i) an implementation borrowed from our earlier work [52], which uses $\mathcal{O}(ntk)$ memory (*genf-1*); and (ii) a memory-efficient implementation, which uses $\mathcal{O}(nt)$ working memory (*genf-2*).

Our next set of experiments demonstrates that the generating-function implementation *genf-2*

Table 4: Using thread-level parallelism.

No. of edges (m)	Decision			Extraction		
	Single	Multi	Speedup	Single	Multi	Speedup
<i>Sparse graphs</i>						
1 070	0.08 s	0.14 s	0.6	0.46 s	0.95 s	0.5
10 070	0.86 s	0.48 s	1.8	2.94 s	2.05 s	1.4
100 070	9.72 s	5.03 s	1.9	43.22 s	23.15 s	1.9
1 000 070	109.95 s	58.38 s	1.9	379.31 s	219.33 s	1.7
<i>Dense graphs</i>						
10 070	0.14 s	0.13 s	1.1	0.28 s	0.39 s	0.7
100 070	1.47 s	0.65 s	2.3	2.16 s	1.12 s	1.9
1 000 070	21.42 s	8.04 s	2.7	31.02 s	11.85 s	2.6
10 000 070	311.51 s	109.04 s	2.9	437.53 s	164.75 s	2.7

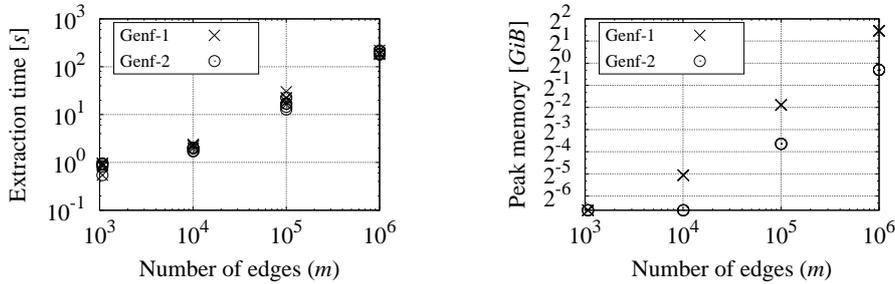


Figure 13: Comparing the memory footprint. Extraction time (left) and peak-memory usage (right) as a function of the number of edges for *genf-1* and *genf-2*.

is more memory efficient than *genf-1*, without significant change in the runtime. Figure 13 displays the extraction time (left) and peak-memory usage (right) for d -regular random graphs with $n = 10^2, \dots, 10^5$ with fixed values of $t = 100$, $k = 8$, and $d = 20$. We observe no significant change in the extraction time between *genf-1* and *genf-2*. However, the reduction in working memory is significant, for example, in large graphs with $m = 10^6$ and $k = 8$, *genf-1* uses at least three times as much memory as *genf-2*. Note that the reported peak-memory also includes the memory used to store the input graph, which occupy a significant portion of the working memory. The experiments are executed on the *workstation* configuration using all cores.

10.5 Preprocessing and vertex-localization

Next we demonstrate the effectiveness of preprocessing and vertex-localization for improving the performance of the algorithm.

Recall that we have implemented two preprocessing techniques [cf. §8.1]: (i) remove vertices with colors not matching the query multiset colors and edges incident to them; and (ii) remove vertices (and edges incident to them), which are not incident to a match in the corresponding non-temporal instance. In the following experiments we only make use of the second preprocessing step.

In Table 5 we report the extraction time: (i) without preprocessing (algebraic), (ii) with preprocessing (*pre*), (iii) with vertex-localization (*vloc*), and (iv) with preprocessing and vertex localiza-

Table 5: Preprocessing and vertex-localization.

No. of edges (m)	Algebraic	Algebraic (pre)	Speedup-1	Algebraic (vloc)	Speedup-2	Algebraic (pre + vloc)	Speedup-3
PATHMOTIF							
1 070	1.11 s	1.06 s	1.0	0.27 s	4.1	0.25 s	4.4
10 070	5.75 s	3.11 s	1.8	1.25 s	4.6	0.56 s	10.2
100 070	47.86 s	11.73 s	4.1	13.95 s	3.4	3.36 s	14.2
1 000 070	493.65 s	111.96 s	4.4	163.64 s	3.0	41.57 s	11.9
COLORFULPATH							
1 070	0.87 s	0.90 s	1.0	0.26 s	3.3	0.26 s	3.4
10 070	1.96 s	2.03 s	1.0	0.58 s	3.4	0.55 s	3.6
100 070	16.60 s	16.90 s	1.0	7.56 s	2.2	7.98 s	2.1
1 000 070	195.99 s	196.79 s	1.0	86.66 s	2.3	90.38 s	2.2

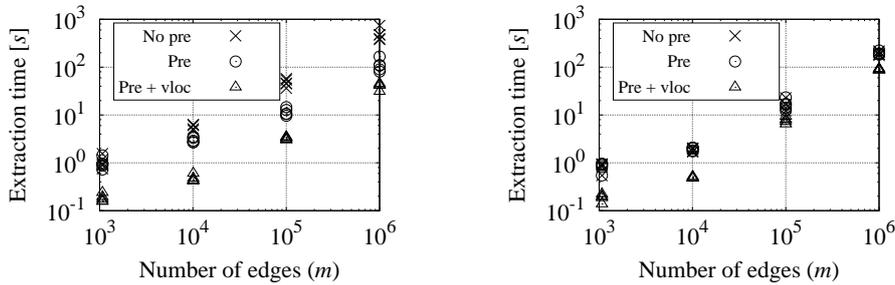


Figure 14: Preprocessing and vertex-localization. Extraction time as a function of the number of edges m for the PATHMOTIF problem (left) and the COLORFULPATH problem (right) problem.

tion (*pre + vloc*). The experiments are performed on five independent instances of d -regular random graphs for each configuration of $n = 10^2, \dots, 10^5$ and fixed values of $d = 20$, $t = 100$, $k = 8$. In the PATHMOTIF problem the vertex colors are chosen uniformly in range $\{1, \dots, 30\}$ and the query multiset is chosen randomly. In the COLORFULPATH problem the vertices are colored uniformly in range $\{1, \dots, k\}$ and the query multiset is $\{1, \dots, k\}$. The reported runtimes are the average of five independent executions and all runtimes are shown in seconds. Additionally, we display the extraction time as a function of the number of edges m for the PATHMOTIF problem (left) and the COLORFULPATH problem (right) in Figure 14.

We observe that preprocessing and vertex-localization are very effective in the PATHMOTIF instances compared to the COLORFULPATH instances. In PATHMOTIF instances we obtain up to factor-fourteen speedup in extraction time for large graphs. However, for the COLORFULPATH instances the speedup is rather modest with up to factor 3.6 improvement in runtime. We also observe high variance in the extraction time for the PATHMOTIF problem as compared to the COLORFULPATH problem. The experiments are performed on the *workstation* configuration using all cores.

Note that, the execution time of our algorithm vary depending on the reduction in the graph size obtained after preprocessing. The high variance in the runtime is a consequence of the variation in the graph size after preprocessing, as observed in Figure 14. Additionally, we observed a significant reduction in the graph size after preprocessing in PATHMOTIF instances compared to COLORFULPATH instances. As a consequence, we obtain better speedup in computation for PATHMOTIF instances.

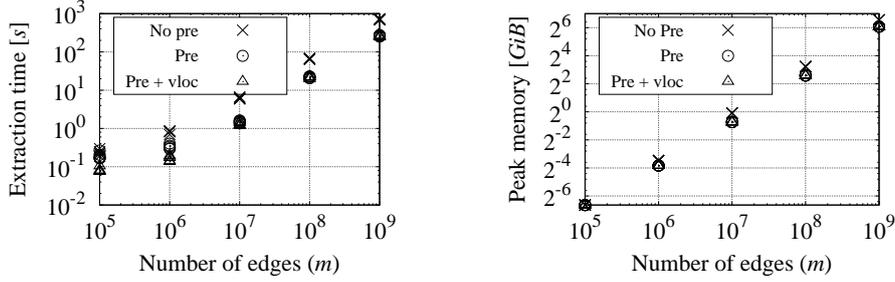


Figure 15: Scaling to a billion edges with small query multiset size. Extraction time (left) and peak-memory usage (right) as a function of the number of edges with query (multiset) size $k = 5$.

10.6 Scaling to large graphs

Next we demonstrate the scalability of the algebraic algorithm to graphs with up to one billion edges.

Figure 15 shows extraction time (left) and peak-memory usage (right) for d -regular random graphs with $n = 10^3, \dots, 10^7$, $d = 200$, $t = 100$ with $k = 5$. In graphs with one billion edges, our algebraic algorithm using preprocessing and vertex-localization can extract an optimum solution in less than thirteen minutes for small query (multiset) size with $k = 5$, while making use of less than one-hundred gigabytes of memory. It is important to note that more than half of the working memory is used for processing the input graph.

Our next set of experiments studies the scaling of the algorithm for graphs up to hundred million edges for large query multiset size with $k = 10$. Figure 16 shows the extraction time (left) and peak-memory usage (right) of the algorithm for five independent d -regular random graphs with $n = 10^3, \dots, 10^6$ and $d = 200$, $k = 10$, $t = 200$, fixed. In graphs with one hundred million edges and query (multiset) size $k = 10$, our implementation using preprocessing and vertex-localization can extract a solution in less than thirty five minutes while using of at most ten gigabytes of working memory.

The experiments are executed on PATHMOTIF instances. The vertex colors are assigned uniformly at random in range $\{1, \dots, 30\}$ and the query multiset is chosen uniformly at random. We ensure that each graph instance has at least ten target instances agreeing with the query multiset colors. All experiments are performed on the *computenode* configuration using all cores with undirected graphs and we employ the second preprocessing step (removing vertices that are not incident to a match in the corresponding non-temporal instance).

10.7 Experiments with real-world graphs

Finally, we evaluate our algebraic algorithm on real-world data, using the datasets described in Section 9.3. For this set of experiments we focus on extraction time. Table 6 compares the extraction time (shown in seconds) for the baseline and algebraic algorithms on the transport datasets. For each dataset we report the *maximum* time for the algebraic algorithm and the *minimum* time for the baseline algorithm, over five independent executions by choosing the query multiset of colors at random. For query multiset size $k = 5$, the extraction time is at most thirteen seconds. For larger query multiset size $k = 10$, the extraction time is at most eight minutes in all the datasets. For the baseline algorithm we preprocess the graphs by removing vertices whose colors do not match with

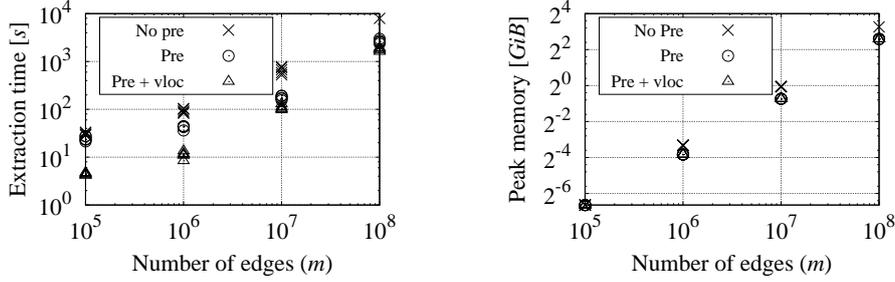


Figure 16: Scaling to large graphs with large query multiset size. Extraction time (left) and peak-memory usage (right) as a function of the number of edges with query (multiset) size $k = 10$.

Table 6: Experimental results on transport networks.

Dataset	n	m	t	$k = 5$		$k = 10$	
				Baseline	Algebraic	Baseline	Algebraic
Madrid tram	70	35 144	1 265	1.37 s	0.12 s	1 337.98 s	28.05 s
Madrid train	91	43 677	1 181	40.01 s	0.12 s	1 634.56 s	24.12 s
Madrid interurban bus	7 543	1 495 055	1 440	744.79 s	1.11 s	–	325.51 s
Madrid bus	4 597	2 254 993	1 440	6 337.89 s	1.40 s	–	278.91 s
Helsinki bus	7 959	6 403 785	1 440	–	3.52 s	–	444.66 s
Madrid metro	467	37 565 706	1 440	–	12.87 s	–	98.69 s

the query multiset colors. The reported running time for the algebraic algorithm include the second preprocessing step with vertex-localization. Note that for the baseline we timeout the experiments which consume more than two hours.

Table 7 reports the extraction time (shown in seconds) of the algebraic algorithm for the experiments on real-world datasets. For each dataset we report the *maximum* time among five independent executions by choosing the multiset colors at random with multiset query size $k = 5$. Speedup is the ratio of the runtime of the algebraic algorithm with and without vertex-localization. Memory is the peak-memory usage in gigabytes. The algorithm can extract a solution in less than ninety seconds in all the datasets using less than twelve gigabytes of working memory.

All experiments are performed on the *workstation* configuration using all cores with undirected graphs and we employ the second preprocessing step (removing vertices that are not incident to a match in the corresponding non-temporal instance).

11 Conclusions and future work

We introduced several pattern detection problems that arise in the context of mining large temporal graphs. In particular, we presented both complexity results and designed exact algebraic algorithms based on constrained multilinear sieving for the problems. As a highlight, our publicly available implementation can scale to large graphs with up to one billion edges despite the studied problems being **NP**-hard. We presented extensive experimental results that validate our scalability claims.

Note that the application of our framework is not limited to temporal paths but rather can be extended to a wide range of pattern detection problems where we search for information cascades,

Table 7: Experimental results on real-world graphs.

Dataset	n	m	t	No vloc	vloc	Speedup	Memory (GB)
Bitcoin alpha	3 783	24 190	1 647	0.69 s	0.36 s	1.9	0.10
Madrid tram	70	35 139	1 265	0.20 s	0.12 s	1.7	0.00
Bitcoin otc	5 881	35 596	31 467	22.19 s	13.27 s	1.7	2.95
DNC emails	1 891	39 268	19 383	4.63 s	2.83 s	1.6	0.58
Madrid train	91	43 672	1 181	0.19 s	0.12 s	1.7	0.00
College msg	1 899	58 975	35 913	12.52 s	7.14 s	1.8	1.11
Chess	7 301	64 962	100	0.12 s	0.10 s	1.1	0.01
Elections	7 118	103 679	98 026	85.85 s	53.32 s	1.6	11.40
Emails EU core	986	327 228	139 649	44.15 s	23.93 s	1.8	2.26
Epinions	131 828	841 376	939	5.31 s	4.63 s	1.1	1.97
Madrid interurban bus	7 543	1 495 050	1 440	1.44 s	1.11 s	1.3	0.22
Madrid bus	4 597	2 254 988	1 440	1.77 s	1.40 s	1.3	0.21
Helsinki bus	7 959	6 403 780	1 440	3.50 s	3.52 s	1.0	0.41
Madrid metro	467	37 565 706	1 195	12.87 s	12.87 s	1.0	1.76

temporal arborescences, and temporal subgraphs. Our algebraic approach makes use of $\mathcal{O}(nt)$ memory, which limits the scalability of the algorithm for large values of t . A possible direction to explore would be to design algorithms with space complexity independent of t . Also we would like to study if it is possible to trade time for space.

12 Acknowledgements

This research was supported by the Academy of Finland project “Adaptive and Intelligent Data (AIDA)” (317085), the EC H2020 RIA project “SoBigData++” (871042), and the Wallenberg AI, Autonomous Systems and Software Program (WASP) funded by Knut and Alice Wallenberg Foundation. We acknowledge the use of computational resources funded by the project “Science-IT” at Aalto University, Finland.

References

- [1] N. ALON, P. DAO, I. HAJIRASOULIHA, F. HORMOZDIARI, AND S. C. SAHINALP, *Biomolecular network motif counting and discovery by color coding*, *Bioinformatics*, 24 (2008), pp. 241–249.
- [2] C. ASLAY, A. NASIR, G. DE FRANCISCI MORALES, AND A. GIONIS, *Mining frequent patterns in evolving graphs*, in *CIKM*, 2018, pp. 923–932.
- [3] N. BELL AND M. GARLAND, *Efficient sparse matrix-vector multiplication on CUDA*, NVIDIA tech. rep., NVIDIA Corp., 2008.
- [4] A. BENSON, D. GLEICH, AND J. LESKOVEC, *Higher-order organization of complex networks*, *Science*, 353 (2016), pp. 163–166.
- [5] A. BJÖRKLUND, T. HUSFELDT, P. KASKI, AND M. KOIVISTO, *Narrow sieves for parameterized paths and packings*, *JCSS*, 87 (2017), pp. 119–139.

- [6] A. BJÖRKLUND, P. KASKI, AND Ł. KOWALIK, *Determinant sums for undirected Hamiltonicity*, SIAM J. Comput., 43 (2014), pp. 280–299.
- [7] ———, *Fast witness extraction using a decision oracle*, in ESA, 2014, pp. 149–160.
- [8] ———, *Constrained multilinear detection and generalized graph motifs*, Algorithmica, 74 (2016), pp. 947–967.
- [9] A. BJÖRKLUND, P. KASKI, Ł. KOWALIK, AND J. LAURI, *Engineering motif search for large graphs*, in ALENEX, 2015, pp. 104–118.
- [10] B. BOLLOBÁS, *Random Graphs*, Cambridge UP, second ed., 2001.
- [11] M. BRESSAN, S. LEUCCI, AND A. PANCONESI, *Motivo: Fast motif counting via succinct color coding and adaptive sampling*, PVLDB, 12 (2019), pp. 1651–1663.
- [12] A. CASTEIGTS, A. HIMMEL, H. MOLTER, AND P. ZSCHOCHÉ, *The computational complexity of finding temporal paths under waiting time constraints*, CoRR, abs/1909.06437 (2019).
- [13] L. CHEN, X. LI, AND Y. SHI, *The complexity of determining the rainbow vertex-connection of a graph*, Theoretical Computer Science, 412 (2011), pp. 4531–4535.
- [14] F. CICALESÉ, T. GAGIE, E. GIAQUINTA, E. S. LABER, Z. LIPTÁK, R. RIZZI, AND A. I. TOMESCU, *Indexes for jumbled pattern matching in strings, trees and graphs*, in SPIRE, 2013, pp. 56–63.
- [15] M. COLETTI, K. GARIMELLA, A. GIONIS, AND C. LUCCHESI, *Automatic controversy detection in social media: A content-independent motif-based approach*, Online Social Networks and Media, 3-4 (2017), pp. 22–31.
- [16] M. COLETTI, K. GARIMELLA, A. GIONIS, AND C. LUCCHESI, *A motif-based approach for identifying controversy*, in Eleventh International AAAI Conference on Web and Social Media, 2017.
- [17] M. CYGAN, F. V. FOMIN, Ł. KOWALIK, D. LOKSHTANOV, D. MARX, M. PILIPCZUK, M. PILIPCZUK, AND S. SAURABH, *Parameterized algorithms*, 2015.
- [18] M. DECHOUDHURY, M. FELDMAN, S. AMER-YAHIA, N. GOLBANDI, R. LEMPEL, AND C. YU, *Automatic construction of travel itineraries using social breadcrumbs*, in HT, 2010, pp. 35–44.
- [19] R. DECHTER, I. MEIRI, AND J. PEARL, *Temporal constraint networks*, Artificial intelligence, 49 (1991), pp. 61–95.
- [20] H. DELL, J. LAPINSKAS, AND K. MEEKS, *Approximately counting and sampling small witnesses using a colourful decision oracle*, in SODA, 2020, pp. 2201–2211.
- [21] F. V. FOMIN, D. LOKSHTANOV, F. PANOLAN, AND S. SAURABH, *Efficient computation of representative families with applications in parameterized and exact algorithms*, J. ACM, 63 (2016).
- [22] T. GAGIE, D. HERMELIN, G. M. LANDAU, AND O. WEIMANN, *Binary jumbled pattern matching on trees and tree-like structures*, in ESA, 2013.
- [23] M. R. GAREY AND D. S. JOHNSON, *Computers and intractability*, vol. 29, W. H. Freeman and Co., 2002.

- [24] B. GEORGE, S. KIM, AND S. SHEKHAR, *Spatio-temporal network databases and routing algorithms: A summary of results*, in International Symposium on Spatial and Temporal Databases, 2007, pp. 460–477.
- [25] E. GIAQUINTA AND S. GRABOWSKI, *New algorithms for binary jumbled pattern matching*, IPL, 113 (2013), pp. 538–542.
- [26] A. GIONIS, T. LAPPAS, K. PELECHRINIS, AND E. TERZI, *Customized tour recommendations in urban areas*, WSDM, 2014, pp. 313–322.
- [27] M. GUPTA, C. C. AGGARWAL, AND J. HAN, *Finding top-k shortest path distance changes in an evolutionary network*, in SSTD, 2011, pp. 130–148.
- [28] P. HOLME, *Modern temporal network theory: a colloquium*, European Physical Journal B, 88 (2015), p. 234.
- [29] P. HOLME AND J. SARAMÄKI, *Temporal networks*, Physics reports, 519 (2012), pp. 97–125.
- [30] ———, *Temporal networks*, Physics reports, 519 (2012), pp. 97–125.
- [31] C. J. HONEY, R. KÖTTER, M. BREAKSPEAR, AND O. SPORNS, *Network structure of cerebral cortex shapes functional connectivity on multiple time scales*, PNAS, 104 (2007), pp. 10240–10245.
- [32] P. KASKI, J. LAURI, AND S. THEJASWI, *Engineering Motif Search for Large Motifs*, in SEA, 2018, pp. 1–19.
- [33] V. KOSTAKOS, *Temporal graphs*, Physica A: Statistical Mechanics and its Applications, 388 (2009), pp. 1007–1023.
- [34] I. KOUTIS, *Faster algebraic algorithms for path and packing problems*, in ICALP, 2008.
- [35] ———, *The power of group algebras for constrained multilinear monomial detection*, Dagstuhl meeting 10441, (2010).
- [36] ———, *Constrained multilinear detection for faster functional motif discovery*, IPL, 112 (2012), pp. 889–892.
- [37] I. KOUTIS AND R. WILLIAMS, *Limits and applications of group algebras for parameterized problems*, in ICALP (1), 2009.
- [38] I. KOUTIS AND R. WILLIAMS, *Algebraic fingerprints for faster algorithms*, Comm. of the ACM, 59 (2016), pp. 98–105.
- [39] L. KOVANEN, M. KARSAI, K. KASKI, J. KERTÉSZ, AND J. SARAMÄKI, *Temporal motifs in time-dependent networks*, Journal of Statistical Mechanics: Theory and Experiment, 2011 (2011), p. P11005.
- [40] Ł. KOWALIK AND J. LAURI, *On finding rainbow and colorful paths*, TCS, 628 (2016), pp. 110 – 114.
- [41] J. KUNEGIS, *KONECT: the Koblenz network collection*, in WWW, 2013, pp. 1343–1350. <http://konect.uni-koblenz.de/networks/>.

- [42] V. LACROIX, C. G. FERNANDES, AND M.-F. SAGOT, *Motif search in graphs: application to metabolic networks*, IEEE Transactions on Computational Biology and Bioinformatics (TCBB), 3 (2006), pp. 360–368.
- [43] M. LATAPY, T. VIARD, AND C. MAGNIEN, *Stream graphs and link streams for the modeling of interactions over time*, Social Network Analysis and Mining, 8 (2018).
- [44] J. LESKOVEC AND A. KREVL, *SNAP Datasets: Stanford large network dataset collection*. <http://snap.stanford.edu/data>, June 2014.
- [45] S.-J. LIN, T. Y. AL-NAFFOURI, Y. S. HAN, AND W.-H. CHUNG, *Novel polynomial basis with fast Fourier transform and its application to Reed-Solomon erasure codes*, ITIT, 62 (2016).
- [46] L. LIU, J. TANG, J. HAN, M. JIANG, AND S. YANG, *Mining topic-level influence in heterogeneous networks*, in CIKM, 2010, pp. 199–208.
- [47] P. LIU, A. BENSON, AND M. CHARIKAR, *Sampling methods for counting temporal motifs*, in WSDM, 2019, pp. 294–302.
- [48] R. MILO, S. SHEN-ORR, S. ITZKOVITZ, N. KASHTAN, D. CHKLOVSKII, AND U. ALON, *Network motifs: Simple building blocks of complex networks*, Science, 298 (2002), pp. 824–827.
- [49] A. PARANJAPE, A. BENSON, AND J. LESKOVEC, *Motifs in temporal networks*, WSDM, 2017, pp. 601–610.
- [50] J. T. SCHWARTZ, *Fast probabilistic algorithms for verification of polynomial identities*, J. ACM, 27 (1980), pp. 701–717.
- [51] S. THEJASWI AND A. GIONIS, 2019. <https://github.com/suhastheju/temporal-patterns>.
- [52] S. THEJASWI AND A. GIONIS, *Pattern detection in large temporal graphs using algebraic fingerprints*, in SDM, 2020, pp. 1–10.
- [53] S. THEJASWI, A. GIONIS, AND J. LAURI, 2020. <https://github.com/suhastheju/temporal-patterns-mk2>.
- [54] K. UCHIZAWA, T. AOKI, T. ITO, A. SUZUKI, AND X. ZHOU, *On the rainbow connectivity of graphs: complexity and FPT algorithms*, Algorithmica, 67 (2013), pp. 161–179.
- [55] P. VANSTEENWEGEN, W. SOUFFRIAUX, AND D. V. OUDHEUSDEN, *The orienteering problem: A survey*, EJOR, 209 (2011), pp. 1 – 10.
- [56] B. WACKERSREUTHER, P. WACKERSREUTHER, A. OSWALD, C. BÖHM, AND K. BORGLWARDT, *Frequent subgraph discovery in dynamic networks*, in MLG, 2010.
- [57] R. WILLIAMS, *Finding paths of length k in $O^*(2^k)$ time*, IPL, 109 (2009).
- [58] H. WU, J. CHENG, S. HUANG, Y. KE, Y. LU, AND Y. XU, *Path problems in temporal graphs*, Proc. VLDB Endow., 7 (2014), pp. 721–732.

- [59] H. WU, J. CHENG, Y. KE, S. HUANG, Y. HUANG, AND H. WU, *Efficient algorithms for temporal path computation*, TKDE, 28 (2016), pp. 2927–2942.
- [60] J. YANG, J. MCAULEY, AND J. LESKOVEC, *Community detection in networks with node attributes*, in ICDM, 2013, pp. 1151–1156.
- [61] R. ZIPPEL, *Probabilistic algorithms for sparse polynomials*, in Proc. International Symposium on Symbolic and Algebraic Computation, vol. 72 of LNCS, 1979, pp. 216–226.