

# Computing Covers under Substring Consistent Equivalence Relations

Natsumi Kikuchi, Diptarama Hendrian, Ryo Yoshinaka, and  
Ayumi Shinohara

Graduate school of information sciences, Tohoku University, Japan

natsumi\_kikuchi@shino.ecei.tohoku.ac.jp  
{diptarama, ryoshinaka, ayumis}@tohoku.ac.jp

## Abstract

Covers are a kind of quasiperiodicity in strings. A string  $C$  is a cover of another string  $T$  if any position of  $T$  is inside some occurrence of  $C$  in  $T$ . The shortest and longest cover arrays of  $T$  have the lengths of the shortest and longest covers of each prefix of  $T$ , respectively. The literature has proposed linear-time algorithms computing longest and shortest cover arrays taking border arrays as input. An equivalence relation  $\approx$  over strings is called a *substring consistent equivalence relation (SCER)* iff  $X \approx Y$  implies (1)  $|X| = |Y|$  and (2)  $X[i : j] \approx Y[i : j]$  for all  $1 \leq i \leq j \leq |X|$ . In this paper, we generalize the notion of covers for SCERs and prove that existing algorithms to compute the shortest cover array and the longest cover array of a string  $T$  under the identity relation will work for any SCERs taking the accordingly generalized border arrays.

## 1 Introduction

Finding regularities in strings is an important task in string processing due to its applications such as pattern matching and string compression. Many variants of regularities in strings have been studied including periods, covers, and seeds [6, 7, 20]. One of the most studied regularities is periods due to their mathematical combinatoric properties and their applications to string processing algorithms [14]. The notion of periods has been generalized concerning various kinds of equivalence relations. Apostolico and Giancarlo [8] studied periods on parameterized strings. Gourdel et al. [17] studied string periods on the order-preserving model.

Covers are another kind of regularities that have extensively been studied. For two strings  $T$  and  $C$ ,  $C$  is a *cover* of  $T$  if any position of  $T$  is inside some occurrences of  $C$  in  $T$ . For example, **aba** is a cover of  $T = \underline{\text{aba}}\underline{\text{aba}}\underline{\text{aba}}\underline{\text{aba}}$  because all positions in  $T$  are inside occurrences of **aba**. The other covers of  $T$  are **abaaba**, **abaababaaba** and  $T$  itself. Apostolico and Ehrenfeucht [6] called a string having a cover besides itself *quasiperiodic* and proposed an algorithm that computes all maximal quasiperiodic substrings of a string. Later, Iliopoulos and

Table 1: The time complexity of computing border (*Border*), shortest cover (*SCover*) and longest cover (*LCover*) arrays under SCERs, where  $n$  is the input length,  $\Pi$  is the parameter set in parameterized equivalence, and  $k$  is the number of input strings in permuted equivalence.

Equivalence relation	<i>Border</i>	<i>SCover</i>	<i>LCover</i>
Identity equivalence	$O(n)$ [23]	$O(n)$ [10]	$O(n)$ [25]
Parameterized equivalence	$O(n \log  \Pi )$ [4]	$O(n \log  \Pi )$	$O(n \log  \Pi )$
Order-isomorphism	$O(n \log n)$ [22, 24]	$O(n \log n)$	$O(n \log n)$
Permuted equivalence	$O(nk)$ [15, 18]	$O(nk)$	$O(nk)$

Mouchard [19] and Brodal and Pedersen [11] proposed  $O(n \log n)$  time algorithm for this task. Apostolico et al. [7] presented a linear-time algorithm to test whether a string is quasiperiodic. Breslauer [10] proposed an online linear-time algorithm that computes the shortest covers of all prefixes as *the shortest cover array* of a string. Moore and Smyth [27, 28] proposed a linear-time algorithm to compute all covers of a string. Later, Li and Smyth [25] proposed an online linear-time algorithm to compute the longest proper covers of all prefixes of a string as *the longest cover array*. Amir et al. [2] defined the approximate cover problem and showed its NP-hardness.

Recently, Matsuoka et al. [26] introduced the notion of *substring consistent equivalence relations (SCERs)*, which are equivalence relations  $\approx$  on strings such that  $X \approx Y$  implies (1)  $|X| = |Y|$  and (2)  $X[i : j] \approx Y[i : j]$  for all  $1 \leq i \leq j \leq |X|$ , where  $X[i : j]$  denotes the substring of  $X$  starting at  $i$  and ending at  $j$ . Clearly the identity relation is an SCER. Moreover, many variants of equivalence relations used in pattern matching are SCERs, such as parameterized pattern matching [9], order-preserving pattern matching [22, 24], permuted pattern matching [21], and Cartesian tree matching [29]. Matsuoka et al. [26] proposed an algorithm to compute the border array of an input string  $T$  under an SCER, which can be used for pattern matching under SCERs.

In this paper, we generalize the notion of covers, which used to be defined based on the identity relation, to be based on SCERs, and prove that both of the algorithms for the shortest and longest cover arrays by Breslauer [10] and Li and Smyth [25], respectively, work under SCERs with no changes: just by replacing the input of those algorithms from the border array under the identity relation to the one under a concerned SCER, their algorithms compute the shortest and longest cover arrays under the SCER. As a minor contribution, we present a slightly simplified version of Li and Smyth’s algorithm, with a correctness proof. Table 1 summarizes implications of our results. The time complexities for computing shortest and longest cover arrays based on various SCERs are the same as those for border arrays. Moreover, if border arrays under an equivalence relation can be computed online, e.g., parameterized equivalence and order-isomorphism, these cover arrays can be computed online by computing border arrays with existing online algorithms at the same time.

## 2 Preliminaries

For an alphabet  $\Sigma$ ,  $\Sigma^*$  denotes the set of all strings over  $\Sigma$ , including the empty string  $\varepsilon$ . The length of a string  $T \in \Sigma^*$  is denoted as  $|T|$ . For  $1 \leq i \leq j \leq |T|$ ,

$T[i : j]$  denotes the substring of  $T$  that starts at  $i$  and ends at  $j$ . By  $T[: j] = T[1 : j]$  we denote the *prefix* of  $T$  that ends at  $j$  and by  $T[i :] = T[i : |T|]$  the *suffix* of  $T$  that starts at  $i$ .

Matsuoka et al. [26] introduced the notion of substring consistent equivalence relations, generalizing several equivalence relations proposed so far in pattern matching.

**Definition 1** (Substring Consistent Equivalence Relation (SCER)  $\approx$ ). *An equivalence relation  $\approx \subseteq \Sigma^* \times \Sigma^*$  is an SCER if for two strings  $X$  and  $Y$ ,  $X \approx Y$  implies (1)  $|X| = |Y|$  and (2)  $X[i : j] \approx Y[i : j]$  for all  $1 \leq i \leq j \leq |X|$ . By  $[X]_{\approx}$  we denote the  $\approx$ -equivalence class of  $X$ .*

For instance, matching relations in parameterized pattern matching [9], order-preserving pattern matching [22, 24], and permuted pattern matching [21] are SCERs, while matching relations in abelian pattern matching [16], indeterminate string pattern matching [5] and function matching [3] are not.

**Definition 2** (Parameterized equivalence [9]). *Two strings  $X$  and  $Y$  of the same length are a parameterized match, denoted as  $X \overset{\text{pr}}{\approx} Y$ , if  $X$  can be transformed into  $Y$  by applying a renaming bijection  $g$  from the characters of  $X$  to the characters of  $Y$ .*

**Definition 3** (Order-isomorphism [22, 24]). *Two strings  $X$  and  $Y$  of the same length over an alphabet with a linear order  $\prec$  are order isomorphic, denoted as  $X \overset{\text{op}}{\approx} Y$ , if  $X[i] \prec X[j] \Leftrightarrow Y[i] \prec Y[j]$  for all  $1 \leq i, j \leq |X|$ .*

**Definition 4** ( $\approx$ -occurrence [26]). *For two strings  $T$  and  $P$ , a position  $1 \leq i \leq |T| - |P| + 1$  is an  $\approx$ -occurrence of  $P$  in  $T$  if  $P \approx T[i : i + |P| - 1]$ . The set of  $\approx$ -occurrence positions of  $P$  in  $T$  is denoted by  $\text{Occ}_{P,T}$ .*

**Definition 5** ( $\approx$ -border [26]). *A string  $B$  is a  $\approx$ -border of  $T$  if  $B \approx T[: |B|] \approx T[|T| - |B| + 1 :]$ . We denote by  $\text{Bord}_{\approx}(T)$  the set of all  $\approx$ -borders of  $T$ . A  $\approx$ -border  $B$  of  $T$  is called proper if  $|B| < |T|$ , and called trivial if  $B = \varepsilon$ .*

**Lemma 1** ([26]). *(1)  $B \in \text{Bord}_{\approx}(S)$  and  $B' \in \text{Bord}_{\approx}(B)$  implies  $B' \in \text{Bord}_{\approx}(S)$ . (2)  $B, B' \in \text{Bord}_{\approx}(S)$  and  $|B'| \leq |B|$  implies  $B' \in \text{Bord}_{\approx}(B)$ .*

Based on Lemma 1, Matsuoka et al. [26] proposed an algorithm to compute border arrays under SCERs, which are defined as follows.

**Definition 6** ( $\approx$ -border array). *The  $\approx$ -border array  $\text{Border}_T$  of  $T$  is an array of length  $|T|$  such that  $\text{Border}_T[i] = \max\{|B| \mid B \text{ is a proper } \approx\text{-border of } T[: i]\}$  for  $1 \leq i \leq |T|$ .*

Tables 2 and 3 show examples of  $\approx$ -border arrays. We use the identity relation in Table 2 and the parameterized equivalence (Definition 2) in Table 3.

The well-known property on  $=$ -borders (e.g., [1]) holds for  $\approx$ -borders, too.

**Lemma 2.** *For any  $1 < i \leq n$ ,  $\text{Border}_T[i - 1] + 1 \geq \text{Border}_T[i]$ .*

Table 2: The  $=$ -border array, the shortest  $=$ -cover array, and the longest  $=$ -cover array of  $T = \text{abaababaabaababa}$ .

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
$T$	a	b	a	a	b	a	b	a	a	b	a	a	b	a	b	a
$Border_T$	0	0	1	1	2	3	2	3	4	5	6	4	5	6	7	8
$SCover_T$	1	2	3	4	5	3	7	3	9	5	3	12	5	3	15	3
$LCover_T$	0	0	0	0	0	3	0	3	0	5	6	0	5	6	0	8

Table 3: The  $\overset{\text{pr}}{\approx}$ -border array, the shortest  $\overset{\text{pr}}{\approx}$ -cover array, and the longest  $\overset{\text{pr}}{\approx}$ -cover array of  $T = \text{abaababaabaababa}$ . Notice that  $SCover_T[i] = 1$  for all  $i$ , for  $a \overset{\text{pr}}{\approx} b$ .

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
$T$	a	b	a	a	b	a	b	a	a	b	a	a	b	a	b	a
$Border_T$	0	1	2	1	2	3	3	3	4	5	6	4	5	6	7	8
$SCover_T$	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
$LCover_T$	0	1	2	1	2	3	3	3	1	5	6	1	5	6	3	8

### 3 Covers under SCERs

In this section, we define covers under SCERs ( $\approx$ -covers) and present some properties of  $\approx$ -covers, which prepares for the succeeding sections. Section 4 shows that the algorithm to compute shortest cover arrays by Breslauer [10] will work under SCERs with no change. Section 5 presents a slight variant of the algorithm by Li and Smyth [25] for computing the longest cover arrays and proves its correctness.

**Definition 7** ( $\approx$ -cover). *We say that a string  $C$  of length  $c$  is an  $\approx$ -cover of a string  $T$  of length  $n$  if there are  $x_1, x_2, \dots, x_m \in \text{Occ}_{C,T}$  such that  $x_1 = 1$ ,  $x_m = n - c + 1$  and  $x_{i-1} < x_i \leq x_{i-1} + c$  for all  $1 < i \leq m$ . Moreover, we say that an  $\approx$ -cover  $C$  of  $T$  is proper if  $c < n$ . The set of all  $\approx$ -covers of  $T$  is denoted by  $\text{Cov}_{\approx}(T)$ . A string  $T$  is primitive<sup>1</sup> if  $T$  has no proper  $\approx$ -cover.*

By definition,  $\text{Cov}_{\approx}(T) \subseteq \text{Bord}_{\approx}(T)$ . Below we observe that basic lemmas in [10] on  $=$ -covers and  $=$ -borders hold for  $\approx$ -covers and  $\approx$ -borders.

**Lemma 3.** *If  $C \in \text{Cov}_{\approx}(T)$ ,  $B \in \text{Bord}_{\approx}(T)$ , and  $|C| \leq |B|$ , then  $C \in \text{Cov}_{\approx}(B)$ .*

**Lemma 4.** *For any  $C, C' \in \text{Cov}_{\approx}(T)$  such that  $|C| \leq |C'|$ ,  $C \in \text{Cov}_{\approx}(C')$ .*

**Lemma 5.** *If  $C \in \text{Cov}_{\approx}(T)$  and  $C' \in \text{Cov}_{\approx}(C)$ , then  $C' \in \text{Cov}_{\approx}(T)$ .*

**Lemma 6.** *An  $\approx$ -cover  $C$  of  $T$  is primitive iff it is a shortest  $\approx$ -cover of  $T$ .*

**Lemma 7.** *For  $0 \leq i - 1 \leq j \leq |T|$ ,  $\text{Cov}_{\approx}(T[:j]) \cap \text{Cov}_{\approx}(T[i:]) \subseteq \text{Cov}_{\approx}(T)$ .*

**Lemma 8.** *A string  $C$  of length  $c$  is a proper  $\approx$ -cover of  $T$  of length  $n$  iff  $C \in \text{Bord}_{\approx}(T)$  and  $C \in \text{Cov}_{\approx}(T[:n-i])$  for some  $1 \leq i \leq c$ .*

In the sequel of this paper, we fix an input string  $T$  of length  $n$ .

<sup>1</sup>In some references it is called *superprimitive*, reserving the term “primitive” for strings that cannot be represented as  $S^k$  for some string  $S$  and integer  $k \geq 2$ .

---

**Algorithm 1:** Algorithm computing the shortest  $\approx$ -cover array

---

```

1 let Border be the  $\approx$ -border array of T;
2 Reach[i]  $\leftarrow$  0 for  $1 \leq i \leq n$ ;
3 for  $1 \leq i \leq n$  do
4   if Border[i] > 0 and Reach[SCover[Border[i]]]  $\geq i - \text{SCover}[\text{Border}[i]]$ 
5     then
6       SCover[i]  $\leftarrow$  SCover[Border[i]];
7       Reach[SCover[i]]  $\leftarrow$  i;
8   else
9     SCover[i]  $\leftarrow$  i;
10    Reach[i]  $\leftarrow$  i;

```

---

## 4 Shortest $\approx$ -cover array

In this section we prove that Algorithm 1 by Breslauer [10] computes the shortest  $\approx$ -cover array for an input string  $T$  based on the  $\approx$ -border array.

**Definition 8** (Shortest  $\approx$ -cover array). *The shortest  $\approx$ -cover array  $SCover_T$  of  $T$  is an array of length  $n$  such that  $SCover_T[i] = \min\{|C| \mid C \in \text{Cov}_{\approx}(T[:i])\}$  for  $1 \leq i \leq n$ .*

Tables 2 and 3 show examples of shortest  $\approx$ -cover arrays. Note that  $SCover_T[i]$  is the length of the unique (modulo  $\approx$ -equivalence) primitive cover of  $T[:i]$  by Lemma 6.

Algorithm 1 uses an additional array *Reach* to compute *SCover*. The algorithm updates *Reach* and *SCover* incrementally so that *Reach*[*j*] shall be the length of the longest prefix of  $T$  of which  $T[:j]$  is a  $\approx$ -cover and *SCover* shall be the shortest  $\approx$ -cover array. More precisely, in each iteration  $i$ , the algorithm updates *Reach* and *SCover* so that they satisfy the following properties at the end of the  $i$ -th iteration.

**R**( $i$ ) *Reach*[ $j$ ] = 0 if  $j > i$  or  $T[:j]$  is not primitive. Otherwise, *Reach*[ $j$ ] =  $\max\{p \mid T[:j] \text{ is a } \approx\text{-cover of } T[:p] \text{ and } p \leq i\}$ .

**S**( $i$ ) For  $1 \leq j \leq i$ ,  $SCover[j] = \min\{|C| \mid C \in \text{Cov}_{\approx}(T[:j])\}$ .

If **S**( $n$ ) holds, we have  $SCover = SCover_T$ .

**Theorem 1.** *Given the  $\approx$ -border array of text  $T$  of length  $n$ , Algorithm 1 computes the shortest  $\approx$ -cover array  $SCover_T$  of  $T$  in  $O(n)$  time.*

**Proof.** The linear time complexity is obvious.

We show the above invariants **R**( $i$ ) and **S**( $i$ ) by induction on  $i$ . Clearly the invariant holds for  $i = 0$ , i.e., the initial values of *Reach*[ $j$ ] = 0 for all  $j > 0$  satisfy the invariant **R**(0). Vacuously **S**(0) is true.

Assume that **R**( $i - 1$ ) and **S**( $i - 1$ ) hold at the beginning of the  $i$ -th iteration. Let  $b = \text{Border}[i]$  and  $c = \text{SCover}[b]$ .

Suppose the **if**-condition of Line 4 is satisfied in the  $i$ -th iteration. By the induction hypothesis on *Reach*[ $c$ ], which is at least as large as  $i - c \geq 1$  at the beginning of the  $i$ -th iteration,  $T[:c]$  is a primitive  $\approx$ -cover of  $T[:i - l]$  for

some  $1 \leq l \leq c$ . Then the algorithm updates the value of  $Reach[c]$  to  $i \geq 1$ , which is still positive at the end of the  $i$ -th iteration. By  $T[:b] \in \text{Bord}_{\approx}(T[:i])$  and  $T[:c] \in \text{Cov}_{\approx}(T[:b]) \subseteq \text{Bord}_{\approx}(T[:b])$  (by  $\mathbf{S}(i-1)$ ), Lemma 1 (1) implies  $T[:c] \in \text{Bord}_{\approx}(T[:i])$ . Therefore,  $T[:c]$  is a proper  $\approx$ -cover of  $T[:i]$  by Lemma 8. Thus,  $Reach[c] = i$  satisfies the invariant. On the other hand, the value  $Reach[i]$  is not changed from its initial value 0, while we get  $SCover[i] = c$ . Indeed  $T[:i]$  is not primitive as it has a  $\approx$ -cover  $T[:c]$ . That is,  $Reach[i]$  and  $SCover[i]$  satisfy the invariants. Since  $T[:c]$  is the unique primitive  $\approx$ -cover prefix of  $T[:i]$ , for other  $j$ ,  $Reach[j]$  need not be updated.

Suppose the **if**-condition is not satisfied in the  $i$ -th iteration, where both  $Reach[i]$  and  $SCover[i]$  are set to be  $i$ . If  $b = 0$ ,  $T[:i]$  has no proper  $\approx$ -cover. Thus  $T[:i]$  is primitive and the lemma holds. Next, consider the case where  $b \neq 0$  and  $Reach[c] < i - c$ . To show by contradiction that  $T[:i]$  is primitive, assume that  $T[:i]$  has a primitive proper  $\approx$ -cover  $T[:k]$ . By  $T[:k] \in \text{Cov}_{\approx}(T[:i]) \subseteq \text{Bord}_{\approx}(T[:i])$  and Lemma 3, we have  $T[:k] \in \text{Cov}_{\approx}(T[:b])$ . Since  $T[:b]$  has only one (up to  $\approx$ -equivalence) primitive  $\approx$ -cover by Lemma 6, we have  $k = c$ , i.e.,  $T[:c] \in \text{Cov}_{\approx}(T[:i])$ . By Lemma 8,  $T[:c] \in \text{Cov}_{\approx}(T[:i-j])$  for some  $1 \leq j \leq c$ , which contradicts the fact  $Reach[c] < i - c$  with the induction hypothesis. Therefore,  $T[:i]$  has no primitive proper  $\approx$ -cover and thus  $T[:i]$  is primitive by Lemma 6. We conclude that  $Reach[i] = SCover[i] = i$  satisfies  $\mathbf{R}(i)$  and  $\mathbf{S}(i)$  and  $Reach[j]$  need not be updated for other  $j$ .  $\square$

**Corollary 1.** *If  $Border_T$  can be computed in  $\beta(n)$  time,  $SCover_T$  can be computed in  $O(\beta(n) + n)$  time.*

## 5 Longest $\approx$ -cover array

This section discusses computing the longest  $\approx$ -cover array of a text. Tables 2 and 3 show examples of longest  $\approx$ -cover arrays.

**Definition 9** (Longest  $\approx$ -cover array). *The longest  $\approx$ -cover array  $LCover_T$  of  $T$  is an array of length  $n$  such that for  $1 \leq i \leq n$ ,  $LCover_T[i] = \max(\{|C| \mid C \text{ is a proper } \approx\text{-cover of } T[:i]\} \cup \{0\})$ .*

Let  $LCover_T^0[i] = i$  and  $LCover_T^q[i] = LCover_T[LCover_T^{q-1}[i]]$  for  $q \geq 1$ . The following lemma is a corollary to Lemmas 4 and 5.

**Lemma 9.** *For any  $1 \leq j \leq i$ ,  $T[:j] \in \text{Cov}_{\approx}(T[:i])$  iff  $j = LCover_T^q[i]$  for some  $q \geq 0$ .*

Therefore, using the longest  $\approx$ -cover array, one can easily obtain all the  $\approx$ -covers up to  $\approx$ -equivalence.

Li and Smyth [25] presented an online linear-time algorithm to compute the longest  $=$ -cover array from the  $=$ -border array of a text  $T$ . We will present a slight variant of theirs for computing the longest  $\approx$ -cover array. Our modification is not due to the generalization. In fact their algorithm works for computing  $\approx$ -covers as it is. We changed their algorithm just for simplicity. We will briefly discuss the difference of their and our algorithms later.

Li and Smyth showed some properties of longest  $=$ -cover arrays, but not all of them hold under SCERs. For instance, the longest  $\approx$ -cover array in Table 3 is a counterexample to Theorems 2.2 and 2.3 in [25]. So it is not trivial that

their algorithm and our variant work under SCERs and we need to carefully check the correctness of the algorithms.

Their algorithm involves an auxiliary array of length  $n$  based on the notion of “live” prefixes. A prefix  $S$  of  $T$  is said to be *live* if  $T$  can be extended so that  $S$  will be a cover of  $TU$  for some  $U \in \Sigma^*$ . This notion is also known as “left seeds” [12, 13]. We generalize the notion for SCERs as follows.

**Definition 10** (left  $\approx$ -seed). *For strings  $T$  of length  $n$  and  $S$  of length  $m$ ,  $S$  is said to be a left  $\approx$ -seed of  $T$  if there exist  $k$  and  $l$  such that  $k \leq l < m$ ,  $S \in \text{Cov}_\approx(T[: n - k])$  and  $S[: l] \approx T[n - l + 1 :]$ . We denote by  $\text{LSeed}_\approx(T)$  the set of all left  $\approx$ -seeds of  $T$ .*

We remark that it is not necessarily true that  $\text{LSeed}_\approx(T) = \{S \mid S \in \text{Cov}_\approx(TU) \text{ for some } U\}$  according to the above definition, contrarily to the case of the identity relation. Consider the order-isomorphism  $\overset{\text{op}}{\approx}$  (Definition 3) on  $\Sigma = \{a, b, c, d\}$  with  $a \prec b \prec c \prec d$ . Then  $S = \text{acb}$  is a left  $\overset{\text{op}}{\approx}$ -seed of  $T = \text{adcbcb}$ , since  $S \overset{\text{op}}{\approx} T[: 3]$  and  $S[: 2] \overset{\text{op}}{\approx} T[4 :]$ . However, for no character  $U \in \Sigma$ , we have  $S \overset{\text{op}}{\approx} (TU)[4 : 6]$ , since  $U$  needs to be a character bigger than  $b$  and smaller than  $c$ .

Clearly  $\text{Cov}_\approx(T) \subseteq \text{LSeed}_\approx(T)$ . Moreover,  $S \in \text{LSeed}_\approx(T)$  implies  $S \in \text{LSeed}_\approx(T')$  for any prefix  $T'$  of  $T$  unless  $|S| > |T'|$ . Being a left  $\approx$ -seed is a weaker property than being an  $\approx$ -cover, but it is easier to handle in an online algorithm, due to the monotonicity that  $T[: j] \notin \text{LSeed}_\approx(T[: i - 1])$  implies  $T[: j] \notin \text{LSeed}_\approx(T[: i])$  for every  $j < i$ . The following series of lemmas investigate the relation among left  $\approx$ -seeds and  $\approx$ -covers.

**Lemma 10.** *If  $k \leq l$ , then  $\text{Cov}_\approx(T[: n - k]) \cap \text{LSeed}_\approx(T[n - l + 1 :]) \subseteq \text{LSeed}_\approx(T)$ .*

**Proof.** Suppose  $S \in \text{Cov}_\approx(T[: n - k]) \cap \text{LSeed}_\approx(T[n - l + 1 :])$ . By  $S \in \text{LSeed}_\approx(T[n - l + 1 :])$ , there are  $k', l'$  such that  $k' \leq l' < |S| \leq l$ ,  $S \in \text{Cov}_\approx(T[n - l + 1 : n - k'])$  and  $S[: l'] \approx T[n - l' + 1 :]$ . We have  $S \in \text{Cov}_\approx(T[: n - k'])$  by  $S \in \text{Cov}_\approx(T[: n - k])$ ,  $n - k \geq n - l$ , and Lemma 7. Hence  $S \in \text{LSeed}_\approx(T[: i])$  by Definition 10.  $\square$

Lemma 11 says somewhat long prefixes are all left  $\approx$ -seeds, which we call *primary*. Lemma 12 says shorter left  $\approx$ -seeds are  $\approx$ -covers of long left  $\approx$ -seeds. As a corollary, we obtain Lemma 13, which corresponds to Lemma 2.5 in [25].

**Lemma 11** (Primary left  $\approx$ -seeds). *For any  $1 \leq i \leq n$  and  $i - \text{Border}_T[i] \leq j \leq i$ , we have  $T[: j] \in \text{LSeed}_\approx(T[: i])$ .*

**Proof.** Let  $b = \text{Border}_T[i]$ ,  $m = \lfloor (i - j)/(i - b) \rfloor$ ,  $l = i - (m + 1)(i - b)$  and  $x_k = k(i - b) + 1$  for  $k \geq 0$ . It is enough to show that (a)  $\{x_0, \dots, x_m\}$  witnesses  $T[: j] \in \text{Cov}_\approx(T[: x_m + j - 1])$ , (b)  $T[: l] \approx T[i - l + 1 : i]$ , and (c)  $i - (x_m + j - 1) \leq l < j$ . The equation (c) can be verified by simple calculation.

(a) Since  $x_{k+1} - x_k = i - b \leq j$ , it is enough to show  $x_k \in \text{Occ}_{T[: j], T[: i]}$  for all  $k \leq m$ . Since  $T[: b] \approx T[i - b + 1 : i]$ , any “corresponding” substrings of  $T[1 : b]$  and  $T[i - b + 1 : i]$  are  $\approx$ -equivalent. In particular,  $T[x_k : x_k + j - 1] \approx T[x_k + i - b : x_k + i - b + j - 1] = T[x_{k+1} : x_{k+1} + j - 1]$  for all  $0 \leq k < m$ . That is,  $T[: j] \approx T[x_k : x_k + j - 1]$  and thus  $x_k \in \text{Occ}_{T[: j], T[: i]}$  for all  $0 \leq k \leq m$ .

(b) The same argument for corresponding substrings of  $T[1 : b]$  and  $T[i - b + 1 : i]$  of length  $l$  establishes  $T[: l] \approx T[x_m : x_m + l - 1] \approx T[x_{m+1} : x_{m+1} + l - 1] = T[i - l + 1 : i]$ .  $\square$

**Lemma 12.** For any  $1 \leq i \leq n$ ,  $T[:j]$  for  $1 \leq j < i - \text{Border}_T[i]$  is a left  $\approx$ -seed of  $T[:i]$  iff  $T[:j]$  is the longest proper  $\approx$ -cover of a left  $\approx$ -seed of  $T[:i]$ .

**Proof.** Let  $b = \text{Border}_T[i]$ . ( $\implies$ ) Assume that for  $1 \leq j < i - b$ ,  $T[:j] \in \text{LSeed}_\approx(T[:i])$ , namely, there exist  $k$  and  $l$  such that  $k \leq l < j$ ,  $T[:j] \in \text{Cov}_\approx(T[:i-k])$  and  $T[:l] \in \text{Bord}_\approx(T[:i])$ . Since  $T[:b]$  is the longest proper  $\approx$ -border of  $T[:i]$ ,  $k \leq l \leq b$  and  $j < i - b \leq i - k$ . By Lemma 9, there exists  $T[:m] \in \text{Cov}_\approx(T[:i-k])$  such that  $j = \text{LCover}_T[m]$ . Moreover, since  $j < m \leq i - k$  and  $k \leq l < m$ , we have  $T[:m] \in \text{LSeed}_\approx(T[:i])$ . Therefore  $T[:j]$  is the longest proper  $\approx$ -cover of  $T[:m]$ , which is a left  $\approx$ -seed of  $T[:i]$ .

( $\impliedby$ ) Assume there is a left  $\approx$ -seed prefix  $T[:m]$  of  $T[:i]$  that is properly covered by  $T[:j]$ . By Definition 10, there exist  $k$  and  $l$  such that  $k \leq l < m$ ,  $T[:m] \in \text{Cov}_\approx(T[:i-k])$  and  $T[:l] \in \text{Bord}_\approx(T[:i])$ . Thus we have  $T[:j] \in \text{Cov}_\approx(T[:i-k])$  by Lemma 5. If  $j \geq l$ ,  $T[:j] \in \text{Cov}_\approx(T[:i-k])$  and  $T[:l] \in \text{Bord}_\approx(T[:i])$ , which implies  $T[:j] \in \text{LSeed}_\approx(T[:i])$  by Definition 10. If  $j < l < m$ ,  $T[:j] \in \text{Cov}_\approx(T[:m]) \subseteq \text{LSeed}_\approx(T[:m])$  implies  $T[:j] \in \text{LSeed}_\approx(T[:l])$ . By Lemma 10,  $T[:j] \in \text{LSeed}_\approx(T[:i])$ .  $\square$

**Lemma 13.** For any  $1 \leq i \leq n$  and  $1 \leq j \leq i$ ,  $T[:j] \in \text{LSeed}_\approx(T[:i])$  iff there exists  $k$  such that  $i - \text{Border}_T[i] \leq k \leq i$  and  $j = \text{LCover}_T^q[k]$  for some  $q \geq 0$ .

**Proof.** By Lemmas 9, 11 and 12.  $\square$

Our algorithm involves an auxiliary array based on the following function  $\text{LongestLSeedCov}_T$ , which is updated by Lemma 15. The significance of this function is shown as Lemma 14.

**Definition 11** ( $\text{LongestLSeedCov}_T(i, j)$ ). For a string  $T$ , define

$$\text{LongestLSeedCov}_T(i, j) = \max(\{l \mid T[:l] \in \text{LSeed}_\approx(T[:i]) \cap \text{Cov}_\approx(T[:j])\} \cup \{0\}).$$

**Lemma 14.** For any  $1 \leq i \leq n$ ,  $\text{LCover}_T[i] = \text{LongestLSeedCov}_T(i, \text{Border}_T[i])$ .

**Proof.** It suffices to show  $\text{Cov}_\approx(T[:i]) \setminus [T[:i]]_\approx = \text{LSeed}_\approx(T[:i]) \cap \text{Cov}_\approx(T[:b])$  for  $b = \text{Border}_T[i]$ . If  $C \in \text{Cov}_\approx(T[:i])$  with  $|C| \neq i$ , then obviously  $C \in \text{Bord}_\approx(T[:i]) \cap \text{LSeed}_\approx(T[:i])$ . By Lemma 1,  $C \in \text{Bord}_\approx(T[:b])$ . Suppose  $S \in \text{LSeed}_\approx(T[:i]) \cap \text{Cov}_\approx(T[:b])$ . There is  $k < |S|$  such that  $S \in \text{Cov}_\approx(T[:i-k])$ . By  $k < |S| \leq b$  and Lemma 7, we have  $S \in \text{Cov}_\approx(T[:i])$ .  $\square$

**Lemma 15.**  $\text{LongestLSeedCov}_T(i, j) = \text{LongestLSeedCov}_T(i-1, j)$  for  $1 \leq j \leq \text{Border}_T[i]$ . Moreover, for  $j = \text{Border}_T[i]$ , if  $T[:j] \notin \text{LSeed}_\approx(T[:i-1])$ , then  $\text{LongestLSeedCov}_T(i, j) = \text{LongestLSeedCov}_T(i-1, \text{LCover}_T[j])$ .

**Proof.** Let  $l = \text{LongestLSeedCov}_T(i-1, j)$  and  $l' = \text{LongestLSeedCov}_T(i, j)$ . Since  $j \leq \text{Border}_T[i] < i$ , we have  $l' < i$ , which implies  $l' \leq l$ .

Suppose  $l = 0$ . This implies  $l' = 0$  and thus  $l' = l$  holds. Suppose in addition that  $j = \text{Border}_T[i]$  and  $T[:j] \notin \text{LSeed}_\approx(T[:i-1])$ . The fact  $l = 0$  means  $\text{LSeed}_\approx(T[:i-1]) \cap \text{Cov}_\approx(T[:j]) = \emptyset$ , which implies  $\text{LSeed}_\approx(T[:i-1]) \cap \text{Cov}_\approx(T[:\text{LCover}_T[j]]) = \emptyset$  by Lemmas 4 and 5. Therefore,  $\text{LongestLSeedCov}_T(i-1, \text{LCover}_T[j]) = 0$ . So the lemma holds.

Hereafter we assume  $l \geq 1$ . Let  $b_i = \text{Border}_T[i] \geq 1$ . By  $T[:l] \in \text{LSeed}_\approx(T[:i-1])$ , there exists  $k < l$  such that  $T[:l] \in \text{Cov}_\approx(T[:i-1-k])$ . On the other hand, by  $b_i \leq i-1$ ,  $T[:l] \in \text{LSeed}_\approx(T[:b_i]) = \text{LSeed}_\approx(T[i-b_i+1:i])$ . Since



---

**Algorithm 2:** Algorithm computing the longest  $\approx$ -cover array

---

```

1 let Border be the  $\approx$ -border array of  $T$ ;
2  $LSChildren[i] \leftarrow 0$ ,  $LongestLSAnc[i] \leftarrow i$  for  $0 \leq i \leq n$ ;
3 for  $1 \leq i \leq n$  do
4   if  $LSChildren[Border[i]] = 0$  and  $0 < 2 \cdot Border[i] < i$  then
5      $LongestLSAnc[Border[i]] \leftarrow LongestLSAnc[LCover[Border[i]]]$ ;
6    $LCover[i] \leftarrow LongestLSAnc[Border[i]]$ ;
7    $LSChildren[LCover[i]] \leftarrow LSChildren[LCover[i]] + 1$ ;
8   if  $i > 1$  then
9      $c_1 \leftarrow i - Border[i]$ ;
10     $c_2 \leftarrow (i - 1) - Border[i - 1]$ ;
11    for  $j$  from  $c_2$  to  $c_1 - 1$  do
12      while  $LSChildren[j] = 0$  do
13         $LSChildren[LCover[j]] \leftarrow LSChildren[LCover[j]] - 1$ ;
14         $j \leftarrow LCover[j]$ ;

```

---

$k < l \leq j \leq b_i$ , by Lemma 10,  $T[:l] \in \text{Cov}_{\approx}(T[:i-1-k]) \cap \text{LSeed}_{\approx}(T[i-b_i+1:i])$  implies  $l \in \text{LSeed}_{\approx}(T[:i])$ . Thus  $l' = l$ .

Suppose  $j = b_i$  and  $T[:j] \notin \text{LSeed}_{\approx}(T[:i-1])$ . Since  $\text{Cov}_{\approx}(T[:j]) = \text{Cov}_{\approx}(T[:LCover_T[j]]) \cup [T[:j]]_{\approx}$  by Lemmas 4 and 5,  $T[:j] \notin \text{LSeed}_{\approx}(T[:i-1])$  implies  $\text{LongestLSeedCov}_T(i-1, LCover_T[j]) = l = l'$ .  $\square$

Algorithm 2 computes the longest  $\approx$ -cover array  $LCover_T$  of  $T$  as  $LCover$  taking the  $\approx$ -border array  $Border_T$  as input. Following Li and Smyth [25], we explain the algorithm using a tree formed by  $LCover_T$ , called the  $\approx$ -cover tree. The  $\approx$ -cover tree consists of nodes  $0, \dots, n$ . The root is 0 and the parent of  $j \neq 0$  is  $LCover_T[j]$ . By Lemma 9,  $T[:k] \in \text{Cov}_{\approx}(T[:j])$  if and only if  $k \neq 0$  and  $k$  is an ancestor of  $j$  (including the case where  $k = j$ ) in the  $\approx$ -cover tree. Hereafter, we casually use the index  $j$  to mean (any string  $\approx$ -equivalent to) the prefix  $T[:j]$  of  $T$ , if no confusion arises. We use two additional arrays  $LSChildren$  and  $LongestLSAnc$ , which have zero-based indices in accordance with the  $\approx$ -cover tree's nodes.  $LSChildren[j]$  counts the number of children of  $j$  that are left  $\approx$ -seeds of  $T$ .  $LongestLSAnc[j]$  points at the lowest ancestor of  $j$  that is a left  $\approx$ -seed of  $T$ . More precisely, the algorithm maintains them so that they satisfy the following invariants at the end of the  $i$ -th iteration of the outer **for** loop.

1.  $LongestLSAnc[j] = j$  if  $LSChildren[Border_T[j]] > 0$  or  $Border_T[j] \geq i - Border_T[i]$  or  $Border_T[j] = 0$  for  $0 \leq j \leq n$ .
2.  $LongestLSAnc[j] = \text{LongestLSeedCov}_T(i, j)$  for  $0 \leq j \leq Border_T[i]$ .
3.  $LCover[j] = LCover_T[j]$  for  $1 \leq j \leq i$ .
4.  $LSChildren[j] = |\text{LSChildren}(i, j)|$ , where

$$\text{LSChildren}(i, j) = \{ k \mid T[:k] \in \text{LSeed}_{\approx}(T[:i]) \text{ and } j = LCover_T[k] \},$$

for  $0 \leq j \leq n$ . Note that  $\text{LSChildren}(i, j) = \emptyset$  for  $j \geq i$ .

Suppose we already have the  $\approx$ -cover tree for  $T[: i-1]$ . To update it for  $T[: i]$  by adding a node  $i$ , we must determine the parent  $LCover_T[i]$  of  $i$ . By Lemma 14 and the invariant, we know that  $LCover_T[i] = LongestLSAnc[Border_T[i]]$ . The array  $LongestLSAnc$  can be maintained by Lemma 15, where we must update  $LongestLSAnc[j]$  when  $T[: j] \notin LSeed_{\approx}(T[: i-1])$  for  $j = Border_T[i] > Border_T[i-1]$ . By Lemma 13,  $T[: j] \in LSeed_{\approx}(T[: i-1])$  iff  $i-1 - Border_T[i-1] \leq j \leq i-1$  or  $LSChildren[j] > 0$  assuming that  $LSChildren$  satisfies the invariant for  $i-1$ . Therefore, constructing the  $\approx$ -cover tree is reduced to maintaining the array  $LSChildren$ . By Lemma 13,  $LSChildren[j]$  counts the number of children of  $j$  that are ancestors of an element of the set  $P_i = \{k \mid i - Border_T[i] \leq k \leq i\}$ , which is the index range of primary left  $\approx$ -seeds. At the beginning of the  $i$ -th iteration,  $LSChildren$  is based on  $P_{i-1}$ , and we must update  $LSChildren$  to be based on  $P_i$  by the end of the  $i$ -th iteration.  $LSChildren[j]$  needs to be updated only when  $j$  is an ancestor of some  $k$  in the difference of  $P_{i-1}$  and  $P_i$ . So, we first increment the value  $LSChildren[LCover[i]]$  by one as  $LCover[i]$  has got a new child  $i \in P_i \setminus P_{i-1}$ . Since  $LCover[i]$  is a left  $\approx$ -seed of  $T[: i-1]$ , we need not increment  $LSChildren[j]$  for further ancestors  $j$  of  $LCover[i]$ . For those  $k \in P_{i-1} \setminus P_i$ , we decrement  $LSChildren[LCover[k]]$  unless  $k$  is an ancestor of  $P_i$ . If this results in  $LSChildren[LCover[k]] = 0$ , we recursively decrement  $LSChildren[LCover^2[k]]$ , and so on.

**Example 1.** We consider the parameterized-equivalence  $\overset{\text{pr}}{\approx}$  (Definition 2) as an SCER. Suppose we have computed the  $\overset{\text{pr}}{\approx}$ -cover tree for  $T[: 5] = \text{abcac}$  as shown in Figure 1 (a). Our goal is to obtain the one for  $T[: 6] = \text{abcacc}$  shown in Figure 1 (d). Since  $LongestLSAnc[j] = j$  for all  $j$  throughout this example, we focus on updating  $LCover$  and  $LSChildren$ . In the figures,  $LSChildren$  is shown in parentheses beside each node. We have  $Border_T[5] = 2$  and  $Border_T[6] = 1$ , so the index sets of the primary left  $\overset{\text{pr}}{\approx}$ -seeds of  $T[: 5]$  and  $T[: 6]$  are  $P_5 = \{3, 4, 5\}$  and  $P_6 = \{5, 6\}$ , respectively. Since  $Border_T[6] = 1$ , Algorithm 2 first lets  $LCover[6] = LongestLSAnc[Border[6]] = 1$ . In other words, a new node 6 is added as a child of 1. It remains to update  $LSChildren$ , which is now based on  $P_5 = \{3, 4, 5\}$  but shall be based on  $P_6 = \{5, 6\}$ . First we increment  $LSChildren[LCover[6]] = LSChildren[1]$  by one, as illustrated in Figure 1 (b). At this moment,  $LSChildren[j]$  counts the number of children of  $j$  which are ancestors of some of  $P_5 \cup P_6 = \{3, 4, 5, 6\}$ . The inner **for**-loop of Line 11 modifies  $LSChildren$  so that it shall be based on  $\{4, 5, 6\}$  first and then on  $\{5, 6\}$ . Since the node 3 is the parent of 4, the  $LSChildren$  arrays based on  $\{3, 4, 5, 6\}$  and  $\{4, 5, 6\}$  are identical, as shown in Figures 1 (b) and (c), respectively. To modify  $LSChildren$  to be based on  $\{5, 6\}$ , we decrement  $LSChildren[j]$  if  $j$  has a child which is an ancestor of 4 but not that of 5 or 6. Since the node 4 is such a child of  $LCover[4] = 3$  (4 is an ancestor of 4, and  $LSChildren[4] = 0$  means that 4 is not an ancestor of 5 or 6), so we decrement  $LSChildren[3]$  by one. This results in  $LSChildren[3] = 0$ , by which we know that the node 3 is an ancestor of 4 but not that of 5 or 6. Hence we decrement  $LSChildren[LCover[3]] = LSChildren[2]$ . This results in  $LSChildren[2] = 1$ , which means that the node 2 is an ancestor of 4 and that of 5 or 6 at the same time. So, we stop the recursion and obtain the  $\approx$ -cover tree with  $LSChildren$  based on  $P_6 = \{5, 6\}$ , as shown in Figure 1 (d).

We remark that Li & Smyth's original algorithm maintains an array *Dead* that represents whether  $j \notin LSeed_{\approx}(T[: i])$  in addition to the arrays used in

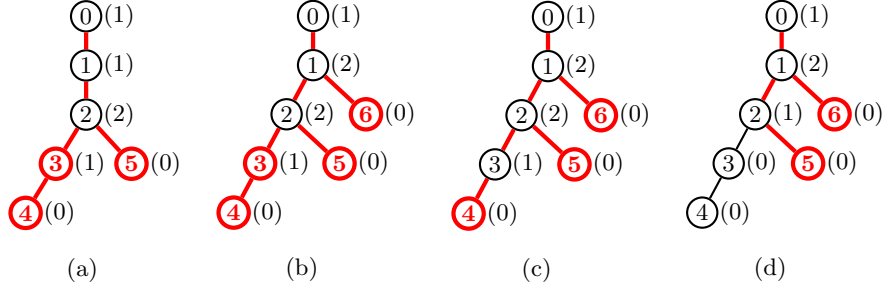


Figure 1: Updating the  $\overset{\text{pr}}{\approx}$ -cover tree of  $T[: 5] = \text{abcac}$  (a) for that of  $T[: 6] = \text{abcacc}$  (d).  $LSChildren$  counts the numbers of children which are ancestors of some nodes drawn as thick red circles. Those highlighted nodes represent primary left  $\overset{\text{pr}}{\approx}$ -seeds  $\{3, 4, 5\}$  of  $T[: 5]$  in (a) and those  $\{5, 6\}$  of  $T[: 6]$  in (d). Paths from highlighted nodes to the root are highlighted, so that  $LSChildren[j]$  is the number of highlighted edges from  $j$ .

our algorithm. Our algorithm judges the property using two arrays  $Border$  and  $LSChildren$  based on Lemmas 11 and 12. The reason why their algorithm requires the additional array is that it performs the inner **for** loop of Line 11 in the reverse order. If we perform the loop in the reverse order without the auxiliary array, in the above example, in the iteration on  $j = 4$ , we obtain the tree in Figure 1 (d), and then in the iteration on  $j = 3$ , the value of  $LSChildren[LCover[3]] = LSChildren[2]$  is decremented to 0 and further more  $LSChildren[LCover[2]] = LSChildren[1]$  is decremented to 1. Their algorithm stops iteration of the **while** loop at Line 12 if  $Dead[j] = \mathbf{True}$ , to restrain excessive decrement of  $LSChildren[j]$ .

**Theorem 2.** *Given the  $\approx$ -border array  $Border_T$  of  $T$ , Algorithm 2 computes the longest  $\approx$ -cover array  $LCover_T$  of  $T$  in  $O(n)$  time.*

**Proof.** We prove the above invariants by induction on  $i$ . In the first iteration, neither of the **if** antecedents are satisfied. At the end of the iteration, we have  $LCover[1] = LongestLSAnc[Border[1]] = LongestLSAnc[0] = 0$  and  $LSChildren[0] = 1$ . Together with the initialization, all the arrays satisfy the above invariants. By Lemmas 16 and 17, finally the algorithm computes  $LCover_T$ . The linear-time complexity is shown in Lemma 18.  $\square$

**Corollary 2.** *If  $Border_T$  can be computed in  $\beta(n)$  time,  $LCover_T$  can be computed in  $O(\beta(n) + n)$  time.*

**Lemma 16.** *Suppose that all the invariants hold at the beginning of the  $i$ -th iteration of the outer **for** loop. Then, at the end of the  $i$ -th loop, the invariants on  $LongestLSAnc$  and  $LCover$  are satisfied.*

**Proof.** Assume that  $LSChildren$ ,  $LongestLSAnc$ , and  $LCover$  hold the above properties at the end of the  $(i - 1)$ -th iteration. Let  $b_i = Border[i]$  and  $b_{i-1} = Border[i - 1]$ .

We first show that the invariant on  $LongestLSAnc$  is satisfied. Concerning the first claim on  $LongestLSAnc$ , the value of  $LongestLSAnc[j]$  can be altered from its initial value  $j$  only when  $LSChildren[j] = 0$ ,  $0 < 2j < i$  and  $j = b_i$ ,

in which case, the invariant does not necessitate  $\text{LongestLSAnc}[j] = j$ . On the other hand, by Lemma 2, if  $\text{Border}_T[j] < i - 1 - \text{Border}_T[i - 1]$ , then  $\text{Border}_T[j] < i - \text{Border}_T[i]$ . Therefore, once the value of  $\text{LongestLSAnc}[j]$  has been altered from  $j$ , the invariant will never necessitate  $\text{LongestLSAnc}[j] = j$ .

Concerning the second claim on  $\text{LongestLSAnc}$ , suppose  $j \leq b_i$ . If  $j < b_i$ , then  $j \leq b_{i-1}$  by Lemma 2. By the induction hypothesis on  $\text{LongestLSAnc}[j]$  and Lemma 15,  $\text{LongestLSAnc}[j] = \text{LongestLSeedCov}(i-1, j) = \text{LongestLSeedCov}(i, j)$ . It remains to show  $\text{LongestLSAnc}[b_i] = \text{LongestLSeedCov}(i, b_i)$ .

If  $b_i = 0$ ,  $\text{LongestLSeedCov}_T(i, b_i) = \text{LongestLSeedCov}_T(i-1, b_i) = 0$ . Suppose  $b_i > 0$  and  $T[: b_i] \notin \text{LSeed}_{\approx}(T[: i-1])$ . Let  $m = \text{LCover}[b_i]$ , for which  $m < b_i \leq b_{i-1} + 1$ . By Lemma 15 and the induction hypothesis on  $\text{LongestLSAnc}[m]$ , we have  $\text{LongestLSeedCov}_T(i, b_i) = \text{LongestLSeedCov}_T(i-1, m) = \text{LongestLSAnc}[m]$ . By Lemmas 11 and 12 and the induction hypothesis,  $b_i < i-1 - b_{i-1}$  and  $\text{LSChildren}[b_i] = 0$ . Thus, since  $2b_i \leq b_i + b_{i-1} + 1 < i-1+1 = i$ , the algorithm lets  $\text{LongestLSAnc}[b_i] = \text{LongestLSAnc}[m]$  in Line 5, which fulfills the invariant on  $\text{LongestLSAnc}$ .

Suppose  $T[: b_i] \in \text{LSeed}_{\approx}(T[: i-1])$ . In this case, there is  $k < b_i$  such that  $T[: b_i] \in \text{Cov}_{\approx}(T[: i-1-k])$ . By Lemma 7,  $T[: b_i] \in \text{Cov}_{\approx}(T[: i]) \subseteq \text{LSeed}_{\approx}(T[: i])$  and thus  $\text{LongestLSeedCov}_T(i, b_i) = b_i$ . By Lemma 2,  $b_i = b_{i-1} + 1$  holds. By Lemmas 11 and 12, either  $b_i \geq i-1 - b_{i-1}$  or  $\text{LSChildren}[b_i] > 0$ . The former case implies  $2b_i \geq i$  and thus in either case the algorithm does not execute Line 5. By the induction hypothesis,  $\text{LongestLSAnc}[b_i] = b_i$ , which fulfills the invariant on  $\text{LongestLSAnc}[b_i]$ .

The invariant on  $\text{LCover}$  is fulfilled in Line 6, which makes  $\text{LCover}[i] = \text{LongestLSAnc}[b_i]$  in accordance with Lemma 14.  $\square$

**Lemma 17.** *If the invariants hold at the beginning of the  $i$ -th iteration of the outer **for** loop, the invariant on  $\text{LSChildren}$  holds at the end of the  $i$ -th loop.*

**Proof.** Assume that at the end of the  $(i-1)$ -th iteration, the invariants hold. Let  $b_i = \text{Border}[i]$ ,  $b_{i-1} = \text{Border}[i-1]$ ,  $c_1 = i - b_i$ , and  $c_2 = (i-1) - b_{i-1}$ . Note that  $c_1 \geq c_2$  by Lemma 2.

First we discuss  $\text{LSChildren}[j]$  for  $j \geq c_1$ . For any  $k$  with  $c_2 \leq c_1 \leq k < i$ , by Lemma 11,  $T[: k] \in \text{LSeed}_{\approx}(T[: i-1]) \cap \text{LSeed}_{\approx}(T[: i])$ . This means that for any  $j$  with  $c_2 \leq c_1 \leq j \leq i$ ,

$$\text{LSChildren}(i, j) = \text{LSChildren}(i-1, j) \cup I_j$$

where  $I_j = \{i\}$  for  $j = \text{LCover}_T[i]$  and  $I_j = \emptyset$  for  $j \neq \text{LCover}_T[i]$ . Accordingly, for those  $j \geq c_1$ , the algorithm realizes  $\text{LSChildren}[j] = |\text{LSChildren}(i-1, j)| + |I_j| = |\text{LSChildren}(i, j)|$ .

It remains to show the invariants on  $\text{LSChildren}[j]$  for  $j < c_1$ . By Lemma 13,  $\text{LSChildren}(i, j)$  can be rewritten as  $\text{LSChildren}(i, j) = \text{rangeChildren}(c_1, i, j)$  for

$$\text{rangeChildren}(k, l, j) = \text{LCover}^{-1}[j] \cap \{ \text{LCover}^q[h] \mid k \leq h \leq l \text{ and } q \geq 0 \}$$

where  $\text{LCover}^{-1}[j] = \{ h \mid j = \text{LCover}[h] \}$ . In terms of the  $\approx$ -cover tree,  $\text{LCover}^{-1}[j]$  is the set of children of  $j$  and  $\text{rangeChildren}(k, l, j)$  is the set of children which have an element between  $k$  and  $l$  as a descendant (a node is thought to be a descendant of itself). Note that  $0 \notin \text{LCover}^{-1}[j]$  for any  $j \geq 0$ . After executing Line 7 of Algorithm 2, together with the induction hypothesis,

we have  $LSChildren[j] = |\text{rangeChildren}(c_2, i, j)|$ . If  $c_1 = c_2$ , then the algorithm does not go into the inner **for** loop of Line 11 and we have done the proof. If  $c_1 > c_2$ , it is enough to show that at the end of each iteration of the inner **for** loop of Line 11,

$$LSChildren[l] = |\text{rangeChildren}(j+1, i, l)| \quad (1)$$

for all  $l < c_1$ . For  $j = c_1 - 1$ , we have  $LSChildren[l] = |\text{rangeChildren}(c_1, i, l)| = |LSChildren(i, l)|$  for all  $l < c_1$ . For this purpose, we show by induction on  $r$  that at the end of the  $r$ -th iteration of the **while** loop (Line 12), we have

$$LSChildren[l] = |\text{rangeChildren}(j+1, i, l) \cup (LCover^{-1}[l] \cap \{LCover^q[j] \mid q \geq r\})| \quad (2)$$

for all  $l < c_1$ . Note that there always exists  $r_j$  such that  $LCover^{r_j}[j] = 0$ , for which  $LCover^{-1}[l] \cap \{LCover^q[j] \mid q \geq r_j\} = \emptyset$ , i.e., Eq. (2) is equivalent to (1).

For  $r = 0$ , i.e., at the beginning of the first iteration of the **while** loop, Eq. (1) for  $j - 1$  holds, i.e.,  $LSChildren[l] = |\text{rangeChildren}(j, i, l)|$ , which is equivalent to (2) with  $r = 0$ .

Assuming the induction hypothesis (2) for  $r$  holds, we show that it is the case for  $r + 1$ . Increasing  $r$  by one never expands the set on the right hand of (2). The set will lose an element  $h$  iff  $h = LCover^r[j]$ ,  $l = LCover^{r+1}[j]$  and

$$LCover^r[j] \notin \{LCover^q[k] \mid j < k \leq i, q \geq 0\}. \quad (3)$$

If  $LSChildren[LCover^r[j]] \neq 0$ , the loop is not repeated. It is enough to show that for any  $l < c_1$

$$LCover^{-1}[l] \cap \{LCover^q[j] \mid q \geq r\} \subseteq \text{rangeChildren}(j+1, i, l), \quad (4)$$

so that we establish (1). If  $LCover^r[j] = 0$ ,  $LCover^{-1}[l] \cap \{LCover^q[j] \mid q \geq r\} = \emptyset$ . Clearly (4) holds. Suppose  $LCover^r[j] \neq 0$ . The assumption that  $LSChildren[LCover^r[j]] \neq 0$  means, by induction hypothesis (2), there is

$$\begin{aligned} k \in \text{rangeChildren}(j+1, i, LCover^r[j]) \\ \cup (LCover^{-1}[LCover^r[j]] \cap \{LCover^q[j] \mid q \geq r\}). \end{aligned}$$

By  $LCover^{-1}[LCover^r[j]] \cap \{LCover^q[j] \mid q \geq r\} = \emptyset$ ,  $k \in \text{rangeChildren}(j+1, i, LCover^r[j])$ , which means  $k = LCover^s[h] \in LCover^{-1}[LCover^r[j]]$  for some  $j < h \leq i$  and  $s \geq 0$ , i.e.,  $LCover^{s+1}[h] = LCover^r[j]$ . For  $1 \leq l \leq c_1$ , if  $LCover^q[j] \in LCover^{-1}[l]$  for some  $q \geq r$ , then

$$LCover^{q-r+s+1}[h] = LCover^q[j] \in LCover^{-1}[l].$$

That is,  $LCover^q[j] \in \text{rangeChildren}(j+1, i, l)$ , which shows (4) and thus (1).

Suppose  $LSChildren[LCover^r[j]] = 0$ . We show that (3) holds. By the induction hypothesis (2) for  $r$ ,  $LSChildren[LCover^r[j]] = 0$  means

$$\begin{aligned} \text{rangeChildren}(j+1, i, LCover^r[j]) \\ \cup (LCover^{-1}[LCover^r[j]] \cap \{LCover^q[j] \mid q \geq r\}) = \emptyset. \end{aligned}$$

If (3) did not hold, there were  $j'$  and  $q$  such that  $LCover^r[j] = LCover^q[j']$  and  $j < j' \leq i$ , where  $q \geq 1$  by  $LCover^r[j] \leq j < j'$ . Then  $LCover^{q-1}[j'] \in LCover^{-1}[LCover^r[j]]$ , which is a contradiction. So, the condition (3) holds.  $\square$

**Lemma 18.** *Algorithm 2 runs in  $O(n)$  time.*

**Proof.** Let  $t(j)$  and  $f(j)$  be the numbers of times that the **while** condition on  $j$  (Line 12) is judged true and false, respectively. Since  $\sum_{j=0}^n f(j) \leq n + \sum_{j=1}^n t(j)$ , it is enough to show  $t(j) \leq 1$  for every  $j$  to establish the linear-time complexity. Suppose that the algorithm finds  $LSChildren[j] = 0$  at the **while** loop in the  $i$ -th iteration of the outer **for** loop. We show that it happens for the least  $i > j$  such that  $T[:j] \notin LSeed_{\approx}(T[:i])$ . Note that the condition is checked only for  $j < c_1$ , where  $c_1 = i - Border[i]$ . Therefore,  $LSChildren[j] = 0$  implies  $T[:j] \notin LSeed_{\approx}(T[:i])$  by Lemma 12. Since  $T[:j] \notin LSeed_{\approx}(T[:i])$  implies  $T[:j] \notin LSeed_{\approx}(T[:i'])$  for any  $i' > i$ , it is enough to show  $T[:j] \in LSeed_{\approx}(T[:i-1])$ . For  $c_2 = i - 1 - Border[i-1]$ , by the algorithm,  $j = LCover^q[k]$  for some  $c_2 \leq k < c_1$  and  $q \geq 0$ . If  $q = 0$ , i.e.,  $c_2 \leq j = k < c_1$ , by Lemma 11,  $T[:j] \in LSeed_{\approx}(T[:i-1])$ . If  $q \geq 1$ , the value  $LSChildren[j]$  is decremented in the  $q$ -th iteration of the **while** loop, just before deciding  $LSChildren[j] = 0$ . Moreover,  $T[:j] \notin LSeed_{\approx}(T[:i])$  implies  $j \neq LCover[i]$ , and hence  $LSChildren[j]$  was strictly positive at the end of the  $(i-1)$ -th iteration of the outer **for** loop. By the invariant,  $LSChildren(i-1, j) \neq \emptyset$ , which means  $T[:j] \in LSeed_{\approx}(T[:i-1])$ .  $\square$

## References

- [1] Aho, A.V., Hopcroft, J.E.: The design and analysis of computer algorithms. Pearson Education India (1974)
- [2] Amir, A., Levy, A., Lubin, R., Porat, E.: Approximate cover of strings. Theoretical Computer Science **793**, 59–69 (2019). <https://doi.org/10.1016/j.tcs.2019.05.020>
- [3] Amir, A., Aumann, Y., Lewenstein, M., Porat, E.: Function matching. SIAM Journal on Computing **35**(5), 1007–1022 (2006)
- [4] Amir, A., Farach, M., Muthukrishnan, S.: Alphabet dependence in parameterized matching. Information Processing Letters **49**(3), 111–115 (1994). [https://doi.org/10.1016/0020-0190\(94\)90086-8](https://doi.org/10.1016/0020-0190(94)90086-8)
- [5] Antoniou, P., Crochemore, M., Iliopoulos, C., Jayasekera, I., Landau, G.: Conservative string covering of indeterminate strings. In: Prague Stringology Conference 2008. pp. 108–115 (2008)
- [6] Apostolico, A., Ehrenfeucht, A.: Efficient detection of quasiperiodicities in strings. Theoretical Computer Science **119**(2), 247–265 (1993). [https://doi.org/10.1016/0304-3975\(93\)90159-Q](https://doi.org/10.1016/0304-3975(93)90159-Q)
- [7] Apostolico, A., Farach, M., Iliopoulos, C.S.: Optimal superprimitivity testing for strings. Information Processing Letters **39**(1), 17–20 (1991). [https://doi.org/10.1016/0020-0190\(91\)90056-N](https://doi.org/10.1016/0020-0190(91)90056-N)
- [8] Apostolico, A., Giancarlo, R.: Periodicity and repetitions in parameterized strings. Discrete Applied Mathematics **156**(9), 1389–1398 (2008). <https://doi.org/10.1016/j.dam.2006.11.017>

- [9] Baker, B.S.: Parameterized Pattern Matching: Algorithms and Applications. *Journal of Computer and System Sciences* **52**(1), 28–42 (1996). <https://doi.org/10.1006/jcss.1996.0003>
- [10] Breslauer, D.: An on-line string superprimitivity test. *Information Processing Letters* **44**(6), 345–347 (1992). [https://doi.org/10.1016/0020-0190\(92\)90111-8](https://doi.org/10.1016/0020-0190(92)90111-8)
- [11] Brodal, G.S., Pedersen, C.N.S.: Finding Maximal Quasiperiodicities in Strings. In: *CPM 2000*. pp. 397–411 (2000). [https://doi.org/10.1007/3-540-45123-4\\_33](https://doi.org/10.1007/3-540-45123-4_33)
- [12] Christou, M., Crochemore, M., Guth, O., Iliopoulos, C.S., Pissis, S.P.: On left and right seeds of a string. *Journal of Discrete Algorithms* **17**, 31–44 (2012)
- [13] Christou, M., Crochemore, M., Iliopoulos, C.S., Kubica, M., Pissis, S.P., Radoszewski, J., Rytter, W., Szreder, B., Waleń, T.: Efficient seed computation revisited. *Theoretical Computer Science* **483**, 171–181 (2013). <https://doi.org/10.1016/j.tcs.2011.12.078>
- [14] Crochemore, M., Rytter, W.: *Jewels of Stringology*. World Scientific Publishing Co. Pte. Ltd. (2002). <https://doi.org/10.1142/9789812778222>
- [15] Diptarama, Ueki, Y., Narisawa, K., Shinohara, A.: KMP Based Pattern Matching Algorithms for Multi-Track Strings. In: *Proceedings of Student Research Forum Papers and Posters at SOFSEM2016*. pp. 100–107 (2016)
- [16] Ehlers, T., Manea, F., Mercas, R., Nowotka, D.:  $k$ -abelian pattern matching. *Journal of Discrete Algorithms* **34**, 37–48 (2015)
- [17] Gourdel, G., Kociumaka, T., Radoszewski, J., Rytter, W., Shur, A., Waleń, T.: String periods in the order-preserving model. *Information and Computation* **270**, 104463:1–22 (2020). <https://doi.org/10.1016/j.ic.2019.104463>
- [18] Hendrian, D., Ueki, Y., Narisawa, K., Yoshinaka, R., Shinohara, A.: Permuted Pattern Matching Algorithms on Multi-Track Strings. *Algorithms* **12**(4), 73:1–20 (2019). <https://doi.org/10.3390/a12040073>
- [19] Iliopoulos, C., Mouchard, L.: Quasiperiodicity: From detection to normal forms. *Journal of Automata, Languages and Combinatorics* **4**, 213–228 (01 1999)
- [20] Iliopoulos, C.S., Moore, D.W.G., Park, K.: Covering a string. *Algorithmica* **16**(3), 288–297 (1996). <https://doi.org/10.1007/BF01955677>
- [21] Katsura, T., Narisawa, K., Shinohara, A., Bannai, H., Inenaga, S.: Permuted Pattern Matching on Multi-track Strings. In: *SOFSEM 2013: Theory and Practice of Computer Science*. pp. 280–291 (2013). [https://doi.org/10.1007/978-3-642-35843-2\\_25](https://doi.org/10.1007/978-3-642-35843-2_25)
- [22] Kim, J., Eades, P., Fleischer, R., Hong, S.H., Iliopoulos, C.S., Park, K., Puglisi, S.J., Tokuyama, T.: Order-preserving matching. *Theoretical Computer Science* **525**, 68–79 (2014). <https://doi.org/10.1016/j.tcs.2013.10.006>

- [23] Knuth, D.E., Morris, Jr., J.H., Pratt, V.R.: Fast Pattern Matching in Strings. *SIAM Journal on Computing* **6**(2), 323–350 (1977)
- [24] Kubica, M., Kulczyński, T., Radoszewski, J., Rytter, W., Waleń, T.: A linear time algorithm for consecutive permutation pattern matching. *Information Processing Letters* **113**(12), 430–433 (2013). <https://doi.org/10.1016/j.ipl.2013.03.015>
- [25] Li, Y., Smyth, W.F.: Computing the Cover Array in Linear Time. *Algorithmica* **32**(1), 95–106 (2002). <https://doi.org/10.1007/s00453-001-0062-2>
- [26] Matsuoka, Y., Aoki, T., Inenaga, S., Bannai, H., Takeda, M.: Generalized pattern matching and periodicity under substring consistent equivalence relations. *Theoretical Computer Science* **656**, 225–233 (2016). <https://doi.org/10.1016/j.tcs.2016.02.017>
- [27] Moore, D., Smyth, W.: An optimal algorithm to compute all the covers of a string. *Information Processing Letters* **50**(5), 239–246 (1994). [https://doi.org/10.1016/0020-0190\(94\)00045-X](https://doi.org/10.1016/0020-0190(94)00045-X)
- [28] Moore, D., Smyth, W.: A correction to “An optimal algorithm to compute all the covers of a string”. *Information Processing Letters* **54**(2), 101–103 (1995). [https://doi.org/10.1016/0020-0190\(94\)00235-Q](https://doi.org/10.1016/0020-0190(94)00235-Q)
- [29] Park, S.G., Amir, A., Landau, G.M., Park, K.: Cartesian Tree Matching and Indexing. In: 30th Annual Symposium on Combinatorial Pattern Matching (CPM 2019). pp. 16:1–16:14 (2019). <https://doi.org/10.4230/LIPIcs.CPM.2019.16>