

Guiding Graph Embeddings using Path-Ranking Methods for Error Detection in noisy Knowledge Graphs

Konstantinos Bougiatiotis^{1,2}, Romanos Fasoulis^{1*}, Fotis Aisopos¹, Anastasios Nentidis¹, Georgios Paliouras¹

¹Institute of Informatics and Telecommunications, National Center Scientific Research Demokritos, Athens, Greece

²Department of Informatics and Telecommunications, National and Kapodistrian University of Athens, Greece
kbogas@di.uoa.gr

Abstract

Nowadays Knowledge Graphs constitute a mainstream approach for the representation of relational information on big heterogeneous data, however, they may contain a big amount of imputed noise when constructed automatically. To address this problem, different error detection methodologies have been proposed, mainly focusing on path ranking and representation learning. This work presents various mainstream approaches and proposes a hybrid and modular methodology for the task. We compare different methods on two benchmarks and one real-world biomedical publications dataset, showcasing the potential of our approach and providing insights on graph embeddings when dealing with noisy Knowledge Graphs.

Introduction

A Knowledge Graph (KG) is a construct for representing relational information between entities that can be extracted either manually or automatically, e.g. from text found online. Each piece of information is usually presented as a triple (s, r, o) , where s is the subject, o is the object, and r is the relation connecting them. Every such triple is also called a fact (Wang et al. 2017).

In the last decade, as the Natural Language Processing (NLP) domain is growing rapidly, we have seen a surge of growth in automatic knowledge graph construction and development. Knowledge graphs like DBpedia (Auer et al. 2007), YAGO (Suchanek, Kasneci, and Weikum 2007), NELL (Carlson et al. 2010) and Wikidata (Tanon et al. 2016) are automatically created. While the aforementioned knowledge graphs are bigger and more detailed than ever before, it is apparent that errors and noise cannot be avoided, as automatic extraction tools are not perfect. Consequently, it is important to estimate how much noise exists in automatically constructed KG's, how prominent it is and how this noise affects any further downstream tasks that will be performed on the KG (e.g. link prediction or node classification).

To address the problem of noise and errors in knowledge graphs, we focus on contrasting various methods that use different techniques concerning error detection. Although

many papers focus on KG completion and link prediction tasks, few actually deal with the problem of existing noise.

In this work, our goal is to compare and combine different approaches, mainly stemming from path ranking analysis and graph embeddings. In addition, we propose a hybrid of the two approaches. We showcase that a specific combination of a path ranking algorithm and graph embeddings can achieve better results on error detection tasks, while also creating robust-to-noise embeddings that can later be used for further analysis and tasks.

The contributions of this work are summarized as follows:

- Development of a hybrid error detection approach that extends the use of path ranking algorithms to generate error-robust embeddings.
- Quantitative and qualitative comparison and assessment of different error detection methods based on path ranking, graph embedding and hybrid techniques.
- A framework that allows the combination of different error detection tools and graph embedding techniques to tackle challenges in noisy knowledge graphs.

The rest of the paper is structured as follows: first, related work on the subject is presented and then the details of the proposed hybrid approach are described. Following that, the experimentation process is presented, alongside comments on the qualitative and quantitative results. Finally, the limitations and conclusions of the current work are discussed.

Related Work

Error detection tasks in knowledge graphs become more and more prominent as modern, automated ways of constructing knowledge graphs create higher demands regarding data integrity (Heindorf et al. 2016). The quality assessment of data residing in such graphs may be applied in a static way, or taking into account their evolution over time (Rashid et al. 2019). There are a handful of methods for error detection in knowledge graphs via fact checking (Shi and Weninger 2016) or anomaly detection (Akoglu, Tong, and Koutra 2015), with each one targeting various types of information (Paulheim 2016). This information can be internal and present in knowledge graph (e.g. density, structure, etc.) or external (e.g. textual information).

*Equal contribution with first author

Internal and External Error Detection Methods

A good example of an internal method is SDValidate (Paulheim and Bizer 2014), which uses the characteristic distribution of types (concepts) and relations. The work in (Jia et al. 2019) presents a knowledge graph triple confidence assessment model, quantifying their semantic correctness based on a Reachable paths inference algorithm.

In our work, we employ PaTyBRED (Melo and Paulheim 2017), a path ranking approach that utilizes the Path Ranking Algorithm (Lao and Cohen 2010) and the Sub-graph Feature Extraction (Gardner and Mitchell 2015) methods for error detection. Recent works showed that the presence of relations between candidate pairs, exploited in path ranking, can be an extremely strong signal of a correct link (Toutanova and Chen 2015) and also that a simple method can achieve state-of-the-art performance when well tuned (Kadlec, Bajgar, and Kleindienst 2017). This is also validated in our results, illustrating the high performance of a simple path ranking approach as will be discussed. PaTyBRED discovers complex patterns over paths between nodes that are used as features in a Random Forest classifier, in order to predict confidence scores for all triples. The feature extraction process of this method is further explained in Methodology.

On the contrary, methods like DeFacto (Lehmann et al. 2012), which specialize in finding erroneous relations, uses external information in the form of lexicalizations. In this work, we are focusing solely on internal methods.

Embedding Methods

While triples are considered to be a very effective structural representation of KGs, the need to better manage and gain access to underlying symbolic information of these triples led to the representation known as knowledge graph embeddings (Cai, Zheng, and Chang 2017). This involves the transformation of entities and relations of knowledge graphs into lower-dimensional, fixed-size vectors. These vectors can afterward be employed for further downstream tasks such as link prediction, node classification, as well as error detection.

Baseline approaches on error detection employ graph embeddings based on Translational Distance Models like TransE (Bordes et al. 2013) or Semantic Matching models (Wang et al. 2017), aiming at identifying erroneous triples through the increased values of specified loss functions. The authors of TransT (Zhao, Feng, and Gallinari 2019) introduce a novel translating embedding approach with triple trustfulness, taking low trust (possible noise) triples into the consideration of the energy function, to extract a confidence for all graph triples. On the other hand, the authors in (Abedini, Keyvanpour, and Menhaj 2020) divide the errors in a Knowledge Graph into three types (outliers, inconsistencies and erroneous relations) and employ Semantic Matching models embeddings in three different trays for the Graph correction.

Rule-based Anomaly Detection

To improve the embedding creation process, the work of (Guo et al. 2017) proposed an iterative guidance from soft rules, resulting in a Rule-Guided Embedding model (RUGE). The RUGE model has been employed by (Hong, Bu, and

Jiang 2020) to produce rule-enhanced noisy embeddings for low-quality error detection, focusing on entity type errors. Rule-based error detection has been also performed in (Cheng et al. 2018) introducing a set of automatic repairing semantic patterns for simple graphs, called Graph-Repairing Rules (GRRs), which focus on conflicts and redundancies, in terms of error detection. Ho et al. (Ho et al. 2018) worked in the opposite direction, using embeddings to guide rule learning, while Zhang et al. (Zhang et al. 2019) operated iteratively, so the embeddings and the rules can guide each other.

Most importantly, (Belth et al. 2020) presented an interesting unified graph summarization and refinement approach, developing a set of soft rules in the form of graph patterns, in order to identify various anomaly types. The resulting model dictated inductive rules for relations between node labels and outperformed baseline embedding methods used for error detection, such as ComplEx and TransE. Our approach, as will be explained, combines embeddings with path ranking, enabling the exploitation of features like frequency of big-length paths, that graph rules may not capture.

Embeddings Guided by the Confidence of Triples

Embedding approaches may be enriched with additional internal information of the KG such as the collection of paths connecting a subject to an object. For example, the PTransE model extends TransE, using paths in addition to relations (Lin et al. 2015). Similarly, the Confidence-aware KRL framework (CKRL) (Xie, Liu, and Sun 2017) introduces a triple confidence score that guides the loss function to pay attention to more "convincing" triples. This confidence score takes into account different aspects and characteristics of triples, both local and global. The Triple trustworthiness measurement model for Knowledge Graph (KGTm) (Jia et al. 2018) uses a crisscrossed neural network-based structure, combining different elements through a multi-layer perceptron fusioner to generate confidence scores for each triple.

The current approach follows a similar principle, by employing a simpler path ranking approach to guide the construction of knowledge graph embeddings.

Methodology

In this section, we briefly present two methods that will be used later as modular components in the proposed Path Ranking Guided Embeddings (PRGE) approach. Then, we present PRGE as a framework along with the specific model tested here. In the following, a knowledge graph G will be defined as a set of triples. Each triple follows the form of (s, r, o) , where $(s, o) \in E$ are the entities and $r \in R$ is the relation that binds them. E is the set that contains all entities that exist in G and R is the set that contains all relations. We assume that G also contains some ratio of noise $N\%$, denoting that $N\%$ of the triples in G are erroneous. The objective of error detection is to find a way to pinpoint these errors in G .

PaTyBRED

PaTyBRED (Melo and Paulheim 2017) is a path-ranking based algorithm that was developed with the task of error

detection in mind. PaTyBRED uses paths as features, with a path being defined as a sequence of relations $r_1 \rightarrow r_2 \rightarrow \dots \rightarrow r_n$, connecting a subject s and an object o . The concept of the algorithm is to use these paths as features to decide whether a given triple is noisy or not. Using pruning and other heuristics, specific paths are kept per relation to indicate whether a triple is erroneous. In the end, a confidence score with values $[0, 1]$ is decided for each triple, with low scores indicating noise.

TransE

The basic idea behind the TransE (Bordes et al. 2013) model is that, given a triple (s, r, o) , the subject s and the relation r can be connected with the object o with low error, meaning $s + r \approx o$. Each component of entity (s, r, o) is represented through an embedding, a vector of fixed size d . The fitness of the model is calculated through the energy function: $E(s, r, o) = \|s + r - o\|_{l_2}$, where l_2 denotes the L_2 norm, and the higher the fitness for a triple, the smaller the value of the energy function. TransE recursively minimizes a pairwise max-margin scoring function that uses the aforementioned energy function and negative sampling for training:

$$Loss = \sum_{(s,r,o) \in S} \sum_{(s',r',o') \in S'} [\gamma + E^+ - E^-]_+ \quad (1)$$

where E^+ is the energy function score of a positive triple from the actual KG and E^- is the energy function score of a negative triple generated by random sampling and γ is the hyper-parameter of margin. $[x]_+$ denotes the positive part of x .

Path Ranking Guided Embeddings (PRGE)

In the previous subsections, we briefly presented PaTyBRED and TransE. The first, outputs a confidence score for each triple present in the knowledge graph, denoting the probability of the triple being erroneous. The second, generates embeddings for each entity and relation, based on the goodness of fit of the model on the original triples. However, the embedding generation methodology has no inherent way of dealing with knowledge graphs containing errors. As such, an erroneous and a correct triple would both influence the embedding generation procedure the same way, leading to low-quality embeddings directly related to the number of erroneous triples existing in a knowledge graph. This problem exists for all graph embeddings procedures, that cannot intrinsically handle the possibility of encountering noisy input.

With the previous concern in mind and taking into account that most real-world knowledge graphs nowadays are noisy due to errors in the automatic construction process, we propose a framework to properly guide the graph embedding creation procedure when working with noisy graphs. In order to showcase this approach, we propose the hybrid approach of Path Ranking Guided Embedding (PRGE). PRGE leverages the PaTyBRED confidence score generated for each triple, to guide the TransE model on focusing on the probably correct triples. An overview of the approach is presented in Figure 1.

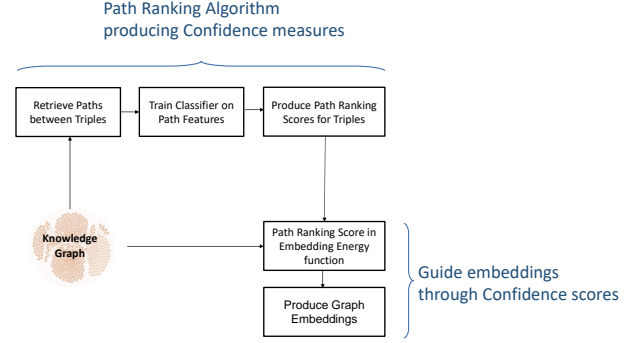


Figure 1: Workflow of the PRGE framework. Applying Path Ranking to calculate confidence scores for each triple and use them to guide the graph embedding procedure.

In order to do so, we utilize the confidence measure $P(s, r, o)$ of the PaTyBRED method, to lessen the effect that noisy triples have during the training process. This is done by incorporating the confidence score of each triple in Eq. (1) in the following way:

$$Loss = \sum_{(s,r,o) \in S} \sum_{(s',r',o') \in S'} ([\gamma + E^+ - E^-]_+) \cdot P(s, r, o)^\lambda \quad (2)$$

where λ is a scaling parameter to tune the importance of the confidence score. Using this additional exponential weight with the confidence score as a base, we can guide the training procedure to put less emphasis on noisy triples and focus on the probably correct facts in the knowledge graph. This is because noisy triples will have on average a smaller $P(s, r, o)$ than the correct ones, thus decreasing the loss accumulated from noise in Eq. (2) and finally diminishing the effect the noisy triples have on the generated embedding values.

It is important to note here, that although PRGE is presented here using the PaTyBRED, as the confidence scoring mechanism and TransE, as the graph embedding procedure, the approach is modular regarding these two components. Any other error detection procedure that generates a score per triple could be plugged in instead of PaTyBRED and likewise, other graph embedding methods could be used instead of TransE. We opted to use the PaTyBRED method to calculate the confidence scores, as it is the most simplified and robust of the PRA-based methods and TransE as it is a well-known, simple yet efficient methodology, that is commonly used as a base for similar approaches.

As such, PRGE provides a modular framework for combining methodologies from the error detection and graph embedding communities to tackle challenges in real-world applications where noise in knowledge graphs usually exists.

Experiments

Datasets

We evaluate the proposed method and other competitors on different tasks related to error detection. We perform experiments on two commonly used KG datasets and a KG created

Dataset	# Rel	# Ent	# Triples
WN18	18	40,943	141,442
FB15k	1345	14,951	483,142
Dementia	64	48,008	135,000

Table 1: Details of the 3 datasets used (WordNet, FreeBase and iASiS) in terms of different relation types and size.

for a real-world application. Statistics for the datasets are presented in Table 1.

The two benchmark datasets are *WN18* from WordNet (Fellbaum 2005) and *FB15k* from the FreeBase Knowledge Base (Bollacker et al. 2008). To demonstrate the need for error detection methodologies in real-world applications, we experimented with a Knowledge Graph dataset (*Dementia*) created in the context of the iASiS Project (Krithara et al. 2019). For the needs of the project, we extracted relations between biomedical entities from abstracts of publications related to Dementia in PubMed¹ using automatic tools. Specifically, after fetching abstracts related to Dementia, through semantic MeSH queries², we use SemRep (Rindfleisch and Fiszman 2003) for automatically extracting biomedical predications, i.e. semantic triples in the form of subject-predicate-object, from unstructured text. The subject and object arguments in these predications are concepts from the Unified Medical Language System (Bodenreider 2004) and the predicate is one of the semantic relations of the Semantic Network (McCray 2003), connecting the semantic types of the subject and object in the context of the specific sentence.

For constructing the graph, 68,791 publications were fetched using the related MeSH term *Dementia*. More details regarding the exact procedure followed for the creation of this knowledge graph and the extraction process can be found in (Nentidis et al. 2019).

Error Imputation Protocol

To assess the methodologies presented and proposed, we need noise to be present in the KG. However, there are no explicitly-labeled noisy triples in FB15K or WN18. Therefore, we generated new datasets with different percentages of noise levels to simulate real-world knowledge graphs constructed automatically. In order to do so, we construct negative triples following different approaches. The basic idea behind the error imputation process is that for each positive triple (s, r, o) in the dataset, we generate a noisy one by corrupting either s or o . For the FB15K knowledge graph, we follow the procedure described in (Xie, Liu, and Sun 2017), where the generation of noise is constrained, in that the new subject s' or object o' should have appeared in the dataset with the same relation r . This constraint focuses on generating harder and more confusing noise for any method. On the contrary, negative sampling on WN18 and Dementia KGs was performed randomly, without any constraint, to compare different methods and datasets on different noise types.

¹<https://www.ncbi.nlm.nih.gov/pubmed/>

²<https://www.nlm.nih.gov/mesh/>

For each dataset, we generated noisy copies of the original graph with (10%), (20%) and (40%) added noise respectively, to assess the impact of different noise levels in the results. It is also important to note that, all these errors which were imbued to the 3 datasets are labeled as positives for training purposes. This means that the evaluation of the methods will be based on how effective they are in finding these hidden errors in every KG, with no indication of the noise level.

Evaluation Protocol

Following the same steps as (Socher et al. 2013), we compute the energy function $E(s, r, o) = ||s + r - o||$ for each triple in the dataset. Then, we generate a ranking for all triples based on this energy function score. The smaller the value of the energy value of the triple, the more valid the triple is. As such, we would hope that the erroneous triples would have much greater value than the initial correct ones. To measure this we use the filtered mean rank (fMR) and the filtered mean reciprocal rank ($fMRR$) (Melo and Paulheim 2017).

Additionally, after normalizing the energy function score in the $[0, 1]$ interval, we also use the Area Under the ROC Curve (AUC) to further examine how well algorithms classify the noise as an error. Values close to 0 indicate a correct triple, while values close to 1 indicate an erroneous triple. For fMR , lower is better while for $fMRR$ and AUC, higher is better.

Comparison and Settings

We compare our methodology with the CKRL (Xie, Liu, and Sun 2017) and the PTransE (Lin et al. 2015) methods. Both of these methodologies are state-of-the-art hybrid methods that also generate embeddings. The CKRL method is build with the error detecting task in mind and follows a similar procedure for generating the embeddings. However, it uses a complex way of generating the confidence score for each triple, taking into account local and global path confidence scores and a final weighting scheme. The PTransE method is a predecessor to the CKRL method using paths to guide embeddings, albeit in a different way than CKRL. We also provide results using the vanilla PaTyBRED and TransE models on the same tasks, with PaTyBRED being the only non-embedding-generating method.

For all methods, we used the settings and parameters suggested by the corresponding authors on the two benchmark datasets. For consistency, we also used these parameters on the Dementia dataset. In all embeddings methods (including our own implementation) we used $d = 50$ as the size of the dimensions. In CKRL the authors also state that $d = 50$ is the best value for the FB15k dataset. For all datasets, training was limited to 1000 epochs, as further training didn't improve performance substantially. Early stopping was used to determine the best model during these epochs. Regarding the scaling value λ of the PRGE method, we use $\lambda = 5$, which yielded the best results on all datasets, after searching over a small subset of possible values.

Results and Discussion

Error Detection Experiments Tables 2, 3 and 4 demonstrate the results of all approaches for the error detection task

Dataset	WN18-10%			WN18-20%			WN18-40%		
	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC
PaTyBRED	4593	0.0008	0.9673	4694	0.0009	0.9668	4703	0.0007	0.9668
TransE	38942	0.0002	0.7247	39339	0.0003	0.7219	44464	0.0005	0.6857
PTransE	45721	0.0007	0.6768	45392	0.0003	0.6791	46412	0.0002	0.6719
CKRL	15738	0.0009	0.8887	16969	0.0007	0.8800	39253	0.0011	0.7225
PRGE	3681	0.0009	0.9740	3870	0.0009	0.9727	3673	0.0008	0.9740

Table 2: Error Detection results for WN18 (Imputing Random Errors).

Dataset	FB15K-10%			FB15K-20%			FB15K-40%		
	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC
PaTyBRED	41785	0.0005	0.9064	46046	0.0003	0.8907	53320	0.0002	0.8694
TransE	127940	0.0002	0.7352	133763	0.0001	0.7231	169488	0.0000	0.6492
PTransE	166349	0.0000	0.6557	167997	0.0000	0.6523	173643	0.0000	0.6406
CKRL	96113	0.0001	0.8011	101583	0.0001	0.7897	112325	0.0001	0.7675
PRGE	73994	0.0006	0.8469	89164	0.0005	0.8155	86347	0.0002	0.8213

Table 3: Error Detection results for FB15K (Imputing with Same Relation Errors constrained approach).

on all datasets. Some interesting observations and insights stemming from the results are presented here:

1) WN18 Dataset: Regarding the WN18 dataset, it is evident from Table 2 that our proposed PRGE outperforms all other methods. CKRL and PaTyBRED perform similarly on the *f*MRR metric but are outperformed on the other evaluation metrics. It is also evident that, compared to the other methods, PRGE performs better as the noise ratio goes up, with *f*MR and AUC score values being non-decreasing when noise increases from 10% to 40%.

2) FB15k Dataset: Here, PaTyBRED performs better than almost any base embedding method in error detection, indicating that potentially important factors here are the dataset size (see Table 1) and the different error imputation method. However, our PRGE method fares better on the *f*MRR metric, indicating that it separates better the obvious erroneous triples from the others. In addition, our PRGE performs better than all other embedding-based methods.

3) Dementia Dataset: Firstly, as discussed in previous paragraphs, the knowledge graph is very sparse and this dataset had noise present even before the noise imputation, due to the automatic creation process. As such, the actual noise level is much higher than the other datasets. Hence, it poses a far more challenging error detection task. This can be seen in Table 4 where all methods perform worse than the other two dataset. In spite of PaTyBRED being slightly better at the ranking metrics, our PRGE method achieves better AUC scores, indicating that on average it can perform better than other models when comparing between an actual and a noisy triple. It can also scale better with the increasing noise ratio, something also seen in the WN18 dataset. In the 40% dataset, our method can achieve better *f*MR score than every method, indicating that in the presence of much noise, something expected in most automatically generated KGs, it can fair better than the competition.

4) Effect of noise: As expected, when the noise level rises from 10% to 40%, the performance of all models deteriorates regardless of the dataset. However, our model is the most robust, especially when compared to the other embedding methods, showing much smaller fluctuations in performance.

5) PTransE performance: Another interesting result is that PTransE performs worse than TransE on error detection on all datasets. This is rather unexpected, as PTransE uses additional path information to guide embeddings similar to CKRL, which in turn performs better in all aspects than both TransE and PTransE.

At this point it is important to stress two main advantages of the proposed methodology, alongside the superior performance results:

- Robust Embeddings: Contrary to the PRA methods where only a confidence score for each triple is provided in the end, the PRGE method produces embeddings trained and guided by this confidence score. This results in embeddings robust to the inherent noise of the knowledge graph, which can be further used in other embedding-based downstream tasks, such as link prediction, triple classification, clustering, etc.
- Modularity: The proposed PRGE method is agnostic of the underlying energy function and triple-scoring mechanism. Since the path ranking score only acts in a multiplicative manner to the energy function, one can deduce that other embedding energy functions can be used to improve performance. Specifically, methods like TransH and TransR or even Semantic Matching methods like RESCAL can also be used in conjunction with the path ranking score and could improve results. Respectively, instead of the PaTyBRED score, other scoring mechanisms could be employed as well. This makes the proposed PRGE method generic and flexible, allowing for different combinations of techniques for the energy function and the confidence

Dataset	Dementia-10%			Dementia-20%			Dementia-40%		
	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC	<i>f</i> MR	<i>f</i> MRR	AUC
PaTyBRED	56485	0.0006	0.5674	55749	0.0007	0.5604	59817	0.0003	0.5552
TransE	58014	0.0001	0.5702	59421	0.0001	0.5599	59835	0.0000	0.5568
PTransE	59718	0.0002	0.5576	61518	0.0001	0.5443	65533	0.0000	0.5146
CKRL	60584	0.0001	0.5512	61034	0.0001	0.5479	61089	0.0001	0.5475
PRGE	57642	0.0001	0.5730	58258	0.0001	0.5685	59314	0.0001	0.5606

Table 4: Error Detection results for Dementia (Imputing Random Errors).

score that could enhance results for the task at hand.

Triple Classification Experiments To prove the usefulness of robust-to-noise embeddings in downstream tasks, we also performed a triple classification experiment following (Socher et al. 2013). Triple classification as a task revolves around predicting whether a triple belongs to a graph or not. Ultimately, our goal is to predict correct facts in the form of relations (s, r, o) from the test data, using the score $||s + r - o||$ by utilizing the embeddings generated from the various models.

More specifically, to classify whether a triple is valid or not, a threshold τ_r for every relation r is introduced. This threshold is chosen based on performance on the validation set. The threshold value for every relation is the one that maximizes the classification accuracy on the validation set. Then, using these thresholds, the performance of the model is estimated on the test set.

Dataset	10%	20%	40%
TransE	0.717	0.703	0.671
PTransE	0.686	0.678	0.670
CKRL	0.639	0.709	0.691
PRGE	0.715	0.715	0.702

Table 5: Triple Classification on the FB15k with the three different noise ratios. The scores correspond to ROC-AUC.

Results on the FB15k, for different noise ratios as before, can be seen in Table 5. We can see that as the noise ratio gets larger, PRGE performs better than the other methods. In addition, the PRGE method consistently outperforms CKRL and PTransE on all noise ratios, indicating that using the path ranking score to train embeddings yields better results. The same behavior was observed on the Dementia and WN18 datasets on average, but they were omitted for brevity. Conclusively, we can see that utilizing the PRGE framework to incorporate an error estimation score during the training process of the embeddings, actually helps in other downstream tasks with the generation of noise-robust embeddings.

Qualitative Results on the Dementia Dataset Since our final goal is to detect the erroneous triples already present in a Knowledge Graph, we also performed a qualitative analysis of the predictions given by the model. We are interested in seeing if the lowest scoring triples, the ones that our model deemed most probable to be errors, should be removed. We

focused on the Dementia dataset to showcase what the PRGE model predicts as erroneous in a real-world application. The PRGE model was trained on the initial Dementia dataset, before the imputation process. Thus, we are trying to detect the actual noise present in the Knowledge Graph. To assess the validity of the predictions we devised the following annotation task:

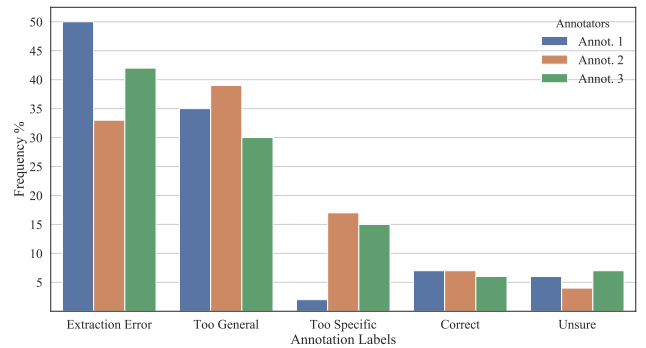


Figure 2: Manual evaluation of the top 100 errors, according to the PRGE model, from the Dementia Dataset.

Firstly, we fetched the top-100 lowest-scoring triples, as predicted by our model. We also fetched the exact textual snippets from the publications that these triples were found in. Three human experts on natural language processing and bioinformatics were presented with these triples alongside their corresponding text. The triples were presented in the form (Entity1 – Relation – Entity2). They were asked to assess the quality of the triple given the corresponding textual content and how useful was the piece of information that was extracted. Specifically, the annotators could select one of the following labels for each triple: “Correct”, “Unsure”, “Extraction Error”, “Too General” and “Too Specific”.

The last three labels “Extraction Error”, “Too Specific” and “Too General” are all errors according to this evaluation scheme. We devised multiple labels for the errors because it is important to have a qualitative analysis of the errors made. For example, high “Extraction Errors” would indicate errors made from the relation extraction tool working directly on the text and would support research towards enhancing that part of the pipeline to reduce the error propagation. On the other hand, higher “Too General/Too Specific” errors would insinuate that the relation extraction tool works correctly, however, the extracted triples are not important for the task at hand. In

Erroneous triple (s - r - o)	Type of error	Supporting text
acetonitrile - AUGMENTS - 80%	Extraction Error	... The acetonitrile concentration was increased to 80% in 5 min and then held in 80% acetonitrile for an additional 5 min ...
Denmark - PART_OF - Neurons	Extraction Error	... Neurons transfected with DA-GFP were found to have dendritic spines that had significantly lengthened necks compared to ...
Cells - PART_OF - Medial geniculate body	Too General	... Dendritic spines of the polyhedral and elongated cells of the medial geniculate bodies were decreased in number ...
DDMS - PART_OF - Homo sapiens	Too Specific	... HT-22 hippocampal cells and confirms observations using brain extracts from monkey, mouse, rat and human DDM ...
Brain - LOCATION_OF - Decreased plasmalogens	Too Specific	... data suggest that long-term alterations in plasmalogen synthesis degradation result in decreased brain plasmalogen levels, a hallmark feature of AD ...

Table 6: The lowest-scoring triples of the erroneous categories, two from each one, along with the type of error and the initial text they were extracted from.

that case, we could devise and apply a post-processing step to keep meaningful triples.

The results of the annotator’s evaluation can be seen in Figure 2. We can see that for all annotators more than 85% of these triples seemed to be erroneous given the context. On the other hand, out of these lowest-scoring triples only $\approx 8\%$ is actually correct, across all annotators. This indicates the high precision of the prediction and allows us to be fairly confident on the scoring of the model.

As an added example, some of the manually assessed triples can be seen in Table 6. There, we present some of lowest-scoring triples from each one of the erroneous categories and the corresponding text they were derived from. The triples presented were all unanimously labeled as the specific type of error from the annotators. As we can see, the triple *Denmark - PART_OF - Neurons* is an exemplary case where the extraction tool failed to identify the correct entities and their relation. On the other hand, the triple *Cells - PART_OF - Medial geniculate body* may be correctly extracted from the text but provides little to no added value to the aggregated knowledge. Having multiple such facts deteriorates the final quality, as each model has to capture a lot of “useless” information.

Limitations

This research, however, is subject to some limitations. The first lies in the marginal improvements presented. The PRGE method indeed performs better across datasets over all embedding-based methods but in most cases, the difference is rather small. Also, PaTyBRED is used as a strong baseline for error detection and as seen it outperforms most embedding-based methods in many cases, including ours in some. The downside with PaTyBRED though, is that it does not generate embeddings as a by-product for further downstream tasks, while PRGE does. Nonetheless, more experimentation and a thorough comparison with other state-of-the-art methods in error detection is needed, also taking into account probabilis-

tic approaches and rule-based techniques as presented in the Related Work section.

Secondly, the technical novelty presented is limited to the combination of two well-known methodologies. TransE and PaTyBRED were used as the core components of the PRGE method to showcase this modular paradigm of combining such methodologies. However, to establish the PRGE framework as a useful way of combining graph-embedding techniques with error detection methods to handle inherent noise in KGs, an extended study with different combination of methodologies is needed. Moreover, the PRGE-generated embeddings of each such combination should be tested against the original ones in different downstream tasks to actually prove their advantages and robustness to noise.

Conclusion

In this paper, we compared different methods for error detection in knowledge graphs and proposed a modular framework for combining them. The proposed PRGE method combines the path ranking score of a triple with the graph embedding framework, creating embeddings robust towards to noise present in the graph. We assessed both the quantitative and qualitative performance of the framework. Utilizing the score from the best-performing PRA-based method (PaTyBRED) to train the embeddings, we have managed to overcome other state-of-the-art hybrid methods (PTransE, CKRL) on all datasets and enhance the classification results of PaTyBRED on two of the three datasets. Moreover, by combining these two frameworks we extended the PRA methods with the ability to generate embeddings for the entities, that could be used further. We also performed a qualitative evaluation of the possible errors detected in a real-world dataset, to showcase the importance of such approaches in actual applications. We then discussed the limitations of the present study and possible future work to mitigate them. Overall, we have proposed a generic framework to generate embeddings resilient to noise and we proved that they can also be used in multiple

downstream tasks enhancing performance in the presence of noise³.

Acknowledgement

This paper is supported by European Union’s Horizon 2020 research and innovation programme under grant agreement No. 727658, project IASIS (Integration and analysis of heterogeneous big data for precision medicine and suggested treatments for different types of patients).

References

- Abedini, F.; Keyvanpour, M. R.; and Menhaj, M. B. 2020. Correction Tower: A general embedding method of the error recognition for the knowledge graph correction. *International Journal of Pattern Recognition and Artificial Intelligence* 2059034.
- Akoglu, L.; Tong, H.; and Koutra, D. 2015. Graph based anomaly detection and description: a survey. *Data mining and knowledge discovery* 29(3): 626–688.
- Auer, S.; Bizer, C.; Kobilarov, G.; Lehmann, J.; Cyganiak, R.; and Ives, Z. 2007. DBpedia: A Nucleus for a Web of Open Data. In Aberer, K.; Choi, K.-S.; Noy, N.; Allemang, D.; Lee, K.-I.; Nixon, L.; Golbeck, J.; Mika, P.; Maynard, D.; Mizoguchi, R.; Schreiber, G.; and Cudré-Mauroux, P., eds., *The Semantic Web*, 722–735. Berlin, Heidelberg: Springer Berlin Heidelberg. ISBN 978-3-540-76298-0.
- Belth, C.; Zheng, X.; Vreeken, J.; and Koutra, D. 2020. What is Normal, What is Strange, and What is Missing in a Knowledge Graph: Unified Characterization via Inductive Summarization. In *Proceedings of The Web Conference 2020*, 1115–1126.
- Bodenreider, O. 2004. The unified medical language system (UMLS): integrating biomedical terminology. *Nucleic acids research* 32(suppl.1): D267–D270.
- Bollacker, K.; Evans, C.; Paritosh, P.; Sturge, T.; and Taylor, J. 2008. Freebase: A Collaboratively Created Graph Database for Structuring Human Knowledge. In *Proceedings of the 2008 ACM SIGMOD International Conference on Management of Data*, SIGMOD ’08, 1247–1250. New York, NY, USA: ACM. ISBN 978-1-60558-102-6. doi:10.1145/1376616.1376746. URL <http://doi.acm.org/10.1145/1376616.1376746>.
- Bordes, A.; Usunier, N.; Garcia-Duran, A.; Weston, J.; and Yakhnenko, O. 2013. Translating Embeddings for Modeling Multi-relational Data. In Burges, C. J. C.; Bottou, L.; Welling, M.; Ghahramani, Z.; and Weinberger, K. Q., eds., *Advances in Neural Information Processing Systems* 26, 2787–2795. Curran Associates, Inc. URL <http://papers.nips.cc/paper/5071-translating-embeddings-for-modeling-multi-relational-data.pdf>.
- Cai, H.; Zheng, V. W.; and Chang, K. C. 2017. A Comprehensive Survey of Graph Embedding: Problems, Techniques and Applications. *CoRR* abs/1709.07604. URL <http://arxiv.org/abs/1709.07604>.
- Carlson, A.; Betteridge, J.; Wang, R. C.; Hruschka, Jr., E. R.; and Mitchell, T. M. 2010. Coupled Semi-supervised Learning for Information Extraction. In *Proceedings of the Third ACM International Conference on Web Search and Data Mining*, WSDM ’10, 101–110. New York, NY, USA: ACM. ISBN 978-1-60558-889-6. doi:10.1145/1718487.1718501. URL <http://doi.acm.org/10.1145/1718487.1718501>.
- Cheng, Y.; Chen, L.; Yuan, Y.; and Wang, G. 2018. Rule-based graph repairing: Semantic and efficient repairing methods. In *2018 IEEE 34th International Conference on Data Engineering (ICDE)*, 773–784. IEEE.
- Fellbaum, C. 2005. WordNet and Wordnets. In Barber, A., ed., *Encyclopedia of Language and Linguistics*, 2–665. Elsevier.
- Gardner, M.; and Mitchell, T. 2015. Efficient and Expressive Knowledge Base Completion Using Subgraph Feature Extraction. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 1488–1498. Lisbon, Portugal: Association for Computational Linguistics. doi:10.18653/v1/D15-1173. URL <https://www.aclweb.org/anthology/D15-1173>.
- Guo, S.; Wang, Q.; Wang, L.; Wang, B.; and Guo, L. 2017. Knowledge graph embedding with iterative guidance from soft rules. *arXiv preprint arXiv:1711.11231*.
- Heindorf, S.; Potthast, M.; Stein, B.; and Engels, G. 2016. Vandalism detection in wikidata. In *Proceedings of the 25th ACM International Conference on Information and Knowledge Management*, 327–336. ACM.
- Ho, V. T.; Stepanova, D.; Gad-Elrab, M. H.; Kharlamov, E.; and Weikum, G. 2018. Rule learning from knowledge graphs guided by embedding models. In *International Semantic Web Conference*, 72–90. Springer.
- Hong, Y.; Bu, C.; and Jiang, T. 2020. Rule-enhanced Noisy Knowledge Graph Embedding via Low-quality Error Detection. In *2020 IEEE International Conference on Knowledge Graph (ICKG)*, 544–551. IEEE.
- Jia, S.; Xiang, Y.; Chen, X.; and E, S. 2018. TTMF: A Triple Trustworthiness Measurement Frame for Knowledge Graphs. *CoRR* abs/1809.09414. URL <http://arxiv.org/abs/1809.09414>.
- Jia, S.; Xiang, Y.; Chen, X.; and Wang, K. 2019. Triple trustworthiness measurement for knowledge graph. In *The World Wide Web Conference*, 2865–2871.
- Kadlec, R.; Bajgar, O.; and Kleindienst, J. 2017. Knowledge base completion: Baselines strike back. *arXiv preprint arXiv:1705.10744*.
- Krithara, A.; Aisopos, F.; Rentoumi, V.; Nentidis, A.; Bougatiotis, K.; Vidal, M.-E.; Menasalvas, E.; Rodriguez-Gonzalez, A.; Samaras, E.; Garrard, P.; et al. 2019. iASiS: Towards Heterogeneous Big Data Analysis for Personalized Medicine. In *2019 IEEE 32nd International Symposium on Computer-Based Medical Systems (CBMS)*, 106–111. IEEE.
- Lao, N.; and Cohen, W. W. 2010. Relational retrieval using a combination of path-constrained random walks. *Machine*

³Code and material can be found here: <https://github.com/RomFas/PRGE/>

- Learning 81(1): 53–67. ISSN 1573-0565. doi:10.1007/s10994-010-5205-8. URL <https://doi.org/10.1007/s10994-010-5205-8>.
- Lehmann, J.; Gerber, D.; Morsey, M.; and Ngonga, Ngomo, A.-C. 2012. Defacto - Deep Fact Validation. In The Semantic Web – ISWC 2012, 312 – 327. Berlin, Heidelberg: Springer Berlin Heidelberg.
- Lin, Y.; Liu, Z.; Luan, H.; Sun, M.; Rao, S.; and Liu, S. 2015. Modeling Relation Paths for Representation Learning of Knowledge Bases. In Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing, 705–714. Lisbon, Portugal: Association for Computational Linguistics. doi:10.18653/v1/D15-1082. URL <https://www.aclweb.org/anthology/D15-1082>.
- McCray, A. T. 2003. An upper-level ontology for the biomedical domain. Comparative and Functional Genomics 4(1): 80–84.
- Melo, A.; and Paulheim, H. 2017. Detection of Relation Assertion Errors in Knowledge Graphs. In Proceedings of the Knowledge Capture Conference, K-CAP 2017, 22:1–22:8. New York, NY, USA: ACM. ISBN 978-1-4503-5553-7. doi:10.1145/3148011.3148033. URL <http://doi.acm.org/10.1145/3148011.3148033>.
- Nentidis, A.; Bougiatiotis, K.; Krithara, A.; and Paliouras, G. 2019. Semantic integration of disease-specific knowledge .
- Paulheim, H. 2016. Knowledge graph refinement: A survey of approaches and methods. Semantic Web 8: 489–508. doi:10.3233/SW-160218.
- Paulheim, H.; and Bizer, C. 2014. Improving the Quality of Linked Data Using Statistical Distributions. International Journal on Semantic Web and Information Systems (IJSWIS) 10(2): 63 – 86.
- Rashid, M.; Torchiano, M.; Rizzo, G.; Mihindukulasooriya, N.; and Corcho, O. 2019. A quality assessment approach for evolving knowledge bases. Semantic Web 10(2): 349–383.
- Rindflesch, T. C.; and Fiszman, M. 2003. The interaction of domain knowledge and linguistic structure in natural language processing: interpreting hypernymic propositions in biomedical text. Journal of biomedical informatics 36(6): 462–477.
- Shi, B.; and Wenginger, T. 2016. Discriminative predicate path mining for fact checking in knowledge graphs. Knowledge-based systems 104: 123–133.
- Socher, R.; Chen, D.; Manning, C. D.; and Ng, A. 2013. Reasoning With Neural Tensor Networks for Knowledge Base Completion. In Burges, C. J. C.; Bottou, L.; Welling, M.; Ghahramani, Z.; and Weinberger, K. Q., eds., Advances in Neural Information Processing Systems 26, 926–934. Curran Associates, Inc. URL <http://papers.nips.cc/paper/5028-reasoning-with-neural-tensor-networks-for-knowledge-base-completion.pdf>.
- Suchanek, F. M.; Kasneci, G.; and Weikum, G. 2007. Yago: A Core of Semantic Knowledge. In Proceedings of the 16th International Conference on World Wide Web, WWW '07, 697–706. New York, NY, USA: ACM. ISBN 978-1-59593-654-7. doi:10.1145/1242572.1242667. URL <http://doi.acm.org/10.1145/1242572.1242667>.
- Tanon, T. P.; Vrandečić, D.; Schaffert, S.; Steiner, T.; and Pintscher, L. 2016. From Freebase to Wikidata: The Great Migration. In World Wide Web Conference.
- Toutanova, K.; and Chen, D. 2015. Observed versus latent features for knowledge base and text inference. In Proceedings of the 3rd Workshop on Continuous Vector Space Models and their Compositionality, 57–66.
- Wang, Q.; Mao, Z.; Wang, B.; and Guo, L. 2017. Knowledge Graph Embedding: A Survey of Approaches and Applications. IEEE Transactions on Knowledge and Data Engineering PP: 1–1. doi:10.1109/TKDE.2017.2754499.
- Xie, R.; Liu, Z.; and Sun, M. 2017. Does William Shakespeare REALLY Write Hamlet? Knowledge Representation Learning with Confidence. CoRR abs/1705.03202. URL <http://arxiv.org/abs/1705.03202>.
- Zhang, W.; Paudel, B.; Wang, L.; Chen, J.; Zhu, H.; Zhang, W.; Bernstein, A.; and Chen, H. 2019. Iteratively learning embeddings and rules for knowledge graph reasoning. In The World Wide Web Conference, 2366–2377.
- Zhao, Y.; Feng, H.; and Gallinari, P. 2019. Embedding Learning with Triple Trustiness on Noisy Knowledge Graph. Entropy 21(11): 1083.