

Asymmetric Streaming Algorithms for Edit Distance and LCS

Alireza Farhadi*

MohammadTaghi Hajiaghayi*

Aviad Rubinfeld†

Saeed Seddighin‡

Abstract

The *edit distance* (ED) and *longest common subsequence* (LCS) are two fundamental problems which quantify how similar two strings are to one another. In this paper, we consider these problems in the asymmetric streaming model introduced by Andoni *et al.* [10] (FOCS'10) and Saks and Seshadhri [57] (SODA'13). In this model we have random access to one string and streaming access the other string. Our main contribution is a constant factor approximation algorithm for ED with the memory of $\tilde{O}(n^\delta)$ for any constant $\delta > 0$. In addition to this, we present an upper bound of $\tilde{O}_\epsilon(\sqrt{n})$ on the memory needed to approximate ED or LCS within a factor $1 + \epsilon$. All our algorithms are deterministic and run in a single pass.

For approximating ED within a constant factor, we discover yet another application of triangle inequality, this time in the context of streaming algorithms. Triangle inequality has been previously used to obtain subquadratic time approximation algorithms for ED. Our technique is novel and elegantly utilizes triangle inequality to save memory at the expense of an exponential increase in the runtime.

*University of Maryland. Email: {farhadi,hajiagha}@cs.umd.edu.

†Stanford University. Email: aviad@cs.stanford.edu.

‡TTIC. Email: saeedreza.seddighin@gmail.com.

1 Introduction

We consider *edit distance* (ED) and *longest common subsequence* (LCS) which are classic problems measuring the similarity between two strings. Edit distance is defined on two strings s and \bar{s} and seeks the smallest number of character insertions, character deletions, and character substitutions to transform s into \bar{s} . While in edit distance the goal is to make a transformation, longest common subsequence asks for the largest string that appears as a subsequence in both s and \bar{s} .

Edit distance and longest common subsequence have applications in various contexts, such as computational biology, text processing, compiler optimization, data analysis, image analysis, among others. As a result, both problems have been subject to a plethora of studies since 1950 (e.g. see [17, 18, 2, 12, 11, 10, 42, 15, 28, 30, 41, 49, 29, 37, 46, 20, 5, 23, 56, 21, 55, 43, 35, 33, 51, 3, 22, 40, 7, 9, 8, 6, 13, 34, 25, 45, 57, 38, 4, 19, 39, 23]).

Both of the problems are often used to measure the similarity of large strings. For example, a human genome consists of almost three billion base pairs that are modeled as a string for similarity testing. Classic algorithms for the problems require quadratic runtime as well as linear memory to find a solution. Unfortunately, none of these bounds seem practical for real-world applications. Therefore, recent work on ED and LCS focus on obtaining fast algorithms [54, 39, 18, 11, 10, 7, 8, 53, 52, 44, 23] as well as solutions with small memory [40, 18, 24, 36].

The *streaming* setting is an increasingly popular framework to model memory constraints. In this setting, the input arrives as a data stream while only sublinear memory is available to the algorithm. The goal is to design an algorithm that solves/approximates the solution by taking a few passes over the data. While several works have studied ED and LCS in the streaming model (see Section 1.1 for a detailed discussion), positive results are known only for the low-distance regime [48, 59, 16, 24]. In addition to this, strong lower bounds are given for the streaming variant of LCS [48, 59].

Inspired by the work of Andoni *et al.* [10] (FOCS'10), Saks and Seshadhri [57] (SODA'13) studied the problem of approximating $n - \text{LCS}$ (which is the edit distance between two strings when insertions and deletions, but not substitutions, are allowed) in the asymmetric model. In this model we have random access to one of the strings and streaming access to the other string. They showed that $(1 + \epsilon)$ approximation of $n - \text{LCS}$ can be found with a memory of $\tilde{O}_\epsilon(\sqrt{n})$.

In this work, we study ED and LCS in the asymmetric model. We present a single-pass deterministic constant factor approximation algorithm for ED that uses only $\tilde{O}(n^\delta)$ memory for any constant $\delta > 0$. In addition to this, we show that with the memory of $\tilde{O}_\epsilon(\sqrt{n})$ one can approximate both ED and LCS within a factor of $1 \pm \epsilon$. All our algorithms are deterministic and run in a single-pass. Moreover, our algorithm for LCS is tight due to a lower bound given in [32]. It is also worth mentioning that the lower bound of $\Omega(\log^2 n / \epsilon)$ is known for computing $1 + \epsilon$ approximation of $n - \text{LCS}$ due to the result of [50].

LIS and distance to monotonicity (DTM) are special cases of LCS and ED that are also studied in the streaming model [36, 57]. In these two problems, one of the strings is a permutation of numbers in $[n]$ and the second string is the sorted permutation $\langle 1, 2, \dots, n \rangle$. Therefore, for these special cases $\bar{s}[i]$ is always equal to i . As a result, our algorithms for ED and LCS can be seen as a generalization of previous works on streaming LIS and distance to monotonicity.

1.1 Related work

Quadratic time solutions for ED and LCS have been known for many decades [47]. Recently, it has been shown that a truly subquadratic time solution for either ED or LCS refutes *Strong Exponential Time Hypothesis* (SETH), a conjecture widely believed in the community (see [12, 2, 22]). Therefore, much attention is given to approximation algorithms for the two problems. For edit distance, a

| problem | approximation factor | memory | reference |
|------------------|----------------------|--------------------------------|-------------|
| ED | $O(2^{1/\delta})$ | $\tilde{O}(n^\delta/\delta)$ | Theorem 1.1 |
| ED | $1 + \epsilon$ | $\tilde{O}_\epsilon(\sqrt{n})$ | Theorem 4.2 |
| LCS | $1 - \epsilon$ | $\tilde{O}_\epsilon(\sqrt{n})$ | Theorem 3.5 |
| LIS | $1 - \epsilon$ | $\tilde{O}_\epsilon(\sqrt{n})$ | [36] |
| $n - \text{LCS}$ | $1 + \epsilon$ | $\tilde{O}_\epsilon(\sqrt{n})$ | [57] |
| DTM | $1 + \epsilon$ | $O_\epsilon(\log^2 n)$ | [57, 50] |
| DTM | $1 + \epsilon$ | $\tilde{O}_\epsilon(\sqrt{n})$ | [36] |
| DTM | 2 | $O(\log^2 n)$ | [31] |
| DTM | 4 | $O(\log^2 n)$ | [36] |

Table 1: The results of this paper along with previous work.

series of works [46], [14], [15], and [11] improve the approximation factor culminating in the seminal work of Andoni, Krauthgamer, and Onak [10] that finally obtains a polylogarithmic approximation factor in near-linear time. More recently constant factor approximation algorithms with truly subquadratic runtimes are obtained for edit distance (a question which was open for a few decades): first a quantum algorithm [18], then a classic solution [23], and finally for far strings, near linear time solutions are also given [52, 44]. LCS has also received tremendous attention in recent years [39, 53, 54, 1, 4, 26]. Only trivial solutions were known for LCS until very recently: a 2 approximate solution when the alphabet is 0/1 and an $O(\sqrt{n})$ approximate solution for general alphabets in linear time. Both these bounds are recently improved by Hajiaghayi *et al.* [39] and Rubinfeld and Song [53] (see also a recent approximation algorithms given by Rubinfeld *et al.* [54]).

Streaming algorithms for edit distance have been limited to the case that the distance between the two strings is *bounded* by a parameter k which is substantially smaller than n . A parameterized streaming algorithm that makes one-pass over its input s and \bar{s} with space $O(k^6)$ (which can be as large as the input size) and running time $O(n + k^6)$ [24] (STOC'16) is presented recently as well.

Independent work. Our $\tilde{O}_\epsilon(\sqrt{n})$ result for ED is also achieved independently in a recent work by Cheng *et al.* [27]. However, they do not give our main result which is a constant approximation streaming algorithm for ED with the memory of $\tilde{O}(n^\delta)$. They also give an algorithm for finding $1 + \epsilon$ approximation of ED with the memory of $O(n^\delta)$. However, their algorithm works only when we have random access to both strings, and their algorithm does not work in the streaming or asymmetric streaming model.

1.2 Preliminaries

For a string s , we use $s[i]$ to denote the i^{th} character in s . We use $s[i, j]$ to denote the substring of s from the i^{th} character to the j^{th} character. We also use $s[i, j)$ to denote the substring of s from the i^{th} character to $(j - 1)^{\text{th}}$ character ($s[i, i)$ is an empty string).

Given two strings s and \bar{s} , the longest common subsequence (LCS) of s and \bar{s} is a string t with the maximum length such that t is a subsequence of both s and \bar{s} . In other words, t can be obtained from both s and \bar{s} by removing some of the characters. We use $\text{lcs}(s, \bar{s})$ to denote the length of the LCS of two strings s and \bar{s} . The edit distance (ED) between two strings s and \bar{s} , denoted by $\text{ed}(s, \bar{s})$, is the minimum number of character insertions, deletions, and substitutions needed to transform one string to the other string.

Asymmetric streaming model. Throughout this paper, we assume that the input of the algorithm consists of two strings \bar{s} and s . We assume for simplicity and without loss of generality

that the two strings have equal length n . We call the string \bar{s} the *offline* string and assume that the algorithm has random access to the characters of \bar{s} by making a query. The other string s arrives as a stream of characters. We call s the *online* string.

1.3 Our Technique: Triangle Inequality

As mentioned earlier, our main result is an algorithm with memory $\tilde{O}(n^\delta)$ for any constant $\delta > 0$ that approximates edit distance within a constant factor in the asymmetric model. When the available memory is limited, a typical approach to approximating edit distance is to break each of the strings into smaller pieces and find a solution in which each piece of a string is entirely transformed into another piece of the other string. Such solutions have been referred to as “window-compatible solutions” [18] or “matching between candidate intervals” in previous work [40] (a similar technique is also used in [23] to obtain a constant-factor approximate solution for ED). One should construct the pieces in a way that there always exists such a solution whose approximation factor is bounded. Previous work give several constructions with small approximation factors [18, 23, 40, 54].

Let us refer to these pieces as windows and to such solutions as window-compatible solutions. It is not hard to see that if the edit distance between every pair of windows is available, then one can find an optimal window-compatible solution without any knowledge of the strings. That is, just knowing the distances between the windows suffices to find the optimal window-compatible solution. On the other hand, computing the edit distance between each pair of windows requires memory proportional to the window sizes. Therefore, a convenient way to design a memory-efficient algorithm (in certain settings such as MPC) is to give a construction for the windows in which the maximum window size is small and that it guarantees the existence of an almost optimal window-compatible solution.

The problem becomes more challenging in the streaming setting as the online string (s) is only available in a single pass. Therefore, when the characters of a window of s are stored in the memory, we have to use that information immediately to compute the edit distance of that particular window with all windows of the offline string. If the maximum window size is l , then we need memory $\Omega(l)$ for that purpose. Moreover, the number of windows for such a construction should be at least $\Omega(n/l)$, otherwise some parts of the strings are not included in any window and such a construction cannot guarantee any approximation factor. Thus, one needs to keep track of $O(n/l)$ values for each window of the online string, determining its distance from the windows of the offline string. Roughly speaking, this suggests that this approach can only take us as far as obtaining a solution with memory $O(\sqrt{n})$. We more formally show in Section 4 that this technique leads to a solution with approximation factor $1 + \epsilon$ and memory $\tilde{O}_\epsilon(\sqrt{n})$.

Triangle inequality is the key to improving the memory of the algorithm. The key idea is summarized in the following: consider a window w of the online string for which we would like to store its distance from all windows of the offline string. Instead of directly storing these values, we find a substring $[\ell, r]$ of the offline string whose edit distance is the smallest to w . Let the distance be d . We only keep 3 integer numbers ℓ, r, d for this window. Surprisingly, these 3 numbers suffice to recover a 3-approximate solution for the edit distance of w from any substring of the offline strings (including all the windows) without even knowing w ! More precisely, whenever the distance of w from an interval $\bar{s}[\ell', r']$ of the offline string is desired, we approximate $\text{ed}(w, \bar{s}[\ell', r'])$ by $d + \text{ed}(\bar{s}[\ell, r], \bar{s}[\ell', r'])$. It is not hard to see by triangle inequality that $d + \text{ed}(\bar{s}[\ell, r], \bar{s}[\ell', r'])$ is at least as large and at most 3 times larger than the actual distance between $\bar{s}[\ell', r']$ and w . Moreover, both substrings $\bar{s}[\ell', r']$ and $\bar{s}[\ell, r]$ are available via queries since they both belong to the offline string. Finally, when two windows of the offline string are available via queries, we show using Savitch’s theorem [58] that their edit distance can be computed with poly-logarithmic memory.

To improve the memory of the algorithm down to $O(n^\delta)$ for any $\delta > 0$, we recursively apply

the above idea to make the window sizes smaller in every recursion. This comes at the expense of a multiplicative factor of roughly 3 in the approximation for each level of recursion. Finding the optimal window-compatible solution for our setting is also cumbersome due to memory constraints. Instead of determining that with dynamic programming, we use a brute force. This takes a significant hit on the runtime of the algorithm while keeping the memory small. More details about this algorithm is given in Section 2.

Theorem 1.1. *Given an offline and online strings of length n and any constant $\delta > 0$, there exists a single-pass deterministic streaming algorithm that finds a $O(2^{1/\delta})$ approximation of the edit distance using $\tilde{O}(n^\delta/\delta)$ memory.*

2 Constant Approximation for Edit Distance

Our main results is a streaming algorithm that given any constant $\delta > 0$ finds a constant approximation of the edit distance using $\tilde{O}(n^\delta)$ memory. As we discussed in the previous section, instead of directly solving the edit distance, we aim to find a substring of s such that its edit distance is smallest to \bar{s} . We formally define this problem as follows.

Closest Substring

Input: An offline string \bar{s} and an online string s .

Output: Indices l, r and $\text{ed}(\bar{s}[l, r], s)$ such that $\text{ed}(\bar{s}[l, r], s) \leq \text{ed}(\bar{s}[i, j], s)$ for every $1 \leq i \leq j \leq n$.

We first show that how solving the closest substring problem can give us a good approximation of the edit distance. Let $\bar{s}[l, r]$ be the substring of \bar{s} with the minimum edit distance to s . We know by the definition of edit distance that it satisfies the *triangle inequality*¹. Therefore, we have

$$\text{ed}(\bar{s}, s) \leq \text{ed}(\bar{s}, \bar{s}[l, r]) + \text{ed}(\bar{s}[l, r], s). \quad (1)$$

We also have,

$$\begin{aligned} & \text{ed}(\bar{s}, \bar{s}[l, r]) + \text{ed}(\bar{s}[l, r], s) \\ & \leq \text{ed}(\bar{s}, s) + \text{ed}(\bar{s}[l, r], s) + \text{ed}(\bar{s}[l, r], s) && \text{By the triangle inequality.} \\ & \leq 3 \text{ed}(\bar{s}, s) && \text{Since } \bar{s}[l, r] \text{ has the minimum ED to } s. \end{aligned} \quad (2)$$

It follows from (1) and (2) that $\text{ed}(\bar{s}, \bar{s}[l, r]) + \text{ed}(\bar{s}[l, r], s)$ is a 3-approximation of the edit distance between \bar{s} and s . Therefore, if we design a streaming algorithm that finds $\bar{s}[l, r]$ and its edit distance from s , we can then estimate the edit distance of s and \bar{s} by computing $\text{ed}(\bar{s}, \bar{s}[l, r]) + \text{ed}(\bar{s}[l, r], s)$. In the following theorem we show that $\text{ed}(\bar{s}, \bar{s}[l, r]) + \text{ed}(\bar{s}[l, r], s)$ can be computed using a polylogarithmic memory. In specific, we show that the edit distance between any two substrings of the offline string can be computed using a very small memory of $O(\log^2 n)$. The proof is available in Appendix A.

Theorem 2.1. *Suppose that we have random access to two given strings s and \bar{s} of length n . Then $\text{lcs}(s, \bar{s})$ and $\text{ed}(s, \bar{s})$ can be computed using $O(\log^2 n)$ memory.*

Therefore, by finding the substring that has the minimum edit distance to s , we can get a good approximation of the edit distance. Nonetheless, we do not know any streaming algorithm with the

¹ $\text{ed}(s_1, s_3) \leq \text{ed}(s_1, s_2) + \text{ed}(s_2, s_3)$ for any strings s_1, s_2, s_3 .

memory of $O(n^\delta)$ for finding closest substring, and our algorithm only finds an approximate solution for this problem. In other words, it finds a substring of \bar{s} such that its approximate edit distance to s is close to the minimum. In the rest of the section, we show that how we can approximately solve the closest substring problem with the memory of $\tilde{O}(n^\delta)$. Given an online string, we divide the online string into $n^{1-\delta}$ windows of size n^δ . Our algorithm (formally as Algorithm 1), then recursively finds substrings of \bar{s} that have the minimum edit distance from each of these windows. Note that for each window we can store the result of solving the closest substring problem in $O(\log n)$ (We can store only three numbers which are the start and the end of the interval and the approximate edit distance to the online string). Therefore, by the end of all recursive calls our algorithm needs to store $O(n^\delta)$ values.

Algorithm 1: Algorithm APPROXIMATE-CLOSEST-SUBSTR for approximating ED.

Data: An offline string \bar{s} of length n , a stream of characters of the online string s , and a parameter $\delta > 0$.

- 1: **if** $|s| \leq n^\delta$ **then**
- 2: Store all characters of s in the memory.
- 3: Find a substring of \bar{s} that has the minimum edit distance to s . Let $\bar{s}[l, r]$ be this substring and d be its edit distance.
- 4: **return** l, r and d .
- 5: **else**
- 6: $\xi \leftarrow n^\delta$.
- 7: Divide s into ξ windows $s_1^*, s_2^*, \dots, s_\xi^*$ of size $|s|/\xi$.
- 8: **for** $i \in [\xi]$ **do**
- 9: Recursively find the closest substring of \bar{s} from s_i^* . Let l_i, r_i be the start and the end of this substring respectively, and d_i be the approximate edit distance of this substring to s_i^* .
- 10: $min_dist \leftarrow \infty$.
- 11: **for** $1 \leq p_0 \leq p_1 \leq \dots \leq p_\xi \leq n+1$ **do**
- 12: $dist = \sum_{i=1}^\xi d_i + \text{ed}(\bar{s}[p_{i-1}, p_i], \bar{s}[l_i, r_i])$.
- 13: **if** $dist < min_dist$ **then**
- 14: $min_dist \leftarrow dist$.
- 15: $l \leftarrow p_0$.
- 16: $r \leftarrow p_\xi - 1$.
- 17: **return** l, r and min_dist .

In order to find the solution of the closest substring problem using these partial solutions, our algorithm considers all different substrings $\bar{s}[l, r]$ of \bar{s} and all different mappings between the windows of the s and the substrings of $\bar{s}[l, r]$. Then, for any mapping it estimates the edit distance between a window of s and its mapped substring of $\bar{s}[l, r]$ using the solution of the closest substring problem that we have found in the recursive call.

In order to analyze our algorithm, we first show that finding any approximation of the closest substring problem, can yield us an approximation for the edit distance. We first define an approximate version of the closest substring problem as follows.

Definition 2.2. Given an offline string \bar{s} and online string s , we say that the substring $\bar{s}[l, r]$ along with its approximate edit distance d is an α -approximation for the closest substring problem if for any substring $\bar{s}[l^*, r^*]$ we have

$$\text{ed}(\bar{s}[l, r], s) \leq d \leq \alpha \cdot \text{ed}(\bar{s}[l^*, r^*], s). \quad (3)$$

In the following claim we show that we can use any α -approximation of the closest substring problem to get a $O(\alpha)$ -approximation for the edit distance.

Claim 2.3. *Let $\bar{s}[l, r]$ be an α approximation of the closest substring problem and let d be its approximate edit distance to s . Then for any substring $\bar{s}[l^*, r^*]$, $d + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*])$ is a $(2\alpha + 1)$ -approximation for the edit distance between $\bar{s}[l^*, r^*]$ and s .*

Proof. First we show that $(d + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*]))$ is not less than the edit distance between $\bar{s}[l^*, r^*]$ and s .

$$\begin{aligned} d + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*]) &\geq \text{ed}(\bar{s}[l, r], s) + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*]) && \text{By (3).} \\ &\geq \text{ed}(\bar{s}[l^*, r^*], s). && \text{By the triangle inequality.} \end{aligned}$$

We now show that the value of $(d + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*]))$ is at most $(2\alpha + 1) \cdot \text{ed}(s, \bar{s}[l^*, r^*])$. Thus it gives us a $(2\alpha + 1)$ -approximation of the edit distance. We have

$$\begin{aligned} d + \text{ed}(\bar{s}[l, r], \bar{s}[l^*, r^*]) &\leq d + \text{ed}(s, \bar{s}[l, r]) + \text{ed}(s, \bar{s}[l^*, r^*]) && \text{By the triangle inequality.} \\ &\leq d + \alpha \cdot \text{ed}(s, \bar{s}[l^*, r^*]) + \text{ed}(s, \bar{s}[l^*, r^*]) && \text{By (3).} \\ &= d + (\alpha + 1) \cdot \text{ed}(s, \bar{s}[l^*, r^*]) \\ &\leq \alpha \cdot \text{ed}(s, \bar{s}[l^*, r^*]) + (\alpha + 1) \cdot \text{ed}(s, \bar{s}[l^*, r^*]) && \text{By (3).} \\ &= (2\alpha + 1) \cdot \text{ed}(s, \bar{s}[l^*, r^*]), \end{aligned}$$

which completes the proof of the claim. \square

Based on our discussion above, we design an algorithm that finds a constant approximation of the edit distance using $\tilde{O}(n^\delta)$ memory for any $\delta > 0$. The algorithm first divides the online string into n^δ windows with the equal length. Therefore, the length of each window is $n^{1-\delta}$. It then finds an approximate solution of the closest substring problem for each window recursively. By Claim 2.3, we can use the approximate solution of the closest substring problem for each window, to find its edit distance from every other substring of the offline string. The algorithm uses these approximate solutions to approximate the edit distance between the entire online string and any substring of the offline string.

Note that by each recursive call the length of the online string will get smaller by a multiplicative factor of $n^{-\delta}$. Therefore, when the depth of the recursive calls becomes $1/\delta$, the length of the remaining online string is bounded by $O(n^\delta)$ and we can store all of this remaining online string in the memory and find the exact solution of the closest substring problem. Thus, the depth of the recursion is bounded by $O(1/\delta)$. In the following theorem we show that the approximation ratio of our algorithm is $O(2^{1/\delta})$.

Theorem 2.4. *Given an offline string \bar{s} , an online string s and any constant $\delta > 0$, let n be the length of the offline string and n^γ be the length of the online string where $\gamma > 0$. Then, Algorithm 1 finds a $O(2^{1/\delta})$ approximation for the closest substring problem.*

Proof. We use induction on the length of the online string to prove the theorem. In specific, using induction on γ we show that the approximation ratio of the algorithm is bounded by $2^{\lceil \gamma/\delta \rceil + 1} - 1$. If the length of the online string is at most n^δ , then the algorithm stores all of the characters of the online string and find the exact solution. In other words, for $\gamma \leq \delta$, the algorithm finds the exact solution. Thus, its approximation ratio is 1 and the induction clearly holds.

Otherwise, we can assume the length of the online string is n^γ where $\gamma > \delta$. In that case the algorithm divides the online string into n^δ windows of equal length. For the simplicity of the

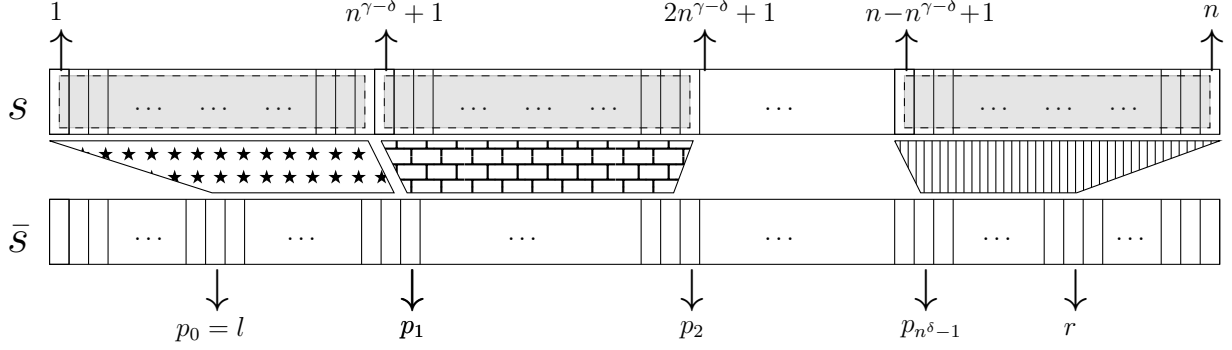


Figure 1: An optimal transformations of the windows of s into intervals of $\bar{s}[l, r]$ is shown in this figure. Gray rectangles illustrate the windows of s and each pattern shows how its corresponding block is transformed into an interval of $\bar{s}[l, r]$.

presentation, we assume that the length of the online string is divisible by n^δ . Therefore, the algorithm divides s into n^δ windows $s_1^*, s_2^*, \dots, s_{n^\delta}^*$ each with the length of $n^{\gamma-\delta}$, and we have $s_i^* = s[(i-1) \cdot n^{\gamma-\delta} + 1, i \cdot n^{\gamma-\delta}]$. The algorithm then recursively finds the closest substring of \bar{s} for each of these windows. For the window s_i^* , let $\bar{s}[l_i, r_i]$ be the substring returned by the algorithm and let d_i be its approximate edit distance from s_i^* . By the induction hypothesis we have that the approximation ratio of the solution for each window is bounded by

$$2^{\lceil(\gamma-\delta)/\delta\rceil+1} - 1 = 2^{\lceil\gamma/\delta\rceil} - 1.$$

Let $\bar{s}[l^*, r^*]$ be an arbitrary substring of \bar{s} . Consider the optimal mapping between s_i^* windows and $\bar{s}[l^*, r^*]$. Let assume that in the optimal mapping, window s_i^* is mapped to $\bar{s}[p_{i-1}^*, p_i^*]$ (see Figure 1) where

$$l^* = p_0^* \leq p_1^* \leq \dots \leq p_{n^\delta}^* = r^* + 1.$$

Since $p_0^*, p_1^*, \dots, p_{n^\delta}^*$ is the optimal mapping, we have

$$\text{ed}(s, \bar{s}[l^*, r^*]) = \sum_{i=1}^{n^\delta} \text{ed}(s_i^*, \bar{s}[p_{i-1}^*, p_i^*]). \quad (4)$$

Recall that for each window s_i^* , the substring $\bar{s}[l_i, r_i]$ and the distance d_i is a $(2^{\lceil\gamma/\delta\rceil} - 1)$ approximation of the closest substring problem. Therefore by Claim 2.3 we can use this approximate solution to estimate the edit distance between s_i^* and other substrings of \bar{s} . By this claim $d_i + \text{ed}(\bar{s}[l_i, r_i], \bar{s}[p_{i-1}^*, p_i^*])$ is a $(2^{\lceil\gamma/\delta\rceil+1} - 1)$ -approximation for the edit distance between s_i^* and $\bar{s}[p_{i-1}^*, p_i^*]$. In specific,

$$d_i + \text{ed}(\bar{s}[l_i, r_i], \bar{s}[p_{i-1}^*, p_i^*]) \leq (2^{\lceil\gamma/\delta\rceil+1} - 1) \cdot \text{ed}(s_i^*, \bar{s}[p_{i-1}^*, p_i^*]). \quad (5)$$

For each substring $\bar{s}[l^*, r^*]$, Algorithm 1 iterates over all different mappings between s_i^* windows and this substring. Note that in order to iterate over all different mappings, we can iterate over the variables $p_0, p_1, \dots, p_{n^\delta}$ such that

$$l^* = p_0 \leq p_1 \leq \dots \leq p_{n^\delta} = r^* + 1,$$

and these variables can be stored in a memory of $\tilde{O}(n^\delta)$. For each different mapping the algorithm estimates the edit distance of each window and the mapped substring using Claim 2.3. We claim that for each substring $\bar{s}[l^*, r^*]$, the algorithm finds $(2^{\lceil \gamma/\delta \rceil + 1} - 1)$ -approximation of the edit distance between this substring and the online string. To show that consider the optimal mapping $p_0^*, p_1^*, \dots, p_{n^\delta}^*$, then the distance that algorithm estimates is bounded by

$$\begin{aligned}
& \sum_{i=0}^{n^\delta} d_i + \text{ed}(\bar{s}[l_i, r_i], \bar{s}[p_{i-1}^*, p_i^*]) \\
& \leq \sum_{i=0}^{n^\delta} (2^{\lceil \gamma/\delta \rceil + 1} - 1) \cdot \text{ed}(s_i^*, \bar{s}[p_{i-1}^*, p_i^*]) \quad \text{By (5).} \\
& = (2^{\lceil \gamma/\delta \rceil + 1} - 1) \sum_{i=0}^{n^\delta} \text{ed}(s_i^*, \bar{s}[p_{i-1}^*, p_i^*]) \\
& = (2^{\lceil \gamma/\delta \rceil + 1} - 1) \text{ed}(s, \bar{s}[l^*, r^*]). \quad \text{By (4).}
\end{aligned}$$

Therefore for each substring $\bar{s}[l^*, r^*]$, the algorithm finds a $(2^{\lceil \gamma/\delta \rceil + 1} - 1)$ approximation of its edit distance to s . Thus, the algorithm finds a $(2^{\lceil \gamma/\delta \rceil + 1} - 1)$ approximation of the closest substring problem. This completes the induction and proves the theorem. \square

Theorem 1.1. *Given an offline and online strings of length n and any constant $\delta > 0$, there exists a single-pass deterministic streaming algorithm that finds a $O(2^{1/\delta})$ approximation of the edit distance using $\tilde{O}(n^\delta/\delta)$ memory.*

Proof. By Theorem 2.4, Algorithm 1 finds a $O(2^{1/\delta})$ approximation of the closest substring problem. Recall that by Theorem 2.1, we can find the edit distance of any two substrings of \bar{s} using a very small memory. Therefore by Claim 2.3, we can find a $O(2^{1/\delta})$ approximation of the edit distance between s and \bar{s} .

Now we show that the memory of Algorithm 1 is at most $\tilde{O}(n^\delta/\delta)$. While the length of the online string is larger than n^δ , Algorithm 1 divides the online string into n^δ windows and recursively solves the closest substring problem for each window. Therefore, by each recursive call the length of the online string will decrease by a multiplicative factor of $n^{-\delta}$. Thus, the maximum depth of the recursive calls is bounded by $O(1/\delta)$. At each call the algorithm acquires a memory of $\tilde{O}(n^\delta)$ which is the memory needed for storing the result of the recursive calls and iterating over all possible mappings. Therefore, the memory of the algorithm is bounded by $\tilde{O}(n^\delta/\delta)$. \square

3 $(1 - \epsilon)$ -Approximation of LCS

In this section, we design a streaming algorithm for finding a $(1 - \epsilon)$ approximation of the LCS using $\tilde{O}(\sqrt{n}/\epsilon)$ memory. We first define the LCSPosition function as below.

LCSPosition _{l, r}

Input: A position p in \bar{s} and a non-negative integer k .

Output: The smallest position q such that $\text{lcs}(\bar{s}[p, q], s[l, r]) \geq k$. If no such q exists, the output is ∞ .

For a position p in \bar{s} , a substring $s[l, r]$ of s , and a non-negative integer k , we use $\text{LCSPosition}_{l,r}(p, k)$ to denote the result of the mentioned function which is the smallest position q such that LCS of $\bar{s}[p, q]$ and $s[l, r]$ is at least k .² It is easy to verify that the LCS of two strings \bar{s} and s is equal to the largest k such that $\text{LCSPosition}_{1,n}(1, k) < \infty$. Therefore, instead of solving the LCS problem, we can solve the $\text{LCSPosition}_{1,n}$ problem and report the largest k such that $\text{LCSPosition}_{1,n}(1, k) < \infty$. We start designing our algorithm, by observing some properties of the function LCSPosition .

Observation 3.1. *Function $\text{LCSPosition}_{l,r}$ is non-decreasing on p and k . In other words, for every numbers $p_1 \leq p_2$ and $k_1 \leq k_2$, we have*

$$\text{LCSPosition}_{l,r}(p_1, k_1) \leq \text{LCSPosition}_{l,r}(p_2, k_2).$$

Proof. It immediately derives from the definition of the function. \square

Consider the function $\text{LCSPosition}_{l,r}(p, k)$, and let $s[l, m]$ and $s[m+1, r]$ be an arbitrary division of the substring $s[l, r]$ into two substrings. The following claim shows how we can compute $\text{LCSPosition}_{l,r}$ from $\text{LCSPosition}_{l,m}$ and $\text{LCSPosition}_{m+1,r}$.

Claim 3.2. *For any $k \geq 0$, the following holds.*

$$\text{LCSPosition}_{l,r}(p, k) = \min_{\substack{k_1, k_2 \geq 0, k_1 + k_2 = k, \\ \text{LCSPosition}_{l,m}(p, k_1) < \infty}} \text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2). \quad (6)$$

Proof. For any $k_1, k_2 \geq 0$ such that $k = k_1 + k_2$ and $\text{LCSPosition}_{l,m}(p, k_1) < \infty$, the value of $\text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2)$ indicates the ending of a common subsequence of size k such that exactly k_1 characters from $s[l, m]$ are in this common subsequence and k_2 characters from $s[m+1, r]$ are in this subsequence. Therefore, we always have

$$\text{LCSPosition}_{l,r}(p, k) \leq \min_{\substack{k_1, k_2 \geq 0, k_1 + k_2 = k, \\ \text{LCSPosition}_{l,m}(p, k_1) < \infty}} \text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2).$$

In order to complete the proof of the claim, we show that there always exists k_1 and k_2 such that $k_1 + k_2 = k$ and $\text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2) \leq \text{LCSPosition}_{l,r}(p, k)$.

Consider an optimal solution of the function $\text{LCSPosition}_{l,r}(p, k)$, and let suppose that $q = \text{LCSPosition}_{l,r}(p, k)$. In this solution there exists a common subsequence of size k between the characters in $s[l, r]$ and $\bar{s}[p, q]$. Let suppose that in that solution character $s[a_i]$ is matched to $\bar{s}[b_i]$ for each $1 \leq i \leq k$. W.l.o.g., we can assume

$$l \leq a_1 < a_2 < \dots < a_k \leq r.$$

It also implies that

$$p \leq b_1 < b_2 < \dots < b_k = q.$$

We consider two different cases. The first case is when all indices a_i are larger than m . In this case k characters from $s[m+1, r]$ are matched to $\bar{s}[p, q]$. Therefore, $\text{LCSPosition}_{m+1,r}(p, k) \leq q$. By setting $k_1 = 0$ and $k_2 = k$, we get

$$\begin{aligned} \text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2) &= \text{LCSPosition}_{m+1,r}((p-1) + 1, k_2) \\ &= \text{LCSPosition}_{m+1,r}(p, k) \\ &\leq q. \end{aligned}$$

²We also define $\text{LCSPosition}_{l,r}(p, 0)$ to be $p-1$.

The other case is when for at least one a_i , we have $a_i \leq m$. Let assume that k_1 the largest number such that a_{k_1} is at most m . Then, in optimal solution of $\text{LCSPosition}_{l,r}(p, k)$ exactly k_1 characters from $s[l, m]$ are matched to the characters in $\bar{s}[p, b_{k_1}]$. Therefore, we have

$$\text{LCSPosition}_{l,m}(p, k_1) \leq b_{k_1}. \quad (7)$$

We also know that there are $k_2 = k - k_1$ characters from $s[m + 1, r]$ that are matched to the characters in $\bar{s}[b_{k_1} + 1, q]$. Therefore we have

$$\text{LCSPosition}_{m+1,r}(b_{k_1} + 1, k_2) \leq q. \quad (8)$$

Thus,

$$\begin{aligned} & \text{LCSPosition}_{m+1,r}(\text{LCSPosition}_{l,m}(p, k_1) + 1, k_2) \\ & \leq \text{LCSPosition}_{m+1,r}(b_{k_1} + 1, k_2) && \text{By (7).} \\ & \leq q && \text{By (8).} \\ & = \text{LCSPosition}_{l,r}(p, k), \end{aligned}$$

which proves the claim. \square

Algorithm 2: Algorithm APPROXIMATE-LCS for approximating the LCS.

Data: An offline string \bar{s} of length n , a stream of characters of the online string s , and an $\epsilon^* > 0$.

- 1: Divide s into \sqrt{n} windows $s_1^*, s_2^*, \dots, s_{\sqrt{n}}^*$ of size \sqrt{n} .
 - 2: $D \leftarrow$ an array of size $\lfloor \log_{1+\epsilon^*} n \rfloor$ initially containing ∞ in all cells.
 - 3: **for** $i \in [\sqrt{n}]$ **do**
 - 4: $T \leftarrow$ an array of size $\lfloor \log_{1+\epsilon^*} n \rfloor$ initially containing ∞ in all cells.
 - 5: **for** $0 \leq k \leq \lfloor \log_{1+\epsilon^*} n \rfloor$ **do**
 - 6: $T[k] \leftarrow \text{LCSPosition}_{(i-1)\sqrt{n}+1, i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$.
 - 7: **for** $0 \leq k_1 \leq k$ **do**
 - 8: **if** $D[k_1] < \infty$ **then**
 - 9: Find $\text{LCSPosition}_{(i-1)\sqrt{n}+1, i\sqrt{n}}(D[k_1] + 1, \lfloor (1 + \epsilon^*)^k \rfloor - \lfloor (1 + \epsilon^*)^{k_1} \rfloor)$ using any offline algorithm. Let q be this result.
 - 10: $T[k] \leftarrow \min \{T[k], q\}$.
 - 11: $D \leftarrow T$.
 - 12: **return** The largest value $\lfloor (1 + \epsilon^*)^k \rfloor$ such that $D[k] < \infty$.
 - 13: **return** 0 if no such k exists.
-

Algorithm 2 first divides the online string into \sqrt{n} windows of equal sizes. We assume w.l.o.g., that length of the strings is divisible by \sqrt{n} . Otherwise we can always pad offline and online strings with different characters that are not in Σ such that their new length get divisible by \sqrt{n} . The algorithm divides s into \sqrt{n} windows $s_1^*, s_2^*, \dots, s_{\sqrt{n}}^*$ each with the size of \sqrt{n} where s_i^* is the substring $s[(i-1)\sqrt{n} + 1, i\sqrt{n}]$. Given an $\epsilon^* > 0$, the algorithm keeps an array D of the size $\lfloor \log_{1+\epsilon^*} n \rfloor$ where $D[k]$ is an estimation of $\text{LCSPosition}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$ in the subsequence of the online string that has arrived so far in the stream. Specifically, after arrival of the window s_i^* in the stream, the algorithm keeps an estimation of $\text{LCSPosition}_{1, i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$ in $D[k]$. First we show that how the algorithm can update the array D upon arrival of a new window, and after that we demonstrate the approximation guarantee of our method.

Let assume that we have an array D in which $D[k]$ is an approximation of $\text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$ for different values of $0 \leq k \leq \lfloor \log_{1+\epsilon^*} n \rfloor$. Upon arrival of a new window s_i^* , the algorithm has to update the array D . Suppose that we want to find $\text{LCSPosition}_{1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$. According to Claim 3.2, there are integers k_1^* and k_2^* such that $k_1^* + k_2^* = \lfloor (1 + \epsilon^*)^k \rfloor$ and

$$\text{LCSPosition}_{1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor) = \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(\text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, k_1^*) + 1, k_2^*). \quad (9)$$

The algorithm stores all of the characters of s_i^* in the memory. Therefore, for every p and k we can compute the function $\text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(p, k)$ using only poly-logarithmic extra memory (see Theorem 2.1). In order to update the array D , the algorithm iterates over all k_1^* such that k_1^* is a power of $(1 + \epsilon^*)$ and pick the one that minimizes the r.h.s. of (9). Specifically, let T an array of length $\lfloor \log_{1+\epsilon^*} n \rfloor$ which represents the updated estimates after arrival of s_i^* . Initially for each k we set

$$T[k] = \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor),$$

which represents the case that all characters in the optimal solution of $\text{LCSPosition}_{1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$ are from the window s_i^* , i.e., when k_1^* is zero in (9). Then the algorithm considers values of k_1^* such that k_1^* is a power of $(1 + \epsilon^*)$, i.e., we have $k_1^* = \lfloor (1 + \epsilon^*)^{k_1} \rfloor$ for some integer k_1 . Recall that our algorithm makes sure that $D[k]$ is an approximation of $\text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor)$. Therefore we can approximate the r.h.s. of (9) for $k_1^* = \lfloor (1 + \epsilon^*)^{k_1} \rfloor$ by computing

$$\text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(D[k_1] + 1, k_2^*),$$

where $k_2^* = \lfloor (1 + \epsilon^*)^k \rfloor - k_1^*$. In our algorithm we compute the value above for all different value of k_1^* and set the $T[k]$ equal to minimum of these values. In other words, by the end of the arrival of the window s_i^* , we have

$$T[k] = \min \left\{ \begin{array}{l} \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor), \\ \min_{\substack{k_1^*, k_2^* \geq 0, k_1^* + k_2^* = \lfloor (1 + \epsilon^*)^k \rfloor, \\ k_1^* = \lfloor (1 + \epsilon^*)^{k_1} \rfloor, \\ D[k_1] < \infty}} \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(D[k_1] + 1, k_2^*) \end{array} \right\}. \quad (10)$$

After computing the values in the array T , we can replace values in the array D with the values in T , and update the array D .

In order to provide an approximation guarantee for our algorithm, we first prove the following claim.

Claim 3.3. *Let D_i be the array D after arrival of the window s_i^* , then for each $1 \leq k^* \leq n$, there exists a $0 \leq k \leq \lfloor \log_{1+\epsilon^*} n \rfloor$ such that*

$$k^*(1 - \epsilon^*)^i \leq \lfloor (1 + \epsilon^*)^k \rfloor \leq k^*,$$

and,

$$D_i[k] \leq \text{LCSPosition}_{1,i\sqrt{n}}(1, k^*).$$

Proof. We prove the claim by induction on i which represents the number of windows that have arrived in the stream. For $i = 1$, the algorithm finds the exact solution of $\text{LCSPosition}_{1,\sqrt{n}}(1, \lfloor (1 +$

$\epsilon^*)^k]$) for all $0 \leq k \leq \lfloor \log_{1+\epsilon^*} n \rfloor$. Consider an integer $1 \leq k^* \leq n$, then there exists some number with the form of $\lfloor (1 + \epsilon^*)^k \rfloor$ between $k^*/(1 + \epsilon^*)$ and k^* . Let $\lfloor (1 + \epsilon^*)^k \rfloor$ be that number. Then we have,

$$D_1[k] = \text{LCSPosition}_{1,\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor) \leq \text{LCSPosition}_{1,\sqrt{n}}(1, k^*).$$

We also have

$$k^*(1 - \epsilon^*) \leq \frac{k^*}{1 + \epsilon^*} \leq \lfloor (1 + \epsilon^*)^k \rfloor \leq k^*,$$

which proves the claim for $i = 1$.

Now consider an $i > 1$, and a $1 \leq k^* \leq n$. If $\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*)$ is ∞ , then the claim clearly holds. Otherwise we can assume $\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*) = q$ where $q < \infty$. By (10) and the way our algorithm computes the array D_i we have

$$D_i[k] = \min \left\{ \begin{array}{l} \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor), \\ \min_{\substack{k_1^*, k_2^* \geq 0, k_1^* + k_2^* = \lfloor (1 + \epsilon^*)^k \rfloor, \\ k_1^* = \lfloor (1 + \epsilon^*)^{k_1} \rfloor, \\ D_{i-1}[k_1] < \infty}} \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(D_{i-1}[k_1] + 1, k_2^*) \end{array} \right\}. \quad (11)$$

By Claim 3.2, there exists integers $k_1^*, k_2^* \geq 0$ such that $k_1^* + k_2^* = k^*$ and

$$\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*) = \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(\text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, k_1^*) + 1, k_2^*).$$

Let $q_1 = \text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, k_1^*)$, then we have

$$\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*) = \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(q_1 + 1, k_2^*). \quad (12)$$

We consider two different cases on k_1^* .

- The first case is when $k_1^* = 0$. In that case we have $q_1 = 0$, and by (12) we have

$$\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*) = \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, k^*). \quad (13)$$

Then there exists some number with the form of $\lfloor (1 + \epsilon^*)^k \rfloor$ between $k^*(1 - \epsilon^*)$ and k^* and by (11) we have

$$\begin{aligned} D_i[k] &\leq \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, \lfloor (1 + \epsilon^*)^k \rfloor) \\ &\leq \text{LCSPosition}_{(i-1)\sqrt{n}+1,i\sqrt{n}}(1, k^*) \\ &= \text{LCSPosition}_{1,i\sqrt{n}}(1, k^*), \end{aligned} \quad \text{By (13).}$$

which proves the claim for this case.

- The other case is when $k_1^* > 0$. In this case, in the optimal solution of $\text{LCSPosition}_{1,i\sqrt{n}}(1, k^*)$, exactly k_1^* characters from $s[1, (i-1)\sqrt{n}]$ are matched to the characters in $\bar{s}[1, q_1]$. By the induction hypothesis, we know there exists some k_1 such that

$$k_1^*(1 - \epsilon^*)^{i-1} \leq \lfloor (1 + \epsilon^*)^{k_1} \rfloor \leq k_1^*, \quad (14)$$

and

$$D_{i-1}[k_1] \leq \text{LCSPosition}_{1,(i-1)\sqrt{n}}(1, k_1^*) = q_1. \quad (15)$$

Let $k' = \lfloor (1 + \epsilon^*)^{k_1} \rfloor + k_2^*$. Then, we have

$$k' \geq k^*(1 - \epsilon^*)^{i-1}. \quad \text{By (14).}$$

Let k an integer such that $\lfloor (1 + \epsilon^*)^k \rfloor$ is between $k'(1 - \epsilon^*)$ and k' . We show that $D_i[k]$ satisfies the claim conditions. From the previous equation, we have

$$\lfloor (1 + \epsilon^*)^k \rfloor \geq k'(1 - \epsilon^*) \geq k^*(1 - \epsilon^*)^i.$$

Let $k_2 = \lfloor (1 + \epsilon^*)^k \rfloor - \lfloor (1 + \epsilon^*)^{k_1} \rfloor$. Then we have,

$$\begin{aligned} k_2 &= \lfloor (1 + \epsilon^*)^k \rfloor - \lfloor (1 + \epsilon^*)^{k_1} \rfloor \\ &\leq k' - \lfloor (1 + \epsilon^*)^{k_1} \rfloor && \text{Since } \lfloor (1 + \epsilon^*)^k \rfloor \leq k'. \\ &= k_2^*. && \text{Since } k' = \lfloor (1 + \epsilon^*)^{k_1} \rfloor + k_2^*. \end{aligned} \quad (16)$$

By (11), we have

$$\begin{aligned} D_i[k] &\leq \text{LCSPosition}_{(i-1)\sqrt{n}+1, i\sqrt{n}}(D_{i-1}[k_1] + 1, k_2) \\ &\leq \text{LCSPosition}_{(i-1)\sqrt{n}+1, i\sqrt{n}}(q_1 + 1, k_2) && \text{By (15).} \\ &\leq \text{LCSPosition}_{(i-1)\sqrt{n}+1, i\sqrt{n}}(q_1 + 1, k_2^*) && \text{By (16).} \\ &= \text{LCSPosition}_{1, i\sqrt{n}}(1, k^*). && \text{By (12).} \end{aligned}$$

This proves the second case and completes the induction and proves the claim. \square

Theorem 3.4. *For any $\epsilon^* > 0$, Algorithm 2 finds a $(1 - \epsilon^*)^{\sqrt{n}}$ approximation of the LCS between \bar{s} and s using $\tilde{O}(\sqrt{n} + \log_{1+\epsilon^*} n)$ memory.*

Proof. Let OPT be the size of LCS between \bar{s} and s . Then OPT is the largest k such that $\text{LCSPosition}_{1,n}(1, k) < \infty$. Our algorithm approximately computes the function $\text{LCSPosition}_{1,n}$ and return the largest k such that $\text{LCSPosition}_{1,n}(1, k) < \infty$. By Claim 3.3, in the final array D computed by the algorithm there exists an integer k such that

$$\lfloor (1 + \epsilon^*)^k \rfloor \geq \text{OPT}(1 - \epsilon^*)^{\sqrt{n}}, \quad (17)$$

and

$$D[k] \leq \text{LCSPosition}_{1,n}(1, \text{OPT}) < \infty.$$

Therefore, the answer returned by the algorithm is at least $\lfloor (1 + \epsilon^*)^k \rfloor$. By (17) it gives us a $(1 - \epsilon^*)^{\sqrt{n}}$ approximation.

To show the memory bound of Algorithm 2, observe that the algorithm needs a memory of $\tilde{O}(\sqrt{n})$ to store each window s_i^* and compute the LCS between a substring of this window and a substring of the offline string (using Theorem 2.1). Also, the algorithm keeps an array D and T of size $\lfloor \log_{1+\epsilon^*} n \rfloor$. Therefore, the memory of the algorithm is bounded by $\tilde{O}(\sqrt{n} + \log_{1+\epsilon^*} n)$. \square

Theorem 3.5. *There exists a single-pass deterministic streaming algorithm that finds a $(1 - \epsilon)$ approximation of the LCS between \bar{s} and s using $\tilde{O}(\sqrt{n}/\epsilon)$ memory.*

Proof. By setting $\epsilon^* = \epsilon/\sqrt{n}$, Theorem 3.4 immediately gives us an algorithm with the approximation ratio of

$$(1 - \epsilon^*)^{\sqrt{n}} \geq 1 - \epsilon^* \cdot \sqrt{n} = 1 - \epsilon.$$

Also, the memory of this algorithm is bounded by

$$\tilde{O}(\sqrt{n} + \log_{1+\epsilon^*} n) = \tilde{O}(\sqrt{n}/\epsilon).$$

□

4 $(1 + \epsilon)$ -Approximation of ED

In this section, we design a streaming algorithm that finds a $(1+\epsilon)$ approximation of the edit distance for an arbitrary $\epsilon > 0$. The memory of our algorithm is $\tilde{O}(\sqrt{n}/\epsilon)$. Our algorithm is inspired by the algorithm of [40] for approximating the edit distance in the Massively Parallel Computation (MPC) model.

Suppose that we are given a distance d , and we want to verify whether the edit distance between \bar{s} and s is close to d or not. If we can solve this subproblem, we can also find an approximation of the edit distance between \bar{s} and s . In order to do that, we can run the algorithm for different values of d in $\{1, \lfloor (1 + \epsilon) \rfloor, \lfloor (1 + \epsilon)^2 \rfloor, \dots\}$ and return the minimum d that our algorithm verifies it is close to the edit distance between \bar{s} and s . The number of guesses for d is also bounded by $O(\log_{1+\epsilon}(n))$ and we can run the algorithm for all different guesses of d in parallel and return the best answer. Thus, our goal in the rest of the section is to design a streaming algorithm that given an approximate size of the edit distance, verifies whether a solution with that size exists.

Similar to our algorithm for LCS, we divide the online string into \sqrt{n} windows of size \sqrt{n} . For simplicity and without loss of generality, we assume that the length of the string is divisible by \sqrt{n} (Otherwise we can pad both online and offline strings with the same character which is not in Σ and this does not change the edit distance). Our algorithm divides the online string into \sqrt{n} windows $s_1^*, s_2^*, \dots, s_{\sqrt{n}}^*$ where s_i^* is the substring $s[(i-1)\sqrt{n} + 1, i\sqrt{n}]$ of the online string. Let assume that in the optimal solution of the edit distance, window s_1^* is mapped to the substring $\bar{s}[l_i, r_i]$. For each window s_i^* , our algorithm finds a set of candidate intervals for the mapping of the this window. Roughly speaking, we show that our candidate set always contains an interval which is very close to $[l_i, r_i]$. We then show that using these intervals we can get a good approximation of the edit distance.

Finding Candidate Intervals. Consider a window s_i^* of the online string. Let us suppose that in the optimal solution, it is mapped to the substring $\bar{s}[l_i, r_i]$. We can always assume that $l_i = r_{i-1}$ for $i > 1$, $l_1 = 1$ and $r_{\sqrt{n}} = n + 1$. We then have

$$\text{ed}(s, \bar{s}) = \sum_{i=1}^{\sqrt{n}} \text{ed}(s_i^*, \bar{s}[l_i, r_i]).$$

Our goal is to find a set of candidate intervals for s_i^* such that at least one of these intervals is very close to $[l_i, r_i]$. In order to design our algorithm, we first explore some properties of the interval $[l_i, r_i]$. We use $\alpha_i = (i-1)\sqrt{n} + 1$, and $\beta_i = i\sqrt{n}$ to denote the starting and the ending of the window s_i^* respectively. Therefore, we have $s_i^* = s[\alpha_i, \beta_i]$. Recall that we have assumed that

we are given a bound d on the size of the edit distance. Therefore, in the optimal mapping s_i^* is mapped to a substring with the distance of at most d , and we must have

$$|r_i - 1 - \beta_i| \leq d.$$

It follows that $r_i \in [\beta_i + 1 - d, \beta_i + 1 + d]$. Let $\kappa = \lfloor d \cdot \epsilon / \sqrt{n} \rfloor$. The algorithm considers all intervals with the ending point in $[\beta_i + 1 - 2d, \beta_i + 1 + 2d]$ such that the ending points are divisible by κ (see Figure 2). We call these intervals, *candidate intervals* and we call their endings *candidate endings*. We also consider all intervals ending in 1, i.e. intervals $[l, 1)$, as candidate intervals if $1 \in [\beta_i + 1 - 2d, \beta_i + 1 + 2d]$.

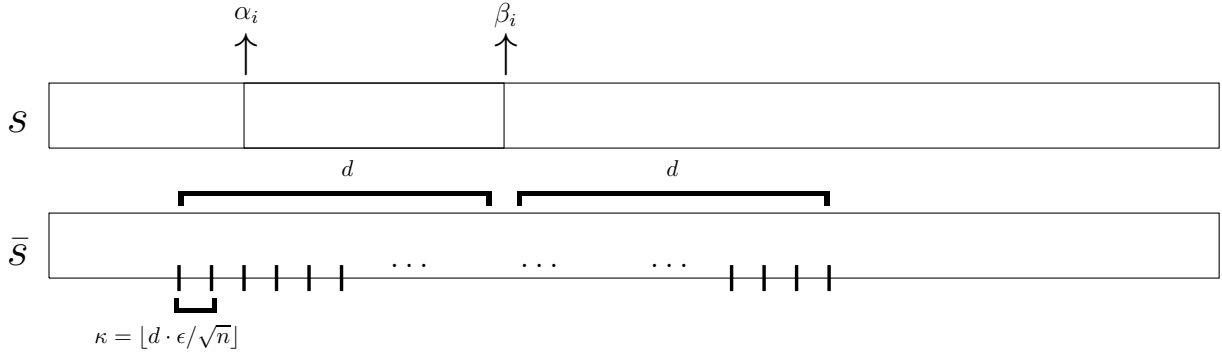


Figure 2: The locations of the ending points for potential intervals of a window are illustrated in this figure. Thick segments show the ending points.

Algorithm 3: Algorithm APPROXIMATE-ED for approximating the edit distance.

Data: An offline string \bar{s} of length n , an online string s , a bound d for the edit distance, and an $\epsilon > 0$.

- 1: $\kappa = \lfloor d \cdot \epsilon / \sqrt{n} \rfloor$.
 - 2: $D \leftarrow$ an empty function.
 - 3: $D[1] \leftarrow 0$.
 - 4: Divide s into \sqrt{n} windows $s_1^*, s_2^*, \dots, s_{\sqrt{n}}^*$ of size \sqrt{n} .
 - 5: **for** each window s_i^* **do**
 - 6: $T \leftarrow$ an empty function.
 - 7: $\beta = i\sqrt{n}$.
 - 8: **for** every integer r in $[\beta + 1 - 2d, \beta + 1 + 2d]$ such that r is 1 or is divisible by κ **do**
 - 9: **if** r is at least 1 and at most $n + 1$ **then**
 - 10: $T[r] \leftarrow \infty$.
 - 11: **for** each $l \in D$ such that $l \leq r$ **do**
 - 12: $T[r] \leftarrow \min \{T[r], D[l] + \text{ed}(\bar{s}[l, r), s_i^*)\}$.
 - 13: $D \leftarrow T$.
 - 14: **return** $\min_{r \in D} D[r] + (n - r + 1)$.
-

Our algorithm uses the dynamic programming to find the best mapping of the s_i^* windows to their candidate intervals. Define the function D_i as follows. Let $D_i[r]$ be the best mapping of the first i windows to their candidate intervals such that s_i^* is mapped to an interval ending in r . Note that for all candidate intervals for the window s_i^* , their ending points are either 1 or an integer

in $[\beta_i + 1 - 2d, \beta_i + 1 + 2d]$ that is divisible by κ . Therefore the number of possible different end points for the candidate intervals is bounded by $O(d/\kappa) = O(\sqrt{n}/\epsilon)$. Thus, function D_i only takes $O(\sqrt{n}/\epsilon)$ values and we can store all values for this function in a memory of $\tilde{O}(\sqrt{n}/\epsilon)$. We say that $r \in D_i$, if the function D_i takes the value r . In other words, r is an end point for at least one of the candidate intervals for s_i^* . Consider an ending point $r \in D_i$. Consider the optimal solution for $D_i[r]$. Let assume in that solution window s_i^* is mapped to an interval $[l, r)$ of the offline string. Then, the first $i-1$ windows are mapped to the substring $\bar{s}[1, l)$. Also, s_{i-1}^* is mapped to an interval with the ending point equal to l . Therefore l is a candidate ending for s_{i-1}^* . By the definition of the D_i functions, $D_{i-1}[l]$ denotes the best mapping for the first $i-1$ windows such that s_{i-1}^* is mapped to an interval with the ending point equal to l . Thus, we have

$$D_i[r] = D_{i-1}[l] + \text{ed}(\bar{s}[l, r), s_i^*).$$

According to the equation above, we can find the value for function D_i by only using the values of function D_{i-1} . As we mentioned earlier, we can store the values of functions D_i and D_{i-1} in a memory of $\tilde{O}(\sqrt{n}/\epsilon)$.

Our algorithm (formally as Algorithm 3), divides the online string into \sqrt{n} windows $s_1^*, s_2^*, \dots, s_{\sqrt{n}}^*$. It also keeps a function D of size at most $O(\sqrt{n}/\epsilon)$ which represents values of the function D_i after arrival of the window s_i^* . Upon arrival a new window s_{i+1}^* , the algorithm stores all characters of s_{i+1}^* in the memory and update the function D based on the update rule below.

$$D_i[r] = \min_{l \in D_{i-1}} D_{i-1}[l] + \text{ed}(\bar{s}[l, r), s_i^*). \quad (18)$$

According to what we have discussed, the update rule above gives the optimal answer for each D_i .

Theorem 4.1. *Algorithm 3 uses $\tilde{O}(\sqrt{n}/\epsilon)$ memory and finds $(1 + 5\epsilon)$ approximation of the edit distance between \bar{s} and s .*

Proof. Consider an optimal solution for $\text{ed}(\bar{s}, s)$. Let OPT be the size of this solution, and d be the best guess of our algorithm for the edit distance between \bar{s} and s . Then, we have

$$\text{OPT} \leq d \leq (1 + \epsilon)\text{OPT}. \quad (19)$$

Suppose in the optimal solution, window s_i^* is mapped to the substring $\bar{s}[l_i, r_i)$ of the offline string. Then we have

$$\text{OPT} = \text{ed}(\bar{s}, s) = \sum_{i=1}^{\sqrt{n}} \text{ed}(\bar{s}[l_i, r_i), s_i^*). \quad (20)$$

We also have that $l_1 = 1$ and $l_i = r_{i-1}$ for $i > 1$. Also, $r_{\sqrt{n}} = n + 1$. Let \mathcal{C} be the set of all integers such that they can be a candidate ending point for one of s_i^* windows. In other words,

$$\mathcal{C} = \{1, \kappa, 2\kappa, \dots, \lfloor n/\kappa \rfloor \kappa\}.$$

For each l_i (respectively, r_i), let l'_i (resp., r'_i) be the largest number in \mathcal{C} that is at most l_i (resp., r_i). Then, for each l_i , we have

$$l_i - \kappa < l'_i \leq l_i. \quad (21)$$

Similarly, for each r_i , we have

$$r_i - \kappa < r'_i \leq r_i. \quad (22)$$

It follows that for each interval $[l'_i, r'_i)$ we have

$$\begin{aligned} \text{ed}(\bar{s}[l'_i, r'_i), s_i^*) &\leq \text{ed}(\bar{s}[l'_i, r'_i), \bar{s}[l_i, r_i)) + \text{ed}(\bar{s}[l_i, r_i), s_i^*) && \text{By the triangle inequality.} \\ &\leq 2\kappa + \text{ed}(\bar{s}[l_i, r_i), s_i^*). && \text{By (21) and (22).} \end{aligned} \quad (23)$$

It follows from (23) that

$$\begin{aligned} &\sum_{i=1}^{\sqrt{n}} \text{ed}(\bar{s}[l'_i, r'_i), s_i^*) \\ &\leq 2\kappa \cdot \sqrt{n} + \sum_{i=1}^{\sqrt{n}} \text{ed}(\bar{s}[l_i, r_i), s_i^*) \\ &\leq 2\epsilon \cdot d + \sum_{i=1}^{\sqrt{n}} \text{ed}(\bar{s}[l_i, r_i), s_i^*) && \text{Since } \kappa = \lfloor d \cdot \epsilon / \sqrt{n} \rfloor. \\ &= 2\epsilon \cdot d + \text{OPT} && \text{By (20).} \\ &\leq \text{OPT}(1 + 2\epsilon(1 + \epsilon)) && \text{By (19).} \\ &\leq \text{OPT}(1 + 3\epsilon). \end{aligned} \quad (24)$$

Therefore, the size of the solution that maps each window s_i^* to $\bar{s}[l'_i, r'_i]$ is at most $(1 + 3\epsilon)\text{OPT}$. We show that our algorithm almost finds this solution. We claim that each r'_i is a candidate endpoint for s_i^* . Since $r'_i \in \mathcal{C}$, it is either 1 or it is divisible by κ . To show that r'_i can be the end point of some candidate interval for s_i^* , it is sufficient to show that r'_i is in $[\beta_i + 1 - 2d, \beta_i + 1 + 2d]$ where $\beta_i = i\sqrt{n}$ is the end point of the window s_i^* .

Because the size of the edit distance between \bar{s} and s is bounded by d , we have

$$|r_i - \beta_i + 1| \leq d.$$

This along with (22) implies that

$$|r'_i - \beta_i + 1| \leq |r'_i - r_i| + |r_i - \beta_i + 1| \leq \kappa + d \leq 2d.$$

Therefore, r'_i is in $[\beta_i + 1 - 2d, \beta_i + 1 + 2d]$ and $[l'_i, r'_i)$ is a candidate interval for s_i^* . Thus in this solution, every window s_i^* is mapped to one of its candidate intervals. Consider the last window, it is mapped to the interval $[l'_{\sqrt{n}}, r'_{\sqrt{n}})$. Let $q = r'_{\sqrt{n}}$. By the definition of D_i functions, $D_{\sqrt{n}}[q]$ is the cost of the best solution such that each window is mapped to one of its candidate interval, and the ending of the last interval is q . Therefore,

$$\begin{aligned} D_{\sqrt{n}}[q] &\leq \sum_{i=1}^{\sqrt{n}} \text{ed}(\bar{s}[l'_i, r'_i), s_i^*) \\ &\leq (1 + 3\epsilon)\text{OPT}. \end{aligned} \quad \text{By (24).} \quad (25)$$

After arrival of all windows, in Algorithm 3 function D will be equal to $D_{\sqrt{n}}$, and the algorithm returns $\min_{r \in D} D[r] + (n - r + 1)$ where $(n - r + 1)$ is the edit distance of between part of offline string

that is not in the mapping represented by l'_i 's and r'_i 's. Therefore, the solution of the algorithm is bounded by

$$\begin{aligned}
\min_{r \in D} D[r] + (n - r + 1) &= \min_{r \in D_{\sqrt{n}}} D_{\sqrt{n}}[r] + (n - r + 1) \\
&\leq D_{\sqrt{n}}[q] + (n - q + 1) \\
&\leq (1 + 3\epsilon)\text{OPT} + (n - q + 1) && \text{By (25).} \\
&\leq (1 + 3\epsilon)\text{OPT} + (r_{\sqrt{n}} - q) && \text{Since } r_{\sqrt{n}} = n + 1. \\
&\leq (1 + 3\epsilon)\text{OPT} + \kappa && \text{By (22).} \\
&\leq (1 + 3\epsilon)\text{OPT} + \epsilon \cdot d \\
&\leq (1 + 5\epsilon)\text{OPT}.
\end{aligned}$$

Therefore the approximation ratio of the algorithm is bounded by $(1 + 5\epsilon)$ and it proves the theorem. \square

The above theorem immediately implies the following.

Theorem 4.2. *For any $\epsilon > 0$, there exists a single-pass deterministic streaming algorithm that finds a $(1 + \epsilon)$ approximation of the edit distance between s and \bar{s} using $\tilde{O}(\sqrt{n}/\epsilon)$ memory.*

References

- [1] Abboud, A. and Backurs, A. (2017). Towards hardness of approximation for polynomial time problems. In *ITCS*.
- [2] Abboud, A., Backurs, A., and Williams, V. V. (2015). Tight hardness results for LCS and other sequence similarity measures. In *FOCS*.
- [3] Abboud, A., Hansen, T. D., Williams, V. V., and Williams, R. (2016). Simulating branching programs with edit distance and friends or: a polylog shaved is a lower bound made. In *STOC*.
- [4] Abboud, A. and Rubinfeld, A. (2018). Fast and deterministic constant factor approximation algorithms for LCS imply new circuit lower bounds. In *ITCS*.
- [5] Alves, C. E., Cáceres, E. N., and Song, S. W. (2006). A coarse-grained parallel algorithm for the all-substrings longest common subsequence problem. *Algorithmica*, 45(3):301–335.
- [6] Andoni, A., Deza, M., Gupta, A., Indyk, P., and Raskhodnikova, S. (2003). Lower bounds for embedding edit distance into normed spaces. In *SODA*.
- [7] Andoni, A., Goldberger, A., McGregor, A., and Porat, E. (2013). Homomorphic fingerprints under misalignments: Sketching edit and shift distances. In *STOC*.
- [8] Andoni, A. and Krauthgamer, R. (2007). The computational hardness of estimating edit distance [extended abstract]. In *FOCS*.
- [9] Andoni, A. and Krauthgamer, R. (2008). The smoothed complexity of edit distance. In *ICALP*.
- [10] Andoni, A., Krauthgamer, R., and Onak, K. (2010). Polylogarithmic approximation for edit distance and the asymmetric query complexity. In *FOCS*.
- [11] Andoni, A. and Onak, K. (2009). Approximating edit distance in near-linear time. In *STOC*.

- [12] Backurs, A. and Indyk, P. (2015). Edit distance cannot be computed in strongly subquadratic time (unless SETH is false). In *STOC*.
- [13] Bansal, N., Lewenstein, M., Ma, B., and Zhang, K. (2010). On the longest common rigid subsequence problem. *Algorithmica*, 56(2):270–280.
- [14] Bar-Yossef, Z., Jayram, T., Krauthgamer, R., and Kumar, R. (2004). Approximating edit distance efficiently. In *FOCS*.
- [15] Batu, T., Ergun, F., and Sahinalp, C. (2006). Oblivious string embeddings and edit distance approximations. In *SODA*.
- [16] Belazzougui, D. and Zhang, Q. (2016). Edit distance: Sketching, streaming, and document exchange. In *FOCS*.
- [17] Bellman, R. (1957). Dynamic programming (dp).
- [18] Boroujeni, M., Ehsani, S., Ghodsi, M., HajiAghayi, M., and Seddighin, S. (2018). Approximating edit distance in truly subquadratic time: Quantum and MapReduce. In *SODA*.
- [19] Boroujeni, M. and Seddighin, S. (2019). Improved MPC algorithms for edit distance and Ulam distance. In *SPAA*.
- [20] Bringman, K. and Künnemann, M. (2018). Multivariate fine-grained complexity of longest common subsequence. In *SODA*.
- [21] Bringmann, K., Grandoni, F., Saha, B., and Williams, V. V. (2016). Truly sub-cubic algorithms for language edit distance and RNA-folding via fast bounded-difference min-plus product. In *FOCS*.
- [22] Bringmann, K. and Kunnemann, M. (2015). Quadratic conditional lower bounds for string problems and dynamic time warping. In *FOCS*.
- [23] Chakraborty, D., Das, D., Goldenberg, E., Koucky, M., and Saks, M. (2018). Approximating edit distance within constant factor in truly sub-quadratic time. In *FOCS*.
- [24] Chakraborty, D., Goldenberg, E., and Koucký, M. (2016). Streaming algorithms for embedding and computing edit distance in the low distance regime. In *STOC*.
- [25] Charikar, M., Geri, O., Kim, M. P., and Kuszmaul, W. (2018). On estimating edit distance: Alignment, dimension reduction, and embeddings. In *ICALP*.
- [26] Chen, L., Goldwasser, S., Lyu, K., Rothblum, G. N., and Rubinfeld, A. (2019). Fine-grained complexity meets $IP=PSPACE$. In *SODA*.
- [27] Cheng, K., Jin, Z., Li, X., and Zheng, Y. (2020). Space efficient deterministic approximation of string measures. *arXiv*.
- [28] Crochemore, M., Iliopoulos, C. S., Pinzon, Y. J., and Reid, J. F. (2001). A fast and practical bit-vector algorithm for the longest common subsequence problem. *Information Processing Letters*, 80(6):279–285.
- [29] Crochemore, M., Landau, G. M., and Ziv-Ukelson, M. (2003). A subquadratic sequence alignment algorithm for unrestricted scoring matrices. *SIAM Journal on Computing*, 32(6):1654–1673.

- [30] de Monvel, J. B. (1999). Extensive simulations for longest common subsequences. *The European Physical Journal B-Condensed Matter and Complex Systems*, 7(2):293–308.
- [31] Ergün, F. and Jowhari, H. (2008). On distance to monotonicity and longest increasing subsequence of a data stream. In *SODA*.
- [32] Gál, A. and Gopalan, P. (2007). Lower bounds on streaming algorithms for approximating the length of the longest increasing subsequence. In *FOCS*.
- [33] Garofalakis, M. and Kumar, A. (2003). Correlating XML data streams using tree-edit distance embeddings. In *PODS*.
- [34] Gold, O. and Sharir, M. (2017). Dynamic time warping and geometric edit distance: Breaking the quadratic barrier. In *ICALP*.
- [35] Goldenberg, E., Krauthgamer, R., and Saha, B. (2019). Sublinear algorithms for gap edit distance. In *FOCS*.
- [36] Gopalan, P., Jayram, T. S., Krauthgamer, R., and Kumar, R. (2007). Estimating the sortedness of a data stream. In *SODA*.
- [37] Gusfield, D. (1997). *Algorithms on strings, trees and sequences: computer science and computational biology*. Cambridge University Press.
- [38] Haeupler, B., Rubinstein, A., and Shahrashbi, A. (2019). Near-linear time insertion-deletion codes and $(1+\epsilon)$ -approximating edit distance via indexing. In *STOC*.
- [39] Hajiaghayi, M., Seddighin, M., Seddighin, S., and Sun, X. (2019a). Approximating lcs in linear time: Beating the \sqrt{n} barrier. In *SODA*.
- [40] Hajiaghayi, M., Seddighin, S., and Sun, X. (2019b). Massively parallel approximation algorithms for edit distance and longest common subsequence. In *SODA*.
- [41] Hunt, J. W. and Szymanski, T. G. (1977). A fast algorithm for computing longest common subsequences. *Communications of the ACM*, 20(5):350–353.
- [42] Indyk, P. (2001). Algorithmic applications of low-distortion geometric embeddings. In *FOCS*.
- [43] Jayaram, R. and Saha, B. (2017). Approximating language edit distance beyond fast matrix multiplication: Ultralinear grammars are where parsing becomes hard! In *ICALP*.
- [44] Koucky, M. and Saks, M. (2019). Constant factor approximations to edit distance on far input pairs in nearly linear time. *arXiv preprint arXiv:1904.05459*.
- [45] Kuszmaul, W. (2019). Dynamic time warping in strongly subquadratic time: Algorithms for the low-distance regime and approximate evaluation. *arXiv preprint arXiv:1904.09690*.
- [46] Landau, G. M., Myers, E. W., and Schmidt, J. P. (1998). Incremental string comparison. *SIAM Journal on Computing*, 27(2):557–582.
- [47] Leiserson, C. E., Rivest, R. L., Cormen, T. H., and Stein, C. (2001). *Introduction to algorithms*, volume 6. MIT press Cambridge, MA.
- [48] Liben-Nowell, D., Vee, E., and Zhu, A. (2005). Finding longest increasing and common subsequences in streaming data. In *COCOON*.

- [49] Masek, W. J. and Paterson, M. S. (1980). A faster algorithm computing string edit distances. *Journal of Computer and System Sciences*, 20(1):18–31.
- [50] Naumovitz, T. and Saks, M. (2014). A polylogarithmic space deterministic streaming algorithm for approximating distance to monotonicity. *SODA*.
- [51] Ostrovsky, R. and Rabani, Y. (2005). Low distortion embeddings for edit distance. In *STOC*.
- [52] Rubinstein, A. and Brakensiek, J. (2019). Constant-factor approximation of near-linear edit distance in near-linear time. *arXiv preprint arXiv:1904.05390*.
- [53] Rubinstein, A. and Song, Z. (2019). Reducing approximate longest common subsequence to approximate edit distance. *arXiv preprint arXiv:1904.05451*.
- [54] Rubinstein, A., Seddighin, S., Song, Z., and Sun, X. (2019). Approximation algorithms for LCS and LIS with truly improved running times. In *FOCS*.
- [55] Saha, B. (2015). Language edit distance and maximum likelihood parsing of stochastic grammars: Faster algorithms and connection to fundamental graph problems. In *FOCS*.
- [56] Saha, B. (2017). Fast & space-efficient approximations of language edit distance and RNA folding: An amnesic dynamic programming approach. In *FOCS*.
- [57] Saks, M. and Seshadhri, C. (2013). Space efficient streaming algorithms for the distance to monotonicity and asymmetric edit distance. In *SODA*.
- [58] Savitch, W. J. (1970). Relationships between nondeterministic and deterministic tape complexities. *Journal of computer and system sciences*, 4(2):177–192.
- [59] Sun, X. and Woodruff, D. P. (2007). The communication and streaming complexity of computing the longest common and increasing subsequences. In *SODA*.

A Omitted proofs

Theorem 2.1. *Suppose that we have random access to two given strings s and \bar{s} of length n . Then $\text{lcs}(s, \bar{s})$ and $\text{ed}(s, \bar{s})$ can be computed using $O(\log^2 n)$ memory.*

Proof. It is known that the LCS and the edit distance are in *Nondeterministic Logarithmic-space* (NL) complexity class. This means that we can solve these problem using a non-deterministic Turing machine with a memory of $O(\log n)$. Savitch's theorem [58] says that every problem in NL can be solved using a deterministic Turing matching with a memory of $O(\log^2 n)$, which implies the theorem. \square