

Why is the Mahalanobis Distance Effective for Anomaly Detection?

Hiyo Kamoi

Department of Computer Science
The University of Tokyo

Kei Kobayashi

Department of Mathematics
Keio University

Abstract

The Mahalanobis distance-based confidence score, a recently proposed anomaly detection method for pre-trained neural classifiers, achieves state-of-the-art performance on both out-of-distribution (OoD) and adversarial examples detection. This work analyzes why this method exhibits such strong performance in practical settings while imposing an implausible assumption; namely, that class conditional distributions of pre-trained features have tied covariance. Although the Mahalanobis distance-based method is claimed to be motivated by classification prediction confidence, we find that its superior performance stems from information not useful for classification. This suggests that the reason the Mahalanobis confidence score works so well is mistaken, and makes use of different information from ODIN, another popular OoD detection method based on prediction confidence. This perspective motivates us to combine these two methods, and the combined detector exhibits improved performance and robustness. These findings provide insight into the behavior of neural classifiers in response to anomalous inputs.

Introduction

Modern neural networks often exhibit unexpected behavior to inputs dissimilar from training data [1, 2]. It is also known that neural classifiers are easily fooled by small adversarial perturbations to inputs [3, 4, 5]. Since these problems pose a serious threat to the safety of machine learning systems, anomaly detection methods such as out-of-distribution (OoD) and adversarial examples detection have attracted considerable attention [6, 7, 8, 9]. However, the behavior of neural networks when fed anomalous inputs is not well understood.

Distance-based methods are a primitive yet popular approach to anomaly detection. One way to apply this approach to neural networks is to use lower dimensional representations for data. Previous studies on OoD [10, 11] and adversarial examples detection [12, 13, 14, 15] have used the Euclidean distance of intermediate representations in neural networks. In this line of research, recent work on anomaly detection for pre-trained neural classifiers [16] has shown that the Mahalanobis distance-based confidence score outperforms methods based on the Euclidean distance. This method achieves state-of-the-art performance in OoD and adversarial examples detection, and is regarded as the new standard in anomaly detection on pre-trained neural classifiers [1, 2, 17, 18, 19, 20, 21, 22, 23]. However, why it works so well has not been sufficiently scrutinized.

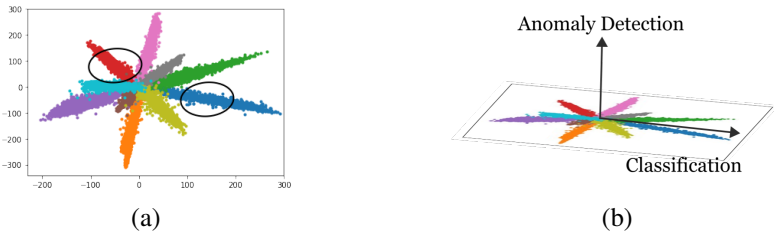


Figure 1: Motivation and proposition of this work. (a) Final features of a convolutional neural network classifier trained on MNIST. The final feature space is set to two dimensions. Black ovals are contours of the Mahalanobis distance under the tied covariance assumption. The Mahalanobis distance does not properly describe the class conditional distributions in this example. However, this score by Lee et al. [20] achieves state-of-the-art performance on anomaly detection under practical settings. (b) Our analysis suggests that directions with small explained variance, while containing relatively less information relevant to classification, strongly contribute to anomaly detection in high-dimensional cases.

Feature	classification confidence	others	combined
OoD detection	Baseline [13], ODIN [14] Mahalanobis [20]	Mahalanobis ([20], ours)	Mahalanobis + ODIN (ours)
Adversarial examples detection	Bayesian Uncertainty [9] Mahalanobis [20]	Mahalanobis ([20], ours), LID [24] Li and Li [25], Kernel Density [9]	Uncertainty + Density [9]

Table 1: Categorization of OoD and adversarial examples detection methods for pre-trained neural classifiers based on our analysis. The Mahalanobis confidence score [20] had been believed to use classification prediction confidence, but our analysis shows otherwise. Motivated by this categorization, we propose a combined method for OoD detection.

The Mahalanobis confidence score [20] assumes that the intermediate features of pre-trained neural classifiers follow class conditional Gaussian distributions whose covariances are tied for all distributions, and the confidence score for a new input is defined as the Mahalanobis distance from the closest class conditional distribution. Our work is motivated by the question of why the Mahalanobis confidence score exhibits strong performance while imposing this unreasonable and restrictive assumption of tied covariance.

We reveal that the reasons why the Mahalanobis confidence score can detect anomalous samples effectively has been misunderstood. This confidence score is derived from prediction confidence for classification, a similar idea to ODIN [14] which uses the output of the softmax function as a confidence score. However, our analysis shows that the information in intermediate features that is not utilized as much for classification is the main contributor to state-of-the-art performance of the method. We propose a simpler method named the marginal Mahalanobis confidence score. This method approximates the penultimate feature distribution with a single Gaussian distribution, and uses the Mahalanobis distance from the mean as confidence scores. In most settings of anomaly detection, our method which does not use class information at all, is competitive with the original confidence score.

In addition, as a consequence of our analysis, the categorization in Table 1 suggests that the Mahalanobis confidence score and ODIN, two popular OoD detection methods, distinguish between in-distribution and OoD data in different ways. Thus, we propose combining

the Mahalanobis score and ODIN for OoD detection. We experimentally show this idea improves OoD detection performance and robustness.

Contribution The Mahalanobis confidence score [20] had been believed to function based on the prediction confidence of classifiers. However, we reveal that the Mahalanobis confidence score is a powerful variant of a method detecting adversarial examples by using properties observed by Li and Li [21], unrelated to prediction confidence. Our analysis deepens our understanding of the Mahalanobis confidence score, the new standard for anomaly detection, and draws connections with previous studies on OoD and adversarial examples detection. Finally, based on this new perspective, we propose combining the Mahalanobis confidence score and ODIN.

2 Related Work

High-Dimensional OoD Detection Hendrycks and Gimpel [15] proposed a baseline method for pre-trained neural classifiers using the output of the softmax function as a confidence score, and Liang et al. [22] significantly improved upon this. Hendrycks et al. [16] proposed to use OoD data during training. An approach related to this paper is the use of lower dimensional representations in neural networks. Mandelbaum and Weinshall [26] proposed a confidence score based on local density estimation in the representation space. There is some work using intermediate features of autoencoders as well [8, 32, 33].

Adversarial Examples Detection Adversarial examples [12, 41] are a major concern of neural networks. A popular approach to avoid this problem is to make neural networks robust against these attacks with methods such as adversarial training [12]. Another approach to mitigate adversarial attacks is adversarial examples detection. As methods using statistical properties in feature space, Li and Li [21] proposed features acquired via principal component analysis (PCA) on intermediate representations, Ma et al. [24] proposed usage of the Local Intrinsic Dimensionality, and Feinman et al. [9] utilized kernel density estimation. Feinman et al. [9] also proposed using Bayesian uncertainty, a prediction confidence. However, Carlini and Wagner [4] have reported that these detection methods can be bypassed relatively easily.

3 Background

We describe the Mahalanobis distance-based confidence score. Lee et al. [20] proposed a confidence score for anomaly detection on pre-trained neural classifiers based on the class-conditional Mahalanobis distance with the assumption of tied covariance in representation space. This method is motivated by an induced generative classifier. Here, we consider a generative classifier with the assumption that the class priors follow categorical distributions $P(t = c) = \beta_c / \sum_{c'} \beta_{c'}$ and class-conditional distributions follow Gaussian distributions with tied covariance $\mathcal{N}(\mathbf{x} | \mu_c, \Sigma)$. Then, its posterior distribution $P(t = c | \mathbf{x})$ can be represented in the following manner:

$$P(t = c | \mathbf{x}) = \frac{\exp(\mu_c^T \Sigma^{-1} \mathbf{x} - \frac{1}{2} \mu_c^T \Sigma^{-1} \mu_c + \log \beta_c)}{\sum_{c'} \exp(\mu_{c'}^T \Sigma^{-1} \mathbf{x} - \frac{1}{2} \mu_{c'}^T \Sigma^{-1} \mu_{c'} + \log \beta_{c'})}. \quad (1)$$

This posterior distribution can be expressed with a softmax classifier by setting $\mu_c^T \Sigma^{-1}$ and $-\frac{1}{2} \mu_c^T \Sigma^{-1} \mu_c + \log \beta_c$ to be the weights and biases. This observation leads to the idea that

the final features of pre-trained neural classifier might follow a class-conditional Gaussian distribution with tied covariance, and the Mahalanobis distances from class means can be used as confidence scores. Given training data $\{(\mathbf{x}_1, t_1), \dots, (\mathbf{x}_n, t_n)\}$, the parameters of the generative classifier can be estimated as follows:

$$\hat{\mu}_c = \frac{1}{n_c} \sum_{i:t_i=c} f(\mathbf{x}_i), \quad \hat{\Sigma} = \frac{1}{n} \sum_c \sum_{i:t_i=c} (f(\mathbf{x}_i) - \hat{\mu}_c)(f(\mathbf{x}_i) - \hat{\mu}_c)^T \quad (2)$$

where $f(\cdot)$ denotes the output of the penultimate layer, and n_c is the number of training examples with label c . The Mahalanobis distance-based score is calculated as the minimum squared Mahalanobis distance from the class means:

$$M(\mathbf{x}) = \max_c -(f(\mathbf{x}) - \hat{\mu}_c)^T \hat{\Sigma}^{-1} (f(\mathbf{x}) - \hat{\mu}_c). \quad (3)$$

To improve detection performance, the authors proposed input pre-processing similar to Liang et al. [22] and a feature ensemble consisting of logistic regression using confidence scores calculated on all layers.

4 Analysis and Proposition

The Unreasonable Assumption Motivating Our Analysis Our analysis is motivated by an unreasonable assumption; Lee et al. [20] assumes that class conditional distributions of the final features have tied covariance. This assumption is not consistent with well-known properties of representation spaces of neural classifiers. The standard framework of neural classifiers with a softmax function following a fully connected layer evaluates similarity based on inner products. Thus, the final features are radially distributed as the decision rule is largely determined by angular similarity [23, 46] as shown in Figure 1 (a), so they would not have tied covariance. Ahuja et al. [4] has already pointed out this problem. However, to the best of our knowledge, this is the first work analyzing why the Mahalanobis confidence score detects anomalous samples effectively despite imposing this unrealistic assumption.

Hypothesis Since Figure 1 (a) suggests that the Mahalanobis confidence score is not effective for low-dimensional features, we hypothesize that it utilizes a property peculiar to high-dimensional feature spaces. In high-dimensional representation spaces, a small number of directions will explain almost all the variance in training data, and the other directions may not contribute to classification. In the subspace containing useful information for classification, the in-distribution features are expected to be radially distributed as explained above, which would not be well fitted by class conditional Gaussian distributions with tied covariance. Therefore, in high-dimensional cases, we hypothesize that the directions which are not important for the classification task provide useful information for anomaly detection.

In this section, we verify this hypothesis by proposing two methods called partial and marginal Mahalanobis distance. Finally, we propose a simple method to improve detection performance based on our analysis.

4.1 Observation on Intermediate Features

Motivating Observation Figure 2 (a) shows the proportion of variance when PCA is applied to the final features of a ResNet classifier trained on CIFAR-10. Here, we subtract the nearest class mean in terms of the Mahalanobis distance from each input, which corresponds

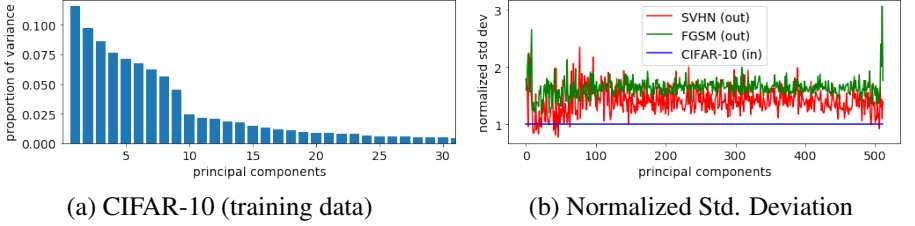


Figure 2: PCA on the final features of ResNet trained on CIFAR-10. The nearest class mean is subtracted from each input. (a) The proportion of variance of training data explained by each principal component. The first several principal components explain almost all of the variance. (b) Standard deviation of SVHN (OoD inputs) and FGSM (adversarial examples) normalized by that of in-distribution data. A similar observation was provided by Li and Li [20] for adversarial examples. We argue the Mahalanobis confidence score utilizes this property to distinguish between in-distribution and anomalous inputs.

to Lee et al. [20]’s method. A small number of principal components explain almost all variance in the data, so most of the directions may not contain useful information for classification. However, Figure 2 (b) shows that OoD data and adversarial examples have larger variance than in-distribution data even on principal components with small explained variance, which may not be expected to contain useful information for classification. In other words, the subspace spanned by principal components with small explained variance also contains information useful for detecting anomalous inputs from in-distribution data. Li and Li [20] reported a similar observation for adversarial examples, so this analysis shows that this phenomenon also occurs on OoD data.

Classification vs. Detection We conduct a simple experiment to verify that information in the subspace spanned by principal components with small explained variance does not contribute to classification. We apply PCA to the final features, and evaluate classification accuracies using subsets of the principal components. Logistic regression on the final features of neural classifiers trained on CIFAR-10 achieves 94.1% accuracy when all principal components are used. A classifier using the first 9 principal components with large proportion of variance achieves 94.1%, but one using the 10-th to 512-th components only achieves 20.5%. These results suggest that principal components with small explained variance do not contain information critical to classification, while Figure 2 suggest they provide useful information for anomaly detection. Note that we do not subtract class means in this experiment here, so this result corresponds to the marginal Mahalanobis distance explained later.

4.2 Partial Mahalanobis Distance

Background The Mahalanobis distance can be alternatively represented with the eigenvectors $\mathbf{u}_i$ of the covariance matrix Σ as $\Delta^2 = (\mathbf{x} - \mu)^T \Sigma^{-1} (\mathbf{x} - \mu) = \sum_{i=1}^N y_i^2 / \lambda_i$, where N is the dimension of data, λ_i is the i -th eigenvalue, and $y_i = \mathbf{u}_i^T (\mathbf{x} - \mu)$ [23]. Note that the eigenvectors and eigenvalues of data sets can be interpreted as the principal components and explained variance of PCA, so this formulation shows the relationship between the Mahalanobis distance and PCA.

Definition To verify our hypothesis, we want to evaluate detection performance of the Mahalanobis score only using information that is not critical for classification task. Motivated by

Method	Conditional (original)	Conditional P(10-512)	Conditional P(1-9)	Marginal (ours)	Marginal P(10-512)	Euclidean
AUROC	93.92	94.05	88.09	93.92	93.94	89.33

Method	Conditional (original)		Marginal (ours)		Marginal P(10-512)	
Ensemble	o	o	o	o	o	o
Pre-Processing		o		o		o
AUROC	98.37	99.14	98.33	99.10	98.03	99.14

Table 2: AUROC for OoD detection of the partial and marginal Mahalanobis distance. Here we use ResNet trained on CIFAR-10, and the OoD data is SVHN. “ $P(i-j)$ ” denotes the partial Mahalanobis distance using the i -th to j -th principal components. “Conditional” and “Marginal” denote the original [20] and our marginal Mahalanobis distances. “Euclidean” denotes the Euclidean distance from the mean. “Ensemble” and “Pre-processing” denote features ensemble and input pre-processing proposed by Lee et al. [20].

the fact that the squared Mahalanobis distance is equivalent to the squared sum of principal component scores, we consider the partial sum:

$$\Delta_S^2 = \sum_{i \in S} \frac{y_i^2}{\lambda_i}, \quad S \subset \{1, \dots, N\}. \quad (4)$$

We will refer to this metric as the **partial Mahalanobis distance**. Although S can be any subset of $\{1, \dots, N\}$, in this paper, we use this metric to compare principal components with large $S = [1, \dots, n]$ and small $S = [n+1, \dots, N]$ proportion of variance. To implement this, we simply calculate the Mahalanobis distance with features projected to the corresponding principal components to avoid numerical instability.

Experiments We compare two partial Mahalanobis distances to analyze behavior of the final features of anomalous inputs. The first one is $\Delta_{[1,9]}^2 = \sum_{i=1}^9 y_i^2 / \lambda_i$ and the second one is $\Delta_{[10,512]}^2 = \sum_{i=10}^{512} y_i^2 / \lambda_i$, where the principal components are sorted in descending order with respect to the proportion of variance. We arbitrarily chose the first 9 principal components, which explains about 70% of variance. Table 2 shows OoD detection performance using different confidence scores. The results show that $\Delta_{[10,512]}^2$ (Conditional P(10-512)) solely achieves the performance of the original Mahalanobis confidence score whilst using information on principal components with small explained variance. On the contrary, the performance of $\Delta_{[1,9]}^2$ (Conditional P(1-9)) performs similar or worse when compared the Euclidean distance while using principal components explaining most of the variance in training data. This observation suggests that the subspace spanned by principal components with small explained variance contains information critical for anomaly detection, while it may not provide useful information for classification. As Euclidean distance is not particularly sensitive to principle components with small explained variance but Mahalanobis distance is, the difference in results for the these distances also suggests that this is information that is meaningful for anomaly detection.

4.3 Marginal Mahalanobis Distance

Definition Our previous analysis of the partial Mahalanobis distances suggests that principal components with small explained variance contribute to OoD detection, while it may not contain information relevant to classification. Motivated by this observation, we propose another variant of the Mahalanobis distance under the much more stronger assumption that

the distribution of intermediate feature is a simple Gaussian, ignoring class information. We call this metric the **marginal Mahalanobis distance**. Here, the model parameters are estimated as follows:

$$\hat{\mu} = \frac{1}{n} \sum_{i=1}^n f(\mathbf{x}_i), \quad \hat{\Sigma} = \frac{1}{n} \sum_{i=1}^n (f(\mathbf{x}_i) - \hat{\mu})(f(\mathbf{x}_i) - \hat{\mu})^T. \quad (5)$$

Based on the estimated parameters, we use the Mahalanobis distance from $\hat{\mu}$, the global mean:

$$M'(\mathbf{x}) = -(f(\mathbf{x}) - \hat{\mu})^T \hat{\Sigma}^{-1} (f(\mathbf{x}) - \hat{\mu}) \quad (6)$$

as a confidence score instead of using class conditional distributions.

Experiments Table 2 shows that the marginal Mahalanobis distance, a score which does not use class information, achieves almost the same performance as the original class conditional Mahalanobis score. We also take the partial Mahalanobis distance for the marginal Mahalanobis distance. “Marginal P(10-512)” effectively detects OoD inputs while only using principal components with small explained variance, which do not contribute to classification performance (Section 4.1), supporting our hypothesis. We also show feature ensemble and input pre-processing proposed by Lee et al. [20] are also effective on our method.

4.4 Combine Detection Methods to Improve Detection Performance

The original paper [20] motivates the Mahalanobis confidence score by likening a softmax classifier to a generative classifier model and demonstrates competitive performance between the softmax classifier and classification based on the confidence score. Thus, it seems that the authors consider their method to be fundamentally based on classifier prediction confidence. A popular OoD detection method ODIN [15] makes use of the output of softmax function, which is directly related to classification. This would suggest that combining their method and ODIN would not work well or reduce robustness.

However, our analysis suggests that the Mahalanobis confidence score does not use information critical for classification. Consequently, it is expected that the Mahalanobis confidence score and ODIN use different information to detect OoD inputs (Table 1). Motivated by this analysis, we propose combining the Mahalanobis confidence score and ODIN for OoD detection. As the Mahalanobis confidence score uses logistic regression for feature ensemble, we simply add a score from ODIN as a new feature. The experiments in Section 5 shows this combined method improves detection performance even for unseen data.

For adversarial examples detection, detection methods based on prediction confidence may not be effective since adversarial attacks directly leverage prediction confidence. Results by Lee et al. [20] support this, showing that combining kernel density and Bayesian uncertainty estimation [9] often do not work well for unseen attacks. We also provide experiments for the combination of the Mahalanobis score and ODIN for adversarial examples in the supplemental material, and show that it becomes more fragile to unseen data.

5 Experiments

Evaluation We evaluate confidence scores on threshold-based detectors of test data and anomalous inputs. We compare the performance with the area under the receiver operating characteristic curve (AUROC).

In-dist	OOD	Detection of test data				Detection of unseen data			
		ODIN [20]	original [20]	marginal (ours)	marginal + ODIN	ODIN [20]	original [20]	marginal (ours)	marginal +ODIN
CIFAR-10 (DenseNet)	SVHN	95.5	98.3	97.7	99.4	—	—	—	—
	TinyImagenet	98.5	99.0	99.2	99.6	90.3	96.5	92.9	98.8
	LSUN	99.2	99.3	99.4	99.8	94.1	98.4	93.0	99.4
CIFAR-100 (DenseNet)	SVHN	93.8	97.1	97.4	99.0	—	—	—	—
	TinyImagenet	85.2	97.4	97.6	98.9	68.2	71.9	74.1	86.3
	LSUN	85.5	97.9	98.0	99.2	66.3	68.8	71.6	84.5
SVHN (DenseNet)	CIFAR-10	91.4	99.0	98.5	98.8	—	—	—	—
	TinyImagenet	95.1	99.9	99.9	99.9	95.1	99.9	99.9	99.9
	LSUN	94.5	99.9	99.9	99.9	94.5	99.9	99.9	99.9
CIFAR-10 (ResNet)	SVHN	96.7	99.1	99.1	99.3	—	—	—	—
	TinyImagenet	94.0	99.5	99.5	99.5	82.9	87.8	89.4	96.4
	LSUN	94.1	99.7	99.8	99.8	81.1	86.1	88.1	96.9
CIFAR-100 (ResNet)	SVHN	93.9	98.4	97.6	98.8	—	—	—	—
	TinyImagenet	87.6	98.2	98.3	98.6	57.0	58.4	85.1	70.0
	LSUN	85.6	98.2	98.4	98.4	51.7	43.4	76.7	56.4
SVHN (ResNet)	CIFAR-10	92.1	99.3	99.2	99.3	—	—	—	—
	TinyImagenet	92.0	99.9	99.9	99.9	92.9	99.7	99.7	99.7
	LSUN	89.4	99.9	99.9	99.9	90.7	99.9	99.9	99.9

Table 3: AUROC for OoD detection on neural classifiers using the marginal Mahalanobis confidence scores (marginal), the Mahalanobis confidence scores by Lee et al. [20] (original), and ODIN [20]. Our marginal confidence score which does not use class information performs almost as well as the original scores which are based on class conditional distributions. Also, we combine the marginal Mahalanobis confidence score and ODIN, and show it improves detection performance even for unseen data.

Settings For experiments on intermediate features of ResNet [14] and DenseNet [17], our implementation is based on code by Lee et al. [20]¹. We evaluate the networks on several data sets: CIFAR-10, CIFAR-100 [18], SVHN [29], TinyImageNet [8, 9], and LSUN [47]. For adversarial examples detection, we evaluate on four types of attacks: FGSM [10], BIM [19], DeepFool [27], and CW [2]. We use both input pre-processing and feature ensemble. Details on hyperparameters are provided in the supplemental material.

OoD Detection Table 3 shows performance of OoD detection on intermediate features of neural classifiers. “Detection of test data” is the OoD detectors trained on the corresponding OoD data, and “Detection of unseen data” is evaluation of the robustness, which shows detection performance of detectors trained on the OoD inputs in the first row (SVHN or CIFAR-10) for unseen data. In both settings, OoD detection with our marginal Mahalanobis confidence score performs as well as the original score by Lee et al. [20], which verifies our hypothesis. Based on the result of our analysis, we combine the marginal Mahalanobis distance and ODIN [20]. This method improves detection performance in most cases even for unseen data detection. The combined method is also as effective when the original Mahalanobis score is used (the results are provided in the supplemental material).

Adversarial Examples Detection Table 4 shows adversarial examples detection performance. Our Mahalanobis confidence score is as effective as the class conditional method by Lee et al. [20]. “Detection of unknown attack” evaluates a detector trained on FGSM, and shows that our confidence score also generalizes well to other types of attacks. The partial Mahalanobis score seems to improve robustness, but does not always outperforms all other methods. However, as our marginal and partial Mahalanobis score works well, these results verify our hypothesis that the Mahalanobis score does not depend on prediction confidence for classification task.

¹https://github.com/pokaxpoka/deep_Mahalanobis_detector

Model	Dataset	Score	Detection of known attack				Detection of unknown attack		
			FGSM	BIM	DeepFool	CW	BIM	DeepFool	CW
DenseNet	CIFAR-10	LID	98.3	99.7	85.0	80.3	94.0	70.4	68.8
		Original	99.9	99.8	83.4	84.9	99.5	83.2	85.7
		Marginal (ours)	99.9	99.8	81.1	82.3	99.2	79.3	81.2
		Marginal P(10-)	99.9	99.6	82.0	83.9	99.3	80.6	83.0
	CIFAR-100	LID	99.3	98.1	69.8	69.6	78.7	68.2	68.8
		Original	99.9	99.3	77.6	82.7	98.7	77.0	80.2
		Marginal (ours)	99.9	99.2	76.9	81.6	98.1	74.3	78.7
		Marginal P(10-)	99.9	99.1	76.7	81.8	98.3	74.5	79.3
	SVHN	LID	99.3	94.8	91.9	94.1	92.0	80.1	81.2
		Original	99.8	99.3	95.1	96.5	99.2	94.2	96.4
		Marginal (ours)	99.9	99.0	92.2	95.0	98.8	90.2	93.4
		Marginal P(10-)	99.9	99.1	92.9	95.4	99.0	91.1	95.0
ResNet	CIFAR-10	LID	99.7	96.6	88.5	83.0	94.0	73.6	78.1
		Original	100.0	99.6	91.4	95.9	99.0	80.6	94.3
		Marginal (ours)	100.0	99.6	91.0	95.8	99.5	86.2	95.5
		Marginal P(10-)	100.0	99.5	90.9	95.3	99.1	82.0	94.5
	CIFAR-100	LID	98.4	97.0	71.8	78.4	59.8	65.1	76.2
		Original	99.8	96.7	85.3	92.0	96.4	81.9	91.0
		Marginal (ours)	99.8	97.7	73.5	90.4	97.1	69.8	87.5
		Marginal P(10-)	99.8	97.7	73.5	90.2	97.6	70.5	88.6
	SVHN	LID	97.8	90.6	92.2	88.3	82.2	68.5	75.1
		Original	99.6	97.1	95.7	92.2	95.8	73.9	87.9
		Marginal (ours)	99.6	97.2	95.2	91.9	95.3	70.2	86.2
		Marginal P(10-)	99.6	97.0	95.2	91.9	95.9	75.6	88.0

Table 4: AUROC for adversarial examples detection on neural classifiers using LID [24], the class conditional Mahalanobis distance-based score by Lee et al. [20] (Original), and our marginal Mahalanobis distance-based score (Marginal). “Marginal P(10-)” denotes the partial Mahalanobis distance using 10-th to 512-th principal components. Our confidence score achieves competitive performance when compared to the original method.

6 Conclusion

The Mahalanobis distance-based confidence score [20], an anomaly detection method for pre-trained neural classifiers, achieves state-of-the-art performance both in OoD and adversarial examples detection. This paper is the first work analyzing why this method can detect anomalous inputs effectively while imposing the implausible assumption that class conditional distributions of intermediate features have tied covariance, and shows that the reason for its effectiveness has been misunderstood. The motivation for the Mahalanobis confidence score was based on prediction confidence for classification, but we demonstrate that it utilizes information that is not critical for classification task to distinguish between in-distribution and anomalous data. Our analysis suggests that the Mahalanobis confidence score makes use of properties of OoD inputs that is not utilized in other OoD detection method such as ODIN [23], so we propose combining these two methods and show this idea improves detection performance and robustness. This work provides critical insight into the new standard anomaly detection method and the behavior of neural networks towards anomalous inputs.

Acknowledgements

This paper has benefited from advice and English language editing from Masayuki Takeda and Toshinori Kitamura. This work was supported by JSPS KAKENHI (JP19K03642, JP19K00912) and RIKEN AIP Japan.

References

- [1] Nilesh. A. Ahuja, Ibrahima Ndiour, Trushant Kalyanpur, and Omesh Tickoo. Probabilistic Modeling of Deep Features for Out-of-Distribution and Adversarial Detection. In *Workshop on Bayesian Deep Learning (NeurIPS)*, 2019.
- [2] Nicholas Carlini and David Wagner. Adversarial Examples Are Not Easily Detected: Bypassing Ten Detection Methods. In *ACM Workshop on Artificial Intelligence and Security*, 2017. ISBN 9781450352024. doi: 10.1145/3128572.3140444.
- [3] Wei-Yu Chen, Yen-Cheng Liu, Zsolt Kira, Yu-Chiang Frank Wang, and Jia-Bin Huang. A Closer Look at Few-shot Classification. In *International Conference on Learning Representations (ICLR)*, 2019.
- [4] Patryk Chrabaszcz, Ilya Loshchilov, and Frank Hutter. A Downsampled Variant of ImageNet as an Alternative to the CIFAR Datasets. In *arXiv preprint arXiv:1707.08819*, 2017.
- [5] Gilad Cohen, Guillermo Sapiro, and Raja Giryes. Detecting Adversarial Samples Using Influence Functions and Nearest Neighbors. *arXiv preprint arXiv:1909.06872*, 2019.
- [6] Gregory Cohen, Saeed Afshar, Jonathan Tapson, and Andr   Van Schaik. EMNIST: an extension of MNIST to handwritten letters. *arXiv preprint arXiv:1702.05373*, 2017.
- [7] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. ImageNet: A Large-Scale Hierarchical Image Database. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2009.
- [8] Taylor Denouden, Rick Salay, Krzysztof Czarnecki, Vahdat Abdelzad, Buu Phan, and Sachin Vernekar. Improving Reconstruction Autoencoder Out-of-distribution Detection with Mahalanobis Distance. *arXiv preprint arXiv:1812.02765*, 2018.
- [9] Reuben Feinman, Ryan R Curtin, Saurabh Shintre, and Andrew B Gardner. Detecting Adversarial Samples from Artifacts. *arXiv preprint arXiv:1703.00410*, 2017.
- [10] Yarin Gal. *Uncertainty in Deep Learning*. PhD thesis, University of Cambridge, 2016.
- [11] Justin Gilmer, Luke Metz, Fartash Faghri, Samuel S. Schoenholz, Maithra Raghu, Martin Wattenberg, and Ian Goodfellow. The Relationship Between High-Dimensional Geometry and Adversarial Examples. *arXiv preprint arXiv:1801.02774*, 2018.
- [12] Ian J. Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and Harnessing Adversarial Examples. In *International Conference on Learning Representations (ICLR)*, 2015.
- [13] Jia Guo, Guannan Liu, Yuan Zuo, and Junjie Wu. An Anomaly Detection Framework Based on Autoencoder and Nearest Neighbor. In *International Conference on Service Systems and Service Management (ICSSSM)*. IEEE, 2018. ISBN 9781538651780. doi: 10.1109/ICSSSM.2018.8464983.
- [14] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep Residual Learning for Image Recognition. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.

- [15] Dan Hendrycks and Kevin Gimpel. A Baseline for Detecting Misclassified and Out-of-Distribution Examples in Neural Networks. In *International Conference on Learning Representations (ICLR)*, 2017.
- [16] Dan Hendrycks, Mantas Mazeika, and Thomas Dietterich. Deep Anomaly Detection with Outlier Exposure. In *International Conference on Learning Representations (ICLR)*, 2019.
- [17] Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger. Densely Connected Convolutional Networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [18] Alex Krizhevsky. Learning Multiple Layers of Features from Tiny Images. Technical report, University of Toronto, 2009.
- [19] Alexey Kurakin, Ian J. Goodfellow, and Samy Bengio. Adversarial examples in the physical world. In *Workshop track of ICLR*, 2017.
- [20] Kimin Lee, Kibok Lee, Honglak Lee, and Jinwoo Shin. A Simple Unified Framework for Detecting Out-of-Distribution Samples and Adversarial Attacks. In *Conference on Neural Information Processing Systems (NeurIPS)*, 2018.
- [21] Xin Li and Fuxin Li. Adversarial Examples Detection in Deep Networks with Convolutional Filter Statistics. In *IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [22] Shiyu Liang, Yixuan Li, and R Srikant. Enhancing The Reliability of Out-of-distribution Image Detection in Neural Networks. In *International Conference on Learning Representations (ICLR)*, 2018.
- [23] Weiyang Liu, Yandong Wen, Zhiding Yu, and Meng Yang. Large-Margin Softmax Loss for Convolutional Neural Networks. In *International Conference on Machine Learning (ICML)*, 2016.
- [24] Xingjun Ma, Bo Li, Yisen Wang, Sarah M Erfani, Sudanthi Wijewickrema, Grant Schoenebeck, Dawn Song, Michael E Houle, and James Bailey. Characterizing Adversarial Subspaces Using Local Intrinsic Dimensionality. In *International Conference on Learning Representations (ICLR)*, 2018.
- [25] David Macêdo, Tsang Ing Ren, Cleber Zanchettin, Adriano L. I. Oliveira, Alain Tapp, and Teresa Ludermir. Distinction Maximization Loss: Fast, Scalable, Turnkey, and Native Neural Networks Out-of-Distribution Detection simply by Replacing the SoftMax Loss. *arXiv preprint arXiv:1908.05569*, 2019.
- [26] Amit Mandelbaum and Daphna Weinshall. Distance-based Confidence Score for Neural Network Classifiers. *arXiv preprint arXiv:1709.09844*, 2017.
- [27] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. DeepFool: a simple and accurate method to fool deep neural networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [28] Kevin P. Murphy. *Machine Learning: A Probabilistic Perspective*. The MIT Press, 2012. ISBN 0262018020.

- [29] Yuval Netzer, Tao Wang, Adam Coates, Alessandro Bissacco, Bo Wu, and Andrew Y. Ng. Reading Digits in Natural Images with Unsupervised Feature Learning. In *NIPS Workshop on Deep Learning and Unsupervised Feature Learning*, 2011.
- [30] Anh Nguyen, Jason Yosinski, and Jeff Clune. Deep Neural Networks are Easily Fooled: High Confidence Predictions for Unrecognizable Images. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [31] Nicolas Papernot and Patrick Mcdaniel. Deep k-Nearest Neighbors: Towards Confident, Interpretable and Robust Deep Learning. *arXiv preprint arXiv:1803.04765*, 2018.
- [32] Pramuditha Perera, Ramesh Nallapati, and Bing Xiang. OCGAN: One-class Novelty Detection Using GANs with Constrained Latent Representations. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
- [33] Marco A.F. Pimentel, David A. Clifton, Lei Clifton, and Lionel Tarassenko. A review of novelty detection. *Signal Processing*, 99:215–249, 2014. ISSN 01651684. doi: 10.1016/j.sigpro.2013.12.026.
- [34] Vickram Rajendran and William Levine. Accurate Layerwise Interpretable Competence Estimation. In *Conference on Neural Information Processing Systems (NeurIPS)*, 2019.
- [35] Sachin Ravi and Hugo Larochelle. Optimization as a Model for Few-Shot Learning. In *International Conference on Learning Representations (ICLR)*, 2017.
- [36] Jie Ren, Peter J. Liu, Emily Fertig, Jasper Snoek, Ryan Poplin, Mark A. DePristo, Joshua V. Dillon, and Balaji Lakshminarayanan. Likelihood Ratios for Out-of-Distribution Detection. In *Conference on Neural Information Processing Systems (NeurIPS)*, 2019.
- [37] Ryne Roady, Tyler L Hayes, Ronald Kemker, Ayesha Gonzales, and Christopher Kanan. Are Out-of-Distribution Detection Methods Effective on Large-Scale Datasets? *arXiv preprint arXiv:1910.14034*, 2019.
- [38] Mohammad Sabokrou, Mohammad Khalooei, Mahmood Fathy, and Ehsan Adeli. Adversarially Learned One-Class Classifier for Novelty Detection. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2018.
- [39] Jake Snell, Kevin Swersky, and Richard S. Zemel. Prototypical Networks for Few-shot Learning. In *Conference on Neural Information Processing Systems (NeurIPS)*, 2017.
- [40] Hongchao Song, Zhuqing Jiang, Aidong Men, and Bo Yang. A Hybrid Semi-Supervised Anomaly Detection Model for High-Dimensional Data. *Computational Intelligence and Neuroscience*, 2017. doi: 10.1155/2017/8501683.
- [41] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. In *arXiv preprint arXiv:1312.6199*, 12 2013.

- [42] Mickael Tardy, Bruno Scheffer, and Mateus Diana. Uncertainty Measurements for the Reliable Classification of Mammograms. In *Medical Image Computing and Computer Assisted Intervention (MICCAI)*, pages 495–503, Cham, 2019. Springer International Publishing. ISBN 978-3-030-32226-7.
- [43] Oriol Vinyals, Charles Blundell, Timothy Lillicrap, Koray Kavukcuoglu, and Daan Wierstra. Matching Networks for One Shot Learning. In *Conference on Neural Information Processing Systems (NIPS)*, 2016.
- [44] Catherine Wah, Steve Branson, Peter Welinder, Pietro Perona, and Serge Belongie. The Caltech-UCSD Birds-200-2011 Dataset. Technical report, California Institute of Technology, 2011.
- [45] Yulong Wang, Xiaolin Hu, and Hang Su. Interpretable Disentanglement of Neural Networks by Extracting Class-Specific Subnetwork. *arXiv preprint arXiv:1910.02673*, 2019.
- [46] Yandong Wen, Kaipeng Zhang, Zhifeng Li, and Yu Qiao. A Discriminative Feature Learning Approach for Deep Face Recognition. In *European Conference on Computer Vision (ECCV)*, 2016. doi: 10.1007/978-3-319-46478-7.
- [47] Fisher Yu, Ari Seff, Yinda Zhang, Shuran Song, Thomas Funkhouser, and Jianxiong Xiao. LSUN: Construction of a Large-Scale Image Dataset using Deep Learning with Humans in the Loop. *arXiv preprint arXiv:1506.03365*, 2016.

A Background

We briefly explain ODIN [22] and the Mahalanobis distance-based confidence score [27].

A.1 ODIN: Out-of-Distribution detector for Neural networks

ODIN [22] is a simple yet effective improvement of a baseline OoD method on pre-trained neural classifiers by Hendrycks and Gimpel [15], which uses the maximum output from softmax function as a confidence score. ODIN is built on two components: temperature scaling and input preprocessing.

Temperature Scaling Let $f = (f_1, \dots, f_N)$ be a pre-trained neural classifier for N classes. The temperature scaling is a variant of softmax function:

$$S_i(x; T) = \frac{\exp(f_i(x)/T)}{\sum_{j=1}^N \exp(f_j(x)/T)}, \quad (7)$$

where $T \in \mathbb{R}^+$ is the temperature scaling parameter. The standard softmax function $T = 1$ is used during training.

Input Pre-processing ODIN applies pre-processing to the input image as follows:

$$\tilde{x} = x - \varepsilon \text{sign}(-\nabla_x \log S_{\hat{y}}(x; T)) \quad (8)$$

where ε is the magnitude parameter. The formulation of this input pre-processing is inspired by FGSM [16], a popular adversarial attack.

A.2 Mahalanobis Distance-Based Confidence Score

Lee et al. [20] proposed an input pre-processing similar to that in ODIN for their Mahalanobis confidence score. They apply pre-processing to the input image as follows:

$$\tilde{x} = x - \varepsilon \text{sign}(-\nabla_x M(x)) \quad (9)$$

where $M(x)$ denotes the Mahalanobis confidence score, and ε is the magnitude parameter.

B Hyperparameters

The Mahalanobis distance-based confidence score and ODIN have hyperparameters. The temperature T of ODIN is chosen from $\{1, 10, 100, 1000\}$, and the magnitude of input pre-processing for the Mahalanobis confidence score and ODIN is chosen from $\{0, 0.0005, 0.001, 0.0014, 0.002, 0.0024, 0.005, 0.01, 0.05, 0.1, 0.2\}$.

For data splitting, we use the same configuration as the original implementation [20]. The training data of the data sets are used to calculate the Mahalanobis parameters. For OoD detection, the test data (of the original data sets) is split into training data, validation data, and test data for logistic regression and hyperparameter tuning. The size of training and validation data for logistic regression is 1,000 each, and the rest of data is used as test data. For adversarial examples detection, the test data is equally split into training data, adversarial examples, and noisy data. The noisy data is images with random noise added, which is regarded as a in-distribution data. The size of training and validation data for logistic regression is 5% each, and the rest of data is used as test data. For the detailed configuration, please refer to the original or our implementation.

In-dist	OOD	Detection of test data				Detection of unseen data			
		original [20]	marginal (ours)	original + ODIN	marginal + ODIN	original [20]	marginal (ours)	original +ODIN	marginal +ODIN
CIFAR-10 (DenseNet)	SVHN	98.3	97.7	99.4	99.4	—	—	—	—
	TinyImagenet	99.0	99.2	99.6	99.6	96.5	92.9	98.9	98.8
	LSUN	99.3	99.4	99.8	99.8	98.4	93.0	99.5	99.4
CIFAR-100 (DenseNet)	SVHN	97.1	97.4	98.8	99.0	—	—	—	—
	TinyImagenet	97.4	97.6	98.9	98.9	71.9	74.1	86.4	86.3
	LSUN	97.9	98.0	98.9	99.2	68.8	71.6	84.6	84.5
SVHN (DenseNet)	CIFAR-10	99.0	98.5	99.0	98.8	—	—	—	—
	TinyImagenet	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
	LSUN	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
CIFAR-10 (ResNet)	SVHN	99.1	99.1	99.4	99.3	—	—	—	—
	TinyImagenet	99.5	99.5	99.5	99.5	87.8	89.4	98.3	96.4
	LSUN	99.7	99.8	99.7	99.8	86.1	88.1	98.4	96.9
CIFAR-100 (ResNet)	SVHN	98.4	97.6	98.8	98.8	—	—	—	—
	TinyImagenet	98.2	98.3	98.1	98.6	58.4	85.1	65.5	70.0
	LSUN	98.2	98.4	98.2	98.4	43.4	76.7	51.9	56.4
SVHN (ResNet)	CIFAR-10	99.3	99.2	99.3	99.3	—	—	—	—
	TinyImagenet	99.9	99.9	99.9	99.9	99.7	99.7	99.7	99.7
	LSUN	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

Table 5: AUROC for OoD detection on neural classifiers using the marginal Mahalanobis confidence scores (marginal) and the Mahalanobis confidence scores by Lee et al. [20] (original). Here, we also show the results for the combined method of the original Mahalanobis distance and ODIN. It is also as effective as the combined method of the marginal Mahalanobis distance and ODIN.

In-dist	OOD	Detection of unseen data				Detection of unseen data			
		original [20]	marginal (ours)	original + ODIN	marginal + ODIN	original [20]	marginal (ours)	original +ODIN	marginal +ODIN
CIFAR-10 (DenseNet)	SVHN	97.8	90.3	99.2	98.2	97.9	78.8	99.3	96.7
	TinyImagenet	—	—	—	—	98.9	99.0	99.7	99.7
	LSUN	99.3	99.5	99.7	99.8	—	—	—	—
CIFAR-100 (DenseNet)	SVHN	91.6	91.5	95.8	95.7	92.0	93.0	96.0	96.7
	TinyImagenet	—	—	—	—	97.5	97.3	98.8	99.1
	LSUN	97.9	98.0	98.9	99.0	—	—	—	—
SVHN (DenseNet)	CIFAR-10	98.7	98.3	98.7	98.3	98.6	98.0	98.5	98.4
	TinyImagenet	—	—	—	—	99.9	99.8	99.9	99.9
	LSUN	99.9	99.9	99.9	99.9	—	—	—	—
CIFAR-10 (ResNet)	SVHN	96.3	94.2	96.3	94.2	96.1	93.2	96.1	93.8
	TinyImagenet	—	—	—	—	99.4	99.4	99.4	99.4
	LSUN	99.7	99.7	99.7	99.7	—	—	—	—
CIFAR-100 (ResNet)	SVHN	90.9	92.1	92.7	89.9	92.5	90.1	92.6	90.2
	TinyImagenet	—	—	—	—	98.0	98.0	98.0	98.0
	LSUN	98.4	98.6	98.3	98.7	—	—	—	—
SVHN (ResNet)	CIFAR-10	99.3	99.3	99.3	99.3	98.6	98.4	98.6	98.4
	TinyImagenet	—	—	—	—	99.4	99.4	99.4	99.4
	LSUN	99.9	99.9	99.9	99.9	—	—	—	—

Table 6: Unseen data detection performance of detectors trained on the second and third OoD data.

C Additional Results

We provide additional experimental results for OoD and adversarial examples detection.

C.1 OoD Detection

Table 5 shows results similar to those provided in the main paper, but we also provide the combined method of the original Mahalanobis score and ODIN. It is as effective as the combined method of our marginal Mahalanobis score and ODIN. Table 6 shows unseen data

In-dist	OOD	Detection of test data				Trained on FGSM			
		original [24]	marginal (ours)	original + ODIN	marginal + ODIN	original [24]	marginal (ours)	original +ODIN	marginal +ODIN
CIFAR-10 (DenseNet)	SVHN	98.3	97.7	99.4	99.4	97.5	96.1	97.5	96.1
	TinyImagenet	99.0	99.2	99.6	99.6	98.8	98.6	98.8	98.6
	LSUN	99.3	99.4	99.8	99.8	99.2	99.1	99.2	99.1
CIFAR-100 (DenseNet)	SVHN	97.1	97.4	98.8	99.0	89.5	87.0	94.6	96.6
	TinyImagenet	97.4	97.6	98.9	98.9	97.3	97.2	97.9	94.1
	LSUN	97.9	98.0	98.9	99.2	98.0	97.8	98.0	92.6
SVHN (DenseNet)	CIFAR-10	99.0	98.5	99.0	98.8	98.7	93.7	89.4	84.0
	TinyImagenet	99.9	99.9	99.9	99.9	99.9	99.5	99.0	98.4
	LSUN	99.9	99.9	99.9	99.9	99.9	99.7	99.5	99.3
CIFAR-10 (ResNet)	SVHN	99.1	99.1	99.4	99.3	67.5	88.4	38.2	34.7
	TinyImagenet	99.5	99.5	99.5	99.5	94.9	99.0	95.5	95.1
	LSUN	99.7	99.8	99.7	99.8	98.0	99.6	98.3	98.0
CIFAR-100 (ResNet)	SVHN	98.4	97.6	98.8	98.8	93.2	78.4	93.3	87.7
	TinyImagenet	98.2	98.3	98.1	98.6	76.3	72.2	76.2	74.9
	LSUN	98.2	98.4	98.2	98.4	65.4	61.4	65.3	64.1
SVHN (ResNet)	CIFAR-10	99.3	99.2	99.3	99.3	97.8	97.4	97.8	97.5
	TinyImagenet	99.9	99.9	99.9	99.9	99.3	99.3	99.3	99.3
	LSUN	99.9	99.9	99.9	99.9	99.9	99.8	99.9	99.8

Table 7: AUROC for OoD detection on neural classifiers using the marginal Mahalanobis confidence scores (marginal) and the Mahalanobis confidence scores by Lee et al. [24] (original). We evaluate detectors trained on adversarial examples detection for FGSM [24] as this setting was evaluated in Lee et al. [24]. In some cases, the combined methods are worse in this setting. This result is understandable because ODIN is directly based on the prediction confidence acquired from the output of softmax function, which is attacked by adversarial attacks.

detection performance of detectors trained on the second and third OoD data.

Table 7 shows OoD detection performances of detectors trained on adversarial examples detection for FGSM, which was provided in Lee et al. [24]. In this setting, the combined methods of the Mahalanobis score and ODIN are worse in some cases. This result is understandable because ODIN is directly based on the prediction confidence acquired from the output of softmax function, which would be fooled by adversarial attacks. Therefore, the confidence score of ODIN trained on adversarial examples detection may not be applicable to OoD detection for unseen data. However, as we demonstrate in the main paper, the combined method can effectively detect unseen data when it is trained to detect realistic OoD data.

C.2 Adversarial Examples Detection

We observe that ODIN and LID harm robustness of the model in some cases when they are combined with the Mahalanobis score. For ODIN, this result is understandable because adversarial attacks directly leverage the prediction confidence, which is utilized by ODIN as explained above. Therefore, ODIN may not effectively detect unseen attacks and harms the detection performance.

D Applicability and Limitations

Lee et al. [24] has suggested that their confidence score may be applied to other architectures such as few-shot learning. Our experiments show that the situation is not that simple; the method does not always work effectively on metric learning. This observation suggests

Model	Dataset	Score	Detection of known attack				Detection of unknown attack		
			FGSM	BIM	DeepFool	CW	BIM	DeepFool	CW
DenseNet	CIFAR-10	LID	98.3	99.7	85.0	80.3	94.0	70.4	68.8
		Original	99.9	99.8	83.4	84.9	99.5	83.2	85.7
		Marginal (ours)	99.9	99.8	81.1	82.3	99.2	79.3	81.2
		Marginal + ODIN	99.9	100.0	88.4	85.7	99.2	79.3	81.2
		Marginal + LID	99.9	99.9	87.9	89.6	98.7	76.9	79.5
	CIFAR-100	LID	99.3	98.1	69.8	69.6	78.7	68.2	68.8
		Original	99.9	99.3	77.6	82.7	98.7	77.0	80.2
		Marginal (ours)	99.9	99.2	76.9	81.6	98.1	74.3	78.7
		Marginal + ODIN	99.6	99.2	84.4	83.4	9.0	78.9	65.7
		Marginal + LID	99.8	99.2	79.7	84.8	63.6	75.2	75.5
	SVHN	LID	99.3	94.8	91.9	94.1	92.0	80.1	81.2
		Original	99.8	99.3	95.1	96.5	99.2	94.2	96.4
		Marginal (ours)	99.9	99.0	92.2	95.0	98.8	90.2	93.4
		Marginal + ODIN	99.8	99.3	95.6	97.7	94.0	80.9	78.5
		Marginal + LID	99.9	99.3	95.0	97.6	98.7	89.8	94.4
ResNet	CIFAR-10	LID	99.7	96.6	88.5	83.0	94.0	73.6	78.1
		Original	100.0	99.6	91.4	95.9	99.0	80.6	94.3
		Marginal (ours)	100.0	99.6	91.0	95.8	99.5	86.2	95.5
		Marginal + ODIN	99.9	99.9	92.0	96.0	98.2	79.7	91.6
		Marginal + LID	100.0	99.7	91.7	96.1	97.4	82.8	89.3
	CIFAR-100	LID	98.4	97.0	71.8	78.4	59.8	65.1	76.2
		Original	99.8	96.7	85.3	92.0	96.4	81.9	91.0
		Marginal (ours)	99.8	97.7	73.5	90.4	97.1	69.8	87.5
		Marginal + ODIN	99.8	98.8	87.7	91.9	97.2	70.9	89.5
		Marginal + LID	99.7	98.8	78.8	91.8	89.8	64.5	78.7
	SVHN	LID	97.8	90.6	92.2	88.3	82.2	68.5	75.1
		Original	99.6	97.1	95.7	92.2	95.8	73.9	87.9
		Marginal (ours)	99.6	97.2	95.2	91.9	95.3	70.2	86.2
		Marginal + ODIN	99.6	97.8	95.7	92.0	95.6	69.5	87.2
		Marginal + LID	99.7	97.8	95.8	93.6	96.0	70.2	88.6

Table 8: AUROC for adversarial example detection on neural classifiers using LID [24], the class conditional Mahalanobis distance-based score by Lee et al. [40] (Original), and our marginal Mahalanobis distance-based score (Marginal). Here, we also evaluate combined methods, but they sometimes do not work for unseen attacks.

that the Mahalanobis distance-based confidence score utilizes a unique property of ordinary neural classifiers, so caution is needed when applying the method to other architectures.

Settings We use the implementation by Chen et al. [8] ². We evaluate two types of distance-based metric learning: Prototypical Networks [39] and Matching Networks [43] with four-layer convolutional networks and a simplified ResNet (Conv-4 and ResNet-10 in Chen et al. [8]). In this experiment, we use two pairs of data sets: CUB-200-2011 [44] vs. mini-ImageNet [8, 35, 43], and Omniglot vs. EMNIST [8]. For both of the pairs, the models are trained on “base” data, and anomaly detection is evaluated on “novel” data of training and OoD data. How the data sets are split are explained in Chen et al. [8]. For comparison, we evaluate neural classifiers using the same architectures and cross entropy as a loss function.

Results Table 9 shows OoD detection performance of the Mahalanobis distance-based confidence score evaluated on distance-based metric learning architectures. We only use the final features, without using feature ensembles nor input pre-processing. Since in-distribution data sets evaluated here have too many labels, we only evaluate our marginal method. For CUB vs. mini-ImageNet, it seems that neural classifiers and metric learning models exhibit similar OoD behavior on the final features; the Mahalanobis distance outperforms the Euclidean distance. However, metric learning models exhibit unexpected behaviors for Omniglot vs. EMNIST; the detection performance of the Euclidean distance is better on the metric learn-

²<https://github.com/wyharveychen/CloserLookFewShot>

Model	Method	Score	in-dist	OoD	TNR at TPR 95%	AUROC	Detection Accuracy
Conv	(Classifier)	Maha	Omniglot	EMNIST	98.27	80.65	75.65
	(Classifier)	Eucl			95.77	47.48	58.83
	ProtoNet	Maha			97.80	80.34	72.84
	ProtoNet	Eucl			98.05	84.71	76.85
	MatchNet	Maha			96.02	57.47	60.04
	MatchNet	Eucl			98.35	72.43	75.09
Conv	(Classifier)	Maha	CUB	ImageNet	9.34	60.21	57.69
	(Classifier)	Eucl			8.57	52.73	52.38
	ProtoNet	Maha			32.93	61.97	58.92
	ProtoNet	Eucl			16.22	55.68	54.94
	MatchNet	Maha			25.31	64.07	61.69
	MatchNet	Eucl			12.50	53.46	54.17
ResNet	(Classifier)	Maha	CUB	ImageNet	14.10	51.60	54.20
	(Classifier)	Eucl			20.87	50.50	51.01
	ProtoNet	Maha			21.07	61.93	59.99
	ProtoNet	Eucl			19.58	46.49	50.10
	MatchNet	Maha			35.51	67.59	63.67
	MatchNet	Eucl			21.36	52.07	52.43

Table 9: Marginal Mahalanobis distance-based OoD detection on distance-based metric learning models. We evaluate Prototypical Networks (ProtoNet), Matching Networks (MatchNet), and ordinary neural classifiers (Classifier). “Conv” and “ResNet” denote Conv-4 and ResNet-10 in Chen et al. [9]. “Maha” and “Eucl” denote the Mahalanobis and Euclidean distance.

ing models for this pair of data sets. Our experimental results suggest that the intermediate features of distance-based metric learning models do not always have the property that principal components with small explained variance provide information for anomaly detection. This observation suggests that the Mahalanobis distance-based confidence score utilizes the unique property of ordinary neural classifiers, and its performance may depend on model architecture along with the choice of in-distribution and OoD data. Furthermore, for CUB vs. ImageNet, Table 9 shows that detection performance on the neural classifier and Matching Networks is influenced by model architecture. In conclusion, caution is required when applying the Mahalanobis distance-based confidence score to new architectures or data sets.

E Analysis of Input Pre-processing

Lee et al. [24] has proposed the following input pre-processing:

$$\hat{\mathbf{x}} = \mathbf{x} + \varepsilon \text{sign}(\nabla_{\mathbf{x}} M(\mathbf{x})) \quad (10)$$

where ε is the magnitude of noise. While this considerably improves the detection performance, the mechanism of its contribution has not been analyzed well. This method is similar to the pre-processing by Liang et al. [22] that takes the gradient of the cross-entropy. For cross-entropy loss, Liang et al. [22] demonstrated that the norms of the gradients for in-distribution data tend to be larger than those for OoD data, so the pre-processing increases confidence for in-distribution data more than that for OoD data. However, in the input pre-processing for the Mahalanobis distance, we observe the opposite behavior. Figure 3 (a) shows that L1 norms of the differences between the original and pre-processed features on the penultimate layer for the class conditional Mahalanobis distance. It shows that L1 norms of SVHN (OoD data) tend to be larger than those for CIFAR-10 (in-distribution data). As a result, the input pre-processing lowers the Mahalanobis distance and increase confidence for

OoD inputs more than for in-distribution data. However, as shown in Figure 3 (b) and (c), the mean Mahalanobis distance on the final features of SVHN increase much faster than that of CIFAR-10 as the magnitude increases after it reaches the minimum value. For $\varepsilon = 0.01$, the mean Mahalanobis distance of CIFAR-10 is still lower than that for $\varepsilon = 0$, while that of SVHN is much larger than the original value. As a result, the detection performance is improved from 98.37 to 99.14 in AUROC. These results and Figure 3 (d) suggest that a proper magnitude that increases the Mahalanobis distances of OoD inputs more than those of in-distribution data, the detection performance will be improved.

We provide further experimental results analyzing input pre-processing by Lee et al. [20]. Figure 3 to 20 show that input pre-processing does not always improve detection performance. When L1 norms of input pre-processing for OoD inputs on the final features are sufficiently larger than these for in-distribution inputs, detection performance will be improved (Figure 3, 6, 15). However, in some cases, input pre-processing does not improve performance as it does not make the Mahalanobis distance of OoD inputs sufficiently large. When L1 norms of in-distribution inputs are larger than these of OoD inputs, i.e. the situation corresponding to what is discussed in Liang et al. [12], detection performance does not improve (Figure 13, 14, 16, 17). To sum up, our experiments show that the effect of input pre-processing depends on the network architecture and choice of data set. However, we demonstrate that the detection performance is improved when OoD inputs on the final features becomes larger than these for in-distribution inputs which is different from previous discussion for input pre-processing for ODIN.

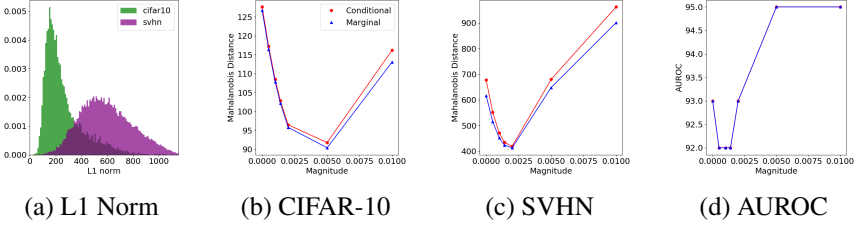


Figure 3: Model: ResNet In: CIFAR-10 Out: SVHN

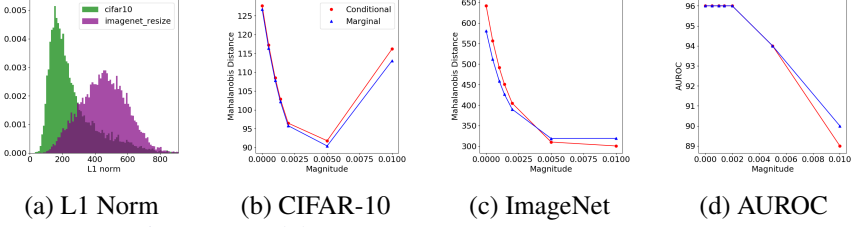


Figure 4: Model: ResNet In: CIFAR-10 Out: ImageNet

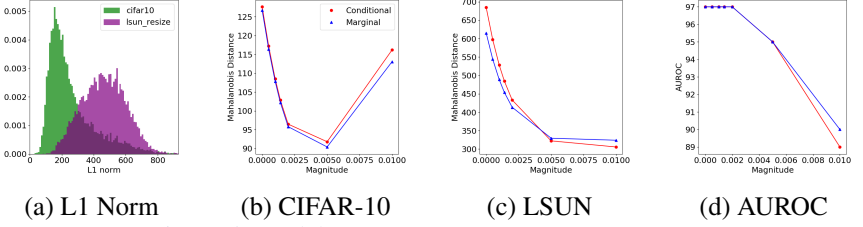


Figure 5: Model: ResNet In: CIFAR-10 Out: LSUN

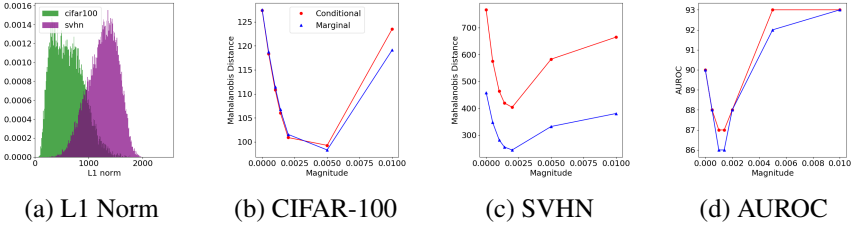


Figure 6: Model: ResNet In: CIFAR-100 Out: SVHN

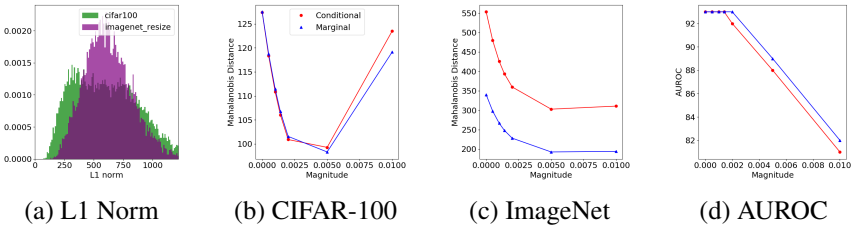


Figure 7: Model: ResNet In: CIFAR-100 Out: ImageNet

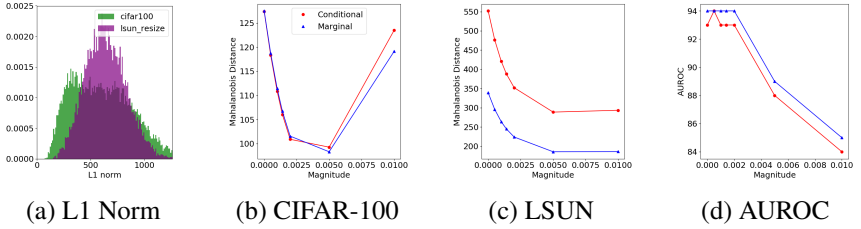


Figure 8: Model: ResNet In: CIFAR-100 Out: LSUN

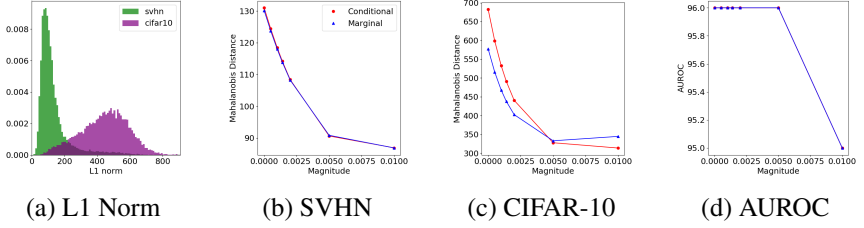


Figure 9: Model: ResNet In: SVHN Out: CIFAR-10

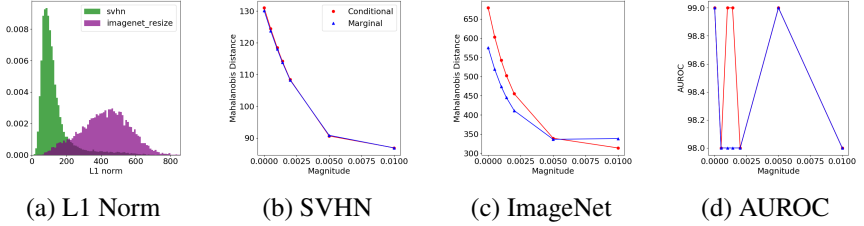


Figure 10: Model: ResNet In: SVHN Out: ImageNet

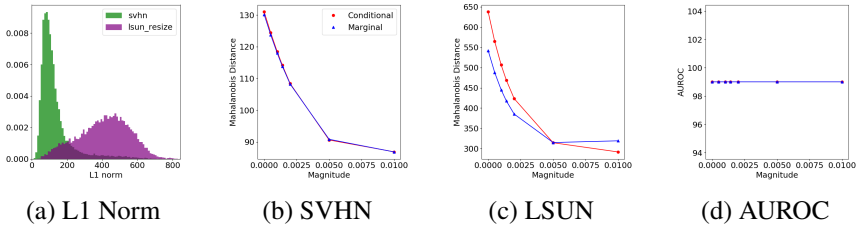


Figure 11: Model: ResNet In: SVHN Out: LSUN

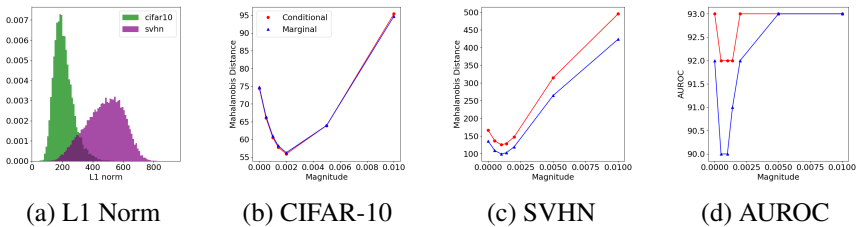
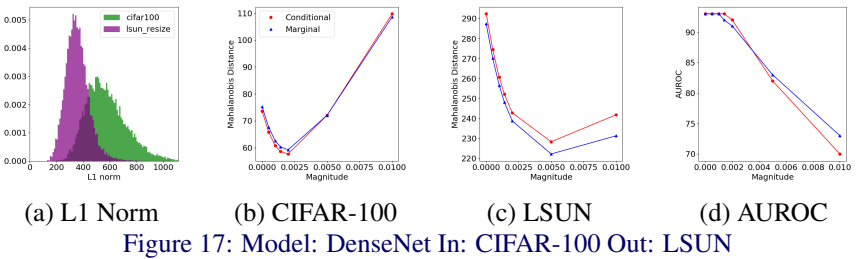
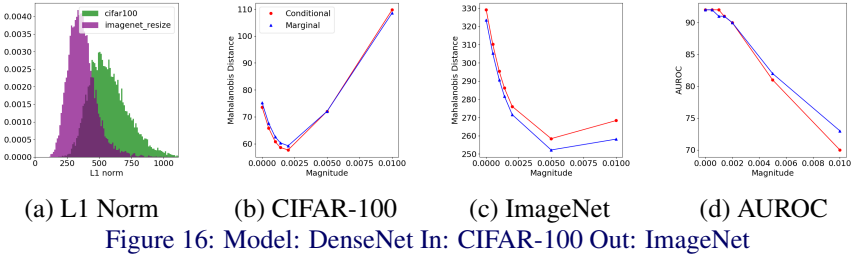
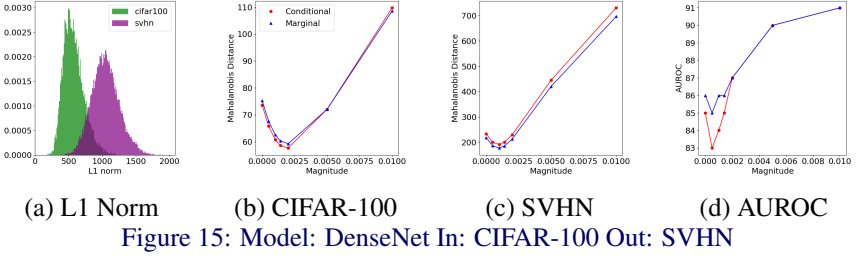
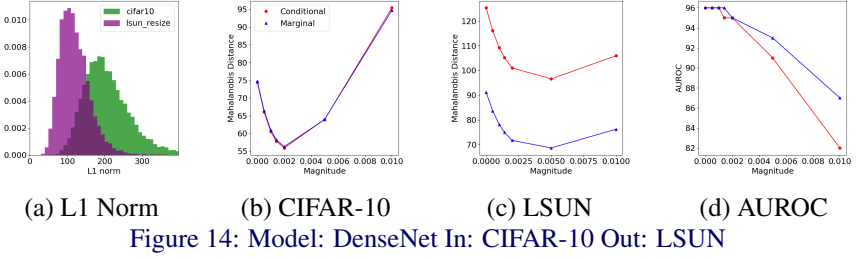
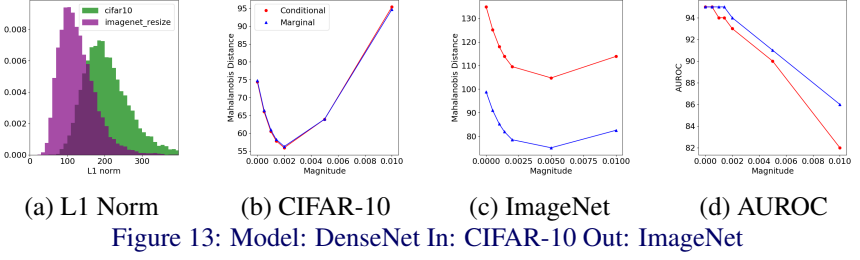


Figure 12: Model: DenseNet In: CIFAR-10 Out: SVHN



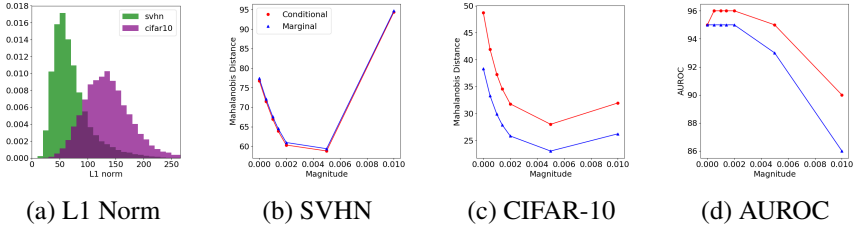


Figure 18: Model: DenseNet In: SVHN Out: CIFAR-10

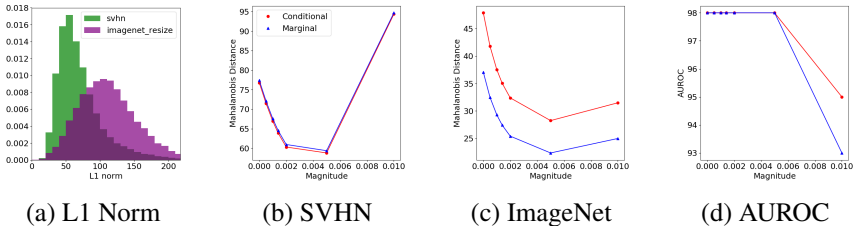


Figure 19: Model: DenseNet In: SVHN Out: ImageNet

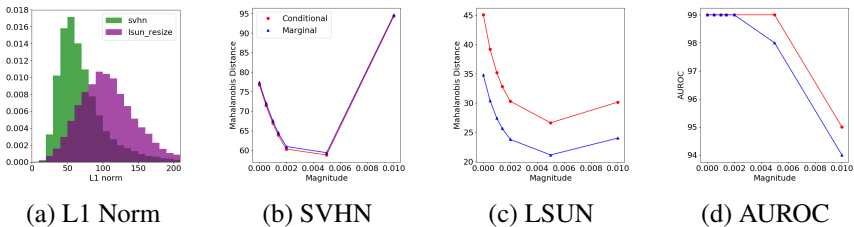


Figure 20: Model: DenseNet In: SVHN Out: LSUN