

The Local Information Cost of Distributed Graph Spanners

PETER ROBINSON*, Augusta University, USA

We introduce the *local information cost* (LIC), which quantifies the amount of information that nodes in a network need to learn when solving a graph problem. We show that the local information cost presents a natural lower bound on the communication complexity of distributed algorithms. For the synchronous CONGEST KT_1 model, where each node has initial knowledge of its neighbors' IDs, we prove that $\Omega\left(\frac{\text{LIC}_\gamma(P)}{\log \tau \log n}\right)$ bits are required for solving a graph problem P with a τ -round algorithm that errs with probability at most γ . Our result is the first lower bound that yields a general trade-off between communication and time for graph problems in the CONGEST KT_1 model.

We demonstrate how to apply the local information cost by deriving a lower bound on the communication complexity of computing a spanner with multiplicative stretch $2t - 1$ that consists of at most $O(n^{1+\frac{1}{t}+\epsilon})$ edges, where $\epsilon = O(1/t^2)$. More concretely, we show that any $O(\text{poly}(n))$ -time spanner algorithm must send at least $\tilde{\Omega}\left(\frac{1}{t^2} n^{1+1/2t}\right)$ bits. Previously, only a trivial lower bound of $\tilde{\Omega}(n)$ bits was known for this problem.

A consequence of our lower bound is that achieving both time- and communication-optimality is impossible when designing a distributed spanner algorithm. In light of the work of King, Kutten, and Thorup (2015), this shows that computing a minimum spanning tree can be done significantly faster than finding a spanner when considering algorithms with $\tilde{O}(n)$ communication complexity. Our results also imply time complexity lower bounds for these problems in the node-capacitated clique of Augustine, Ghaffari, Gmyr, Hinnehal, Scheideler, Kuhn, and Li (2019), and in the push-pull gossip model with limited bandwidth, as studied by Haeupler, Mohapatra, and Su (2018).

CCS Concepts: • **Theory of computation** → **Models of computation**; **Distributed algorithms**;

1 INTRODUCTION

Designing fast and communication-efficient distributed algorithms is crucial for many applications. Modern-day examples include building large-scale networks of resource-restricted devices and processing massive data sets in a distributed system. When analyzing the performance of distributed algorithms, communication efficiency is usually quantified by the message complexity, i.e., the total number of messages sent by the algorithm, and the communication complexity, which refers to the total number of bits sent throughout the execution. Recently, there has been significant interest in obtaining communication-efficient algorithms for solving fundamental graph problems in the message passing setting. Due to [KPP⁺15], it is known that, even for very basic problems such as single-source broadcast and constructing a spanning tree, $\Omega(m)$ messages (and bits) are required in an n -node graph G that has m edges, assuming that nodes are initially unaware of the IDs of their neighbors and messages are addressed using port numbers rather than specific IDs. This model is called the *clean network model* [Pel00] or *port numbering model* [Suo13] (if nodes do not have IDs), and several time- and communication-optimal algorithms have been obtained that match the $\Omega(m)$ barrier, e.g., for minimum spanning trees (MST) [PRS17, Elk17], approximate single-source shortest paths [HHW18], and leader election [KPP⁺15].

Since the clean network model does not capture the more realistic setting of IP networks where nodes are aware of the IDs of their peers initially, there has been a growing interest in studying communication-efficient algorithms under the KT_1 *assumption* [AGPV90, Pel00], where nodes have unique IDs of length $\Theta(\log n)$ and each node knows the IDs of its neighbors in G from the start. [KKT15] were the first to present a minimum spanning tree (MST) algorithm that runs

*A short version of this paper appeared in the proceedings of the 32th ACM-SIAM Symposium on Discrete Algorithms (SODA'21).

in $\tilde{O}(n)$ rounds and sends $\tilde{O}(n)$ bits in the CONGEST model [Pel00] under the KT_1 assumption by using linear graph sketching techniques. More recently, new distributed algorithms have been proposed for several graph problems in this setting; for instance, algorithms for single-source broadcast [GK18], graph verification problems [GP18], and computing an MST in the asynchronous setting [MK17, MK19] have been obtained that achieve a message complexity of $o(m)$. A second motivation for studying communication complexity stems from the area of distributed large-scale graph processing: For instance, in [KNPR15] it is shown how to convert any time- and communication-efficient CONGEST KT_1 algorithm to a fast k -machine algorithm.

A somewhat counterintuitive feature of the KT_1 assumption is that it allows solving *any* graph problem using only $\tilde{O}(n)$ bits of communication by leveraging silence to convey information, albeit at the cost of increasing the time complexity to an exponential number of rounds: If we first construct a rooted spanning tree using the algorithm of [KKT15], we can then employ a simple time-encoding scheme using $\tilde{O}(n)$ bits to collect the entire graph topology at the root, who locally solves the problem. Subsequently, the root can disseminate the result of the computation (no matter the output size) to all nodes again via time-encoding.¹ Consequently, any lower bound on the required communication must be conditional on the algorithm terminating in a sufficiently small number of rounds; note that this stands in contrast to the clean network model where the $\Omega(m)$ barrier holds for all algorithms that terminate in a finite number of rounds. Hence, it is not too surprising that the stronger guarantees provided by the KT_1 assumption make it significantly harder to show meaningful lower bounds on the required communication.

While the above-mentioned work assumes the synchronous model, where nodes can send messages of $O(\log n)$ bits over each link in each round, communication complexity has also been studied in the asynchronous CONGEST KT_1 model [MK18, MK19], which, analogously to its synchronous counterpart, assumes that a node can send a message of size $O(\log n)$ bits whenever it is scheduled to take a step. Even though time-encoding is not possible in the asynchronous model due to the absence of lock-step synchronicity, the state of the art is that nontrivial lower bounds on the required communication for many graph problems are still lacking even in the asynchronous setting.

In this paper, we introduce a new way of quantifying the communication complexity of distributed graph problems, and our main result is a lower bound on the necessary communication for constructing a spanner with a distributed algorithm. Given an unweighted graph G , a multiplicative k -spanner [PS89, AGPV90] is a subgraph $S \subseteq G$, such that the distance in S between any pair of vertices is at most k times their distance in the original graph G . Fast distributed algorithms for constructing a $(2t - 1)$ -spanner with $O(n^{1+1/t} \log n)$ edges with high probability² are well known, e.g., see [EN19]. Moreover, this size-stretch ratio is believed to be close to optimal due to the girth conjecture of Erdős [Erd63], namely that there exist graphs with $\Omega(n^{1+1/t})$ edges and girth $2t + 1$. We point out that all existing distributed spanner algorithms for the CONGEST model send at least $\Omega(m)$ bits in the worst case on graphs having m edges. On the other hand, for the LOCAL model, [BEIK19] showed that it is possible to obtain a spanner in constant rounds with $O(n^{1+\epsilon})$ edges and constant stretch by sending only $O(n^{1+\epsilon})$ messages. Note, however, that there is no bandwidth restriction in the LOCAL model and hence their result does not imply an upper bound on the communication complexity. Since a spanner can be used as a communication backbone to solve other problems such as single-source broadcast with $o(m)$ bits of communication, we know from the existing lower bound of [KPP⁺15] that, in the clean network model, constructing a spanner is subject to the above-mentioned barrier of $\Omega(m)$ on the message complexity; we note that the $\Omega(m)$ lower bound for spanners was also pointed out in [Elk07]. In other words, the existing distributed spanner algorithms are near-optimal with respect to time, as well as communication complexity in the clean network model,

¹For completeness, we provide a more detailed description of this time-encoding procedure in Appendix A.

²We say that an event happens *with high probability* if it occurs with probability at least $1 - \frac{1}{n}$.

for small values of t . So far, however, a lower bound on their communication complexity under the KT_1 assumption has been elusive. Our work is a first step towards resolving this open question.

1.1 Our Results

In this work, we initiate a systematic approach to proving lower bounds on the required communication for graph problems under the KT_1 assumption. Our main results are as follows:

- In Section 3, we define the *local information cost* (LIC) of solving a problem P with error at most γ , which we denote by $\text{LIC}_\gamma(P)$, and show that it represents a lower bound on the communication complexity in the asynchronous message passing model, as well as a lower bound of $\Omega\left(\frac{\text{LIC}_\gamma(P)}{\log \tau \log n}\right)$ bits for τ -round algorithms in the synchronous CONGEST KT_1 model. To the best of our knowledge, this is the first lower bound that provides a general trade-off between communication and time in this setting. As the local information cost can be characterized for any graph problem P , we believe these results to be of independent interest. Moreover, we show that the local information cost implies a time complexity lower bound of $\Omega\left(\frac{\text{LIC}_\gamma(P)}{n \log^4 n}\right)$ rounds in the node-capacitated clique [AGG⁺19], and $\Omega\left(\frac{\text{LIC}_\gamma(P)}{n \log^3 n}\right)$ rounds in the push-pull gossip model where nodes send messages of size $O(\log n)$.³
- We show that constructing a $(2t - 1)$ -spanner with $O(n^{1+\frac{1}{t}+\epsilon})$ edges, for any $\epsilon \leq \frac{1}{64t^2}$, incurs a high local information cost, resulting in a communication complexity of $\Omega\left(\frac{n^{1+1/2t}}{t^2 \log n}\right)$ bits in the CONGEST KT_1 model, for any algorithm that terminates in $O(\text{poly}(n))$ rounds (Theorem 3), which is the first nontrivial lower bound for a sparse subgraph problem in this setting. This reveals a sharp contrast to the known fast $(2t - 1)$ -spanner algorithms such as [BS07], which takes only $O(t^2)$ rounds and hence does not depend on n at all, but sends $\tilde{\Omega}(t \cdot m)$ bits. Interestingly, our lower bound result holds even in the synchronous congested clique, thus showing that the availability of additional communication links does not help in achieving simultaneous time- and message-optimality. We obtain these results by proving a lower bound on the local information cost for constructing a spanner in the asynchronous KT_1 clique. In the proof, we use tools from information theory to quantify the information that many nodes need to learn about their incident edges and then apply known synchronization techniques.
- As a consequence of the above, we obtain Corollary 2, which states that it is impossible to obtain a spanner algorithm that is both time- and communication optimal.
- Our technique also implies a *time* complexity lower bound of $\Omega\left(\frac{n^{1/2t}}{t^2 \log^4 n}\right)$ rounds for constructing a $(2t - 1)$ -spanner in the node-capacitated clique of [AGG⁺19] (see Theorem 4). Similarly, we obtain a lower bound of $\Omega\left(\frac{n^{1/2t}}{t^2 \log^3 n}\right)$ rounds in the push-pull gossip model with restricted bandwidth (see Theorem 5).

1.2 Technical Approach of the Lower Bound for Graph Spanners

To obtain a lower bound on the local information cost of computing a $(2t - 1)$ -spanner, we consider a graph G on two sets of nodes U and V , each of size $n/2$. The topology of G consists of some static edges and a smaller number of randomly sampled edges. The static edges are obtained by connecting U and V by many disjoint copies of a complete bipartite graph, which we call the *regions* of G . In contrast, the random edges are independently sampled only on U and loosely interconnect the regions on U 's side (see Figure 1 on Page 32 where static edges are blue and random edges are

³Much of the classic literature gossip model does not restrict the message sizes. However, more recent work (e.g. [HMS18]) considers algorithms in the gossip model where the size of messages is limited to $O(\log n)$ bits.

red). The intuition behind this construction is that from the point of view of a node $u \in U$, most of its incident static edges cannot be part of a $(2t - 1)$ -spanner, whereas most of u 's incident random edges are *crucial* for maintaining the stretch bound. That is if a random edge (u, v) is removed, and u and v are not part of the same region of G , then it is unlikely that there is a path of length at most $(2t - 1)$ from u to v , due to the topological structure of G .

It is, of course, possible (and even likely when considering existing algorithms such as [BS07]) that some nodes end up including most of their incident edges as part of the spanner. Nevertheless, most nodes in U need to restrict their output to roughly their (expected) number of incident random edges to guarantee the bound on the size of the spanner. For the rest of this overview, we focus on this set of *sparse nodes*. While the lower bound graph construction assures us that the crucial random edges must be part of the spanner, we also need to quantify the information that u needs to receive in order to distinguish its static edges from its random ones. Initially, u 's knowledge is limited to its local view of the graph topology, consisting only of its incident edges and the IDs of its neighboring nodes. Assuming the algorithm terminates correctly, the (initially) high entropy regarding which of u 's incident edges are crucial random edges must be reduced significantly over the course of the algorithm.

1.3 Can We Use 2-Party Communication Complexity?

It is unclear whether we can obtain a communication complexity bound for spanners under the KT_1 assumption via the standard route of two-party communication complexity. First off, much of the work in this setting (e.g. [FWY20]) assumes that the edges are partitioned between Alice and Bob, which makes it challenging to apply these results to the KT_1 setting, where edges are always shared between nodes that are neighbors. On the other hand, if we consider the vertex-partition model, where the vertices and their incident edges are distributed between Alice and Bob (with shared edges being duplicated), it is possible to simulate the 3-spanner algorithm of [BS07] by using only $O(n \log n)$ bits of communication, no matter how dense the input graph is: Initially, Alice and Bob locally sample the clusters required by the first phase of the algorithm as follows: They each add all nodes with a degree of at most \sqrt{n} to their respective set of clusters. Then, they both locally sample each of their remaining vertices independently with probability $\Theta(\log n / \sqrt{n})$. This ensures that every node that has a degree of at least \sqrt{n} will have a cluster neighbor with high probability. Alice and Bob then exchange their computed cluster assignments using $O(n \log n)$ bits of communication. In the second phase of [BS07], for every vertex, we need to add an edge to each of its neighboring cluster. Since Alice and Bob both know the cluster membership of all nodes, they can simulate this step without further communication by using the simple rule⁴ that, for each vertex v and each of its adjacent cluster c , we add a spanner edge to the neighbor of v that has the smallest ID among all neighbors that are members of c .

1.4 Additional Related Work

Complexity bounds on the message complexity for distributed graph algorithms have been shown for a variety of graph problems under the KT_0 assumption such as computing a maximal independent set [PPP⁺17] and vertex coloring. The KT_1 assumption was introduced in [AGPV90], where they show a message complexity of $\Omega(m)$ for comparison-based broadcast algorithms, where m is the number of edges in the graph. More recently, [PPPR21], show several message complexity lower bounds that apply for comparison-based algorithms for symmetry breaking problems, as well as a general lower bound of $\Omega(n)$ message complexity for $O(1)$ -ruling sets.

⁴A similar rule was used to simulate the algorithm of [BS07] in the LCA model, see [PRVY19].

Numerous hardness results on the time complexity are known in the CONGEST model, the first of which was the work in [SHK⁺12]. Here, we focus only on the works that are most closely related to graph spanners. [CHD18] show a hardness result for the directed k -spanner problem. In particular, they show that any α -approximation requires at least $\Omega\left(\frac{\sqrt{n}}{\sqrt{\alpha \log n}}\right)$ rounds. For computing the network diameter, [FHW12] show that a linear number of rounds are necessary. While the work of [CHD18, FHW12] is concerned with *time* complexity, they can be extended to yield message complexity results via the synchronization theorem of [PPS16].

Several ways of measuring the information learned by the parties when executing an algorithm have been defined in the information and communication complexity literature. Closely related to our notion of local information cost is the *internal information cost* that has been studied extensively in the 2-player model of communication complexity (see [BBCR13, CSWY01, BYJKS04]): Consider inputs X and Y of Alice and Bob respectively that are sampled according to some joint distribution μ and let Π denote the transcript of a 2-party protocol. The *internal information cost with respect to μ* is defined as $\mathbf{I}[X : \Pi \mid Y] + \mathbf{I}[Y : \Pi \mid X]$. This corresponds to the expected amount of information that Alice learns about the input of Bob (and vice versa) from the transcript of the protocol.

In contrast, the *external information cost* [CSWY01] measures the amount of information that the transcript reveals to an external observer (without any prior knowledge) about the parties' inputs. In [KOS17], it is shown how to generalize the external information cost of [BBCR13] to the multiparty setting in the shared blackboard model, which measures the amount of information that an external observer learns about the players' inputs. [BEO⁺13] define the *switched information cost* for the multiparty number-in-hand message passing model, which, in a sense, combines internal and external information cost. Their model is similar to our setting, with the main difference being that players communicate only through a coordinator. They use the switched information cost to obtain a tight bound of $\Omega(kn)$ on the communication complexity of set disjointness.

1.5 Roadmap

In Section 2, we define the distributed computing models and complexity measures. In Section 3, we introduce the local information cost and show how it relates to communication complexity. In Section 4, we define the lower bound graph for graph spanners and prove certain reachability properties that are necessary for obtaining a lower bound on the local information cost of constructing spanners in Section 5.

2 DISTRIBUTED COMPUTING MODELS

For the main technical part of the paper, we consider an asynchronous network, where n nodes execute a distributed algorithm and communicate by sending messages across point-to-point links. The set of nodes, together with the available communication links, form a clique, and we refer to this model as the *asynchronous clique*. Since we are interested in studying graph problems in this setting, we consider a graph G with m edges as the input, which is a spanning subgraph of the clique defined above. Thus, each node of the communication network (i.e. clique) is associated with one vertex in G and its incident edges. We equip the nodes with unique identifiers (IDs) chosen from an integer range of small polynomial size such that an ID can be represented using $\Theta(\log n)$ bits. Throughout this work, we consider the KT_1 assumption introduced by [AGPV90]. In our setting, the KT_1 assumption means that each node starts out knowing its own ID in addition to the IDs of all other nodes. In particular, a node u is aware of the IDs of its neighbors in G . We point out that the KT_1 assumption has been used by several recent works to obtain sublinear (in the number of edges) bounds on the communication complexity for various graph problems (e.g., [AGPV90, GK18, GP18, KKT15, MK17, MK18, MK19]).

Nodes take computing steps at points in time determined by the (adversarial) scheduler, who also controls the speed at which messages travel across links with the restriction that each message sent takes at most one unit of time to be delivered to its destination. Whenever a node takes a step, it can process all received messages, perform some local computation, including accessing a private source of unbiased random bits, and send (possibly distinct) messages to an arbitrary subset of its peers in the clique. We assume that each message contains the ID of the sender in addition to the actual payload, and hence the smallest message size is $\Theta(\log n)$ bits. We say that an algorithm \mathcal{A} errs with probability at most γ , if, for any given graph G , the execution of \mathcal{A} has probability at least $1 - \gamma$ to yield a correct output at each node.

In Sections 3.1 and 5.2, we also consider the *congested clique* [LPP06] and the *synchronous CONGEST KT_1 model* [Pel00], where the computation is structured in rounds, and thus each node can send at most $O(\log n)$ bits over each communication link per round. The former model allows all-to-all communication, analogously to the asynchronous clique described above, whereas the CONGEST KT_1 model restricts the communication to the edges of G .

The *message complexity* of a distributed algorithm \mathcal{A} is defined as the maximum number of messages sent by the nodes when executing \mathcal{A} . The *communication complexity* of \mathcal{A} , on the other hand, takes into account the maximum number of bits sent in any run of \mathcal{A} . As these two quantities are within logarithmic factors of each other in the CONGEST model, we will state our bounds in terms of communication complexity. When considering the synchronous CONGEST KT_1 model in Section 5.2, we are interested in algorithms that ensure that all nodes terminate within τ rounds in the worst case, and we define τ to be the *time complexity* of such an algorithm.

3 LOCAL INFORMATION COST

When solving a graph optimization problem P , each node must produce an output that is a function of its $O(1)$ -hop neighborhood. In contrast to verification problems such as graph connectivity testing, it is possible that the nodes' output for solving an optimization problem on a given graph is not unique. For instance, when constructing a k -spanner, the local output of a node is the set of its incident edges that are part of the spanner, with the requirement that the total number of output edges is sufficiently small and that their union guarantees a stretch of at most k .

As mentioned in Section 2, we consider an asynchronous clique as the underlying communication network, and we assume that we sample the graph G according to some distribution \mathcal{G} on a set of n vertices. Given G , each node u_i observes its initial local state represented by a random variable X_i . At the very least, X_i contains u_i 's ID as well as the IDs of its neighbors in G , according to the KT_1 assumption. For technical reasons, it sometimes makes sense to reveal additional information about G to u_i (as part of X_i); we will do so in Section 5. Clearly, this can only help the algorithm and hence strengthens the obtained lower bound.

In the remainder of the paper, we refer to several standard notions in information theory. Section B gives a brief summary of the main definitions and tools.

Definition 1. For an algorithm \mathcal{A} that errs with probability at most γ , let random variable Π_i be the transcript of the messages received by node u_i . We use $\text{LIC}_{\mathcal{G}}(\mathcal{A})$ to denote the *local information cost of algorithm \mathcal{A} under distribution \mathcal{G}* , and define

$$\text{LIC}_{\mathcal{G}}(\mathcal{A}) = \sum_{i=1}^n \mathbb{I}[\Pi_i : G \mid X_i]. \quad (1)$$

The local information cost for solving problem P with error at most γ is defined as

$$\text{LIC}_\gamma(P) = \inf_{\mathcal{A}: \gamma\text{-error}} \max_{\mathcal{G}} \text{LIC}_{\mathcal{G}}(\mathcal{A}). \quad (2)$$

That is, we obtain $\text{LIC}_\gamma(P)$ by considering the best-performing γ -error algorithm (if one exists⁵) and the worst-case input graph distribution \mathcal{G} with respect to \mathcal{A} . We point out that similar lower bound arguments based on the concept of mutual information were employed in the context of triangle finding and listing; see [FGKO18, IG17, PRS18].

Lemma 1 confirms that there always exists a worst-case distribution \mathcal{G} , which justifies using the maximum instead of the supremum in (2).

Lemma 1. *Consider any γ -error algorithm \mathcal{A} as stated in Definition 1. Then,*

$$\max_{\mathcal{G}} (\text{LIC}_{\mathcal{G}}(\mathcal{A})) = \sup_{\mathcal{G}} (\text{LIC}_{\mathcal{G}}(\mathcal{A})).$$

PROOF. Let \mathcal{S} be the set of all graphs of n nodes where each node has a unique ID and let $s = |\mathcal{S}|$. Consider the set \mathcal{D} of all probability distributions over graphs in \mathcal{S} . We will first show that \mathcal{D} is compact by showing that it is bounded and closed. If we represent each element $a \in \mathcal{D}$ as a vector of length s , where entry $a[i]$ is the probability of sampling the i -th graph assuming some fixed ordering of \mathcal{S} , it follows that \mathcal{D} corresponds to a bounded subset of \mathbb{R}^s .

To see that \mathcal{D} is closed (i.e. contains all limit points), consider the map $f : \mathbb{R}^s \rightarrow \mathbb{R}$ where

$$f(a) = \sum_{i=1}^s a[i].$$

Since f is continuous and the set $\{1\}$ is closed in \mathbb{R} , it follows from Theorem 18.1 in [Mun13] that $f^{-1}(\{1\})$ is closed too. Moreover, the hypercube $[0, 1]^s$ is closed and hence

$$[0, 1]^s \cap f^{-1}(\{1\}) = \mathcal{D}$$

is closed too. Thus we have shown that \mathcal{D} is compact. Now, consider the function $g : \mathcal{D} \rightarrow \mathbb{R}$ defined as $g(\mathcal{G}) = \text{LIC}_{\mathcal{G}}(\mathcal{A}) = \sum_{i=1}^n \mathbf{I}[\Pi_i : G \mid X_i]$, for every $\mathcal{G} \in \mathcal{D}$.

Since the entropy of discrete random variables is a continuous function, (37) tells us that the same holds for the term $\mathbf{I}[\Pi_i : G \mid X_i]$, and thus g is continuous too. As we have shown that \mathcal{D} is compact, Theorem 26.5 in [Mun13] yields that $g(\mathcal{D})$ is compact too. The lemma follows since supremum and maximum coincide in compact spaces. \square

We emphasize that, in our definition of $\text{LIC}_{\mathcal{G}}(\mathcal{A})$, the node inputs X_i and X_j are not necessarily independent for nodes in G ; for instance, if u_i and u_j have a common neighbor, its ID will show up in both X_i and X_j . Consequently, if u_i has neighbors u_1, \dots, u_j , then u_i 's input X_i is fully determined by its neighbors' inputs X_1, \dots, X_j . This is a crucial feature of the KT_1 assumption and a difference to the edge-partition multiparty number-in-hand model of communication complexity (c.f. [PVZ16, WZ17]), where the inputs of parties may be chosen to be completely disjoint.

3.1 Lower Bounds for Distributed Algorithms via Local Information Cost

We now prove that the local information cost presents a lower bound on the communication complexity of distributed graph algorithms. We first show the result for the asynchronous KT_1 clique.

Lemma 2. *The communication complexity of solving problem P in the asynchronous KT_1 model with error at most γ , is at least $\text{LIC}_\gamma(P)$.*

⁵Note that it may be possible to define an infinite sequence of algorithms with strictly decreasing LIC values.

PROOF. Define the *communication complexity* $CC(\mathcal{A})$ of algorithm \mathcal{A} to be the maximum number of bits sent in any run of the γ -error algorithm \mathcal{A} , and recall that the *communication complexity* $CC_\gamma(P)$ of solving problem P with error γ (e.g., see [RY20]) is defined as

$$CC_\gamma(P) = \min_{\mathcal{A}: \gamma\text{-error}} CC(\mathcal{A}).$$

Let \mathcal{A} be a communication-optimal γ -error algorithm for P , i.e., $CC(\mathcal{A}) = CC_\gamma(P)$. Moreover, let G be sampled according to \mathcal{G} , which is a distribution that maximizes (2) with respect to \mathcal{A} . For each node u_i , let L_i be the length of the transcript received by u_i during the run of algorithm \mathcal{A} on graph G . Notice that L_i is a random variable and hence different from the *worst case* transcript length, usually denoted by $|\Pi_i|$ in the literature (e.g. [BJKS04]). We have

$$\mathbf{E}[L_i] \geq \mathbf{H}[\Pi_i] \geq \mathbf{H}[\Pi_i | X_i] \geq \mathbf{I}[\Pi_i : G | X_i], \quad (3)$$

where we have used Lemma 25 in the first inequality, (23) in the second inequality, and Lemma 24 in the last step. Let random variable M be the number of bits sent by algorithm \mathcal{A} , i.e., $M = \sum_{u_i \in G} L_i$. Since \mathcal{A} is communication-optimal w.r.t. P , we have

$$\begin{aligned} CC_\gamma(P) = CC(\mathcal{A}) &\geq \mathbf{E}[M] = \sum_{u_i \in G} \mathbf{E}[L_i] \\ &\geq \sum_{u_i \in G} \mathbf{I}[\Pi_i : G | X_i] && \text{(by (3))} \\ &= \text{LIC}_{\mathcal{G}}(\mathcal{A}) && \text{(by (1))} \\ &= \max_{\mathcal{G}} \text{LIC}_{\mathcal{G}}(\mathcal{A}) && \text{(by def. of } \mathcal{G}) \\ &\geq \inf_{\mathcal{A}: \gamma\text{-error}} \max_{\mathcal{G}} \text{LIC}_{\mathcal{G}}(\mathcal{A}) \\ &= \text{LIC}_\gamma(P). && \text{(by (2))} \end{aligned}$$

□

Lemma 3. *The communication complexity of solving problem P in at most τ rounds with probability at least $1 - \gamma$ is $\Omega\left(\frac{\text{LIC}_\gamma(P)}{\log \tau \log n}\right)$ bits. This holds in the synchronous CONGEST KT_1 model as well as in the congested clique.*

PROOF. Several synchronizers have been proposed in the literature (see [Awe85, Pel00]). As we consider a clique communication topology, we will use the σ -synchronizer of [PPS16]. Given a synchronous algorithm with communication complexity C_S and round complexity T_S for some problem P , the σ -synchronizer yields an algorithm in the asynchronous clique with a communication complexity of $CC_\gamma(P) = O(C_S \log(T_S) \log n)$ bits (see Theorem 1 in [PPS16]) by exploiting the clique topology and compressing silent rounds. Applying Lemma 2, we know that

$$\text{LIC}_\gamma(P) \leq CC_\gamma(P) = O(C_S \log T_S \log n),$$

and hence $C_S = \Omega\left(\frac{\text{LIC}_\gamma(P)}{\log T_S \log n}\right)$. This shows the result for the congested clique. Since the CONGEST KT_1 model can be simulated in the congested clique by simply ignoring communication links that are not part of the graph, the same lower bound also holds in the former model. □

We now move on to models where a high local information cost implies a lower bound on the time complexity, due to limitations imposed on the communication capabilities of the nodes. In more detail, the proofs of the next two lemmas exploit that the total per-round bandwidth is $O(n \text{ polylog } n)$ in the node congested clique and the gossip model:

Lemma 4. *Solving problem P with probability at least $1 - \gamma$ in the node-capacitated clique requires $\Omega\left(\frac{\text{LIC}_\gamma(P)}{n \log^4 n}\right)$ rounds.*

PROOF. Assume towards a contradiction that there exists an algorithm \mathcal{A} that solves P (w.h.p.) in $\tau = o\left(\frac{\text{LIC}_\gamma(P)}{n \log^4 n}\right)$ rounds in the node-capacitated clique. During each of the at most τ rounds of execution, a node can send at most $O(\log n)$ messages of $O(\log n)$ bits according to the specification of the node-capacitated clique [AGG⁺19], i.e., the total number of bits sent per round is $O(n \log^2 n)$. Now, suppose we execute the presumed algorithm \mathcal{A} in the KT_1 congested clique. Observe that $\text{LIC}_\gamma(P) = \sum_{u_i} \mathbf{I}[G : \Pi_i \mid X_i] \leq n \mathbf{H}[G] = \tilde{O}(n^3)$, since each one of the possible $O(n^2)$ edges of G can be described using $O(\log n)$ bits, which implies that $\tau = O(\text{poly}(n))$. Therefore, the communication complexity $\text{CC}(\mathcal{A})$ of \mathcal{A} is

$$\text{CC}(\mathcal{A}) = O(n \log^2 n) \cdot \tau = o\left(\frac{\text{LIC}_\gamma(P)}{\log^2 n}\right) = o\left(\frac{\text{LIC}_\gamma(P)}{\log \tau \log n}\right),$$

which is a contradiction to Lemma 3. \square

Lemma 5. *Consider a gossip model as described in [CHKM12, HMS18] where, in each round, each node can initiate a message exchange with a single neighbor but, in contrast to [CHKM12], we follow the assumption of [HMS18] by limiting the bandwidth of each link to $O(\log n)$ bits. Solving problem P with probability at least $1 - \gamma$ requires $\Omega\left(\frac{\text{LIC}_\gamma(P)}{n \log^3 n}\right)$ rounds.*

PROOF. We omit the details as the proof follows along similar lines as the proof of Lemma 4, with the main difference being that the total available bandwidth that can be used per round is even smaller (by a logarithmic factor) than in the node congested clique. \square

3.2 Limitations of the LIC Approach

Thus far we have shown that a bound on the LIC yields bounds for several models of interest. However, we point out that, in general, a lower bound approach purely based on the LIC cannot yield communication complexity lower bounds that *exceed* the total output size of the problem at hand. This follows from the seminal work of [PY19a, PY19b], who give a framework for obtaining distributed algorithms that are “secure”, in the sense that the nodes only learn their respective output while obtaining no information regarding the inputs or outputs of the other nodes. In the context of computing a graph spanner, this means that each node only learns about its incident spanner edges, whereas for other problems, such as computing a spanning tree, a node may only learn the ID of its parent, which amounts to an output size of $O(n \log n)$ bits (over all nodes). An important consequence of the work of [PY19a, PY19b] is that additional techniques are required for proving lower bounds on the communication complexity of problems with small outputs. This includes, in particular, the fundamental problems of single-source broadcast and computing a spanning tree, for which no nontrivial bounds on the communication complexity are known for time-efficient non-comparison based algorithms under the KT_1 assumption, at the time of writing.

4 A LOWER BOUND CONSTRUCTION FOR SPANNERS

For a given integer $t \geq 2$, we define

$$k = 2t - 1 = O\left(\left(\frac{\log n}{\log \log n}\right)^{1/3}\right). \quad (4)$$

In this section, we describe the lower bound graph distribution \mathcal{G}_k on which constructing a multiplicative k -spanner with a distributed algorithm incurs a high local information cost.

Consider n vertices and divide them into two sets, each of size $n/2$, called $U = \{u_1, \dots, u_{n/2}\}$ and $V = \{v_1, \dots, v_{n/2}\}$.⁶ To ensure that each node has a unique ID, we fix some enumeration of the vertices $u_1, \dots, u_{n/2}, v_1, \dots, v_{n/2}$ and choose a permutation of $[1, n]$ uniformly at random as the ID assignment.

We classify every edge as either blue or red. Note that we only introduce this coloring for the purpose of our analysis, i.e., the edge colors are not part of the nodes' input. We partition the vertices into subgraphs of size $2n^{\frac{2}{k+1} + \frac{1}{4k^2}}$ that we call *regions*. A region consists of $n^{\frac{2}{k+1} + \frac{1}{4k^2}}$ nodes each from U and V and we form a complete bipartite graph of *blue edges* between the vertices from U and V that lie in the same region. For instance, the first region consists of the vertices $u_1, \dots, u_{n^{2/(k+1)+1/4k^2}}$ and $v_1, \dots, v_{n^{2/(k+1)+1/4k^2}}$ and the blue edges between them. Note that each vertex u_i is in exactly one region, denoted by $P(u_i)$.

Next, we add *red edges* by creating a random graph on the subgraph $G[U]$ (induced by the nodes in U) according to the Erdős-Rényi model. That is, we sample each one of the $|U|(|U| - 1)$ possible edges independently with probability $\frac{3}{2n^{1-1/(k+1)}}$. Figure 1 depicts an example of a lower bound graph instance.

Let X be the number of red edges incident to u_i . According to the random graph model, we have

$$\mathbf{E}[X] = (|U| - 1) \left(\frac{3}{2n^{1-1/(k+1)}} \right) = \frac{3}{4} n^{\frac{1}{k+1}} - o(1). \quad (5)$$

The following lemma shows that all degrees are likely to be concentrated around the mean. We omit the proof, which follows by a straightforward application of a standard Chernoff bound (c.f. Theorems 4.4 and 4.5 in [MU05]).

Lemma 6. *Let Dense be the event that the number of red edges incident to every node in U is $\frac{3}{4} n^{\frac{1}{k+1}} \pm O\left(n^{\frac{1}{2(k+1)}} \sqrt{\log n}\right)$. Then, Dense happens with high probability.*

4.1 Reachability and Critical Edges

Critical Edges. Suppose we sample G according to \mathcal{G}_k . This results in each node $u \in U$ having $\Theta\left(n^{\frac{1}{k+1}}\right)$ incident red edges in expectation. A crucial property of our lower bound graph is that some of these red edges are likely to be part of any k -spanner. We say that a red edge (u, v) is *critical* if any cycle that contains both u and v has a length of at least $k + 2$. See Figure 1 for an example of a critical edge. From this definition, we immediately have the following property:

Lemma 7. *A k -spanner of G contains all critical edges.*

The main result of this section is a lower bound on the expected number of critical edges:

Lemma 8. *Conditioned on event Dense, every $u \in U$ is incident to at least $\frac{3}{4} n^{\frac{1}{k+1}} \left(1 - \frac{2}{n^{1/k^3}}\right) - o(1)$ critical edges in expectation.*

4.2 Proof of Lemma 8

We start our analysis by first defining some technical machinery, after which we give a high-level overview of the proof.

Traversal Sequences and Reachable Sets. Consider some node u and an incident red edge (u, v) in G , i.e., $v \in U$, and let H be the graph obtained by removing (u, v) . There is a nonzero probability that v is reachable from u in H by traversing some sequence of red and blue edges. This motivates us to consider a traversal sequence (starting from u), which is a k -length sequence of edge colors that specify, for each step, whether we follow the red or blue edges.

⁶To simplify the presentation, we assume that $n/2$, $n^{\frac{2}{k+1} + \frac{1}{4k^2}}$, $\frac{1}{2} n^{1 - \frac{2}{k+1} - \frac{1}{4k^2}}$, $n^{\frac{1}{k+1}}$ are integers.

Formally, a *traversal sequence* T is a k -length string where each character is chosen from the alphabet $\{R, B\}$; R and B stand for colors red and blue, respectively. We use the notation $T[i]$ to refer to the i -th step of T , and define $T[0] = \perp$ for convenience. Any sequence of R and B can form a traversal sequence, under the restriction that there exists a path in H starting from u that traverses an edge of color $T[i]$ in its i -th step, for all $1 \leq i \leq k$.

We use the notation $T[i, j]$ to denote the *traversal subsequence* $T[i] T[i+1] \dots T[j]$. We say that the i -th step is a *B-step* if $T[i] = B$, and define *R-step* similarly. The following is immediate from the definition of the lower bound graph:

Lemma 9. *Consider any traversal sequence T of length $k \geq 3$ and suppose that $i < k$. If $T[i] = B$, then either $T[i-1] = B$ or $T[i+1] = B$ (or both).*

A traversal sequence T induces a *reachable set* of nodes, denoted by $\mathcal{R}(T)$, which is determined by the subset of all nodes in U that lie in the k -hop neighborhood of u and are reachable from u by following all possible paths in graph H along edges with the colors in the order specified by T . We use $\mathcal{R}_i(T)$ to refer to the reachable set of the traversal subsequence $T[1, i]$. The following lemma is immediate from the definition of traversal sequences:

Lemma 10. *Node $v \in U$ is reachable from $u \in U$ in at most k hops in H if there exists a traversal sequence T of length k starting at u such that $v \in \mathcal{R}(T)$.*

High-level Overview of the Proof. Lemma 10 provides us with the following strategy for bounding the probability that v is reachable from u in k steps: Consider some $u \in U$ and a red edge (u, v) to some other $v \in U$. Recall that, if (u, v) is critical then, upon removing (u, v) , reaching v from u requires more than k hops. Thus, we analyze the reachability of v from u on the graph $H = G \setminus \{(u, v)\}$, and assume that event Dense occurs, i.e., the number of incident red edges is close to the expected value for all nodes in U . We first identify the type of traversal sequence that exhibits the largest growth with respect to the reachable set of nodes. Below we show that sequences that follow a certain structure, i.e., are “ BB -maximal”, dominate all other sequences regarding the probability of leading to a reachable set that contains v . Intuitively speaking, a sequence is BB -maximal if it alternates crossing the blue edges twice (this will extend the reachable set to all nodes in U that are inside the regions of the currently reachable nodes) with a single hop over red edges (which may lead to nodes outside of these already-reached regions). We show that the number of nodes in U reached by a BB -maximal traversal sequence is still sufficiently small, which yields an upper bound of roughly $\frac{1}{2^k n^{1/k^3}}$ on the probability of reaching v with a BB -maximal traversal sequence. This shows that, at least a $\left(1 - \frac{2}{n^{1/k^3}}\right)$ -fraction of the incident red edges of u are critical in expectation. In the remainder of this section, we give the detailed proof.

As it is difficult to directly analyze the size of the reachable set for a given traversal sequence, we instead study the growth of a function $\rho_i(T)$ that, as shown below, upper-bounds the size of this set after the first i steps of T .

Definition 2. Let T be a k -length traversal sequence, for some integer $k \geq 3$, and define $T[0] = \perp$. For each $i \in [0, k]$, we define a function ρ_i where

$$\rho_i(T) := \begin{cases} 1 & \text{if } i = 0; & (6a) \\ \rho_{i-1}(T) \cdot n^{\frac{1}{k+1}} & \text{if } i \geq 1, T[i] = R; & (6b) \\ \rho_{i-1}(T) \cdot n^{\frac{2}{k+1} + \frac{1}{4k^2}} & \text{if } i \geq 2, T[i-2, i] = XBB, \text{ where } X \neq B; & (6c) \\ \rho_{i-1}(T) & \text{otherwise.} & (6d) \end{cases}$$

Moreover, we define $\rho(T) := \rho_k(T)$.

Lemma 11. *Consider any k -length traversal sequence T and suppose that event Dense happens (see Lemma 6). Then, it holds that $|\mathcal{R}_i(T)| \leq \rho_i(T)$, for all $i \in [0, k]$.*

PROOF. We proceed by induction over i . The base step $i = 0$ is trivial since $\mathcal{R}_0(T) = \{u\}$.

For the inductive step, first consider the case $i \geq 1$ and $T[i] = R$, i.e., we traverse the red edges incident to nodes in $\mathcal{R}_{i-1}(T)$. Since we assume that event Dense occurs, the number of red edges incident to each node in $|\mathcal{R}_{i-1}(T)|$ is bounded from above by $n^{\frac{1}{k+1}}$, and the claim follows. Next, consider the case where $T[i] = B$ and $T[i-1] \neq B$. If $T[i-1] = \perp$ (i.e., $i = 1$), then it is clear that we only reach nodes in V by following the blue edges incident to u , which implies $\mathcal{R}_1(T) = \mathcal{R}_{i-1}(T)$, and the claim follows by the inductive hypothesis. Similarly, if $T[i-1] = R$, then we know that the last step used edges connecting nodes in U and hence the i -th step of T reaches only nodes in V and thus $\mathcal{R}_1(T) = \mathcal{R}_{i-1}(T)$. Again, the statement follows from the inductive hypothesis.

Finally, consider the case $i \geq 2$, $T[i] = B$, $T[i-1] = B$, and $T[i-2] \neq B$. We pessimistically assume that all nodes in $\mathcal{R}_{i-2}(T)$ lie in $|\mathcal{R}_{i-2}(T)|$ distinct regions of the graph, and let S denote the set of nodes in these regions. Recalling that each region forms a complete bipartite graph on $2n^{\frac{2}{k+1} + \frac{1}{4k^2}}$, it follows that the traversal sequence reaches all nodes in $S \cap V$ in step $i-1$. Thus, in step i , it reaches all nodes in $S \cap U$. Since $|S \cap U| = n^{\frac{2}{k+1} + \frac{1}{4k^2}}$, we have

$$\begin{aligned} |\mathcal{R}_i(T)| &\leq |\mathcal{R}_{i-2}(T)| n^{\frac{2}{k+1} + \frac{1}{4k^2}} \leq \rho_{i-2}(T) \cdot n^{\frac{2}{k+1} + \frac{1}{4k^2}} \\ &= \rho_{i-1}(T) n^{\frac{2}{k+1} + \frac{1}{4k^2}} && \text{(by (6d))} \\ &= \rho_i(T) && \text{(by (6c))} \end{aligned}$$

□

Throughout this section, whenever we say “traversal sequence”, we mean a traversal sequence of length $k \geq 3$, for some integer k . Moreover, we refer to two adjacent B -steps as a BB -pair.

Definition 3. A traversal sequence T is BB -maximal, if all of the following hold:

- (1) T does not contain three consecutive B -steps.
- (2) T contains at most one pair of consecutive R -steps and, if it does, then this pair occurs at the very end, i.e., $T[k-1] = T[k] = R$.

Intuitively speaking, a BB -maximal traversal sequence contains the maximal number of BB -pairs. Equations (7) and (8) show examples of such a sequence.

Next, we will prove that, even if we expand the reachability set by following a BB -maximal traversal sequence, the resulting size still falls short of containing a constant fraction of the nodes in U .

Lemma 12. *Condition on event Dense. If T is BB -maximal, then it holds that*

$$\rho(T) \leq \frac{n^{1 - \frac{1}{k^3}}}{2^k}.$$

PROOF. We distinguish three cases depending on the value of $k \bmod 3$.

First, consider the case where $k \bmod 3 = 0$. Let T be a B -maximal traversal sequence. Definition 3 tells us that the remaining sequence is fully determined by whether the first character is B or R . More specifically, the only two

possibilities for T are either

$$T = \underbrace{BBR BBR \dots BBR}_{k/3\text{-times}} \quad (7)$$

or

$$T = \underbrace{RBB RBB \dots RBB}_{k/3\text{-times}}. \quad (8)$$

Thus, we have exactly $k/3$ triples of the form BBR or RBB in T . Applying Definition 2 for each step, we obtain

$$\rho(T) = n^{\frac{k}{3} \left(\frac{2}{k+1} + \frac{1}{2k^2} + \frac{1}{k+1} \right)} = n^{\frac{k}{k+1} + \frac{1}{6k}}. \quad (9)$$

Observe that

$$n^{1 - \frac{1}{k^3} - \frac{1}{k^2}} \leq n^{1 - \frac{1}{k^3} - \frac{k}{\log_2 n}} = \frac{n^{1 - \frac{1}{k^3}}}{2^k} \quad (10)$$

where the inequality follows from (4). Thus, our goal is to show that the right-hand side of (9) is bounded by the left-hand side of (10). Comparing the exponents in (9) and (10), we observe that $\rho(T) \leq n^{1 - \frac{1}{k^3} - \frac{1}{k^2}}$ if

$$\frac{k}{k+1} + \frac{1}{6k} \leq 1 - \frac{1}{k^3} - \frac{1}{k^2},$$

Multiplying by the common denominator, this is true if

$$\frac{k^3 - \frac{7k^2}{5} - \frac{12k}{5} - \frac{6}{5}}{k^3(k+1)} \geq 0. \quad (11)$$

Consider the function $f(k) = k^3 - \frac{7k^2+12k+6}{5}$. Factorizing and simplifying shows that $f(k) \geq 0$ for all $k \geq 3$, which implies (11).

Next, we consider the case $k \bmod 3 = 1$. Since T is BB -maximal, there must be exactly $\ell = \frac{k-1}{3}$ BB -pairs and R -steps in the $(k-1)$ -length subsequence $T' = T[1, k-1]$. First suppose that T' satisfies (7), which means that $T[k] = B$. In this case, Definition 2 tells us that $\rho_{k-1}(T) = \rho_k(T)$ and hence the result follows from the case $k \bmod 3 = 0$. Now, suppose that T' satisfies (8), which means that $T[k] = R$. Thus, according to Definition 2, we get

$$\rho(T') = n^{\frac{k-1}{3} \left(\frac{2}{k+1} + \frac{1}{4k^2} + \frac{1}{k+1} \right) + \frac{1}{k+1}} = n^{\frac{k}{k+1} + \frac{1}{12k} - \frac{1}{12k^2}}. \quad (12)$$

By a calculation similar to the one for the case $k \bmod 3 = 0$, it follows that, for all $k \geq 3$,

$$n^{\frac{k}{k+1} + \frac{1}{12k} - \frac{1}{12k^2}} \leq n^{1 - \frac{1}{k^3} - \frac{1}{k^2}} \leq \frac{n^{1 - \frac{1}{k^3}}}{2^k}, \quad (13)$$

where the second inequality follows from (10).

The final case that we need to analyze is $k \bmod 3 = 2$. Consider the length $(k-2)$ subsequence T' of T . Since $(k-2) \bmod 3 = 0$, we first consider the case where T' satisfies (7). Since T is BB -maximal, it follows that $T[k-1] = T[k] = B$, and therefore T consists of $\frac{k+1}{3}$ pairs of BB -steps, interleaved with $\frac{k-2}{3}$ R -steps. Analogously to the first

case, Definition 2 yields

$$\rho(T) = n^{\frac{k+1}{3} \left(\frac{2}{k+1} + \frac{1}{4k^2} \right) + \frac{k-2}{3} \frac{1}{k+1}} \quad (14)$$

$$= n^{\frac{2}{3} + \frac{1}{6k} + \frac{1}{6k^2} + \left(\frac{1}{3} - \frac{1}{k+1} \right)} \quad (15)$$

$$= n^{1 + \frac{1}{6k} + \frac{1}{6k^2} - \frac{1}{k+1}}. \quad (16)$$

For any $k \geq 3$, it holds that

$$1 + \frac{1}{6k} + \frac{1}{6k^2} - \frac{1}{k+1} \leq 1 - \frac{1}{k^3} - \frac{1}{k^2}, \quad (17)$$

and thus the right-hand side of (16) is at most $n^{1 - \frac{1}{k^3} - \frac{1}{k^2}}$ as required.

Now consider the case where the subsequence T' satisfies (8). Since T is BB -maximal, it holds that $T[k-1] = R$. We distinguish two cases depending on the value of $T[k]$:

- (1) First, suppose that $T[k] = B$. As $T[k-1] = R$ and all other B -steps happening before step k must have occurred in pairs, it follows that no new nodes in U are reached in the k -th step of T . Consequently, $\rho(T) = \rho_{k-1}(T)$ and since $T[1, k-1]$ satisfies $k \bmod 3 = 1$, the claim follows from the previously analyzed case.
- (2) Finally, suppose that $T[k] = T[k-1] = R$. Since we have $\frac{k-2}{3}$ BB -pairs and $\frac{k-2}{3} + 2 = \frac{k+4}{3}$ R -steps in T , Definition 2 yields

$$\begin{aligned} \rho(T) &= n^{\frac{k-2}{3} \left(\frac{2}{k+1} + \frac{1}{4k^2} \right) + \frac{k+4}{3} \frac{1}{k+1}} \\ &= n^{\frac{2}{3} \left(1 - \frac{3}{k+1} \right) + \frac{1}{12k} - \frac{1}{6k^2} + \left(\frac{1}{3} + \frac{1}{k+1} \right)} \\ &= n^{1 - \frac{2}{k+1} + \frac{1}{12k} - \frac{1}{6k^2}}. \end{aligned}$$

Recalling (10), it needs to hold for the exponent on the right-hand side that

$$1 - \frac{2}{k+1} + \frac{1}{12k} - \frac{1}{6k^2} \leq 1 - \frac{1}{k^3} - \frac{1}{k^2}.$$

This is satisfied if

$$\frac{k^3 - \frac{k^2}{23} - \frac{12k}{23} - \frac{12}{23}}{k^3(k+1)} \geq 0,$$

and factorizing shows that this holds for any $k \geq 3$, as required. \square

Consider an arbitrary traversal sequence T . We say that an R -step at index i is *free in T* if $T[i-1] = R$ or $T[i+1] = R$, or both. By left-shifting $T[i+1], \dots, T[k]$ by one position and setting $T[k] = R$, we obtain a new traversal sequence T' . We call this operation an *R -shift of T* . The following lemma is immediate from Definition 2:

Lemma 13. *Suppose we obtain T' by performing an R -shift on some traversal sequence T . Then, $\rho(T') = \rho(T)$. Moreover, if T does not contain three consecutive B -steps (Property (1) of Definition 3 holds), then the same is true for T' .*

The next Lemma confirms the intuition that a traversal sequence does not reach as many nodes as possible, if it contains a subsequence of 3 or more consecutive B -steps.

Lemma 14. Consider any traversal sequence T' that contains at least three consecutive B -steps, i.e., there exists an index i and an integer $\ell \geq 2$, such that $T'[i] = \dots = T'[i + \ell] = B$, $T'[i + \ell + 1] = R$; assume that i is the smallest index for which this holds. Define traversal sequence T , where

$$T[j] = \begin{cases} R & \text{if } j \in [i + 2, i + \ell]; \\ T'[j] & \text{otherwise.} \end{cases}$$

Then, it holds that $\rho(T') < \rho(T)$.

PROOF. Recalling that i was chosen to be the smallest index for which the premise of the lemma holds, it follows that either $i = 1$ or $T'[i - 1] = R$. By assumption $\rho_{i+1}(T') = \rho_{i+1}(T)$. Equation (6b) implies that

$$\rho_{i+2}(T) = \rho_{i+1}(T) \cdot n^{1/(k+1)} = \rho_{i+1}(T') \cdot n^{1/(k+1)},$$

whereas, for T , we apply (6d), which ensures that $\rho_{i+2}(T') = \rho_{i+1}(T')$, and thus $\rho_{i+2}(T) > \rho_{i+2}(T')$. This captures the intuition that, in step $i + 2$ in T , we traverse red edges, whereas in T' , we again take a step along the blue edges, which must lead to nodes that are in regions already contained in the reachable set and hence cannot increase the reachable set of nodes. We continue to apply this argument to all indices $i + 2, \dots, i + \ell$ and conclude that $\rho_{i+\ell}(T) > \rho_{i+\ell}(T')$. Since the color sequences of T and T' are the same in the remaining indices $i + \ell + 1, \dots, k$, Definition 2 tells us that $\rho_{i+\ell+j}(T) > \rho_{i+\ell+j}(T')$, for all $j \in [1, k - \ell - i]$, and the lemma follows. \square

Lemma 15. Let T be any traversal sequence that contains at least one BB -pair but no three consecutive B -steps. Let i be the smallest index of T such that $T[i] = T[i + 1] = B$. Consider the traversal sequence T' defined as $T'[i] = T'[i + 1] = R$ whereas, for all $j \neq \{i, i + 1\}$ we have $T'[j] = T[j]$. Then, $\rho(T') < \rho(T)$.

PROOF. Since T and T' are identical up to including index $i - 1$, we have $\rho_{i-1}(T) = \rho_{i-1}(T')$. Then, after following only red edges for two consecutive steps, as required by T' , Definition 2 implies that

$$\rho_{i+1}(T') = \rho_{i-1}(T) \cdot \left(n^{\frac{1}{k+1}}\right)^2 = \rho_{i-1}(T) \cdot n^{\frac{2}{k+1}}.$$

On the other hand, if we consider T and take two hops following only blue edges, it again follows from Definition 2 that

$$\rho_{i+1}(T) = \rho_{i-1}(T) \cdot n^{\frac{2}{k+1} + \frac{1}{4k^2}},$$

and hence $\rho_{i+1}(T) > \rho_{i+1}(T')$.

To see that this inequality continues to hold for the remaining indices, we use the fact that $T[i + 2] = T'[i + 2] = R$ and T and T' perform the same sequence of colors for all indices $j \geq i + 3$ onward. \square

Lemma 16. If T is not BB -maximal, then there exists a BB -maximal traversal sequence \bar{T} such that $\rho(\bar{T}) \geq \rho(T)$.

PROOF. In the proof, we combine Lemmas 13, 14, and 15: Assume towards a contradiction that T is not BB -maximal, and $\rho(T) > \rho(\bar{T})$, for any BB -maximal traversal sequence \bar{T} . We choose T such that it has the maximum $\rho(T)$ of all non- BB -maximal traversal sequences with this property, which implies that $\rho(T) \geq \rho(T')$, for any (not necessarily BB -maximal) traversal sequence T' . Since T is not BB -maximal, it does not satisfy at least one of the two properties of Definition 3.

Suppose that T does not satisfy (1), i.e., it contains a segment of three or more consecutive B -steps. By applying Lemma 14 to the first of these segments, we obtain a distinct traversal sequence T' that satisfies (1) and $\rho(T') > \rho(T)$, which is a contradiction.

Now, consider the case that T does not satisfy (2), i.e., $T[i] = T[i+1] = R$, for some $i \leq k-2$, and suppose that i is the smallest index for which this is true. First suppose that T does not contain any BB -pair after step i . Since $i \leq k-2$, it follows that T ends with at least three R -steps. Applying Lemma 15 tells us that replacing the last two steps of T with a BB -pair yields a traversal sequence T' such that $\rho(T') > \rho(T)$, which is a contradiction to the assumed maximality of $\rho(T)$.

Thus, we can assume that T contains at least one BB -pair after step i . By construction, T has a free R -step at index i , and thus Lemma 13 yields a sequence T_1 such that $\rho(T) = \rho(T_1)$ by moving this R -step to the end and shifting all subsequent steps to the left. Then, we check if T_1 is BB -maximal, i.e., satisfies Property (2) of Definition 3, or ends with at least three R -steps. In the former case, we have a contradiction to the assumption that $\rho(T) > \rho(\hat{T})$, for any BB -maximal traversal sequence \hat{T} , whereas in the latter case we obtain a contradiction by applying Lemma 15.

Otherwise, we continue this process by considering the next smallest index i' for which we can find a free R -step in T_1 , which must exist since T_1 is not BB -maximal, and obtain sequence T_2 with $\rho(T_2) = \rho(T)$, by applying the left-shifting operation of Lemma 13 to index i' . After at most three iterations of this process, we must arrive at some sequence T_3 that is either BB -maximal or ends with three R -steps. Either case provides a contradiction to the assumed maximality of $\rho(T)$. \square

Combining Lemmas 12 and 16 yields the following:

Corollary 1. *For any traversal sequence T , it holds that*

$$|\mathcal{R}(T)| \leq \frac{n^{1-\frac{1}{k^3}}}{2^k}. \quad (18)$$

We can now complete the proof of Lemma 8. Recall that we have analyzed the reachability sets in the graph H , which does not contain the edge (u, v) . Moreover, (u, v) is sampled independently of the other red edges according to our lower bound graph distribution \mathcal{G}_k (see Sec. 4). It follows that node v is independent of $\mathcal{R}(T)$ and hence the probability that $v \in \mathcal{R}(T)$ is at most $\frac{|\mathcal{R}(T)|}{|U|} = \frac{|\mathcal{R}(T)|}{n/2}$. By taking a union bound over the (at most) 2^k possible traversal sequences and using (18), we obtain that

$$\Pr[(u, v) \text{ not critical}] = \Pr[\exists T: v \in \mathcal{R}(T)] \leq \frac{2^{k+1}|\mathcal{R}(T)|}{n} \leq 2n^{-\frac{1}{k^3}}. \quad (19)$$

Let X be the number of red edges incident to u , and let $Y \subseteq X$ be the random variable denoting the number of critical edges incident to u . From (19), we get

$$\mathbf{E}[Y \mid \text{Dense}, X] \geq X \left(1 - 2n^{-\frac{1}{k^3}}\right).$$

Therefore,

$$\begin{aligned} \mathbf{E}[Y \mid \text{Dense}] &= \mathbf{E}_X \left[\mathbf{E}_Y [Y \mid \text{Dense}, X] \mid \text{Dense} \right] \\ &\geq \left(1 - 2n^{-\frac{1}{k^3}}\right) \mathbf{E}[X \mid \text{Dense}] \\ &\geq \left(1 - 2n^{-\frac{1}{k^3}}\right) \left(\frac{3}{4}n^{\frac{1}{k+1}} - o(1)\right) \\ &\geq \frac{3}{4} \left(n^{\frac{1}{k+1}} - 2n^{\frac{1}{k+1} - \frac{1}{k^3}}\right) - o(1). \end{aligned} \quad (\text{by (5)})$$

This completes the proof of Lemma 8.

5 THE LOCAL INFORMATION COST OF SPANNERS

In this section, we use an information-theoretic approach to bound the local information cost of computing a spanner. In more detail, we will prove the following result:

Theorem 1. *Consider the problem of constructing a $(2t-1)$ -spanner that, with high probability, has at most $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}\right)$ edges, for any integer t such that $2 \leq t = O\left((\log n/\log \log n)^{1/3}\right)$. Then,*

$$\text{LIC}_{1/n}((2t-1)\text{-spanner}) = \Omega\left(\frac{1}{t^2}n^{1+\frac{1}{2t}}\log n\right).$$

To put Theorem 1 into perspective, note that the distributed $(2t-1)$ -spanner algorithm of Baswana & Sen [BS07] outputs at most $O(tn^{1+\frac{1}{t}}\log n) = O\left(n^{1+\frac{1}{t}+\frac{t}{\log n}+\frac{\log \log n}{\log n}}\right)$ edges with high probability. For $t = O\left(\sqrt{\log n/\log \log n}\right)$, this amounts to strictly less than $n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}$ edges.

Consider any $(2t-1)$ -spanner algorithm \mathcal{A} that achieves the properties stated in the theorem's premise. Using (4), we can rewrite the bound on the number of edges in Theorem 1 as $O\left(n^{1+\frac{2}{k+1}+\frac{1}{16k^2}}\right)$, which we will use throughout this section.

We make use of the following indicator random variables:

- We define $I_D = 1$ if and only if every node $u \in U$ has roughly $\frac{3}{4}n^{\frac{1}{k+1}}$ incident red edges, i.e., event Dense occurs, which happens with high probability according to Lemma 6.
- Let Y_i be the number of critical edges incident to u_i . We define $I_{Y_i} = 1$ if and only if $Y_i \geq \frac{1}{16}n^{\frac{1}{k+1}}$.
- In parts of our analysis, in particular Lemma 22, we will focus on the nodes where the output is sparse, in the sense that each of them adds only few incident edges to the spanner. In particular, we will prove that these sparse nodes learn a significant amount of information about which of their incident edges are critical. This motivates us to define $S \subseteq U$ to be the set of *sparse nodes*, where every node $u \in S$ outputs at most $n^{\frac{2}{k+1}+\frac{1}{8k^2}}$ edges. We use the indicator random variable I_S , and define $I_S = 1$ if and only if $u_i \in S$ and $|S| \geq \frac{n}{2} - \frac{n}{\log n}$. The reason for introducing I_S will become clearer in the proof of Lemma 21.

For the indicator random variables defined above, we use shorthands such as $I_{D, Y_i} = 1$ to refer to the event $I_D = I_{Y_i} = 1$.

The Initial Knowledge of Nodes. We consider the following information to be part of u_i 's input X_i : Due to the KT_1 assumption, u_i knows the random variable Z_i , which contains the list of IDs of its neighbors in G including its own ID. Notice that Z_i does not contain any other information about the network at large. In addition, node u_i also knows the number of incident critical edges to u_i , which we denote by the random variable Y_i . This extra knowledge is not part of the KT_1 assumption but given to u_i for free. Since Y_i fully determines the indicator random variable I_{Y_i} defined above, it follows that u_i also knows I_{Y_i} . Finally, we assume that u_i knows I_D .

5.1 Proof of Theorem 1

High-level Overview. We start our analysis by deriving a lower bound on $\text{LIC}_{\mathcal{G}}(\mathcal{A})$ in terms of the sum over the mutual information terms $\mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_{D, Y_i} = 1]$, where the sum ranges over all $u_i \in U$. In fact, since the critical edges incident to u_i are fully determined by G , we can instead use $\mathbf{I}[C_i : \Pi_i \mid Y_i, Z_i, I_{D, Y_i} = 1]$, which tells us that the local information cost is bounded from below by the sum over the expected amount of information that each u_i 's transcript Π_i reveals about its critical incident edges C_i , conditioned on u_i 's initial knowledge. By definition, the

mutual information is equivalent to how much the entropy of C_i decreases upon revealing Π_i , which corresponds to the difference

$$\mathbf{H}[C_i \mid Y_i, Z_i, I_D, Y_i = 1] - \mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_D, Y_i = 1].$$

Intuitively speaking, this is the difference between the *initial entropy* of C_i , i.e., before executing the algorithm, and the *remaining entropy* after u_i has received all messages. We can obtain a bound on the initial entropy that depends on the expected number of critical edges incident to u_i , see Lemma 21. As we explain in more detail below, we need a technical result (Lemma 20) to lift the bound into the probability space where we also condition on $I_{S_i} = 1$, as we need to compute the *expected* difference between the initial and remaining entropy terms. We can only hope to obtain a reasonably small upper bound on the remaining entropy if we assume that u_i outputs few incident spanner edges, which motivates the conditioning on event $I_{S_i} = 1$, see Lemma 22. Finally, we combine the bounds of Lemmas 21 and 22 to obtain the sought bound on $\text{LIC}_{\mathcal{G}}(\mathcal{A})$.

The proof of the following Lemma 17 follows by a counting argument: if more than $n/\log n$ nodes had a degree (in the spanner) that is greater than $n^{\frac{2}{k+1} + \frac{1}{8k^2}}$, we would obtain a contradiction to the assumed bound on the number of edges.

Lemma 17. *Recall that $S \subseteq U$ is the subset of nodes such that each $u \in S$ outputs at most $n^{\frac{2}{k+1} + \frac{1}{8k^2}}$ edges. If the algorithm terminates correctly, then*

$$|S| \geq |U| - \frac{n}{\log n} = \frac{n}{2} - \frac{n}{\log n}.$$

PROOF. Assume towards a contradiction that $|U \setminus S| \geq \frac{n}{\log n}$. This means that a set B of at least $\frac{n}{\log n}$ nodes in U output at least $n^{\frac{2}{k+1} + \frac{1}{8k^2}}$ spanner edges each. Consequently, the algorithm outputs at least

$$|B| n^{\frac{2}{k+1} + \frac{1}{8k^2}} = \Omega\left(n^{1 + \frac{2}{k+1} + \frac{1}{8k^2} - \frac{\log \log n}{\log n}}\right) \quad (20)$$

edges in total. From (4), we know that $k = O\left(\left(\frac{\log n}{\log \log n}\right)^{1/3}\right)$ and hence $k \leq \sqrt{\frac{\log n}{24 \log \log n}}$, for sufficiently large n , which implies that

$$\frac{1}{8k^2} - \frac{\log \log n}{\log n} \geq \frac{1}{12k^2}.$$

It follows that the right-hand side of (20) is at least

$$\Omega\left(n^{1 + \frac{2}{k+1} + \frac{1}{12k^2}}\right) = \Omega\left(n^{1 + \frac{1}{t} + \frac{1}{12(2t-1)^2}}\right),$$

thus exceeding the assumed bound on the size of the spanner stipulated by Theorem 1 and resulting in a contradiction. \square

Next, we prove a lower bound on the number of critical edges by leveraging Lemma 8 and the upper bound on the incident red edges stated in Lemma 6.

Lemma 18. *Recall that $I_{Y_i} = 1$ if and only if u_i has at least $\frac{1}{16} n^{\frac{1}{k+1}}$ incident critical edges. It holds that*

$$\Pr[I_{Y_i} = 1 \mid I_D = 1] \geq 1 - O\left(n^{-\frac{1}{k^3}}\right).$$

PROOF. Let Y_i be the number of critical edges incident to u_i . We first give some intuition why the lemma holds. Recall from Lemma 8 that $\mathbf{E}[Y_i \mid I_D = 1] \geq \frac{3}{4} \left(n^{\frac{1}{k+1}} - 2n^{\frac{1}{k+1} - \frac{1}{k^3}}\right) - o(1)$. We know that Y_i cannot exceed the number

of red edges incident to u_i and, conditioned on $I_D = 1$, Lemma 6 tells us that we can set the upper bound on Y_i to be $B = \frac{3}{4}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}$, for a suitable constant $c_1 \geq 1$. Consider the random variable $B - Y_i$, which is always positive due to the conditioning on $I_D = 1$. Applying Markov's inequality (c.f. Theorem 3.1 in [MU05]) to $B - Y_i$ (and hence in "reverse" direction to Y_i) shows that Y_i is likely to be sufficiently large which is equivalent to event $I_{Y_i} = 1$.

We now give the formal proof. From Lemma 8, we know that

$$\mathbf{E}[Y_i \mid I_D = 1] \geq \frac{3}{4} \left(n^{\frac{1}{k+1}} - 2n^{\frac{1}{k+1} - \frac{1}{k^3}} \right) - o(1). \quad (21)$$

We know that Y_i cannot exceed the number of red edges incident to u_i and, conditioned on $I_D = 1$ (i.e. event Dense happens), Lemma 6 tells us that we can set the upper bound to be

$$B = \frac{3}{4}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}, \quad (22)$$

for a suitable constant $c_1 \geq 1$. Consider the random variable $B - Y_i$, which is always positive due to the conditioning on $I_D = 1$. By Markov's inequality (c.f. Theorem 3.1 in [MU05]), it follows that, for any $a < B$,

$$\Pr[Y_i \leq a \mid I_D = 1] = \Pr[B - Y_i \geq B - a \mid I_D = 1] \leq \frac{B - \mathbf{E}[Y_i \mid I_D = 1]}{B - a}.$$

Choosing $a = \frac{1}{16}n^{\frac{1}{k+1}}$, and plugging (21) and (22) into this concentration bound yields

$$\begin{aligned} \Pr\left[Y_i \leq \frac{1}{16}n^{\frac{1}{k+1}} \mid I_D = 1\right] &\leq \frac{\left(\frac{3}{4}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}\right) - \frac{3}{4} \left(n^{\frac{1}{k+1}} - 2n^{\frac{1}{k+1} - \frac{1}{k^3}}\right) + o(1)}{\left(\frac{3}{4}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}\right) - \frac{1}{16}n^{\frac{1}{k+1}}} \\ &\leq \frac{c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n} + \frac{3}{2}n^{\frac{1}{k+1} - \frac{1}{k^3}} + o(1)}{\frac{11}{16}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}}. \end{aligned}$$

Observe that $n^{\frac{1}{2(k+1)}} \sqrt{\log n} = n^{\frac{1}{2(k+1)} + \frac{\sqrt{\log \log n}}{\log n}} \leq n^{\frac{1}{2(k+1)} + \frac{1}{2k^2}}$, for any $k \geq 3$. Moreover, $n^{\frac{1}{2(k+1)} + \frac{1}{2k^2}} \leq n^{\frac{1}{k+1} - \frac{1}{k^3}}$, and therefore

$$\begin{aligned} \Pr\left[Y_i \leq \frac{1}{16}n^{\frac{1}{k+1}} \mid I_D = 1\right] &\leq \frac{\left(c_1 + \frac{3}{2}\right)n^{\frac{1}{k+1} - \frac{1}{k^3}} + o(1)}{\frac{11}{16}n^{\frac{1}{k+1}} + c_1 n^{\frac{1}{2(k+1)}} \sqrt{\log n}} \\ &\leq \frac{\left(c_1 + \frac{3}{2}\right)n^{\frac{1}{k+1} - \frac{1}{k^3}} + o(1)}{\frac{11}{16}n^{\frac{1}{k+1}}} \\ &= O\left(n^{-\frac{1}{k^3}}\right). \end{aligned}$$

□

We make use of the following conditioning property of mutual information:

Lemma 19. *Let X, Y, Z_1 , and Z_2 be discrete random variables. Then, for any z in the support of Z_1 , it holds that*

$$\mathbf{I}[X : Y \mid Z_1, Z_2] \geq \Pr[Z_1 = z] \mathbf{I}[X : Y \mid Z_1 = z, Z_2].$$

PROOF.

$$\begin{aligned}
\mathbf{I}[X : Y \mid Z_1, Z_2] &= \sum_{z_1} \sum_{z_2} \Pr[z_1, z_2] \mathbf{I}[X : Y \mid Z_1 = z_1, Z_2 = z_2] \\
&= \sum_{z_1} \Pr[z_1] \sum_{z_2} \Pr[z_2 \mid z_1] \mathbf{I}[X : Y \mid Z_1 = z_1, Z_2 = z_2] \\
&\geq \Pr[z] \mathbf{I}[X : Y \mid Z_1 = z, Z_2],
\end{aligned}$$

for any z in the support of Z_1 . \square

We are now ready to bound the local information cost $\text{LIC}_{\mathcal{G}}(\mathcal{A})$ as stated in Definition 1 (Page 6). Since $U \subset V(G)$ and X_i is just a shorthand for the random variables Y_i, Z_i, I_D, I_{Y_i} , we have

$$\begin{aligned}
\text{LIC}_{\mathcal{G}}(\mathcal{A}) &\geq \sum_{u_i \in U} \mathbf{I}[G : \Pi_i \mid X_i] \\
&= \sum_{u_i \in U} \mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_D, I_{Y_i}] \\
&\stackrel{\text{(by Lemma 19)}}{\geq} \Pr[I_D = 1] \sum_{u_i \in U} \mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_{Y_i}, I_D = 1] \\
&\geq \Pr[I_D = 1] \sum_{u_i \in U} \Pr[I_{Y_i} = 1 \mid I_D = 1] \mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_D, I_{Y_i} = 1], \tag{23}
\end{aligned}$$

where, in the last step, we have applied Lemma 19 to each term of the sum. Without conditioning on the initial states of the nodes, it holds that, for all $u_i, u_j \in U$,

$$\Pr[I_{Y_i} = 1 \mid I_D = 1] = \Pr[I_{Y_j} = 1 \mid I_D = 1] \geq 1 - O\left(n^{-\frac{1}{k^3}}\right),$$

where the inequality follows from Lemma 18. Furthermore, we know from Lemma 6 that $\Pr[I_D = 1] \geq 1 - \frac{1}{n}$ and hence

$$\Pr[I_D = 1] \Pr[I_{Y_i} = 1 \mid I_D = 1] \geq \left(1 - O\left(n^{-\frac{1}{k^3}}\right)\right) \left(1 - \frac{1}{n}\right) \geq \frac{1}{2},$$

for sufficiently large n , since we assume that $k = O\left((\log n / \log \log n)^{1/3}\right)$. Applying these observations to (23), we get

$$\text{LIC}_{\mathcal{G}}(\mathcal{A}) \geq \frac{1}{2} \sum_{u_i \in U} \mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_D, I_{Y_i} = 1].$$

For each $u_i \in U$, its incident critical edges given by the random variable C_i , are determined by the graph G . This means that $\Pi_i \rightarrow G \rightarrow C_i$ forms a Markov chain and hence the data processing inequality (see Lemma 26) implies that

$$\mathbf{I}[G : \Pi_i \mid Y_i, Z_i, I_D, I_{Y_i} = 1] \geq \mathbf{I}[C_i : \Pi_i \mid Y_i, Z_i, I_D, I_{Y_i} = 1].$$

Moreover, we can write the mutual information between C_i and Π_i in terms of the conditional entropies (see (37) in Appendix B), yielding

$$\text{LIC}_{\mathcal{G}}(\mathcal{A}) \geq \frac{1}{2} \sum_{u_i \in U} (\mathbf{H}[C_i \mid Y_i, Z_i, I_D, I_{Y_i} = 1] - \mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_D, I_{Y_i} = 1]). \tag{24}$$

We will proceed by analyzing the entropy terms on the right-hand side in (24). To bound the remaining entropy $\mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_D, I_{Y_i} = 1]$, i.e., after u_i has received all messages, we need to reason about the number of spanner edges

output by u_i . We provide additional knowledge to the algorithm “for free”, by revealing to each u_i whether $u_i \in S$ and $|S| \geq \frac{n}{2} - \frac{n}{\log n}$, which is captured by the indicator random variable I_{S_i} defined above. Note that this assumption can only help the algorithm and hence does not weaken Theorem 1.

However, the conditioning on I_{S_i} introduces a technical challenge: We would like to compute the *expected* difference between the two entropy terms, but we are computing the initial entropy of the critical edges (i.e. $\mathbf{H}[C_i \mid Y_i, Z_i, I_{D, Y_i} = 1]$) conditioned on $I_{D, Y_i} = 1$, whereas, for the remaining entropy, we also condition on $I_{S_i} = 1$. Thus, we need the following lemma that will help us to lift the bound on the initial entropy to the probability space where we condition on all three indicator random variables.

Lemma 20. $\Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1] \geq 1 - O\left(\frac{1}{\log n}\right)$.

PROOF. We begin our analysis by first deriving a lower bound on $\Pr[I_{S_i} = 1]$. Without conditioning on the initial states, $\Pr[u_i \in S] = \Pr[u_j \in S]$, for all $u_i, u_j \in U$, and hence it follows that

$$\Pr[u_i \in S \mid |S| \geq \frac{n}{2} - \frac{n}{\log n}] \geq \frac{\frac{n}{2} - \frac{n}{\log n}}{\frac{n}{2}} = 1 - O\left(\frac{1}{\log n}\right).$$

By assumption, the algorithm succeeds with probability at least $1 - \frac{1}{n}$ and, if it does, then it also holds that $|S| \geq \frac{n}{2} - \frac{n}{\log n}$ according to Lemma 17. This means that

$$\begin{aligned} \Pr[I_{S_i} = 1] &= \Pr[u_i \in S \mid |S| \geq \frac{n}{2} - \frac{n}{\log n}] \Pr[|S| \geq \frac{n}{2} - \frac{n}{\log n}] \\ &\geq 1 - O\left(\frac{1}{\log n}\right) - \frac{1}{n} = 1 - O\left(\frac{1}{\log n}\right). \end{aligned}$$

We now return to bounding $\Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1]$. We have

$$\begin{aligned} 1 - O\left(\frac{1}{\log n}\right) &\leq \Pr[I_{S_i} = 1] \\ &= \Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1] \Pr[I_{D, Y_i} = 1] \\ &\quad + \Pr[I_{S_i} = 1 \mid \neg I_{D, Y_i} = 1] \Pr[\neg I_{D, Y_i} = 1] \\ &\leq \Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1] + \Pr[\neg I_{D, Y_i} = 1], \end{aligned}$$

and hence

$$\Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1] \geq 1 - \Pr[\neg I_{D, Y_i} = 1] - O\left(\frac{1}{\log n}\right).$$

To complete the proof of the lemma, we need to argue that $\Pr[\neg I_{D, Y_i} = 1] = O\left(\frac{1}{\log n}\right)$. We have

$$\begin{aligned} \Pr[\neg I_{D, Y_i} = 1] &\leq \Pr[I_D = 0] + \Pr[I_{Y_i} = 0 \mid I_D = 1] \Pr[I_D = 1] \\ &\stackrel{\text{(by Lemma 6)}}{\leq} \Pr[I_{Y_i} = 0 \mid I_D = 1] + O\left(\frac{1}{n}\right) \\ &\stackrel{\text{(by Lemma 18)}}{=} O\left(\frac{1}{\log n}\right). \end{aligned}$$

□

We are now ready to show a lower bound on the first entropy expression in (24). In more detail, we show that the initial entropy of the set of incident critical edges conditioned on the event $I_{D, Y_i} = 1$ is bounded from below by their

expected number (ignoring logarithmic factors), where this expectation is conditional on the event that $u_i \in S$ and $|S| \geq \frac{n}{2} - \frac{n}{\log n}$ (i.e. $I_{S_i} = 1$) in addition to event $I_{D, Y_i} = 1$:

Lemma 21. *Let C_i denote the critical edges incident to u_i . It holds that*

$$\mathbf{H}[C_i \mid Y_i, Z_i, I_{D, Y_i} = 1] \geq \left(\frac{2}{k+1} + \frac{1}{4k^2} \right) (\log_2(n) - O(1)) \cdot \mathbf{E}[Y_i \mid I_{D, S_i, Y_i} = 1] - \mathbf{E}[Y_i \log_2 Y_i \mid I_{D, S_i, Y_i} = 1].$$

PROOF. By the definition of conditional entropy, we have

$$\mathbf{H}[C_i \mid Y_i, Z_i, I_{D, Y_i} = 1] = \sum_{y, z} \Pr[y, z \mid I_{D, Y_i} = 1] \mathbf{H}[C_i \mid Y_i = y, Z_i = z, I_{D, Y_i} = 1], \quad (25)$$

where y and z are such that $\Pr[Y_i = y, Z_i = z \mid I_{D, Y_i} = 1] > 0$.

We will derive a bound on $\mathbf{H}[C_i \mid Y_i = y, Z_i = z, I_{D, Y_i} = 1]$. Recall from Section 4 that the assignment of the random IDs to the nodes is done independently of the sampling of the red edges (which determines I_D and I_{Y_i}), and hence the assignment of the IDs to the nodes in the neighborhood of u_i (given by z) is independent of I_D and I_{Y_i} . In other words, the ID assignments given to u_i 's neighbors which is known to u_i does not reveal any information about which edges are blue and which ones are red, let alone which edges are critical. More formally, for each neighbor $w \in U \cup V$ of u_i , the edge (u_i, w) is red with some probability p (independent of w 's ID), and critical with some probability $p' \leq p$, where this event is also independent of w 's ID. Therefore, if we consider any two subsets c and c' of exactly y nodes chosen from the neighborhood z of u_i that are identified by their (unique) IDs, it follows from the above that $\Pr[C_i = c \mid y, z, I_{D, Y_i} = 1] = \Pr[C_i = c' \mid y, z, I_{D, Y_i} = 1]$.

To obtain a lower bound on u_i 's degree, we recall that u_i has $n^{\frac{2}{k+1} + \frac{1}{4k^2}}$ incident (blue) edges, and hence

$$\Pr[C_i = c \mid y, z, I_{D, Y_i} = 1] \leq 1 / \binom{n^{\frac{2}{k+1} + \frac{1}{4k^2}}}{y}. \quad (26)$$

We combine these observations to obtain that

$$\begin{aligned} \mathbf{H}[C_i \mid y, z, I_{D, Y_i} = 1] &= \sum_c \Pr[C_i = c \mid y, z, I_{D, Y_i} = 1] \log_2(1 / \Pr[c \mid y, z, I_{D, Y_i} = 1]) \\ &\stackrel{\text{(by (26))}}{\geq} \sum_c \Pr[c \mid y, z, I_{D, Y_i} = 1] \log_2 \binom{n^{\frac{2}{k+1} + \frac{1}{4k^2}}}{y} \\ &= \log_2 \binom{n^{\frac{2}{k+1} + \frac{1}{4k^2}}}{y} \sum_c \Pr[c \mid y, z, I_{D, Y_i} = 1] \\ &= \log_2 \binom{n^{\frac{2}{k+1} + \frac{1}{4k^2}}}{y} \\ &\stackrel{\text{(since } \binom{n}{k} \geq \left(\frac{n}{k}\right)^k)}{\geq} \log_2 \left(\frac{n^{\frac{2}{k+1} + \frac{1}{4k^2}}}{y} \right)^y \\ &= \left(\frac{2}{k+1} + \frac{1}{4k^2} \right) y \log_2 n - y \log_2 y. \end{aligned}$$

Applying this bound to (25), we get

$$\begin{aligned} \mathbf{H}[C_i \mid Y_i, Z_i, I_{D, Y_i} = 1] &\geq \sum_{y, z} \Pr[y, z \mid I_{D, Y_i} = 1] \left(\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) y \log_2 n - y \log_2 y \right) \\ &= \sum_y \Pr[y \mid I_{D, Y_i} = 1] \left(\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) y \log_2 n - y \log_2 y \right). \end{aligned} \quad (27)$$

The final expression is equivalent to $\mathbf{E}_{Y_i} \left[\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) Y_i \log_2 n - Y_i \log_2 Y_i \mid I_{D, Y_i} = 1 \right]$.

As explained earlier, we need to compute the expectation conditioned on $I_{D, S_i, Y_i} = 1$. We will use Lemma 20 to lift (27) to this probability space. For any y in the support of Y_i , we have

$$\begin{aligned} \Pr[y \mid I_{D, Y_i} = 1] &\geq \Pr[y \mid I_{D, S_i, Y_i} = 1] \Pr[I_{S_i} = 1 \mid I_{D, Y_i} = 1] \\ &\stackrel{\text{(by Lem. 20)}}{\geq} \left(1 - O\left(\frac{1}{\log n}\right) \right) \Pr[y \mid I_{D, S_i, Y_i} = 1]. \end{aligned}$$

Returning to (27), we conclude that

$$\begin{aligned} \mathbf{H}[C_i \mid Y_i, Z_i, I_{D, Y_i} = 1] &\geq \left(1 - O\left(\frac{1}{\log n}\right) \right) \sum_y \Pr[y \mid I_{D, S_i, Y_i} = 1] \left(\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) y \log_2 n - y \log_2 y \right) \\ &= \left(1 - O\left(\frac{1}{\log n}\right) \right) \cdot \mathbf{E}_{Y_i} \left[\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) Y_i \log_2 n - Y_i \log_2 Y_i \mid I_{D, S_i, Y_i} = 1 \right]. \end{aligned}$$

The result follows by linearity of expectation. \square

In the next lemma, we will derive an upper bound on the second entropy expression in (24). In particular, we show that the entropy that remains after u_i has received all messages that were sent to it by the algorithm is sufficiently small in the case where u_i has few incident spanner edges, i.e., $I_{S_i} = 1$.

Lemma 22. *Recall that C_i denotes the critical edges incident to u_i . We have*

$$\begin{aligned} \mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_{D, Y_i} = 1] &\leq \left(\left(\frac{2}{k+1} + \frac{1}{8k^2} \right) \log_2 n + \log_2 e \right) \mathbf{E}[Y_i \mid I_{D, S_i, Y_i} = 1] \\ &\quad + O\left(\frac{3}{k+1}\right) \mathbf{E}[Y_i \mid I_{D, Y_i} = 1, I_{S_i} = 0] - \mathbf{E}[Y_i \log_2(Y_i) \mid I_{D, S_i, Y_i} = 1]. \end{aligned}$$

PROOF. As outlined above, we can deduce I_{S_i} from the transcript because the first bit that u_i receives is the value of I_{S_i} . Moreover, the set of incident spanner edges F_i that are finally output by u_i is determined by the transcript Π_i

and the initial state of u_i as given by Y_i, Z_i (including u_i 's private random bits). Hence,

$$\begin{aligned}
& \mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_{D,Y_i}=1] \\
& \leq \mathbf{H}[C_i \mid F_i, I_{S_i}, Y_i, Z_i, I_{D,Y_i}=1] \\
\text{(by Lem. 23)} \quad & \leq \mathbf{H}[C_i \mid F_i, I_{S_i}, Y_i, I_{D,Y_i}=1] \\
& = \sum_{b \in \{0,1\}} \sum_{f,y} \Pr[F_i=f, I_{S_i}=b, Y_i=y \mid I_{D,Y_i}=1] \mathbf{H}[C_i \mid f, b, y, I_{D,Y_i}=1] \\
& = \Pr[I_{S_i}=1 \mid I_{D,Y_i}=1] \sum_{f,y} \Pr[f, y \mid I_{D,S_i,Y_i}=1] \mathbf{H}[C_i \mid f, y, I_{D,S_i,Y_i}=1] \\
& \quad + \Pr[I_{S_i}=0 \mid I_{D,Y_i}=1] \sum_{f,y} \left(\Pr[f, y \mid I_{D,Y_i}=1, I_{S_i}=0] \right. \\
& \quad \quad \quad \left. \cdot \mathbf{H}[C_i \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] \right) \\
& \leq \sum_{f,y} \Pr[f, y \mid I_{D,S_i,Y_i}=1] \mathbf{H}[C_i \mid f, y, I_{D,S_i,Y_i}=1] \\
& \quad + O\left(\frac{1}{\log n}\right) \sum_{f,y} \Pr[f, y \mid I_{D,Y_i}=1, I_{S_i}=0] \mathbf{H}[C_i \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] \tag{28}
\end{aligned}$$

where the last inequality holds because Lemma 20 implies that $\Pr[I_{S_i}=0 \mid I_{D,Y_i}=1] = O(1/\log n)$.

We will separately bound the sums on the right-hand side. Fix any f and y . To obtain an upper bound on $\mathbf{H}[C_i \mid f, y, I_{D,S_i,Y_i}=1]$, recall that the conditioning on $I_{S_i}=1$ says that u_i 's output f contains at most $n^{\frac{2}{k+1} + \frac{1}{8k^2}}$ spanner edges (see Lemma 17) and, we know from Lemma 7 that every critical edge must be part of the spanner, which tells us that the y critical edges incident to u_i are part of u_i 's output. The total number of ways we can choose a subset c of size y from the edges in f is

$$\binom{|f|}{y} \leq \binom{n^{\frac{2}{k+1} + \frac{1}{8k^2}}}{y}.$$

Moreover, the (remaining) entropy $\mathbf{H}[C_i \mid f, y, I_{D,S_i,Y_i}=1]$ is maximized if the conditional distribution of C_i is uniform over all subsets c of size y . Combining these observations, we get

$$\begin{aligned}
\mathbf{H}[C_i \mid f, y, I_{D,S_i,Y_i}=1] & = \sum_c \Pr[C_i=c \mid f, y, I_{D,S_i,Y_i}=1] \log_2 \left(\frac{1}{\Pr[c \mid f, y, I_{D,S_i,Y_i}=1]} \right) \\
& \leq \log_2 \left(\frac{n^{\frac{2}{k+1} + \frac{1}{8k^2}}}{y} \right) \sum_c \Pr[C_i=c \mid f, y, I_{D,S_i,Y_i}=1] \\
& = \log_2 \left(\frac{n^{\frac{2}{k+1} + \frac{1}{8k^2}}}{y} \right) \\
\text{(since } \binom{n}{k} & \leq \left(\frac{en}{k}\right)^k) \quad & \leq \log_2 \left(\frac{e n^{\frac{2}{k+1} + \frac{1}{8k^2}}}{y} \right)^y \\
& = y \left(\left(\frac{2}{k+1} + \frac{1}{8k^2} \right) \log_2 n + \log_2 \left(\frac{e}{y} \right) \right). \tag{29}
\end{aligned}$$

Next, we derive an upper bound on the entropy term in the second sum of (28), i.e., $\mathbf{H}[C_i \mid f, y, I_{D,Y_i}=1, I_{S_i}=0]$. Since $I_{S_i}=0$, we cannot make any assumptions on the number of edges that are included in the output of u_i ; in fact, it may

happen that u_i simply outputs all incident edges and so the entropy of C_i may not decrease at all. Since we condition on $I_D = 1$, we know from Lemma 6 that the maximum number of blue and red edges incident to u_i is bounded by

$$d_{\max} = n^{\frac{2}{k+1} + \frac{1}{4k^2}} + n^{\frac{1}{k+1}} \leq n^{\frac{3}{k+1}}, \quad (30)$$

for sufficiently large n . The conditioning on $Y_i = y$ ensures that u_i has exactly y critical edges, which means that the entropy is maximized if the distribution of C_i over the at most d_{\max} edges incident to u_i is uniform with probability $1/\binom{d_{\max}}{y}$. That is,

$$\begin{aligned} & \mathbf{H}[C_i \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] & (31) \\ &= \sum_c \Pr[c \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] \log_2 \left(\frac{1}{\Pr[c \mid f, y, I_{D,Y_i}=1, I_{S_i}=0]} \right) \\ &\leq \sum_c \Pr[c \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] \log_2 \left(\binom{d_{\max}}{y} \right) \\ (\text{since } \binom{N}{K} \leq N^K) &\leq y \log_2 d_{\max} \sum_c \Pr[c \mid f, y, I_{D,Y_i}=1, I_{S_i}=0] \\ &\leq \frac{3y}{k+1} \log_2 n, & (32) \end{aligned}$$

where the last step follows from (30) and the fact that $\sum_c \Pr[c \mid \dots] = 1$.

We now combine the bounds that we obtained in (29) and (32) to obtain an upper bound on the expression $\mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_{D,Y_i}=1]$. From (28), it follows that

$$\begin{aligned} & \mathbf{H}[C_i \mid \Pi_i, Y_i, Z_i, I_{D,Y_i}=1] \\ &\leq \sum_{f,y} \Pr[f, y \mid I_{D,S_i,Y_i}=1] y \left(\left(\frac{2}{k+1} + \frac{1}{8k^2} \right) \log_2 n + \log_2 \left(\frac{e}{y} \right) \right) \\ &\quad + O\left(\frac{1}{\log n} \right) \sum_{f,y} \Pr[f, y \mid I_{D,Y_i}=1, I_{S_i}=0] \frac{3y}{k+1} \log_2 n \\ &= \mathbf{E}_{F_i, Y_i} \left[Y_i \left(\left(\frac{2}{k+1} + \frac{1}{8k^2} \right) \log_2 n + \log_2 \left(\frac{e}{Y_i} \right) \right) \mid I_{D,S_i,Y_i}=1 \right] \\ &\quad + O\left(\frac{1}{\log n} \right) \mathbf{E}_{F_i, Y_i} \left[\frac{3Y_i}{k+1} \log_2 n \mid I_{D,Y_i}=1, I_{S_i}=0 \right] \\ &= \left(\left(\frac{2}{k+1} + \frac{1}{8k^2} \right) \log_2 n + \log_2 e \right) \mathbf{E}_{Y_i} [Y_i \mid I_{D,S_i,Y_i}=1] \\ &\quad + O\left(\frac{3}{k+1} \right) \mathbf{E}_{Y_i} [Y_i \mid I_{D,Y_i}=1, I_{S_i}=0] - \mathbf{E}_{Y_i} [Y_i \log_2(Y_i) \mid I_{D,S_i,Y_i}=1]. \end{aligned}$$

□

Equipped with Lemmas 21 and 22, we can continue our derivation of a lower bound on $\text{LIC}_{\mathcal{G}}(\mathcal{A})$. By applying these bounds to the two entropy terms on the right-hand side of (24), we get

$$\begin{aligned} \text{LIC}_{\mathcal{G}}(\mathcal{A}) &\geq \frac{1}{2} \sum_{u_i \in U} \left(\left(\frac{1}{4k^2} - \frac{1}{8k^2} \right) \log_2 n \right. \\ &\quad \left. - O\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) - \log_2 e \right) \mathbf{E}[Y_i \mid I_{D,S_i,Y_i}=1] \\ &\quad - O\left(\frac{3}{k+1} \right) \mathbf{E}[Y_i \mid I_{D,Y_i}=1, I_{S_i}=0] \\ &\geq \frac{1}{2} \sum_{u_i \in U} \left(\frac{1}{16k^2} \log_2 n \cdot \mathbf{E}[Y_i \mid I_{D,S_i,Y_i}=1] \right. \\ &\quad \left. - O\left(\frac{3}{k+1} \right) \mathbf{E}[Y_i \mid I_{D,Y_i}=1, I_{S_i}=0] \right), \end{aligned}$$

where we have used the fact that

$$\frac{1}{16k^2} \log_2 n \geq O\left(\frac{2}{k+1} + \frac{1}{4k^2} \right) + \log_2(e),$$

for sufficiently large n . The conditioning on $I_{Y_i}=1$ tells us that $Y_i \geq \frac{1}{16} n^{\frac{1}{k+1}}$ and hence also

$$\mathbf{E}[Y_i \mid I_{D,S_i,Y_i}=1] \geq \frac{1}{16} n^{\frac{1}{k+1}}.$$

On the other hand, the conditioning on $I_D=1$ guarantees that the number of red edges incident to u_i is at most $n^{\frac{1}{k+1}}$ (see Lemma 6) and hence the same bound holds for the number of critical edges, which guarantees that

$$\mathbf{E}[Y_i \mid I_{D,Y_i}=1, I_{S_i}=0] \leq n^{\frac{1}{k+1}}.$$

From this we conclude that

$$\begin{aligned} \text{LIC}_{\mathcal{G}}(\mathcal{A}) &\geq \frac{|U|}{2} \left(\frac{1}{16^2 k^2} n^{\frac{1}{k+1}} \log_2 n - O\left(n^{\frac{1}{k+1}} \right) \right) \\ &\quad \text{(since } |U| = \Omega(n) \text{ and } k = O\left(\left(\frac{\log n}{\log \log n} \right)^{1/3} \right)) = \Omega\left(\frac{1}{k^2} n^{1+\frac{1}{k+1}} \log n \right) \\ &= \Omega\left(\frac{1}{t^2} n^{1+\frac{1}{2t}} \log n \right). \end{aligned} \tag{by (4)}$$

This completes the proof of Theorem 1.

5.2 Lower Bounds for Distributed Spanner Algorithms

In this section, we derive communication and time lower bounds from Theorem 1. We first apply Lemma 2 to obtain the claimed bound on the communication complexity in the asynchronous model:

Theorem 2. *Any algorithm that, with high probability, constructs a $(2t-1)$ -spanner with $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}} \right)$ edges, for $2 \leq t \leq O\left((\log(n)/\log \log n)^{1/3} \right)$, has a communication complexity of $\Omega\left(\frac{1}{t^2} n^{1+\frac{1}{2t}} \log n \right)$ bits in the asynchronous message passing clique under the KT_1 assumption.*

From Lemma 3, we get a similar result for the synchronous CONGEST KT_1 model and the congested clique. We do not explicitly state our bounds in terms of the message complexity, as this would change the result only by a logarithmic factor.

Theorem 3. *Consider the synchronous KT_1 congested clique and any $\tau = O(\text{poly}(n))$. Any τ -round algorithm algorithm that, with high probability, outputs a $(2t - 1)$ -spanner with at most $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}\right)$ edges sends at least $\Omega\left(\frac{1}{t^2 \log n} \cdot n^{1+\frac{1}{2t}}\right)$ bits in the worst case, for $2 \leq t \leq O\left((\log(n)/\log \log n)^{1/3}\right)$. The same result holds in the CONGEST KT_1 model.*

When considering the CONGEST KT_1 model and $t = O(1)$, Theorem 3 implies that, for any $(2t - 1)$ -spanner algorithm that succeeds with high probability and takes a polynomial number of rounds, there exists a graph where at least $\Omega(n^{1+\epsilon})$ bits are sent, for some constant $\epsilon > 0$. On the other hand, we know from [BS07] that the time complexity of $(2t - 1)$ -spanners is $O(t^2)$ rounds and, according to [DGPV08], $\Omega(t)$ is a lower bound even in the more powerful LOCAL model, which means that a time-optimal algorithm does not need to depend on n at all! Furthermore, by leveraging the time-encoding trick mentioned in Section 1 (and described in more detail in Appendix A) it is possible to send only $\tilde{O}(n)$ bits at the cost of a larger running time, which matches the trivial lower bound on the communication complexity of $\Omega(n)$ bits up to polylogarithmic factors. Combining these observations we have the following:

Corollary 2. *There is no $(2t - 1)$ -spanner algorithm in the CONGEST KT_1 model (or the congested clique) that outputs at most $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}\right)$ edges with high probability and simultaneously achieves optimal time and optimal communication complexity.*

Notice that Corollary 2 reveals a gap between constructing a spanner and the problem of finding a minimum spanning tree (MST) in the congested clique, as the work of [HPP⁺15] shows that it is possible to solve the latter problem in $O(\text{polylog}(n))$ time while sending only $\tilde{O}(n)$ bits.

We now turn our attention towards time complexity in the node-capacitated clique and the gossip model with limited bandwidth, as studied in [HMS18]. Applying Lemma 4 reveals that constructing a spanner is harder than MST in the node-capacitated clique, for which there is a $O(\text{polylog}(n))$ time algorithm (see [AGG⁺19]):

Theorem 4. *Consider the node-capacitated clique defined in [AGG⁺19]. Constructing a $(2t - 1)$ -spanner that, with high probability, has $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}\right)$ edges requires $\Omega\left(\frac{1}{t^2 \log^4 n} n^{\frac{1}{2t}}\right)$ rounds, for $2 \leq t \leq O\left((\log(n)/\log \log n)^{1/3}\right)$.*

From Lemma 5 we get a similar result for the gossip model:

Theorem 5. *Consider the push-pull gossip model where the link bandwidth is limited to $O(\log n)$ bits. Constructing a $(2t - 1)$ -spanner that, with high probability, has $O\left(n^{1+\frac{1}{t}+\frac{1}{16(2t-1)^2}}\right)$ edges requires $\Omega\left(\frac{1}{t^2 \log^3 n} n^{\frac{1}{2t}}\right)$ rounds, for $2 \leq t \leq O\left((\log(n)/\log \log n)^{1/3}\right)$.*

6 FUTURE WORK AND OPEN PROBLEMS

We conclude by listing some interesting open problems and possible future research directions.

We have argued in Section 5.2 that it is impossible to construct a spanner in a way that is both time- and communication-optimal. However, this question is still unresolved for the basic problem of constructing minimum spanning trees:

Open Problem 1. *Is it possible to construct a minimum spanning tree in $\tilde{O}(D + \sqrt{n})$ rounds and with $O(n \text{polylog}(n))$ communication complexity in the synchronous CONGEST KT_1 model?*

We have shown in Section 3 that the local information cost $\text{LIC}_\gamma(P)$ presents a lower bound on the communication complexity $\text{CC}_\gamma(P)$ of solving P in the asynchronous message passing model with error at most γ . A natural question is whether this relationship is tight (up to polylogarithmic factors) for all graph problems.

Open Problem 2. *Does it hold that $\text{CC}_\gamma(P) = \tilde{\Theta}(\text{LIC}_\gamma(P))$, for every graph problem P ?*

In this work, we have studied communication complexity lower bounds for multiplicative $(2t - 1)$ -spanners. To the best of our knowledge, all existing distributed spanner algorithms send at least $\Omega(tm)$ bits and hence it is still an open question whether the $\Omega(m)$ barrier known to hold for the clean network model (see Section 1) also holds under the KT_1 assumption. In fact, this question is still open even if we allow a polynomial number of rounds:

Open Problem 3. *Does there exist a distributed algorithm that constructs a $(2t - 1)$ -spanner with $O\left(n^{1+\frac{1}{t}+\epsilon}\right)$ edges, while sending $\tilde{O}\left(n^{1+\frac{1}{2t}}\right)$ bits and terminating in at most $O(\text{poly}(n))$ rounds in the synchronous CONGEST KT_1 model?*

A A SIMPLE TIME-ENCODING MECHANISM FOR OBTAINING OPTIMAL COMMUNICATION COMPLEXITY IN THE CONGEST KT_1 MODEL

We describe a folklore technique for obtaining a message-optimal algorithm for *any* problem P in the CONGEST KT_1 model. We first construct a spanning tree by using the algorithm of [KKT15], which takes time $\tilde{O}(n)$ and requires sending $\tilde{O}(n)$ bits. Then, we elect a leader on this tree, which requires $\tilde{O}(n)$ bits using the algorithm of [KPP⁺15]. Subsequently, the leader u_* serves as the root of the spanning tree T and every node knows its distance in T from u_* . Assuming an ID range of size n^c , there are at most $t = 2^{\binom{n}{2}}(n!) \cdot \binom{n^c}{n}$ possible n -node graphs where a subset of n IDs is chosen and assigned to the nodes by selecting one of the possible $n!$ permutations. Let E be some arbitrary enumeration of the set of permutations and let E_i refer to the i -th item in the order stipulated by E . We split the computation into iterations of t rounds with the goal of performing a convergecast. Let d be the maximum distance of a node from the root u_* in T , which can be known by all nodes in $O(D)$ additional rounds.

In the first iteration, each leaf at distance d sends exactly 1 bit to its parent in round k if its local neighborhood corresponds to E_k . Similarly, in iteration $i > 1$, every node u at distance $d - i + 1$, sends 1 bit in round k' such that $E_{k'}$ corresponds to the subgraph consisting of u 's neighborhood as well as the topology information received from its children in the previous iterations. Proceeding in this manner ensures that a node can convey its current knowledge of the network topology to its parent by sending only a single bit during one of the rounds in this iteration while remaining silent in all others. After d iterations, the entire topological information is received by the root u_* , and this information again corresponds to some $E_{k''}$. Subsequently we use another d iterations, each consisting of t rounds, to disseminate $E_{k''}$ starting from u_* to all nodes in the network, and, similarly to the mechanism described above, this can be done by sending only $O(n)$ bits in total. Finally, each node locally computes its output from $E_{k''}$ according to the solution to problem P .

B TOOLS FROM INFORMATION THEORY.

We first introduce some basic definitions from information theory such as entropy and mutual information and restate some facts (without proofs) that we use throughout the paper. More details can be found in [CT06].

Throughout this section, we assume that X , Y , and Z are discrete random variables. We use capitals to denote random variables and corresponding lowercase characters for values. To shorten the notation, we abbreviate the event

“ $X=x$ ” by simply writing “ x ”, for random variables X and a value x .⁷ When computing expected values, we sometimes use the subscript notation \mathbf{E}_X to clarify that the expectation is taken over the distribution of random variable X .

Definition 4. The *entropy of X* is defined as

$$\mathbf{H}[X] = \sum_x \Pr[X=x] \log_2(1/\Pr[X=x]). \quad (33)$$

The *conditional entropy of X conditioned on Y* is given by

$$\begin{aligned} \mathbf{H}[X | Y] &= \mathbf{E}_Y[\mathbf{H}[X | Y=y]] \\ &= \sum_y \Pr[Y=y] \mathbf{H}[X | Y=y]. \end{aligned} \quad (34)$$

Definition 5. Let X and Y be discrete random variables. The *mutual information between X and Y* is defined as

$$\mathbf{I}[X : Y] = \sum_{x,y} \Pr[x,y] \cdot \log\left(\frac{\Pr[x,y]}{\Pr[x] \Pr[y]}\right) \quad (35)$$

Definition 6. Let X , Y , and Z be discrete random variables. The *conditional mutual information of X and Y* is defined as

$$\mathbf{I}[X : Y | Z] = \mathbf{E}_Z[\mathbf{I}[X : Y | Z=z]] \quad (36)$$

$$= \mathbf{H}[X | Z] - \mathbf{H}[X | Y, Z]. \quad (37)$$

Lemma 23. $\mathbf{H}[X | Y, Z] \leq \mathbf{H}[X | Y]$.

Lemma 24. $\mathbf{I}[X : Y | Z] \leq \mathbf{H}[X | Z]$.

Lemma 25 (Theorem 6.1 in [RY20]). *Consider any random variable X . Every encoding of X has expected length at least $\mathbf{H}[X]$.*

Lemma 26 (Data Processing Inequality). *If random variables X , Y , and Z form the Markov chain $X \rightarrow Y \rightarrow Z$, i.e., the conditional distribution of Z depends only on Y and is conditionally independent of X , then*

$$\mathbf{I}[X : Y] \geq \mathbf{I}[X : Z].$$

Lemma 27 (Chain Rule of Mutual Information). *Let W , X , Y , and Z be jointly distributed random variables. Then*

$$\mathbf{I}[X, Y : Z | W] = \mathbf{I}[X : Z | W] + \mathbf{I}[Y : Z | W, X]. \quad (38)$$

REFERENCES

- [AGG⁺19] John Augustine, Mohsen Ghaffari, Robert Gmyr, Kristian Hinmenthal, Christian Scheideler, Fabian Kuhn, and Jason Li. Distributed computation in node-capacitated networks. In Christian Scheideler and Petra Berenbrink, editors, *The 31st ACM on Symposium on Parallelism in Algorithms and Architectures, SPAA 2019, Phoenix, AZ, USA, June 22-24, 2019*, pages 69–79. ACM, 2019.
- [AGPV90] Baruch Awerbuch, Oded Goldreich, David Peleg, and Ronen Vainish. A trade-off between information and communication in broadcast protocols. *J. ACM*, 37(2):238–256, 1990.
- [Awe85] Baruch Awerbuch. Complexity of network synchronization. *J. ACM*, 32(4):804–823, 1985.
- [BBCR13] Boaz Barak, Mark Braverman, Xi Chen, and Anup Rao. How to compress interactive communication. *SIAM J. Comput.*, 42(3):1327–1363, 2013.

⁷For instance, the expression $\mathbf{H}[C_i | F, y_i]$ is the same as $\mathbf{H}[C_i | F, Y_i = y_i]$, where C_i , F , and Y_i are random variables.

- [BEIK19] Shimon Bitton, Yuval Emek, Taisuke Izumi, and Shay Kutten. Message reduction in the LOCAL model is a free lunch. In *33rd International Symposium on Distributed Computing, DISC 2019, October 14-18, 2019, Budapest, Hungary*, pages 7:1–7:15, 2019.
- [BEO⁺13] Mark Braverman, Faith Ellen, Rotem Oshman, Toniann Pitassi, and Vinod Vaikuntanathan. A tight bound for set disjointness in the message-passing model. In *54th Annual IEEE Symposium on Foundations of Computer Science, FOCS 2013, 26-29 October, 2013, Berkeley, CA, USA*, pages 668–677. IEEE Computer Society, 2013.
- [BJKS04] Ziv Bar-Yossef, T. S. Jayram, Ravi Kumar, and D. Sivakumar. An information statistics approach to data stream and communication complexity. *J. Comput. Syst. Sci.*, 68(4):702–732, 2004.
- [BS07] Surender Baswana and Sandeep Sen. A simple and linear time randomized algorithm for computing sparse spanners in weighted graphs. *Random Struct. Algorithms*, 30(4):532–563, 2007.
- [BYJKS04] Ziv Bar-Yossef, Thathachar S Jayram, Ravi Kumar, and D Sivakumar. An information statistics approach to data stream and communication complexity. *Journal of Computer and System Sciences*, 68(4):702–732, 2004.
- [CHD18] Keren Censor-Hillel and Michal Dory. Distributed spanner approximation. In *Proceedings of the 2018 ACM Symposium on Principles of Distributed Computing*, pages 139–148, 2018.
- [CHKM12] Keren Censor-Hillel, Bernhard Haeupler, Jonathan A. Kelner, and Petar Maymounkov. Global computation in a poorly connected world: fast rumor spreading with no dependence on conductance. In Howard J. Karloff and Toniann Pitassi, editors, *Proceedings of the 44th Symposium on Theory of Computing Conference, STOC 2012, New York, NY, USA, May 19 - 22, 2012*, pages 961–970. ACM, 2012.
- [CSWY01] Amit Chakrabarti, Yaoyun Shi, Anthony Wirth, and Andrew Yao. Informational complexity and the direct sum problem for simultaneous message complexity. In *Proceedings 42nd IEEE Symposium on Foundations of Computer Science*, pages 270–278. IEEE, 2001.
- [CT06] T. Cover and J.A. Thomas. *Elements of Information Theory, second edition*. Wiley, 2006.
- [DGPV08] Bilel Derbel, Cyril Gavoille, David Peleg, and Laurent Viennot. On the locality of distributed sparse spanner construction. In *Proceedings of the twenty-seventh ACM symposium on Principles of distributed computing*, pages 273–282, 2008.
- [Elk07] Michael Elkin. A near-optimal distributed fully dynamic algorithm for maintaining sparse spanners. In Indranil Gupta and Roger Wattenhofer, editors, *Proceedings of the Twenty-Sixth Annual ACM Symposium on Principles of Distributed Computing, PODC 2007, Portland, Oregon, USA, August 12-15, 2007*, pages 185–194. ACM, 2007.
- [Elk17] Michael Elkin. A simple deterministic distributed MST algorithm, with near-optimal time and message complexities. In Elad Michael Schiller and Alexander A. Schwarzmann, editors, *Proceedings of the ACM Symposium on Principles of Distributed Computing, PODC 2017, Washington, DC, USA, July 25-27, 2017*, pages 157–163. ACM, 2017.
- [EN19] Michael Elkin and Ofer Neiman. Efficient algorithms for constructing very sparse spanners and emulators. *ACM Trans. Algorithms*, 15(1):4:1–4:29, 2019.
- [Erd63] Paul Erdős. Extremal problems in graph theory. In *Proc. Symp. Theory of Graphs and its Applications*, page 2936, 1963.
- [FGKO18] Orr Fischer, Tzlil Gonen, Fabian Kuhn, and Rotem Oshman. Possibilities and impossibilities for distributed subgraph detection. In Christian Scheideler and Jeremy T. Fineman, editors, *Proceedings of the 30th on Symposium on Parallelism in Algorithms and Architectures, SPAA 2018, Vienna, Austria, July 16-18, 2018*, pages 153–162. ACM, 2018.
- [FHW12] Silvio Frischknecht, Stephan Holzer, and Roger Wattenhofer. Networks cannot compute their diameter in sublinear time. In Yuval Rabani, editor, *Proceedings of the Twenty-Third Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2012, Kyoto, Japan, January 17-19, 2012*, pages 1150–1162. SIAM, 2012.
- [FWY20] Manuel Fernandez, David P. Woodruff, and Taisuke Yasuda. Graph spanners in the message-passing model. In Thomas Vidick, editor, *11th Innovations in Theoretical Computer Science Conference, ITCS 2020, January 12-14, 2020, Seattle, Washington, USA*, volume 151 of *LIPICs*, pages 77:1–77:18. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2020.
- [GK18] Mohsen Ghaffari and Fabian Kuhn. Distributed MST and broadcast with fewer messages, and faster gossiping. In *32nd International Symposium on Distributed Computing, DISC 2018, New Orleans, LA, USA, October 15-19, 2018*, volume 121 of *LIPICs*, pages 30:1–30:12. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018.
- [GP18] Robert Gmyr and Gopal Pandurangan. Time-message trade-offs in distributed algorithms. In *32nd International Symposium on Distributed Computing, DISC 2018, New Orleans, LA, USA, October 15-19, 2018*, volume 121 of *LIPICs*, pages 32:1–32:18. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018.
- [HHW18] Bernhard Haeupler, D. Ellis Hershkowitz, and David Wajc. Round- and message-optimal distributed graph algorithms. In *Proceedings of the 2018 ACM Symposium on Principles of Distributed Computing, PODC 2018, Egham, United Kingdom, July 23-27, 2018*, pages 119–128, 2018.
- [HMS18] Bernhard Haeupler, Jeet Mohapatra, and Hsin-Hao Su. Optimal gossip algorithms for exact and approximate quantile computations. In *Proceedings of the 2018 ACM Symposium on Principles of Distributed Computing, PODC 2018, Egham, United Kingdom, July 23-27, 2018*, pages 179–188, 2018.
- [HPP⁺15] James W Hegeman, Gopal Pandurangan, Sriram V Pemmaraju, Vivek B Sardeshmukh, and Michele Scquizzato. Toward optimal bounds in the congested clique: Graph connectivity and mst. In *Proceedings of the 2015 ACM Symposium on Principles of Distributed Computing*, pages 91–100, 2015.
- [IG17] Taisuke Izumi and François Le Gall. Triangle finding and listing in CONGEST networks. In Elad Michael Schiller and Alexander A. Schwarzmann, editors, *Proceedings of the ACM Symposium on Principles of Distributed Computing, PODC 2017, Washington, DC, USA, July 25-27, 2017*, pages 381–389. ACM, 2017.

- [KKT15] Valerie King, Shay Kutten, and Mikkel Thorup. Construction and impromptu repair of an MST in a distributed network with $o(m)$ communication. In Chryssis Georgiou and Paul G. Spirakis, editors, *Proceedings of the 2015 ACM Symposium on Principles of Distributed Computing, PODC 2015, Donostia-San Sebastián, Spain, July 21 - 23, 2015*, pages 71–80. ACM, 2015.
- [KNPR15] Hartmut Klauck, Danupon Nanongkai, Gopal Pandurangan, and Peter Robinson. Distributed computation of large-scale graph problems. In *Proceedings of the Twenty-Sixth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2015, San Diego, CA, USA, January 4-6, 2015*, pages 391–410. 2015.
- [KOS17] Gillat Kol, Rotem Oshman, and Dafna Sadeh. Interactive compression for multi-party protocol. In Andréa W. Richa, editor, *31st International Symposium on Distributed Computing, DISC 2017, October 16-20, 2017, Vienna, Austria*, volume 91 of *LIPICs*, pages 31:1–31:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017.
- [KPP⁺15] Shay Kutten, Gopal Pandurangan, David Peleg, Peter Robinson, and Amitabh Trehan. On the complexity of universal leader election. *J. ACM*, 62(1):7:1–7:27, 2015.
- [LPP06] Zvi Lotker, Boaz Patt-Shamir, and David Peleg. Distributed MST for constant diameter graphs. *Distributed Computing*, 18(6):453–460, 2006.
- [MK17] Ali Mashreghi and Valerie King. Time-communication trade-offs for minimum spanning tree construction. In *Proceedings of the 18th International Conference on Distributed Computing and Networking, Hyderabad, India, January 5-7, 2017*, page 8. ACM, 2017.
- [MK18] Ali Mashreghi and Valerie King. Broadcast and minimum spanning tree with $o(m)$ messages in the asynchronous CONGEST model. In *32nd International Symposium on Distributed Computing, DISC 2018, New Orleans, LA, USA, October 15-19, 2018*, volume 121 of *LIPICs*, pages 37:1–37:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018.
- [MK19] Ali Mashreghi and Valerie King. Brief announcement: Faster asynchronous MST and low diameter tree construction with sublinear communication. In Jukka Suomela, editor, *33rd International Symposium on Distributed Computing, DISC 2019, October 14-18, 2019, Budapest, Hungary*, volume 146 of *LIPICs*, pages 49:1–49:3. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2019.
- [MU05] Michael Mitzenmacher and Eli Upfal. *Probability and Computing: Randomized Algorithms and Probabilistic Analysis*. Cambridge University Press, 2005.
- [Mun13] James Munkres. *Topology: Pearson New International Edition*. Pearson, 2013.
- [Pel00] David Peleg. *Distributed Computing: A Locality-Sensitive Approach*. Society for Industrial and Applied Mathematics, 2000.
- [PPP⁺17] Shreyas Pai, Gopal Pandurangan, Sriram V. Pemmaraju, Talal Riaz, and Peter Robinson. Symmetry breaking in the congest model: Time- and message-efficient algorithms for ruling sets. In Andréa W. Richa, editor, *31st International Symposium on Distributed Computing, DISC 2017, October 16-20, 2017, Vienna, Austria*, volume 91 of *LIPICs*, pages 38:1–38:16. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017.
- [PPPR21] Shreyas Pai, Gopal Pandurangan, Sriram V. Pemmaraju, and Peter Robinson. Can we break symmetry with $o(m)$ communication? In Avery Miller, Keren Censor-Hillel, and Janne H. Korhonen, editors, *PODC '21: ACM Symposium on Principles of Distributed Computing, Virtual Event, Italy, July 26-30, 2021*, pages 247–257. ACM, 2021.
- [PPS16] Gopal Pandurangan, David Peleg, and Michele Scquizzato. Message lower bounds via efficient network synchronization. In Jukka Suomela, editor, *Structural Information and Communication Complexity - 23rd International Colloquium, SIROCCO 2016, Helsinki, Finland, July 19-21, 2016, Revised Selected Papers*, volume 9988 of *Lecture Notes in Computer Science*, pages 75–91, 2016.
- [PRS17] Gopal Pandurangan, Peter Robinson, and Michele Scquizzato. A time- and message-optimal distributed algorithm for minimum spanning trees. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing, STOC 2017, Montreal, QC, Canada, June 19-23, 2017*, pages 743–756, 2017.
- [PRS18] Gopal Pandurangan, Peter Robinson, and Michele Scquizzato. On the distributed complexity of large-scale graph computations. In Christian Scheideler and Jeremy T. Fineman, editors, *Proceedings of the 30th on Symposium on Parallelism in Algorithms and Architectures, SPAA 2018, Vienna, Austria, July 16-18, 2018*, pages 405–414. ACM, 2018.
- [PRVY19] Merav Parter, Ronitt Rubinfeld, Ali Vakilian, and Anak Yodpinyanee. Local computation algorithms for spanners. In Avrim Blum, editor, *10th Innovations in Theoretical Computer Science Conference, ITCS 2019, January 10-12, 2019, San Diego, California, USA*, volume 124 of *LIPICs*, pages 58:1–58:21. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2019.
- [PS89] David Peleg and Alejandro A. Schäffer. Graph spanners. *Journal of Graph Theory*, 13(1):99–116, 1989.
- [PVZ16] Jeff M. Phillips, Elad Verbin, and Qin Zhang. Lower bounds for number-in-hand multiparty communication complexity, made easy. *SIAM J. Comput.*, 45(1):174–196, 2016.
- [PY19a] Merav Parter and Eylon Yogev. Distributed algorithms made secure: A graph theoretic approach. In Timothy M. Chan, editor, *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2019, San Diego, California, USA, January 6-9, 2019*, pages 1693–1710. SIAM, 2019.
- [PY19b] Merav Parter and Eylon Yogev. Secure distributed computing made (nearly) optimal. In Peter Robinson and Faith Ellen, editors, *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing, PODC 2019, Toronto, ON, Canada, July 29 - August 2, 2019*, pages 107–116. ACM, 2019.
- [RY20] Anup Rao and Amir Yehudayoff. *Communication Complexity: and Applications*. Cambridge University Press, 2020.
- [SHK⁺12] Atish Das Sarma, Stephan Holzer, Liah Kor, Amos Korman, Danupon Nanongkai, Gopal Pandurangan, David Peleg, and Roger Wattenhofer. Distributed verification and hardness of distributed approximation. *SIAM J. Comput.*, 41(5):1235–1265, 2012.
- [Suo13] Jukka Suomela. Survey of local algorithms. *ACM Comput. Surv.*, 45(2):24:1–24:40, 2013.
- [WZ17] David P. Woodruff and Qin Zhang. When distributed computation is communication expensive. *Distributed Computing*, 30(5):309–323, 2017.

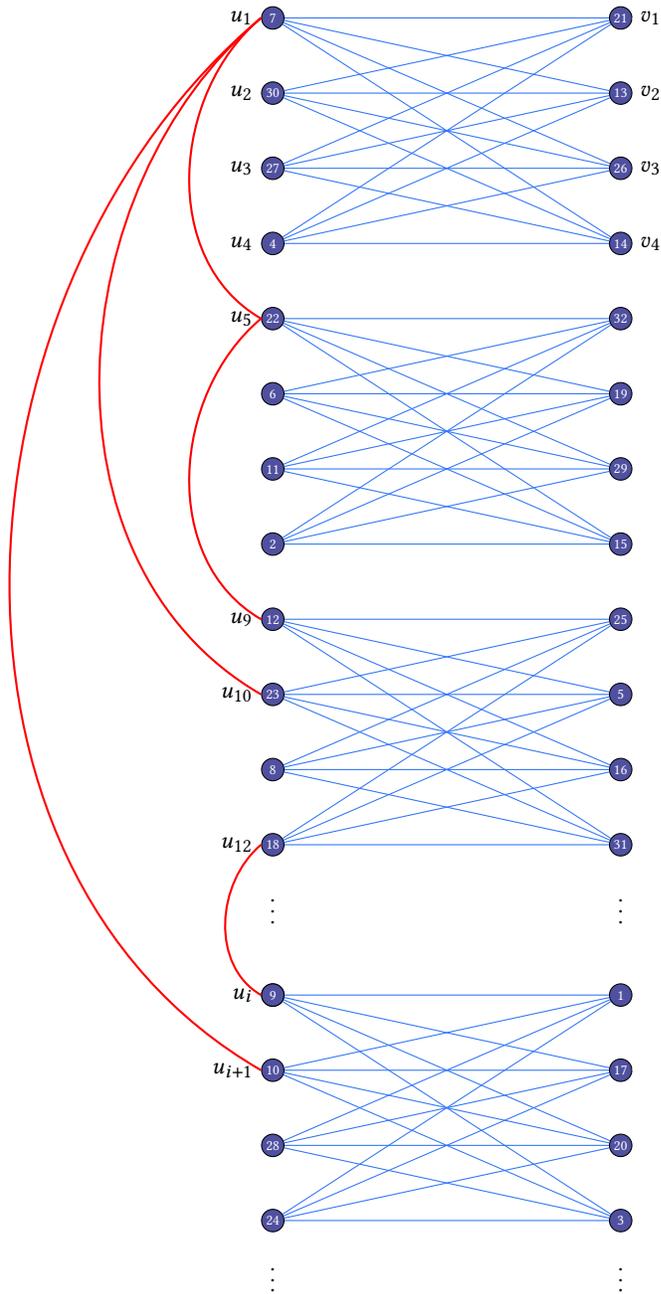


Fig. 1. A simplified instance of the lower bound graph sampled according to \mathcal{G}_k with randomly assigned node IDs. The region of u_1 consists of nodes $u_1, \dots, u_4, v_1, \dots, v_4$. Assuming that $k = 5$, the edge (u_1, u_{i+1}) is critical as any other path from u_1 to u_{i+1} has length greater than 5. On the other hand, the edges (u_1, u_5) and (u_1, u_{10}) are not critical as they are both reachable by traversal sequences of length (at most) k : after removing (u_1, u_5) , node u_5 is reachable via the traversal sequence $RBBR$. Similarly, if we discard (u_1, u_{10}) , then u_{10} is still in the reachable set $\mathcal{R}(RRBB)$.