

# Feedback Edge Sets in Temporal Graphs\*

Roman Haag, Hendrik Molter, Rolf Niedermeier, and Malte Renken

Algorithmics and Computational Complexity, Faculty IV, TU Berlin, Germany  
{h.molter,rolf.niedermeier,m.renken}@tu-berlin.de

## Abstract

The classical, linear-time solvable FEEDBACK EDGE SET problem is concerned with finding a minimum number of edges intersecting all cycles in a (static, unweighted) graph. We provide a first study of this problem in the setting of *temporal graphs*, where edges are present only at certain points in time. We find that there are four natural generalizations of FEEDBACK EDGE SET, all of which turn out to be NP-hard. We also study the tractability of these problems with respect to several parameters (solution size, lifetime, and number of graph vertices, among others) and obtain some parameterized hardness but also fixed-parameter tractability results.

## 1 Introduction

A temporal graph  $\mathcal{G} = (V, \mathcal{E}, \tau)$  has a fixed vertex set  $V$  and each time edge in  $\mathcal{E}$  has a discrete time-label  $t \in \{1, 2, \dots, \tau\}$ , where  $\tau$  denotes the *lifetime* of the temporal graph  $\mathcal{G}$ . A *temporal cycle* in a temporal graph is a time-respecting sequence of edges starting and ending at the same vertex. We study the computational complexity of searching for small *feedback edge sets*, i.e., edge sets whose removal from the temporal graph destroys all temporal cycles. We distinguish between the following two variants of feedback edge set problems.

1. *Temporal feedback edge sets*, which consist of time-edges, that is, connections between two specific vertices at a specific point in time.
2. *Temporal feedback connection sets*, which consist of vertex pairs  $\{v, w\}$  causing that all time-edges between  $v$  and  $w$  will be removed.

Defining feedback edge set problems in temporal graphs is not straight-forward because for temporal graphs the notions of paths and cycles are more involved than for static graphs. First, we consider two different, established models of temporal paths. Temporal paths are time-respecting paths in a temporal graph. *Strict* temporal paths have strictly increasing time-labels on consecutive time-edges. *Non-strict* temporal paths have non-decreasing time-labels on consecutive time-edges. Non-strictness can be used whenever the traversal time per edge is very short compared to the scale of the time dimension.

---

\*Supported by the DFG, project MATE (NI 369/17).

We focus on finding temporal feedback edge sets and temporal feedback connection sets (formalized in Section 2) of small cardinality in unweighted temporal graphs, each time using both the strict and non-strict temporal cycle model. We call the corresponding problems (STRICT) TEMPORAL FEEDBACK EDGE SET and (STRICT) TEMPORAL FEEDBACK CONNECTION SET, respectively.

(STRICT) TEMPORAL FEEDBACK EDGE SET ((S)TFES)

**Input:** A temporal graph  $\mathcal{G} = (V, \mathcal{E}, \tau)$  and  $k \in \mathbb{N}$ .

**Question:** Is there a (strict) temporal feedback edge set  $\mathcal{E}' \subseteq \mathcal{E}$  of  $\mathcal{G}$  with  $|\mathcal{E}'| \leq k$ ?

(STRICT) TEMPORAL FEEDBACK CONNECTION SET ((S)TFCS)

**Input:** A temporal graph  $\mathcal{G} = (V, \mathcal{E}, \tau)$  and  $k \in \mathbb{N}$ .

**Question:** Is there a (strict) temporal feedback connection set  $C'$  of  $\mathcal{G}$  with  $|C'| \leq k$ ?

**Related Work.** In static connected graphs, removing a minimum-cardinality feedback edge set results in a spanning tree. This can be done in linear time via depth-first or breadth-first search. Thus, it is natural to compare temporal feedback edge sets to the temporal analogue of a spanning tree. This analogue is known as the *minimum temporally connected (sub)graph*, which is a graph containing a time-respecting path from each vertex to every other vertex. The concept was first introduced by Kempe et al. [17], and Axiotis and Fotakis [4] showed that in an  $n$ -vertex graph such a minimum temporally connected subgraph can have  $\Omega(n^2)$  edges while Casteigts et al. [10] showed that complete temporal graphs admit sparse temporally connected subgraphs. Additionally, Akrida et al. [2] and Axiotis and Fotakis [4] proved that computing a minimum temporally connected subgraph is APX-hard. Considering *weighted* temporal graphs, there is also (partially empirical) work on computing minimum spanning trees, mostly focusing on polynomial-time approximability [16].

While feedback edge sets in temporal graphs seemingly have not been studied before, Agrawal et al. [1] investigated the related problem  $\alpha$ -SIMULTANEOUS FEEDBACK EDGE SET, where the edge set of a graph is partitioned into  $\alpha$  color classes and one wants to find a set of at most  $k$  edges intersecting all monochromatic cycles. They show that this is NP-hard for  $\alpha \geq 3$  colors and give a  $2^{O(k\alpha)}$  poly( $n$ )-time algorithm.

Another related problem is finding  $s$ - $t$ -separators in temporal graphs; this was studied by Berman [6], Kempe et al. [17], and Zschoche et al. [23]. Already here some differences were found between the strict and the non-strict setting, a distinction that also matters for our results.

**Our Contributions.** Based on a reduction from 3-SAT, we show NP-hardness for all four problem variants. The properties of the corresponding construction yield more insights concerning special cases. More specifically, the constructed graph uses  $\tau = 8$  distinct time-labels for the strict variants and  $\tau = 3$  labels for the non-strict variants. Similarly, we observe that our constructed graph has at most one time edge between any pair of vertices (i.e., is *simple*), implying that the problems remain NP-hard when restricted to simple temporal graphs. Based on the Exponential Time Hypothesis, we can derive the additional result stating that there is presumably no subexponential-time algorithm solving (S)TFES or (S)TFCS. Moreover, we show that all four problem variants are W[1]-hard when parameterized by the solution size  $k$ , using a parameterized reduction from the W[1]-hard problem MULTICUT IN DAGs [18].

On the positive side, based on a simple search tree, we first observe that all problem variants are fixed-parameter tractable with respect to the combined parameter  $k + L$ , where  $L$  is the

Table 1: Overview of our results for (STRICT) TEMPORAL FEEDBACK EDGE SET (marked with \*) and (STRICT) TEMPORAL FEEDBACK CONNECTION SET (marked with \*\*). Unmarked results apply to both variants. The parameter  $k$  denotes the solution size,  $\tau$  the lifetime of the temporal graph,  $L$  the maximum length of a minimal temporal cycle, and  $\text{tw}_\downarrow$  the treewidth of the underlying graph.

Param.	Complexity	
	Strict variant	Non-strict variant
none	NP-hard [Thm. 10*/Thm. 11**]	NP-hard [Thm. 12]
$k$	W[1]-hard [Thm. 14]	W[1]-hard [Thm. 14]
$\tau$	$\tau \geq 8$ : NP-h. [Thm. 10*/Thm. 11**]	$\tau \geq 3$ : NP-h. [Thm. 12]
$k + L$	$\mathcal{O}(L^k \cdot  V  \cdot  \mathcal{E} ^2)$ [Thm. 6]	$\mathcal{O}(L^k \cdot  V  \cdot  \mathcal{E} ^2)$ [Thm. 6]
$k + \tau$	$\mathcal{O}(\tau^k \cdot  V  \cdot  \mathcal{E} ^2)$ [Thm. 7]	open
$ V $	$\mathcal{O}(2^{2 V ^2} \cdot  V ^3 \cdot \tau)^*$ [Thm. 17*] $\mathcal{O}(2^{\frac{1}{2}( V ^2 -  V )} \cdot  V  \cdot  \mathcal{E} ^2)^{**}$	$\mathcal{O}(2^{3 V ^2} \cdot  V ^2 \cdot \tau)^*$ [Thm. 17*] $\mathcal{O}(2^{\frac{1}{2}( V ^2 -  V )} \cdot  V  \cdot  \mathcal{E} ^2)^{**}$
$\text{tw}_\downarrow + \tau$	FPT [Thm. 23]	FPT [Thm. 23]

maximum length of a *minimal* temporal cycle. For the strict problem variants, this also implies fixed-parameter tractability for the combined parameter  $\tau + k$ . Our main result is to prove fixed-parameter tractability for (S)TFES with respect to the number of vertices  $|V|$ . (For (S)TFCS, the corresponding result is straightforward as there are  $\frac{1}{2}(|V|^2 - |V|)$  vertex pairs to consider.) Finally, studying the combined parameter  $\tau$  plus treewidth of the underlying graph, we show fixed-parameter tractability based on an MSO formulation.

Our results are summarized in Table 1. For the combined parameter  $k + \tau$ , the non-strict case remains open as we cannot use  $\tau$  to upper-bound the length of temporal cycles. Comparing feedback edge sets to feedback connection sets, we note a disparity for the parameter number of vertices  $|V|$ . While both (S)TFES and (S)TFCS are fixed-parameter tractable with respect to  $|V|$ , proving this result for (S)TFES was much more involved, because the maximum number of time-edges depends on  $\tau$  and  $|V|$  whereas the number of “connections” only depends on  $|V|$ .

## 2 Preliminaries and Basic Observations

We assume familiarity with standard notion from graph theory and from (parameterized) complexity theory. We denote the set of positive integers with  $\mathbb{N}$ . For  $a \in \mathbb{N}$ , we set  $[a] := \{1, \dots, a\}$ .

**Temporal Graphs.** We use the following definition in which the vertex set does not change with time and each time-edge has a discrete time-label [14, 15, 20].

**Definition 1** (Temporal Graph, Underlying Graph). A (undirected) *temporal graph*  $\mathcal{G} = (V, \mathcal{E}, \tau)$  is an ordered triple consisting of a set of vertices  $V$ , a set  $\mathcal{E} \subseteq \binom{V}{2} \times [\tau]$  of (undirected) *time-edges*, and a lifetime  $\tau \in \mathbb{N}$ .

The *underlying graph*  $G_\downarrow$  is the static graph obtained by removing all time-labels from  $\mathcal{G}$  and keeping only one edge from every multi-edge. We call a temporal graph *simple* if each vertex pair is connected by at most one time-edge.

Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph. For  $i \in [\tau]$ , let  $E_i(\mathcal{G}) := \{\{v, w\} \mid (\{v, w\}, i) \in \mathcal{E}\}$  be the set of edges with time-label  $i$ . We call the static graph  $G_i(\mathcal{G}) = (V, E_i(\mathcal{G}))$  *layer  $i$*  of  $\mathcal{G}$ . For  $t \in [\tau]$ , we denote the temporal subgraph consisting of the first  $t$  layers of  $\mathcal{G}$  by  $G_{[t]}(\mathcal{G}) := (V, \{\{e, i\} \mid i \in [t] \wedge e \in E_i(\mathcal{G})\}, t)$ . We omit the function parameter  $\mathcal{G}$  if it is clear from the context. For some  $\mathcal{E}' \subseteq \binom{V}{2} \times [\tau]$ , we denote  $\mathcal{G} - \mathcal{E}' := (V, \mathcal{E} \setminus \mathcal{E}', \tau)$ .

**Definition 2** (Temporal Path, Temporal Cycle). Given a temporal graph  $\mathcal{G} = (V, \mathcal{E}, \tau)$ , a *temporal path* of length  $\ell$  in  $\mathcal{G}$  is a sequence  $P = (e_1, e_2, \dots, e_\ell)$  of time-edges  $e_i = (\{v_i, v_{i+1}\}, t_i) \in \mathcal{E}$  where  $v_i \neq v_j$  for all  $i, j \in [\ell]$  and  $t_i \leq t_{i+1}$  for all  $i \in [\ell - 1]$ .

A temporal cycle is a temporal path of length at least three, except that the first and last vertex are identical.

A temporal path or cycle is called *strict* if  $t_i < t_{i+1}$  for all  $i \in [\ell - 1]$ .

The definitions of (STRICT) TEMPORAL FEEDBACK EDGE SET and (STRICT) TEMPORAL FEEDBACK CONNECTION SET (see Section 1) are based on the following two sets (problem and set names are identical).

**Definition 3** ((Strict) Temporal Feedback Edge Set). Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph. A time-edge set  $\mathcal{E}' \subseteq \mathcal{E}$  is called a (*strict*) *temporal feedback edge set* of  $\mathcal{G}$  if  $\mathcal{G}' = (V, \mathcal{E} \setminus \mathcal{E}', \tau)$  does not contain a (strict) temporal cycle.

**Definition 4** ((Strict) Temporal Feedback Connection Set). Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph with underlying graph  $G_\downarrow = (V, E_\downarrow)$ . An edge set  $C' \subseteq E_\downarrow$  is a (*strict*) *temporal feedback connection set* of  $\mathcal{G}$  if  $\mathcal{G}' = (V, \mathcal{E}', \tau)$  with  $\mathcal{E}' = \{\{\{v, u\}, t\} \in \mathcal{E} \mid \{v, u\} \notin C'\}$  does not contain a (strict) temporal cycle.

The elements in a feedback connection set are known as *underlying edges* (edges of  $G_\downarrow$ ).

**Simple Observations.** We can compute shortest temporal paths from any given vertex to all other vertices in  $O(|\mathcal{E}| \log(|\mathcal{E}|))$  time [22], respectively  $O(|\mathcal{E}|)$  time for strict temporal paths [23]. Thus, by searching for each time-edge  $(\{v, w\}, t)$  for a shortest temporal path from  $w$  to  $v$  which starts at time  $t$  and avoids the edge  $\{v, w\}$ , we can record the following observation.

**Observation 5.** *In  $O(|\mathcal{E}|^2 \log(|\mathcal{E}|))$  time, we can find a shortest temporal cycle or confirm that none exists. (For the strict case  $O(|\mathcal{E}|^2)$  time suffices.)*

Given a shortest temporal cycle of length  $L$ , any temporal feedback edge or connection set must contain an edge or connection used by that cycle. By repeatedly searching for a shortest temporal cycle and then branching over all of its edges or connections, we obtain the following (again the log-factor is only required in the non-strict case).

**Observation 6.** Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph where each temporal cycle has length at most  $L \in \mathbb{N}$ . Then, (S)TFES and (S)TFCS can be solved in  $O(L^k \cdot |\mathcal{E}|^2 \log|\mathcal{E}|)$  time.

*Proof.* We can construct a simple search tree based on the fact that at least one edge from each cycle has to be in the solution. According to Theorem 5, we can confirm that  $\mathcal{G}$  is cycle-free or find some shortest cycle  $C$  in  $\mathcal{O}(|\mathcal{E}|^2 \cdot |V|)$  time. If we find a cycle  $C$ , then we branch over all of its  $|C| \leq L$  time-edges and recursively solve the instance  $\mathcal{I}'$  remaining after removing this time-edge (underlying edge for (S)TFCS) and lowering  $k$  by one. Clearly, removing any time-edge cannot create a new temporal cycle and, thus,  $L$  is also an upper-bound for the length of a minimal temporal cycle in  $\mathcal{I}'$ . The size of the resulting search tree is upper-bounded by  $L^k$ .  $\square$

Clearly, a strict temporal cycle cannot be longer than the lifetime  $\tau$ . Thus, Theorem 6 immediately gives the following result.

**Corollary 7.** STFES and STFCFS can be solved in  $O(\tau^k \cdot |\mathcal{E}|^2)$  time.

Alternatively, we can also upper-bound  $L$  in terms of the length of any cycle of the underlying graph  $G_\downarrow$ , which in turn can be upper-bounded by  $2^{O(\text{td}_\downarrow)}$  [21], where  $\text{td}_\downarrow$  is the treedepth of the underlying graph.

**Corollary 8.** Let  $\mathcal{G}$  be a temporal graph and  $\text{td}_\downarrow$  be the treedepth of  $G_\downarrow$ . Then, (S)TFES and (S)TFCS can be solved in  $2^{O(\text{td}_\downarrow \cdot k)} \cdot |\mathcal{E}|^2 \log(|\mathcal{E}|)$  time.

In contrast to static graphs,  $|V|$  is to be considered as a useful parameter for temporal graphs because the maximum number of time-edges  $|\mathcal{E}|$  can be arbitrarily much larger than  $|V|$ . However, the number of underlying edges is at most  $\frac{1}{2}(|V|^2 - |V|)$  which yields the following fixed-parameter tractability result for (S)TFCS.

**Observation 9.** (S)TFCS can be solved in  $\mathcal{O}(2^{\frac{1}{2}(|V|^2 - |V|)} \cdot |\mathcal{E}|^2 \log|\mathcal{E}|)$  time.

*Proof.* Let  $\mathcal{G}$  be a temporal graph with underlying graph  $G_\downarrow = (V, E_\downarrow)$ . As  $G_\downarrow$  is a static graph, we have  $|E_\downarrow| \leq \frac{1}{2}(|V|^2 - |V|)$ . Thus, there are  $2^{|E_\downarrow|} \leq 2^{\frac{1}{2}(|V|^2 - |V|)}$  possible feedback connection sets, each of which can be tested in  $\mathcal{O}(|\mathcal{E}|^2 \log|\mathcal{E}|)$  time (Theorem 5).  $\square$

### 3 Computational Hardness Results

We now show that all four problem variants, (S)TFES and (S)TFCS, are NP-hard on simple temporal graphs with constant lifetime. The proofs work by reduction from the classic 3-SAT problem.

**Theorem 10.** STFES is NP-hard for simple temporal graphs with  $\tau = 8$ .

*Proof.* We show NP-hardness via a polynomial-time many-one reduction from 3-SAT. For a boolean formula  $\Phi$  in conjunctive normal form (CNF) with at most three variables per clause, 3-SAT asks if there is a satisfying truth assignment for  $\Phi$ . Let  $\Phi$  be such a formula with variables  $x_1, x_2, \dots, x_n$  and clauses  $c_1, c_2, \dots, c_m$  of the form  $c_j = (\ell_j^1 \vee \ell_j^2 \vee \ell_j^3)$ . We construct an STFES instance with temporal graph  $\mathcal{G}(\Phi)$  and  $k = n + 2m$  as follows.

For each variable  $x_i$ , we introduce a variable gadget (see Figure 1) with vertices  $v_i, v_i^T$ , and  $v_i^F$  and edges  $e_i^T := (\{v_i, v_i^T\}, 2)$ ,  $e_i^F := (\{v_i, v_i^F\}, 3)$ , and  $e_i^h := (\{v_i^T, v_i^F\}, 1)$ . As these three edges form



satisfiable.

( $\Rightarrow$ ) : Let  $\mathcal{E}'$  be a solution to the constructed STFES instance. Due to the size constraint  $k \leq n + 2m$  and the cycles existing inside the gadgets,  $\mathcal{E}'$  contains exactly one edge from each variable gadget and none of the edges adjacent to  $s$  or connecting variable and clause gadgets. We obtain the solution for the 3-SAT instance by setting  $x_i$  to true if  $e_i^T \in \mathcal{E}'$  and to false if  $e_i^F \in \mathcal{E}'$  or  $e_i^h \in \mathcal{E}'$ . Assume towards contradiction that there is a clause  $c_j = (\ell_j^1 \vee \ell_j^2 \vee \ell_j^3)$  which is not satisfied. Then, in all three variable gadgets connected to  $w_j$ , the edge needed to go from  $s$  to the corresponding literal vertex of  $c_j$  is present in  $\mathcal{G}(\Phi) - \mathcal{E}'$ . As  $\mathcal{E}'$  contains only two of the edges from the clause gadget, the path of one of the three literals can be extended to the vertex  $w_j$  and from there back to  $s$ , contradicting that  $\mathcal{G}(\Phi) - \mathcal{E}'$  is cycle-free.

( $\Leftarrow$ ) : For the other direction, suppose we have a satisfying truth assignment for  $\Phi$ . We obtain a solution  $\mathcal{E}' = \mathcal{E}_{\text{Var}} \cup \mathcal{E}_{\text{Cl}}$  for the STFES instance ( $\mathcal{G}(\Phi) = (V, \mathcal{E}, \tau = 8)$ ,  $k = n + 2m$ ) as follows. For the variable gadgets, we use the variable assignment to add the feedback edges

$$\mathcal{E}_{\text{Var}} = \{e_i^T \mid i \in [n], x_i = \text{true}\} \cup \{e_i^F \mid i \in [n], x_i = \text{false}\}.$$

For each clause  $c_j = (\ell_j^1 \vee \ell_j^2 \vee \ell_j^3)$ , let  $z_j \in [3]$  be the number of one of the literals satisfying the clause, i.e.,  $\ell_j^{z_j} = \text{true}$ . We add the edges between  $w_j$  and the other two literal vertices to the feedback edge set:

$$\mathcal{E}_{\text{Cl}} = \{f_j^z \mid j \in [m], z \in [3], z \neq z_j\}.$$

Note that this breaks all cycles inside the variable and clause gadgets and that  $|\mathcal{E}'| = |\mathcal{E}_{\text{Var}}| + |\mathcal{E}_{\text{Cl}}| = n + 2m$ . Cycles going through multiple gadgets but not starting in  $s$  are impossible as they would use at least two edges with time-label 4. It remains to show that  $\mathcal{G} - \mathcal{E}'$  does not contain any cycle starting and ending in  $s$ . Assume towards contradiction that there is such a cycle going through the variable gadget of  $x_i$  and the clause gadget of  $c_j$ . Further, assume that  $x_i$  was set to true (the other case is handled analogously) and that, therefore,  $(\{v_i, v_i^F\}, 3) \in \mathcal{E} \setminus \mathcal{E}'$ . Then, the cycle begins with  $(\{s, v_i\}, 1)$ ,  $(\{v_i, v_i^F\}, 3)$ ,  $(\{v_i^F, w_j^y\}, 4)$  for some  $y \in [3]$ . Note that the edges  $e_i^h$ ,  $f_j^a$ , and  $f_j^b$  cannot be used due to the time-labels. By construction of  $\mathcal{G}(\Phi)$ , we know that if  $(\{v_i^F, w_j^y\}, 4)$  exists, then  $\ell_j^y$  is one of the literals satisfying the clause if  $x_i = \text{false}$ . Since we assumed that  $x_i = \text{true}$ , it holds that  $y \neq z_j$  and, thus,  $f_j^y \in \mathcal{E}_{\text{Cl}}$ . It follows that there is no edge which can be appended to the temporal path and, in particular, no possibility of reaching  $s$ , thus contradicting the assumption.  $\square$

The temporal graph constructed in the proof for Theorem 10 does not contain any pair of vertices which is connected by more than one time-edge. Hence, each underlying edge corresponds to a single time-edge and thus the reduction implies the following corollary.

**Corollary 11.** *STFCS is NP-hard even for simple temporal graphs with  $\tau \geq 8$ .*

A very similar reduction can also be used for the following.

**Corollary 12.** *TFES and TFCS are both NP-hard even for simple temporal graphs with  $\tau \geq 3$ .*

*Proof sketch.* The changes that need to be made to the reduction described in the proof of Theorem 10 are shown in Figure 3. Here, we have to subdivide the edges between variable and clause gadgets in order to avoid cycles which go through multiple gadgets but not through  $s$ . In turn, only three different time-labels are needed to create the required cycles.  $\square$

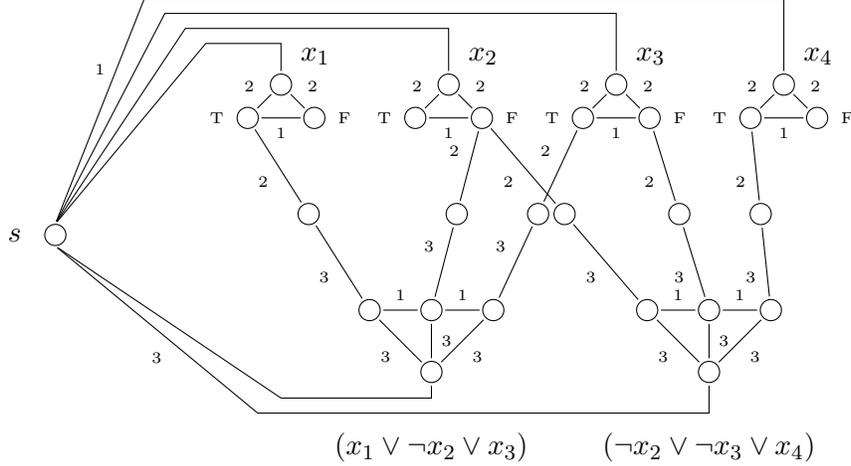


Figure 3: Example: Reduction from 3-SAT to TFES/TFCS.

We can also observe that the strict problem variants are NP-hard even if all edges are present at all times. This problem is essentially equivalent to selecting a set of edges of the underlying graph that intersects all cycles of length at most  $\tau$ , which is known to be NP-hard [9].

**Observation 13.** *STFES and STFCS are NP-hard even on temporal graphs where all time edges are present at all times, with  $\tau = 3$ , planar  $G_\downarrow$ , and  $\Delta(G_\downarrow) = 7$ .*

*Proof.* Let  $\mathcal{G} = (V, \mathcal{E}, 3)$  be a temporal graph with three layers  $E_1 = E_2 = E_3$ . Then an edge set  $C' \subseteq E_\downarrow$  is a strict temporal feedback connection set if and only if it intersects all triangles in  $G_\downarrow$ .

Similarly, it is easy to see that a strict temporal feedback edge set  $\mathcal{E}' \subseteq \mathcal{E}$  must contain at least three time-edges from every triangle in  $G_\downarrow$  and exactly three time-edges from each triangle suffice.

Since it is NP-hard to determine whether there exists a set of  $k$  edges intersecting all triangles in a planar graph with maximum degree 7 [9], the claim follows.  $\square$

We next show that our problems are W[1]-hard when parameterized by the solution size  $k$  with a parameterized reduction from MULTICUT IN DAGS [18]. The idea here is that we can simulate a DAG  $D$  by an undirected temporal graph by first subdividing all edges of  $D$  and then assigning time-labels according to a topological ordering. This ensures that each path in  $D$  corresponds to a path in the resulting temporal graph and vice versa. By adding a reverse edge from  $t$  to  $s$  for each terminal pair  $(s, t)$  of the MULTICUT instance, an  $s$ - $t$ -path in  $D$  produces a temporal cycle involving  $s$ ,  $t$  and vice versa.

**Theorem 14.** *(S)TFES and (S)TFCS, parameterized by the solution size  $k$ , are W[1]-hard.*

We prove W[1]-hardness with a parameterized reduction from MULTICUT IN DAGS parameterized by the solution size.

MULTICUT IN DAGS

**Input:** A DAG  $D = (V, A)$ , a set of terminal pairs  $\mathcal{T} = \{(s_i, t_i) \mid i \in [r] \text{ and } s_i, t_i \in V\}$ , and an integer  $k$ .

**Question:** Is there a cut-set  $Z \subseteq V$  of at most  $k$  nonterminal vertices of  $G$  such that for all  $i \in [r]$  the terminal  $t_i$  is not reachable from  $s_i$  in  $G - Z$ ?

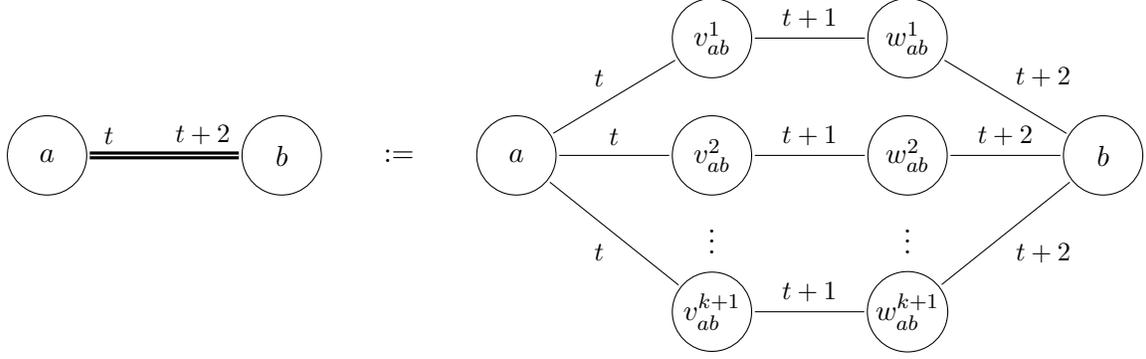


Figure 4: Heavy time-edge  $h(a, b, t)$ .

This problem was shown to be  $W[1]$ -hard when parameterized by  $k$  by Kratsch et al. [18] who also provided the following lemma which will simplify our proof by further restricting the input instance.

**Lemma 15** (Kratsch et al. [18, Lemma 2.1]). *There exists a polynomial-time algorithm that, given a MULTICUT IN DAGS instance  $(D, \mathcal{T}, k)$  with  $D = (V, A)$ , computes an equivalent instance  $(D', \mathcal{T}', k')$  with  $D' = (V', A')$  such that*

1.  $|\mathcal{T}| = |\mathcal{T}'|$  and  $k = k'$ ;
2.  $\mathcal{T}' = \{(s'_i, t'_i) \mid i \in [r]\}$  and all terminals  $s'_i$  and  $t'_i$  are pairwise distinct; and
3. for each  $v \in V$  and  $i \in [r]$  we have  $(v, s'_i) \notin A'$  and  $(t'_i, v) \notin A'$ .

We will from now on assume that we have an instance with these properties. The goal of our reduction will be to create one temporal cycle for each terminal pair. Since there is a temporal path from  $s_i$  to  $t_i$  (the pair can be ignored otherwise), we can create a cycle by adding a *back-edge* from  $t_i$  to  $s_i$ . To preserve the direction of the arcs in the (undirected) temporal graph, we will subdivide each arc into small paths with ascending time-labels. As MULTICUT IN DAGS asks for a vertex set, we also need to subdivide each nonterminal vertex  $v$  into two new vertices  $v_{\text{in}}$  and  $v_{\text{out}}$  which are connected by one edge. Then, the vertex  $v$  is in the cut-set of the original problem if the edge between  $v_{\text{in}}$  and  $v_{\text{out}}$  is in the solution edge set of the STFES instance.

Before stating our reduction, we introduce two auxiliary concepts. First, when we want to exclude edges from (S)TFES/(S)TFCS solutions, we will employ a gadget we call *heavy time-edge* which connects two vertices using  $k + 1$  parallel paths.

**Definition 16** (Heavy time-edge). Let  $\mathcal{I} = (\mathcal{G} = (V, \mathcal{E}, \tau), k)$  be an instance of (S)TFES or (S)TFCS. For  $a, b \in V$  and  $t \leq \tau - 2$ , a heavy time-edge of  $\mathcal{G}$  is a subgraph  $h(a, b, t) := (V_h, \mathcal{E}_h, \tau_h = t + 2)$  connecting vertex  $a$  to vertex  $b$  with

$$V_h = \{a, b\} \cup \{v_{ab}^i, w_{ab}^i \mid i \in [k + 1]\} \quad \text{and}$$

$$\mathcal{E}_h = \{(\{a, v_{ab}^i\}, t), (\{v_{ab}^i, w_{ab}^i\}, t + 1), (\{w_{ab}^i, b\}, t + 2) \mid i \in [k + 1]\}.$$

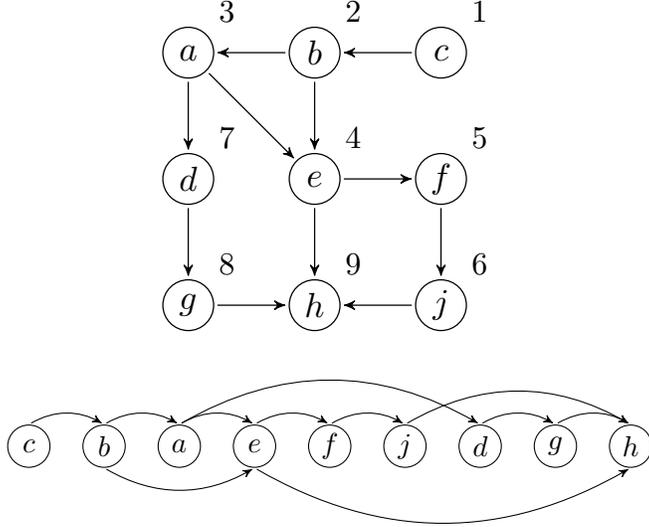


Figure 5: A DAG with values for  $\pi(v)$  (derived from an acyclic ordering) for each vertex  $v$  (top) and with the vertices aligned on a line according to  $\pi$  (bottom).

The construction is shown in Figure 4. Let  $e^h := h(a, b, t)$  be a heavy time-edge. Due to the time-labels, the gadget only connects  $a$  to  $b$  (and not  $b$  to  $a$ ) which we will use to model directed arcs with (undirected) time-edges. For (S)TFES/(S)TFCS solutions, it is easy to see that if there is a temporal path from  $b$  to  $a$ , then the  $k + 1$  cycles going through  $e^h$  cannot be disconnected by removing edges inside the gadget. Thus, without loss of generality we can assume that a given solution contains no edges from  $e^h$ . We also note that, for both temporal path models (i.e., strict or non-strict), it is possible to design a smaller gadget with identical properties, but we opted to use one which works for both models simultaneously.

Second, in order to assign time-labels while preserving all paths of the input graph  $D$ , we will use an *acyclic ordering* (also known as topological ordering) of  $D$ . For a directed graph  $D = (V, A)$ , an acyclic ordering  $<$  is a linear ordering of the vertices with the property  $(v, w) \in A \Rightarrow v < w$ . In other words, if we place the vertices on a line in the order given by  $<$ , then all arcs point in one direction (see Figure 5 for an example). If  $D$  is a DAG, then such an ordering exists and can be computed in linear time [5, Theorem 4.2.1]. For convenience, we represent this ordering as a function  $\pi : V \rightarrow \mathbb{N}$  which maps each vertex to its position in the ordering. We now have all the ingredients to prove the theorem.

*Proof of Theorem 14.* Let  $\mathcal{I} = (D, \mathcal{T}, k)$  be an instance of MULTICUT IN DAGS with terminal vertices  $V_{\mathcal{T}} := \{s_i, t_i \mid (s_i, t_i) \in \mathcal{T}\}$ . We construct an instance  $\mathcal{I}' = (\mathcal{G}, k' = k)$  of (S)TFES as follows.

1. We compute an acyclic ordering of the vertices  $V := V(D)$  and store it as a function  $\pi : V \rightarrow \mathbb{N}$  (see Figure 5). We use  $\pi$  to transform  $D$  into an equivalent temporal graph  $\mathcal{G}^1 = (V', \mathcal{E}, \tau = 4|V|)$  by replacing each arc  $(v, w) \in A$  with the heavy time-edge  $e^{vw} := h(v, w, 4\pi(v) + 1)$ . It is easy to verify that, for two vertices  $s, t \in V$ , the graph  $D$  contains a path from vertex  $s$  to vertex  $t$  if and only if  $\mathcal{G}$  contains a temporal path from  $s$  to  $t$ . Note that starting each heavy

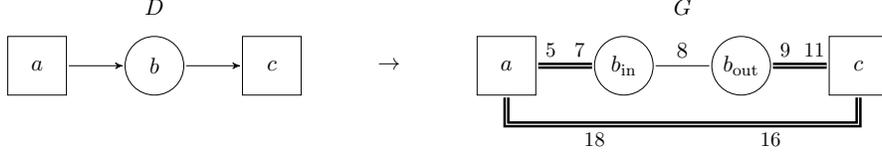


Figure 6: Example: Reduction from MULTICUT IN DAGS with input digraph  $D$  and one terminal pair  $(a, c)$  to TFES. Double lines represent heavy time-edges (Theorem 16).

time-edge with time-label  $4\pi(v) + 1$  leaves layer  $4\pi(v)$  empty which we will use in the next step.

2. In  $\mathcal{G}^1$ , we replace each nonterminal vertex  $v \in V \setminus V_{\mathcal{T}}$  with two new vertices  $v_{\text{in}}$  and  $v_{\text{out}}$  connected by time-edge  $e^v = (\{v_{\text{in}}, v_{\text{out}}\}, 4\pi(v))$  and update the edges adjacent to  $v$  as follows. For each (incoming) edge of the form  $e_{uv} := (\{u, v\}, t)$  with  $t < 4\pi(v)$ , replace  $e_{uv}$  with  $(\{u, v_{\text{in}}\}, t)$ . For each (outgoing) edge of the form  $e_{vw} := (\{v, w\}, 4\pi(v) + 1)$ , replace  $e_{vw}$  with  $(\{v_{\text{out}}, w\}, 4\pi(v) + 1)$ . Let  $\mathcal{G}^2$  denote the resulting graph. Clearly, for two vertices  $s, t \in V$ , removing  $v$  in  $\mathcal{G}^1$  disconnects all  $(s, t)$ -paths if and only if removing  $e^v$  in  $\mathcal{G}^2$  disconnects all  $(s, t)$ -paths.
3. We obtain  $\mathcal{G}^3 = \mathcal{G}$  by adding a back-edge  $h(t_i, s_i, \tau_{\text{be}})$  with  $\tau_{\text{be}} = 4|V + 1|$  for each terminal pair  $(s_i, t_i)$ . Since there is a temporal path from  $s_i$  to  $t_i$ , this creates at least one cycle for each terminal pair.

Figure 6 shows a small example. It is easy to see that the construction can be done in polynomial time. Now we show that  $\mathcal{I} = (D, \mathcal{T}, k)$  is a yes-instance of MULTICUT IN DAGS if and only if  $\mathcal{I}' = (\mathcal{G}, k' = k)$  is a yes-instance of (S)TFES.

( $\Rightarrow$ ): Let  $Z$  be a solution of  $\mathcal{I}$ . We claim that  $\mathcal{E}' = \{(\{v_{\text{in}}, v_{\text{out}}\}, 4\pi(v)) \mid v \in Z\}$  is a solution of  $\mathcal{I}'$ . We first show that, for any terminal pair  $(s_i, t_i)$ , the graph  $\mathcal{G} - \mathcal{E}'$  contains no temporal path from  $s_i$  to  $t_i$ . For  $\mathcal{G}^2$ , this is easily verified as  $D - Z$  contains no  $(s_i, t_i)$ -path. In  $\mathcal{G} = \mathcal{G}^3$ , this claim holds if no temporal path from  $s_i$  to  $t_i$  contains a back-edge  $e^{t_j s_j} = h(t_j, s_j, \tau_{\text{be}})$  added in step 3. Due to the starting time-label of the back-edges, no temporal path can contain more than one back-edge and, if it does, then this back-edge must be at its end. Clearly, the temporal path cannot end at both  $t_i$  and  $s_j$ , unless  $t_i = s_j$  which we excluded by applying Theorem 15. Now, assume towards contradiction that  $\mathcal{G} - \mathcal{E}'$  contains a cycle  $C$ . Since  $\mathcal{G}^2$  was cycle-free,  $C$  must use some back edge  $e^{t_i s_i}$  introduced in step 3 and, as reasoned above, this back edge must be the last edge of  $C$ . However, there is no temporal path from  $s_i$  to  $t_i$  in  $\mathcal{G} - \mathcal{E}'$  and, thus,  $C$  cannot be a temporal cycle.

( $\Leftarrow$ ): Let  $\mathcal{E}'$  be a solution of  $\mathcal{I}'$ , i.e.,  $\mathcal{G} - \mathcal{E}'$  contains no cycles. Recall that  $V_{\mathcal{T}} := \{s_i, t_i \mid (s_i, t_i) \in \mathcal{T}\}$  is the set of terminal vertices of  $\mathcal{I}$ . As observed above,  $\mathcal{E}'$  does not contain any edges from heavy time-edges, thus we have  $\mathcal{E}' \subseteq \{e^v \mid v \in V \setminus V_{\mathcal{T}}\}$  and define the solution for  $\mathcal{I}$  as  $Z := \{v \mid e^v \in \mathcal{E}'\}$ . Assume towards a contradiction that  $D - Z$  contains an  $(s_i, t_i)$ -path for some terminal pair  $(s_i, t_i)$ . This path induces a temporal path from  $s_i$  to  $t_i$  in  $\mathcal{G} - \mathcal{E}'$  which we can extend back to  $s_i$  by appending the back edge  $e^{t_i s_i}$  to obtain a cycle in  $\mathcal{G} - \mathcal{E}'$  and, thus, a contradiction.

For both directions, we have  $|Z| = |\mathcal{E}'| \leq k = k'$  meeting the requirements for the solution size.

As the constructed temporal graph  $\mathcal{G}$  contains no pair of vertices connected by more than one time-edge, we can easily transform a minimal feedback edge set of  $\mathcal{G}$  into a minimal feedback

connection set. Thus, the arguments presented in this proof also hold for (S)TFCS.  $\square$

## 4 Fixed-Parameter Tractability Results

After having shown computational hardness for the single parameters solution size  $k$  and life-time  $\tau$  in Section 3, we now consider larger and combined parameters, and present fixed-parameter tractability results.

### 4.1 Parameterization by Number of Vertices

As shown in Theorem 9, (S)TFCS is trivially fixed-parameter tractable with respect to the number of vertices  $|V|$ . For (S)TFES, however, the same result is much more difficult to show as the size of the search space is only upper-bounded by  $2^{\tau(|V|^2-|V|)}$ . Here, the dependence on  $\tau$  prevents us from using the (brute-force) approach that worked for (S)TFCS.

**Theorem 17.** *STFES can be solved in  $\mathcal{O}(2^{2|V|^2} \cdot |V|^3 \cdot \tau)$  time and TFES can be solved in  $\mathcal{O}(2^{3|V|^2} \cdot |V|^2 \cdot \tau)$  time, both requiring  $\mathcal{O}(2^{|V|^2})$  space.*

We prove Theorem 17 using a dynamic program which computes the minimum number of time-edges which have to be removed to achieve a specified connectivity at a specified point in time. The key idea is that in order to compute optimal solutions for time  $t$ , we only need to know which temporal paths were possible at time  $t-1$ . In particular, we will only need the start and end points of these temporal paths and, thus, avoid storing the time-edges that were removed before  $t$  which would cause problems when aiming at a fixed-parameter tractability result for the parameter  $|V|$ . With the dynamic programming table available, we can solve (S)TFES by looking up the entry at time  $\tau$  for a connectivity specification that excludes temporal cycles.

Before formally describing the dynamic program, we need to introduce some notations and intermediate results. Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph with  $V = \{v_1, v_2, \dots, v_n\}$ . The first dimension of the dynamic programming table will be the connectivity between the vertices of  $\mathcal{G}$ . We will store this as a *connectivity matrix*  $A \in \{0, ?\}^{n \times n}$  encoding the following connectivity relationships:

$$\begin{aligned} a_{ij} = 0 &\Rightarrow \text{there is no temporal path from vertex } v_i \text{ to } v_j \\ &\quad \text{(resp. no temporal cycle if } i = j \text{) and} \\ a_{ij} = ? &\Rightarrow \text{there might be a temporal path (resp. cycle) from } v_i \text{ to } v_j. \end{aligned}$$

Next, we define two functions,  $\text{srd}(G, B, A)$  (**s**trict **r**equired **d**eletions) and  $\text{nrd}(G, B, A)$  (**n**on-strict **r**equired **d**eletions), which return the solution to the following subproblem. Given connectivity  $B$  (**b**efore) at time  $t-1$ , what is the minimum number of edge deletions required in  $G_t$  to ensure connectivity  $A$  (**a**fter) at time  $t$ ? Figure 7 illustrates this problem for two vertices  $v_i$  and  $v_j$ . If  $a_{ij} = 0$  and there is some vertex  $v_k$  which might be reachable from  $v_i$  (i.e.,  $b_{ik} = ?$  represented by the dotted path), then we must remove the edge between  $v_k$  and  $v_j$ . In order to guarantee correctness, we have to assume that every “?” in  $B$  represents an existing path. Additionally, if  $A$  and  $B$  encode incompatible connectivity, then the function value is defined as  $\infty$ .

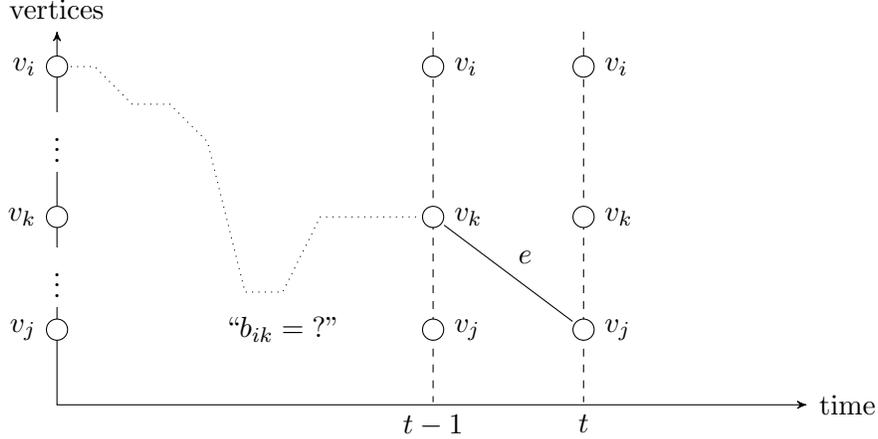


Figure 7: Illustration of the subproblem solved by  $\text{srd}/\text{nrd}(G, B, A)$ . If we want to make sure that no temporal path from  $v_i$  to  $v_j$  exists at time  $t$  (that is, we have  $a_{ij} = 0$ ), then the time-edge  $e$  has to be removed from the graph because there might be a temporal path from  $v_i$  to  $v_k$  ( $b_{ik} = ?$ , dotted line).

**Definition 18.** Let  $G = (V, E)$  be a static graph with  $|V| = n$  and let  $A, B \in \{0, ?\}^{n \times n}$  be two connectivity matrices. Function  $\text{srd}(G, B, A)$  is as follows.

If  $\exists i, j \in [n] : b_{ij} = ? \wedge a_{ij} = 0$ , then  $\text{srd}(G, B, A) := \infty$ . Otherwise,  $\text{srd}(G, B, A) := |\{\{v_k, v_j\} \in E \mid \exists i \in [n] : a_{ij} = 0 \wedge (b_{ik} = ? \vee i = k)\}|$ .

Note the clause  $b_{ik} = ? \vee i = k$  in the formulation of Theorem 18. This is due to the fact that a vertex  $v_k$  is always reachable from itself by a trivial temporal path, regardless of whether a temporal cycle at  $v_k$  exists.

Next, we show that  $\text{srd}(G, B, A)$  can be computed in polynomial time.

**Lemma 19.** *Algorithm 1 computes function  $\text{srd}(G, B, A)$  in  $\mathcal{O}(|V|^3)$  time.*

*Proof.* In order to show correctness, we first point out that lines 4 and 5 check for the case where  $\text{srd}(G, B, A) = \infty$  in a straightforward manner. For the other case of Theorem 18, it can be easily verified that the loops and conditions in lines 3 and 6 to 9 will count an edge  $\{v_k, v_j\} \in E$  if  $\exists i, j, k \in [n] : b_{ij} = 0 \wedge a_{ij} = 0 \wedge b_{ik} = ?$ . The running time is determined by the loops in line 3 ( $\mathcal{O}(|V|^2)$ ) and line 7 ( $\mathcal{O}(|V|)$ ) as we have  $|\{\{v_k, v_j\} \in E(G_t)\}| \leq |V|$  for any fixed vertex  $v_j$ . Using a hash-set as data structure for  $E'$ , we can add edges in constant time for an overall running time of  $\mathcal{O}(|V|^3)$ .  $\square$

Since, in the non-strict case, a temporal path can successively use multiple edges from  $G_t$ , it is not possible to consider each entry  $a_{ij} = 0$  separately (a single edge might be part of multiple unwanted temporal walks). Instead, we have to find an optimal edge-cut disconnecting all “problematic” pairs  $(v_k, v_j)$  in  $G_t$  where  $\exists i \in [n] : a_{ij} = 0 \wedge (b_{ik} = ? \vee i = k)$ . This problem is known as the MULTICUT problem. We will use MULTICUT to define the second function,  $\text{nrd}(G, B, A)$ .

---

**Algorithm 1** Algorithm computing  $\text{srd}(G, B, A)$  (for strict temporal paths)

---

**Parameters**

$G$ : static graph  
 $A, B$ : connectivity matrices

**Output**

$\text{srd}(G, B, A)$

```
1: function STRICTREQUIREDDELETIONS( $G, B, A$ )
2:    $E' \leftarrow \{\}$ 
3:   for  $i, j \in [n]$  do
4:     if  $b_{ij} = ? \wedge a_{ij} = 0$  then
5:       return  $\infty$ 
6:     else if  $b_{ij} = 0 \wedge a_{ij} = 0$  then
7:       for all  $e := \{v_k, v_j\} \in E(G)$  with  $b_{ik} = ?$  do
8:          $E' \leftarrow E' \cup \{e\}$ 
9:       end for
10:    end if
11:  end for
12:  return  $|E'|$ 
13: end function
```

---

**MULTICUT (OPTIMIZATION VARIANT)**

**Input:** An undirected, static graph  $G = (V, E)$  and a set of  $r$  terminal pairs  $\mathcal{T} = \{(s_i, t_i) \mid i \in [r] \text{ and } s_i, t_i \in V\}$ .

**Output:** A minimum-cardinality edge set  $E' \subseteq E$  whose removal disconnects all terminal pairs in  $\mathcal{T}$ .

**Definition 20.** Let  $G = (V, E)$  be a static graph with  $|V| = n$  and let  $A, B \in \{0, ?\}^{n \times n}$  be two connectivity matrices. Function  $\text{nrd}(G, B, A)$  is as follows.

If  $\exists i, j \in [n] : b_{ij} = ? \wedge a_{ij} = 0$ , then  $\text{nrd}(G, B, A) := \infty$ .

Otherwise, let  $E'$  be a solution to **MULTICUT** ( $G, \mathcal{T}$ ) with  $\mathcal{T} = \{(v_k, v_j) \mid \exists i \in [n] : a_{ij} = 0 \wedge (b_{ik} = ? \vee i = k)\}$ . Then,  $\text{nrd}(G, B, A) := |E'|$ .

In order to compute  $\text{nrd}(G, B, A)$ , we have to solve **MULTICUT** which was shown to be APX-hard [12]. While there exist FPT algorithms [8, 19] for the parameter solution size, our best upper bound for the solution size is  $|V|^2 - |V|$  and thus using these algorithms would result in a worse running time than the brute-force approach we will use to prove the next lemma.

**Lemma 21.** *Function  $\text{nrd}(G, B, A)$  can be computed in  $\mathcal{O}(2^{|V|^2} \cdot |V|^2)$  time.*

*Proof.* The number of subsets of  $E$  is at most  $2^{|V|^2 - |V|}$  and we can verify if a subset is a **MULTICUT** solution by performing a breadth-first search in  $\mathcal{O}(|V| + |E|) = \mathcal{O}(|V|^2)$  time. Thus,  $\text{nrd}(G, B, A)$  can be computed in  $\mathcal{O}(2^{|V|^2} \cdot |V|^2)$  time.  $\square$

We can now define the dynamic program which we will use to prove Theorem 17. Let  $A \in \{0, ?\}^{n \times n}$  be a connectivity matrix. The table entry  $T(A, t) \in \mathbb{N}$  contains the minimum number of

time-edges which have to be removed from  $G_{[t]}$  in order to achieve the connectivity specified by  $A$ . We define  $T$  as follows.

$$T(A, 0) := 0 \quad \forall A \in \{0, ?\}^{n \times n} \quad (1)$$

$$\text{strict paths: } T(A, t) := \min_{B \in \{0, ?\}^{n \times n}} T(B, t-1) + \text{srd}(G_t, B, A) \quad (2a)$$

$$\text{non-strict paths: } T(A, t) := \min_{B \in \{0, ?\}^{n \times n}} T(B, t-1) + \text{nrd}(G_t, B, A) \quad (2b)$$

**Lemma 22.** *Let  $\mathcal{G} = (V, \mathcal{E}, \tau)$  be a temporal graph with  $|V| = n$  and let  $A \in \{0, ?\}^{n \times n}$  be a connectivity matrix. Then, there exists no  $\mathcal{E}' \subseteq \mathcal{E}$  with  $|\mathcal{E}'| < T(A, t)$  for which  $(\mathcal{G} - \mathcal{E}')_{[t]}$  possesses the connectivity specified by  $A$ .*

*Proof.* We prove the lemma via induction over  $t$ . Recall that the connectivity matrix  $A$  can only encode that certain temporal paths must not exist. Thus, the correctness of the initialization  $T(A, 0) = 0$  is easy to see since no temporal paths exist at time  $t = 0$ . For the correctness of the update step (Equations (2a) and (2b)), we note that, by minimizing over all possible  $B \in \{0, ?\}^{n \times n}$ , we always find the optimal state  $B$  for the time  $t - 1$ . With some  $B$  fixed, it remains to show that  $T(B, t - 1) + \text{srd}/\text{nrd}(G_t, B, A)$  is minimal for achieving both connectivity  $B$  at time  $t - 1$  and connectivity  $A$  at time  $t$ . By induction hypothesis, we know that  $T(B, t - 1)$  is minimal. To show correctness and minimality of  $\text{srd}(G_t, B, A)$  and  $\text{nrd}(G_t, B, A)$ , we analyze how the time-edges of layer  $G_t$  influence the possible temporal paths up to time  $t$  and which changes (i.e., time-edge deletions) are required to achieve connectivity  $A$ . For any two vertices  $v_i, v_j \in V$ , we compare the connectivity for time  $t - 1$  given by  $b_{ij}$  to the target connectivity given by  $a_{ij}$  and identify the following four cases.

(Case 1)  $b_{ij} = ? \wedge a_{ij} = ?$ : Here, we do not care if  $v_j$  is reachable from  $v_i$  and, thus, we do not need to remove any edges.

(Case 2)  $b_{ij} = ? \wedge a_{ij} = 0$ : We cannot disconnect a temporal path that already exists at time  $t - 1$  by removing edges in layer  $t$  and, therefore, cannot guarantee  $a_{ij} = 0$ . In this case, there is no solution for the input parameters. Both functions are defined (see Theorems 18 and 20) to return  $\infty$  in this case.

(Case 3)  $b_{ij} = 0 \wedge a_{ij} = ?$ : Identical to Case 1.

(Case 4)  $b_{ij} = 0 \wedge a_{ij} = 0$ : We have to ensure that  $v_j$  is not reachable from  $v_i$  in  $G_{[t]}$ . Both  $\text{srd}(G_t, B, A)$  and  $\text{nrd}(G_t, B, A)$  are defined based on the following concept. If there is a vertex  $v_k$  which was reachable from  $v_i$  in the past, then we cannot keep an edge (strict case) or any path (non-strict case) connecting  $v_k$  and  $v_j$  in layer  $t$ . Assuming that Case 2 is already excluded for all vertex pairs, it can be easily verified that Theorem 18 uses exactly the set of such edges  $\{v_k, v_j\}$ . For the non-strict case, the set  $\mathcal{T}$  of terminal pairs in Theorem 20 is defined to exactly contain all such pairs  $(v_k, v_j)$ . The minimality and correctness of  $\text{nrd}(G_t, B, A)$  follows from the definition of MULTICUT.

Finally, we must show that assuming “ $b_{ij} = ? \Rightarrow$  there is a temporal path from  $v_i$  to  $v_j$ ” at time  $t - 1$  for the functions  $\text{srd}/\text{nrd}(G_t, B, A)$  did not result in unnecessary time-edge deletions. To this end, assume  $b_{ij} = ?$  and that there is no temporal path from  $v_i$  to  $v_j$  at time  $t - 1$ . Let  $B'$  be a connectivity matrix identical to  $B$  except for  $b'_{ij} = 0$ . As the path from  $v_i$  to  $v_j$  does not exist, we have  $T(B, t - 1) = T(B', t - 1)$ . If the entry  $b_{ij} = ?$  resulted in an unnecessary time-edge deletion,

i.e.,  $\text{srd}/\text{nrd}(G_t, B, A) > \text{srd}/\text{nrd}(G_t, B', A)$ , then the minimum function in Equations (2a) and (2b) will not chose the value computed using  $B$ .  $\square$

Since we are only interested in specifying that certain paths (cycles) must not exist, we chose to use “?”-entries in the connectivity matrices to represent entries we do not care about. The advantage is evident in Cases 1 and 3 of the previous proof. We now have all required ingredients to prove Theorem 17.

*Proof of Theorem 17.* Let  $(\mathcal{G}, k)$  be an instance of (S)TFES. Further, let  $A^*$  be an  $n \times n$  connectivity matrix with  $a_{ij}^* = 0$  if  $i = j$  and  $a_{ij}^* = ?$  otherwise. As “?”-entries cannot require more time-edge deletions than “0”-entries,  $A^*$  is the cheapest connectivity specification that does not allow any temporal cycle to exist. Thus, it follows from Theorem 22 that  $(\mathcal{G}, k)$  is a yes-instance if  $T(A^*, \tau) \leq k$ , and a no-instance otherwise.

For the running time, we first note that a connectivity matrix has size  $|V|^2$  with two possible choices for each entry resulting in  $2^{|V|^2}$  possible connectivity matrices. Thus, the table size of the dynamic program is  $2^{|V|^2} \cdot \tau$ . To compute each table entry, we have to compute  $\text{srd}/\text{nrd}(G_t, B, A)$  for each of the  $2^{|V|^2}$  possible choices for  $B$ . Together with Theorems 19 and 21, we obtain the running times stated in the theorem. The computation requires  $\mathcal{O}(2^{|V|^2})$  space as we only need the table entries for time  $t - 1$  in order to compute the entries for time  $t$ . Thus, it is not necessary to store more than two columns of the table, each of size  $2^{|V|^2}$ .  $\square$

We note that our dynamic program indeed solves the optimization variant of (S)TFES. That is, given a temporal graph  $\mathcal{G}$ , it finds the smallest  $k$  for which  $(\mathcal{G}, k)$  is a yes-instance of the decision variant stated defined in Section 1. As shown in the previous proof, we can easily use the result to solve any instance  $(\mathcal{G}, k')$  of the decision variant by comparing  $k'$  to  $k$ .

For the ease of presentation, we did not store the actual solution, that is, the feedback edge set of size  $T(A, t)$ . However, the functions  $\text{srd}(G_t, B, A)$  and  $\text{nrd}(G_t, B, A)$  can easily be changed to return the solution edge sets for each layer  $t$ . Using linked lists, which can be concatenated in constant time, it is possible to include the solutions sets in the dynamic programming table without changing the asymptotic running time.

## 4.2 Parameterization by Treewidth and Lifetime

Finally, we show that all our problem variants are fixed-parameter tractable when parameterized by the combination of the treewidth of the underlying graph and the lifetime. To this end we employ an optimization variant of Courcelle’s famous theorem on graph properties expressible in monadic second-order (MSO) logic [3, 11].

**Theorem 23.** *(S)TFES and (S)TFCS are fixed-parameter tractable when parameterized by the combination of the treewidth of the underlying graph and the lifetime.*

To prove this result we require an auxiliary (static) graph  $\mathcal{S}$  whose vertex set is the disjoint union of

- the set  $V$  of vertices of  $\mathcal{G}$ ,
- the set  $E(G_\downarrow)$  of underlying edges,
- the set  $[\tau]$  of points in time, and

- the set  $\mathcal{E}$  of time-edges.

Its edges are given by the (disjoint union of) the following binary relations, where we write  $R(e, v)$  as a shortcut for  $(e, v) \in R$ :

- the incidence relation  $\text{inc} \subseteq E \times V$  where  $\text{inc}(e, v) \iff v \in e$ ,
- the time relation  $\text{time} \subseteq \mathcal{E} \times [\tau]$  where  $\text{time}((e, t), t') \iff t = t'$ ,
- the edge relation  $\text{edge} \subseteq \mathcal{E} \times E$  where  $\text{edge}((e, t), e') \iff e = e'$ , and
- the presence relation  $\text{pres} \subseteq E \times [\tau]$  where  $\text{pres}(e, t) \iff (e, t) \in \mathcal{E}$ .

A *monadic second-order (MSO) formula* over  $\mathcal{S}$  is a formula that uses

- the above relations,
- the logical operators  $\wedge, \vee, \neg, =$ , and parentheses,
- a finite set of variables, each of which is either taken as an element or a subset of  $V(\mathcal{S})$ , and
- the quantifiers  $\forall$  and  $\exists$ .

Additionally we will use some folklore shortcuts such as  $\neq, \subseteq, \in$ , and  $\oplus$  (exclusive or) which can themselves be replaced by MSO formulas.

By the following theorem, for any property that can be expressed by an MSO formula, a minimum subset that satisfies it can be computed in linear time.

**Theorem 24** (Arnborg et al. [3, Thm 5.6]). *There exists an algorithm that, given*

- an MSO formula  $\phi$  with free variables  $X_1, \dots, X_r$ ,
- an affine function  $\alpha(x_1, \dots, x_r)$ , and
- a graph  $G$  together with a tree decomposition of width  $w$ ,

*finds the minimum of  $\alpha(|X_1|, \dots, |X_r|)$  over all  $X_1, \dots, X_r \subseteq V(G)$  for which formula  $\phi$  is satisfied on  $G$ . The running time is  $f(|\phi|, w) \cdot |G|$ , where  $|\phi|$  is the length of  $\phi$ .*

*Proof sketch of Theorem 23.* Let  $(\mathcal{G} = (V, \mathcal{E}, \tau), k)$  be a problem instance of one of our problem variants. We will show that a solution can be found by applying Theorem 24 to the auxiliary graph  $\mathcal{S}$  defined above and a suitable MSO formula.

First we observe that the treewidth of  $\mathcal{S}$  is bounded in terms of  $\text{tw}(G_\downarrow) + \tau$ . To this end let  $(T, \{B_t\}_{t \in V(T)})$  be an optimal tree decomposition of  $G_\downarrow$  where  $T$  is a tree and  $B_t \subseteq V(G)$  for  $t \in V(T)$ . Then  $(T, \{B'_t\}_{t \in V(T)})$  with  $B'_t := B_t \cup [\tau] \cup (E \cap B_t) \cup \{(e, t) \in \mathcal{E} \mid e \in E \cap B_t\}$  is a tree decomposition of  $\mathcal{S}$  of width at most  $O(\tau \cdot \text{tw}(G_\downarrow)^2)$ . Note that a suitable tree decomposition of  $\mathcal{S}$  can be computed in  $f(\tau + \text{tw}(G_\downarrow)) \cdot |\mathcal{S}|$  for some function  $f$  [7].

Now we construct MSO formulas to express our problem variants. We begin by giving several auxiliary subformulas of constant size to ease readability.

- Adjacency of two vertices  $v, w$  at some time  $t$ :

$$\text{tadj}(v, w, t) := \exists e \in E : \text{inc}(e, v) \wedge \text{inc}(e, w) \wedge \text{pres}(e, t)$$

- Connectivity of two vertices  $v, w$  using only edges from some edge set  $E' \subseteq E$ :

$$\text{conn}(v, w, E') := \exists X \subseteq V \forall \emptyset \neq Y \subset X \exists x \in X \setminus Y \exists y \in Y \exists e \in E' : v \in X \wedge w \in X \wedge \text{inc}(e, x) \wedge \text{inc}(e, y)$$

- Connectivity of two vertices  $v, w$  using only edges from  $\{e \mid (e, t) \in \mathcal{E}'\}$  for some given  $t$  and  $\mathcal{E}' \subseteq \mathcal{E}$ :

$$\text{ttconn}(v, w, t, \mathcal{E}') := \exists E' \subseteq E \forall e \in E' \exists \varepsilon \in \mathcal{E}' : \text{edge}(\varepsilon, e) \wedge \text{time}(\varepsilon, t) \wedge \text{conn}(v, w, E')$$

- Connectivity of two vertices  $v, w$  using only edges from  $E' \cap E_t$ :

$$\text{tconn}(v, w, t, E') := \exists \mathcal{E}' \subseteq \mathcal{E} \forall \varepsilon \in \mathcal{E}' \exists e \in E' : \text{edge}(\varepsilon, e) \wedge \text{ttconn}(v, w, t, \mathcal{E}')$$

- Testing whether  $(\{v, w\}, t) \in \mathcal{E}'$  for some given  $\mathcal{E}' \subseteq \mathcal{E}$ :

$$\text{teelem}(v, w, t, \mathcal{E}') := \exists \varepsilon \in \mathcal{E}' \exists e \in E : \text{edge}(\varepsilon, e) \wedge \text{inc}(v, e) \wedge \text{inc}(w, e) \wedge \text{time}(\varepsilon, t)$$

The formulas expressing the existence of a temporal cycle for our four problem variants are then the following.

- Existence of a strict cycle using only time edges whose underlying edges are contained in  $E' \subseteq E$ :

$$\text{cycle}_{\text{SC}}(E') := \exists v_1, v_2, \dots, v_\tau \in V : \bigvee_{t^*=1}^{\tau-2} \left( \text{tadj}(v_{t^*}, v_\tau, t^*) \wedge \bigwedge_{t=t^*+1}^{\tau} (v_t = v_{t-1} \vee (*)) \right)$$

where

$$(*) := \text{tadj}(v_t, v_{t-1}, t) \wedge \{v_t, v_{t-1}\} \in E' \wedge \{v_t, v_{t-1}\} \neq \{v_{t^*}, v_\tau\}$$

Note that the sequence of vertices  $v_1, v_2, \dots, v_\tau$  might not be a temporal cycle, but then it contains a subsequence which is.

- Existence of a non-strict cycle using only time edges whose underlying edges are contained in  $E' \subseteq E$ :

$$\text{cycle}_{\text{C}}(E') := \text{cycle}_{\text{SC}}(E'), \text{ but with } (*) \text{ replaced by } (**), \text{ where}$$

$$(**) := \exists E'' \subseteq E \forall e \in E' : (e \in E'' \oplus e = \{v_{t^*}, v_\tau\}) \wedge \text{tconn}(v_t, v_{t-1}, t, E'')$$

- Existence of a strict cycle using only time edges in  $\mathcal{E}' \subseteq \mathcal{E}$ :

$$\text{cycle}_{\text{SE}}(\mathcal{E}') := \text{cycle}_{\text{SC}}(\mathcal{E}'), \text{ but with } (*) \text{ replaced by } (***), \text{ where}$$

$$(***) := \text{tadj}(v_t, v_{t-1}, t) \wedge \text{teelem}(v_t, v_{t-1}, t, \mathcal{E}') \wedge \{v_t, v_{t-1}\} \neq \{v_{t^*}, v_\tau\}$$

- Existence of a non-strict cycle using only time edges in  $\mathcal{E}' \subseteq \mathcal{E}$ :

$$\text{cycle}_{\text{E}}(\mathcal{E}') := \text{cycle}_{\text{SC}}(\mathcal{E}'), \text{ but with } (*) \text{ replaced by } (****), \text{ where}$$

$$(****) := \exists \mathcal{E}'' \subseteq \mathcal{E} \forall \varepsilon \in \mathcal{E}' : (\varepsilon \in \mathcal{E}'' \oplus \text{edge}(\varepsilon, \{v_{t^*}, v_\tau\})) \wedge \text{ttconn}(v_t, v_{t-1}, t, \mathcal{E}'')$$

It is easy to check that the sizes of the formulas are in  $O(\tau)$ . We can now build a formula identifying a feedback set for each of the problem variants as follows. For (S)TFES:

$$\phi_{(S)TFES} = \exists \mathcal{E}' : \neg \text{cycle}_{(S)E}(\mathcal{E} \setminus \mathcal{E}'),$$

and for (S)TFCS:

$$\phi_{(S)TFCS} = \exists E' : \neg \text{cycle}_{(S)C}(E \setminus E').$$

The result now follows from Theorem 24 (for  $\alpha(x) = x$ ) since  $|\mathcal{S}| \in O(\tau \cdot |\mathcal{G}|)$ ,  $\text{tw}(\mathcal{S}) \in O(\tau \cdot \text{tw}(G_{\downarrow})^2)$ , and  $|\phi_{(S)TFES}|, |\phi_{(S)TFCS}| \in O(\tau)$ .  $\square$

## 5 Conclusion

To summarize, we investigated the parameterized computational complexity of the problem of removing edges from a temporal graph to destroy all temporal cycles. We showed NP-hardness even for temporal graphs with constant lifetime and W[1]-hardness for the solution size parameter. On the positive side our main results are fixed-parameter tractability for the parameter “number of vertices” and the treewidth of the underlying graph combined with the lifetime.

We conclude with some challenges for future research. For the parameter lifetime  $\tau$ , it remains open whether there exists a polynomial-time algorithm for instances with  $3 \leq \tau \leq 7$  in the strict case and  $\tau = 2$  in the non-strict case. We believe that, for the strict case, our 3-SAT reduction can be modified to use only seven time-labels. Similarly to the work of Zschoche et al. [23] in the context of temporal separators, we could not resolve the question whether the non-strict variants are fixed-parameter tractable for the combined parameter  $\tau + k$ , whereas for the strict case, this is almost trivial. Additionally, it seems natural to study (S)TFES and (S)TFCS variants restricted to specific temporal graph classes (e.g., see Fluschnik et al. [13]).

Finally, we remark that we focused on finding feedback edge sets, ignoring the presumably harder vertex variant; however, one can observe that our W[1]-hardness result also transfers to the problem of finding feedback vertex sets in temporal graphs.

## References

- [1] Akanksha Agrawal, Fahad Panolan, Saket Saurabh, and Meirav Zehavi. Simultaneous feedback edge set: A parameterized perspective. In *Proceedings of the 27th International Symposium on Algorithms and Computation (ISAAC 2016)*, volume 64 of *LIPIcs*, pages 5:1–5:13. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2016. doi:10.4230/LIPIcs.ISAAC.2016.5. 2
- [2] Eleni C. Akrida, Leszek Gasieniec, George B. Mertzios, and Paul G. Spirakis. The complexity of optimal design of temporally connected graphs. *Theory of Computing Systems*, 61(3):907–944, 2017. doi:10.1007/978-3-319-28684-6\_8. 2
- [3] Stefan Arnborg, Jens Lagergren, and Detlef Seese. Easy problems for tree-decomposable graphs. *Journal of Algorithms*, 12(2):308–340, 1991. doi:10.1016/0196-6774(91)90006-K. 16, 17
- [4] Kyriakos Axiotis and Dimitris Fotakis. On the size and the approximability of minimum temporally connected subgraphs. In *Proceedings of the 43rd International Colloquium on Automata, Languages, and Programming (ICALP '16)*, volume 55 of *LIPIcs*, pages 149:1–149:14.

- Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016. doi:10.4230/LIPIcs.ICALP.2016.149. 2
- [5] Jørgen Bang-Jensen and Gregory Z. Gutin. *Digraphs - Theory, Algorithms and Applications*. Springer, 2009. doi:10.1007/978-1-84800-998-1\_1. 10
- [6] Kenneth A. Berman. Vulnerability of scheduled networks and a generalization of Menger’s theorem. *Networks*, 28(3):125–134, 1996. doi:10.1002/(SICI)1097-0037(199610)28:3<125::AID-NET143.0.CO;2-P. 2
- [7] Hans L. Bodlaender. A linear-time algorithm for finding tree-decompositions of small treewidth. *SIAM Journal on Computing*, 25(6):1305–1317, 1996. doi:10.1137/S0097539793251219. 17
- [8] Nicolas Bousquet, Jean Daligault, and Stéphan Thomassé. Multicut is FPT. *SIAM Journal on Computing*, 47(1):166–207, 2018. doi:10.1137/140961808. 14
- [9] Daniel Brügmann, Christian Komusiewicz, and Hannes Moser. On generating triangle-free graphs. *Electronic Notes in Discrete Mathematics*, 32:51–58, 2009. doi:10.1016/j.endm.2009.02.008. 8
- [10] Arnaud Casteigts, Joseph G. Peters, and Jason Schoeters. Temporal cliques admit sparse spanners. In *Proceedings of the 46th International Colloquium on Automata, Languages, and Programming (ICALP 2019)*, volume 132 of *LIPIcs*, pages 134:1–134:14. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2019. 2
- [11] Bruno Courcelle and Joost Engelfriet. *Graph Structure and Monadic Second-order Logic: a Language-theoretic Approach*. Cambridge University Press, 2012. 16
- [12] Elias Dahlhaus, David S. Johnson, Christos H. Papadimitriou, Paul D. Seymour, and Mihalis Yannakakis. The complexity of multiterminal cuts. *SIAM Journal on Computing*, 23(4): 864–894, 1994. doi:10.1137/S0097539792225297. 14
- [13] Till Fluschnik, Hendrik Molter, Rolf Niedermeier, Malte Renken, and Philipp Zschoche. Temporal graph classes: A view through temporal separators. *Theoretical Computer Science*, 806: 197–218, 2020. doi:10.1016/j.tcs.2019.03.031. 19
- [14] Petter Holme and Jari Saramäki (eds.). *Temporal Networks*. Springer, 2013. 4
- [15] Petter Holme and Jari Saramäki (eds.). *Temporal Network Theory*. Springer, 2019. 4
- [16] Silu Huang, Ada Wai-Chee Fu, and Ruifeng Liu. Minimum spanning trees in temporal graphs. In *Proceedings of the 2015 ACM SIGMOD International Conference on Management of Data*, pages 419–430, 2015. doi:10.1145/2723372.2723717. 2
- [17] David Kempe, Jon M. Kleinberg, and Amit Kumar. Connectivity and inference problems for temporal networks. *Journal of Computer and System Sciences*, 64(4):820–842, 2002. doi:10.1006/jcss.2002.1829. 2

- [18] Stefan Kratsch, Marcin Pilipczuk, Michal Pilipczuk, and Magnus Wahlström. Fixed-parameter tractability of multicut in directed acyclic graphs. *SIAM Journal on Discrete Mathematics*, 29(1):122–144, 2015. doi:10.1137/120904202. 2, 8, 9
- [19] Dániel Marx and Igor Razgon. Fixed-parameter tractability of multicut parameterized by the size of the cutset. *SIAM Journal on Computing*, 43(2):355–388, 2014. doi:10.1137/110855247. 14
- [20] Othon Michail. An introduction to temporal graphs: An algorithmic perspective. *Internet Mathematics*, 12(4):239–280, 2016. doi:10.1080/15427951.2016.1177801. 4
- [21] Jaroslav Nešetřil and Patrice Ossona De Mendez. *Sparsity: Graphs, Structures, and Algorithms*. Springer, 2012. doi:10.1007/978-3-642-27875-4. 5
- [22] H. Wu, J. Cheng, Y. Ke, S. Huang, Y. Huang, and H. Wu. Efficient algorithms for temporal path computation. *IEEE Transactions on Knowledge and Data Engineering*, 28(11):2927–2942, 2016. doi:10.1109/TKDE.2016.2594065. 4
- [23] Philipp Zschoche, Till Fluschnik, Hendrik Molter, and Rolf Niedermeier. The complexity of finding separators in temporal graphs. *Journal of Computer and System Sciences*, 107:72–92, 2020. doi:10.4230/LIPIcs.MFCS.2018.45. 2, 4, 19