

Variable Shift SDD: A More Succinct Sentential Decision Diagram

Kengo Nakamura

NTT Communication Science Laboratories, Kyoto, Japan
kengo.nakamura.dx@hco.ntt.co.jp

Shuhei Denzumi

Graduate School of Information Science and Technology, The University of Tokyo, Tokyo, Japan
denzumi@mist.i.u-tokyo.ac.jp

Masaaki Nishino

NTT Communication Science Laboratories, Kyoto, Japan
masaaki.nishino.uh@hco.ntt.co.jp

Abstract

The Sentential Decision Diagram (SDD) is a tractable representation of Boolean functions that subsumes the famous Ordered Binary Decision Diagram (OBDD) as a strict subset. SDDs are attracting much attention because they are more succinct than OBDDs, as well as having canonical forms and supporting many useful queries and transformations such as model counting and **Apply** operation. In this paper, we propose a more succinct variant of SDD named *Variable Shift SDD* (VS-SDD). The key idea is to create a unique representation for Boolean functions that are equivalent under a specific variable substitution. We show that VS-SDDs are never larger than SDDs and there are cases in which the size of a VS-SDD is exponentially smaller than that of an SDD. Moreover, despite such succinctness, we show that numerous basic operations that are supported in polytime with SDD are also supported in polytime with VS-SDD. Experiments confirm that VS-SDDs are significantly more succinct than SDDs when applied to classical planning instances, where inherent symmetry exists.

2012 ACM Subject Classification Theory of computation → Data structures design and analysis; Computing methodologies → Knowledge representation and reasoning

Keywords and phrases Boolean function, Data structure, Sentential decision diagram

1 Introduction

The succinct representations of a Boolean function have long been studied in the computer science community. Among them, the *Ordered Binary Decision Diagram* (OBDD) [5] has been used as a prominent tool in various applications. An OBDD represents a Boolean function as a directed acyclic graph (DAG). The reason for the popularity of OBDDs is that it can often represent a Boolean function very succinctly while supporting many useful queries and transformations in polytime with respect to the compilation size.

In the last few years, the *Sentential Decision Diagram* (SDD) [9], which is also a DAG representation, has also attracted attention [26, 22]. SDDs have a tighter bound on the compilation size than OBDDs [9], and there are cases in which the use of SDDs can make the size exponentially smaller than OBDDs [3]. In addition, SDDs also support a number of queries and transformations in polytime. Among them, the most important polytime operation is the **Apply** operation, which takes two SDDs representing two Boolean functions f, g and binary operator \circ , such as conjunction (\wedge) and disjunction (\vee), and returns the SDD representing the Boolean function $f \circ g$. This operation is fundamental in computing an arbitrary Boolean function into an SDD, as well as in proving the polytime solvability of various important and useful operations.

One of the reasons why OBDDs and SDDs, as well as many other such DAG representations, can express a Boolean function succinctly is that they share identical substructures that represent the equivalent Boolean function; they represent a Boolean function by recursively decomposing it into subfunctions that can also be represented as DAGs. If a decomposition generates equivalent subfunctions, we do not need to have multiple DAGs, and thus more succinctly represent the original Boolean function. Since the effectiveness of such representations depend on the DAG size, representations that are more succinct while still supporting useful operations are always in demand.

In this paper, we propose a new SDD-based structure named *Variable Shift SDD* (VS-SDD); it can even more succinctly represent Boolean functions, while supporting polytime **Apply** operations. The key idea is to extend the condition for sharing DAGs. While an SDD can share DAGs representing identical Boolean functions, a VS-SDD can share DAGs representing Boolean functions that are equivalent under a specific variable substitution. For example, consider two Boolean functions $f = A \wedge B$ and $g = C \wedge D$ defined over variables A, B, C, D . An SDD cannot share DAGs representing f and g since they are not equivalent. On the other hand, VS-SDD can share them since f and g are equivalent under the variable substitution that exchanges A with C and B with D . Such Boolean functions appear in a wide range of situations. One typical example is modeling time-evolving systems; such as, we want to find a sequence of assignments of variables $\mathbf{x}_1, \dots, \mathbf{x}_T$ over timestamps $t = 1, \dots, T$ such that every \mathbf{x}_t satisfies the condition that $h(\mathbf{x}_t) = \text{true}$. Such a sequence is modeled as Boolean function $f(\mathbf{X}_1, \dots, \mathbf{X}_T) = h^{(1)}(\mathbf{X}_1) \wedge \dots \wedge h^{(T)}(\mathbf{X}_T)$, where $h^{(t)}$ is $h(\mathbf{X})$ defined over \mathbf{X}_t . Since all $h^{(t)}(\mathbf{X}_t)$ are equivalent under variable substitutions, it is highly possible that VS-SDD can yield more succinct representations.

Technically, these advantages of VS-SDD are obtained by introducing the indirect specification of depending variables. Every SDD is associated with a set of variables that the corresponding Boolean function depends on. In SDD, such set of variables are represented by IDs, where each set of variables has a unique ID. On the other hand, VS-SDD represents such sets of variables by storing the *difference* of IDs. This allows the sharing of the Boolean functions that are equivalent under specific types of variable substitutions.

Our main results are as follows:

- VS-SDDs are never larger than their SDDs equivalents. Moreover, there is a class of Boolean functions for which VS-SDDs are exponentially smaller than SDDs.
- VS-SDD supports polytime **Apply**. Moreover, the queries and transformations listed in [10] that SDDs support in polytime are also supported in polytime by VS-SDDs.
- We experimentally confirm that when applied to classical planning instances, VS-SDDs are significantly smaller than SDDs.

To summarize, VS-SDDs incur no additional overhead over SDDs while being potentially much smaller than SDDs.

The rest of this paper is organized as follows. Sect. 2 reviews related works. Sect. 3 gives the preliminaries. Sect. 4 introduces SDD, on which our proposed structure is based. Sect. 5 describes the formal definition of the equivalence relation we want to share, the definition of VS-SDD, and the relation between them. Sect. 6 examines the properties of VS-SDDs. Sect. 7 deals with the operations on VS-SDDs, especially **Apply**. Sect. 8 mentions some implementation details that ensure that VS-SDDs suffer no overhead penalty relative to SDDs. Sect. 9 provides experiments and their results, and Sect. 10 gives concluding remarks.

2 Related Works

There have been studies that attempt to share the substructures that represent the “equivalent” Boolean functions up to a conversion. For OBDDs, the most famous among them are complement edges and attributed edges [18, 20]. For example, with complement edges, we can share the substructures representing the equivalent Boolean functions up to taking a negation. However, this study does not focus on the solvability of the operations in the compressed form. Actually, some **Apply** operations cannot be performed in a compressed form. After that, the differential BDD [1], especially $\uparrow\Delta$ BDD, was proposed to share equivalent Boolean functions up to the shifting of variables, that is, given the total order of the variables, shift them uniformly to share isomorphic substructures. This structure supports operations like **Apply**, but its complexity depends on the number of variables, which means that this operation is not supported in polytime of the compilation size. With regard to other representations, Sym-DDG/FBDD [2], based on DDG [12] and FBDD [13], can share equivalent functions up to variable substitution. Since their method adopts a permutation of variables, it can, in principle, treat any variable substitution. However, Sym-DDG/FBDD fails to support some important operations such as conditioning and **Apply**. With regard to these previous works, VS-SDD differs in three points. First, to the best of our knowledge, VS-SDD is the first attempt to extend the equivalence relationships of an SDD. We should note that VS-SDD is not obtained by a straightforward application of the techniques invented for OBDDs. Second, VS-SDD has theoretical guarantees on its size. Last, it supports the flexible polytime **Apply** operation.

3 Preliminaries


We use an uppercase letter (e.g., X) to represent a variable and a lowercase letter (e.g., x) to denote its assignment (either *true* or *false*). A bold uppercase letter (e.g., \mathbf{X}) represents a set of variables and a bold lowercase letter (e.g., \mathbf{x}) denotes its assignment. *Boolean function* $f(\mathbf{X})$ is a function that maps each assignment of \mathbf{X} to either *true* or *false*. The *conditioning* of f on instantiation \mathbf{X} , written $f|\mathbf{x}$, is the subfunction that results from setting variables \mathbf{X} to their values in \mathbf{x} . We say f *essentially depends* on variable X iff $f|X \neq f|\neg X$. We take $f(\mathbf{Z})$ to mean that f can only essentially depend on variables in \mathbf{Z} . A *trivial* function maps all its inputs to 0 (denoted *false*) or maps all to 1 (denoted *true*).

Consider an ordered full binary tree. For two nodes u, w in it, we say w is a *left descendant* (resp. *right descendant*) of u if w is a (not necessarily proper) descendant of the left (resp. right) child of u .

4 Sentential Decision Diagrams

First, we introduce SDD. It is a data structure that can represent a Boolean function as a directed acyclic graph (DAG) like OBDD.

Let f be a Boolean function and \mathbf{X}, \mathbf{Y} be non-intersecting sets of variables. The (\mathbf{X}, \mathbf{Y}) -*decomposition* of f is $f = \bigvee_{i=1}^n [p_i(\mathbf{X}) \wedge s_i(\mathbf{Y})]$, where $p_i(\mathbf{X})$ and $s_i(\mathbf{Y})$ are Boolean functions. Here p_1, \dots, p_n are called *primes* and s_1, \dots, s_n are called *subs*. We denote (\mathbf{X}, \mathbf{Y}) -decomposition as $\{(p_1, s_1), \dots, (p_n, s_n)\}$, where n is the size of the decomposition. The pair (p_i, s_i) is called an *element*. An (\mathbf{X}, \mathbf{Y}) -decomposition is called \mathbf{X} -*partition* iff $p_i \wedge p_j = \text{false}$ for all $i \neq j$, $\bigvee_{i=1}^n p_i = \text{true}$, and $p_i \neq \text{false}$ for all i . If $s_i \neq s_j$ for all $i \neq j$, the partition is called *compressed*. It is known that a function $f(\mathbf{X}, \mathbf{Y})$ has exactly one compressed \mathbf{X} -partition (see Theorem 3 of [9]).

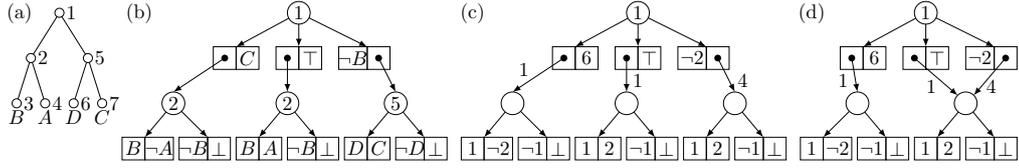

■ **Figure 1** (a) An example of a vtree. (b) The SDD of $f = (A \wedge B) \vee (B \wedge C) \vee (C \wedge D)$ that respects the vtree of (a). (c)(d) The VS-SDD of $f = (A \wedge B) \vee (B \wedge C) \vee (C \wedge D)$ given the vtree (a) with offset 1. Here (d) is the more reduced form than (c).

An SDD decomposes a Boolean function by recursively applying **X**-partitions. The structure of partitions is determined by an ordered full binary tree called the *vtree*; its leaves have a one-to-one correspondence with variables. Here, each internal node partitions the variables into those in the left subtree (**X**) and those in the right subtree (**Y**). For example, the vtree in Fig. 1(a) shows the recursive partition of variables A, B, C, D . The root node represents the partition of variables to $\{A, B\}, \{C, D\}$, while the left child of the root represents the partition $\{A\}, \{B\}$. SDD implements **X**-partitions by following these recursive partitions of variables.

Let $\langle \cdot \rangle$ be a mapping from an SDD to a Boolean function (i.e., the semantics of SDD). The SDD is defined recursively as follows.

- **Definition 1.** *The following α is an SDD that respects vtree node v .*
- (constant) $\alpha = \top$ or $\alpha = \perp$. *Semantics: $\langle \top \rangle = \text{true}$ and $\langle \perp \rangle = \text{false}$.*
- (literal) $\alpha = X$ or $\alpha = \neg X$, and v is a leaf node with variable X . *Semantics: $\langle X \rangle = X$ and $\langle \neg X \rangle = \neg X$.*
- (decomposition) $\alpha = \{(p_1, s_1), \dots, (p_n, s_n)\}$, and v is an internal node. *Here each p_i is an SDD respecting a left descendant node of v , each s_i is an SDD respecting a right descendant node of v , and $\langle p_1 \rangle, \dots, \langle p_n \rangle$ form a partition. Semantics: $\langle \alpha \rangle = \bigvee_{i=1}^n [\langle p_i \rangle \wedge \langle s_i \rangle]$.*

The size of α (denoted by $|\alpha|$) is defined as the sum of the sizes of all its decompositions.

Given the vtree of Fig. 1(a), Fig. 1(b) depicts an SDD that respects the vtree node labeled 1 and represents $f = (A \wedge B) \vee (B \wedge C) \vee (C \wedge D)$. At the top level, f is decomposed as $[(\neg A \wedge B) \wedge C] \vee [(A \wedge B) \wedge D] \vee [\neg B \wedge (C \wedge D)]$. This is the compressed $\{A, B\}$ -partition since primes $\neg A \wedge B$, $A \wedge B$ and $\neg B$ satisfy the condition for $\{A, B\}$ -partition and subs are all different. Here each circle represents a decomposition node, and the number inside each circle indicates the respecting vtree node ID. The size of the SDD is 9.

There are two classes of canonical SDDs. We say a class of SDDs is canonical iff, given a vtree, for any Boolean function f , there is exactly one SDD in this class that represents f . Here we consider only *reduced* SDDs, i.e. the SDDs such that the identical substructures are fully merged.

► **Definition 2.** *We say SDD α is compressed iff all partitions in α are compressed. We say α is trimmed iff it does not have decompositions of the form $\{(\top, \beta)\}$ and $\{(\beta, \top), (\neg\beta, \perp)\}$, and lightly trimmed iff it does not have decompositions of the form $\{(\top, \top)\}$ and $\{(\top, \perp)\}$. We say α is normalized iff for each decomposition that respects vtree node w , its primes respect the left child of w and its subs respect the right child of w .*

► **Theorem 3 ([9]).** *Compressed and trimmed SDDs are canonical. Also, compressed, lightly trimmed, and normalized SDDs are canonical.*

The key property of SDDs is that they support the polytime **Apply** operation, which takes, given vtree v , two SDDs α, β and binary operation \circ , and computes a new SDD that

represents $\langle \alpha \rangle \circ \langle \beta \rangle$ in $O(|\alpha||\beta|)$ time. Using `Apply`, we can compile an arbitrary Boolean function into an SDD.

5 Variable Shift Sentential Decision Diagrams

We now introduce our more succinct variant of SDD, named *variable shift SDD* (VS-SDD). As mentioned above, an SDD expresses a Boolean function succinctly by sharing equivalent substructures that represent the same Boolean subfunction. The motivation to introduce VS-SDD is, in addition to this, to share substructures that represent equivalent Boolean functions under a particular variable substitution.

First, we briefly describe the idea by using an intuitive example. Let us consider two Boolean functions $f = X_1 \wedge X_2$ and $g = X_3 \wedge X_4$ defined over variables X_1, \dots, X_4 . Apparently, f and g are not equivalent, but they are equivalent if we exchange X_1 with X_3 and X_2 with X_4 . We formally define this equivalency of Boolean functions below.

► **Definition 4.** *We say two Boolean functions f, g defined over \mathbf{X} are substitution-equivalent with permutation π if $f(X_1 = x_1, \dots, X_M = x_M) = g(X_1 = x_{\pi(1)}, \dots, X_M = x_{\pi(M)})$ for any assignment \mathbf{x} , where $M = |\mathbf{X}|$ and $\pi : \{1, \dots, M\} \mapsto \{1, \dots, M\}$ is a bijection.*

In the above example, f and g are substitution equivalent with π satisfying $\pi(3) = 1$ and $\pi(4) = 2$. For $i = 1, 2$, this permutation is defined by simply adding constant to an input, i.e., $\pi(i) = i + c$ ($i = 1, 2$) where the constant $c = 2$. This result implies that a class of substitution-equivalent functions can be represented as the pair of a base representation and constant value c . VS-SDD exploits this idea.

5.1 Definition of the structure

Now we consider the structure and semantics of VS-SDD. VS-SDD shares many properties with SDDs; it is defined with a vtree and a DAG structure representing recursive \mathbf{X} -partitions following the vtree. VS-SDD has two main differences from SDD. First, it associates every vtree node with an integer ID and it considers some mathematical operations over them. We use $\text{ID}(v)$ to represent the ID associated with vtree node v , and $\text{ID}^{-1}(i)$ to represent the vtree node that corresponds to ID i . In the following, we assume that integer IDs of vtree nodes are assigned following a preorder traversal of the vtree. The IDs assigned to the vtree in Fig. 1(a) satisfy this condition. Second, while SDD represents a Boolean function as a node of a DAG, VS-SDD represents a Boolean function as a pair (α, k) of node α in a DAG and integer k . We say α is the VS-SDD *structure* and k is its *offset*. We use $\langle \alpha, k \rangle$ as a mapping from VS-SDD (α, k) to the corresponding Boolean function.

► **Definition 5.** *Given vtree v , the following (α, k) is a VS-SDD.*

- (constant) $\alpha = \top$ or $\alpha = \perp$. *Semantics:* $\langle \top, \cdot \rangle = \text{true}$ and $\langle \perp, \cdot \rangle = \text{false}$.
- (literal) $\alpha = \mathbf{v}$ or $\alpha = \neg \mathbf{v}$, and $\text{ID}^{-1}(k)$ is a leaf vtree node. *Semantics:* $\langle \mathbf{v}, k \rangle = l(\text{ID}^{-1}(k))$ and $\langle \neg \mathbf{v}, k \rangle = \neg l(\text{ID}^{-1}(k))$, where $l(v)$ is a variable corresponding to vtree node v .
- (decomposition) $\alpha = \{([p_1, d_1], [s_1, e_1]), \dots, ([p_n, d_n], [s_n, e_n])\}$, and $\text{ID}^{-1}(k)$ is an internal node of v . Here each p_i is a VS-SDD structure and d_i is an integer such that $\text{ID}^{-1}(d_i + k)$ is a left descendant vtree node of $\text{ID}^{-1}(k)$. Similarly, each s_i is a VS-SDD structure and e_i is integer such that $\text{ID}^{-1}(e_i + k)$ is a right descendant node of $\text{ID}^{-1}(k)$ and Boolean functions $\langle p_1, d_1 + k \rangle, \dots, \langle p_n, d_n + k \rangle$ form a partition. *Semantics:* $\langle \alpha, k \rangle = \bigvee_{i=1}^n (\langle p_i, d_i + k \rangle \wedge \langle s_i, e_i + k \rangle)$.

The size of α (denoted by $|\alpha|$) is defined as the sum of the sizes of all decompositions.

Given the vtree of Fig. 1(a), Fig. 1(c)-(d) depict the VS-SDDs representing $f = (A \wedge B) \vee (B \wedge C) \vee (C \wedge D)$, where Fig. 1(d) is a further reduced form created by sharing the identical substructures in Fig. 1(c). Here the offset is written in the circle of the root node. Every prime $[p_i, d_i]$ is drawn as an arrow to structure p_i annotated with d_i , except for the following cases. If $p_i = \mathbf{v}$ (resp. $\neg\mathbf{v}$), it is drawn as simply d_i (resp. $\neg d_i$). If p_i is either of \top or \perp , it is represented by p_i itself, since the value of d_i has no effect on the semantics. Subs $[s_i, e_i]$ are treated in the same way.

We first give an interpretation of VS-SDD. By comparing the SDD in Fig. 1(b) with the VS-SDD in Fig. 1(c) having the same structure, we find they differ only in the labels of nodes and edges. Actually, we can construct the SDD of Fig. 1(b) from the VS-SDD in Fig. 1(c) in the following way. Let P_α be a path from the root to VS-SDD structure α and D_{P_α} be the sum of the offset and edge values appearing along the path. Then, $\text{ID}^{-1}(D_{P_\alpha})$ is the vtree node that the corresponding SDD node respects. For example, the leftmost child of the root node in the VS-SDD in Fig. 1(c) has offset value 6. The sum of offset values for this node is $1 + 6 = 7$ and $\text{ID}^{-1}(D_{P_\alpha})$ corresponds to the leaf vtree node having variable C . In this way, VS-SDD can be seen as an SDD variant that employs an indirect way of representing the respecting vtree nodes.

5.2 Substitution-equivalency in VS-SDDs

Next we show how substitution-equivalent functions are shared in VS-SDD. In Fig. 1(d), we should observe that the bottom-right node (say β) represents two substitution-equivalent functions $A \wedge B$ and $C \wedge D$. There are two different paths (say P_1 and P_2) from the root to β , and they correspond to different offset values $D_{P_1} = 1 + 1 = 2$ and $D_{P_2} = 1 + 4 = 5$. Therefore, β is used in two VS-SDDs $(\beta, 2)$ and $(\beta, 5)$ and they correspond to $A \wedge B$ and $C \wedge D$, respectively. In this way, substitution-equivalent functions are represented by VS-SDDs with the same structure and different offsets.

Now we proceed to the formal description. Let u, w be isomorphic subtrees of vtree v , \mathbf{X} be the set of variables corresponding to the leaves of v , and M be the number of variables. We consider permutation $\pi_{u,w} : \{1, \dots, M\} \mapsto \{1, \dots, M\}$ that preserves the relation between u and w . That is, let X_i and X_j be the variables associated with leaf nodes u' in u and w' in w , respectively. We assume that u' and w' are associated through the graph isomorphism between u and w . Then $\pi_{u,w}$ is the bijection satisfying $\pi_{u,w}(j) = i$ for every pair of X_i and X_j corresponding to the leaf nodes of u and w . If u and w are isomorphic and we employ preorder IDs, then the difference in IDs of corresponding nodes of u and w is unique. We call this the *shift* between u, w and denote it as δ . For example, in the vtree in Fig. 1(a), two child nodes of the root node represent isomorphic vtrees. In these vtrees $\delta = 3$ for every corresponding node pair.

► **Theorem 6.** *Let f, g be Boolean functions that essentially depend on isomorphic vtrees u and w (resp.), where u and w are nodes in the entire vtree v . If f and g are substitution-equivalent with $\pi_{u,w}$ then the compressed and trimmed VS-SDDs (α, k) and (β, ℓ) representing f and g satisfies $\alpha = \beta$ and $\ell = k + \delta$.*

Proof. The Boolean function $\langle \alpha, k + \delta \rangle$ is the one wherein every appearance of every variable $l(\text{ID}^{-1}(i))$ in $\langle \alpha, k \rangle$ is replaced with $l(\text{ID}^{-1}(i + \delta))$. It is equivalent to $\langle \beta, \ell \rangle$. ◀

It is possible that there exist two VS-SDDs (α, k) and (β, ℓ) where $\alpha = \beta$ but vtrees $\text{ID}^{-1}(k)$ and $\text{ID}^{-1}(\ell)$ are not isomorphic. In such case, we do not share their structure. In other words, we share the identical structures only when for the offsets k and ℓ , $\text{ID}^{-1}(k)$

and $ID^{-1}(\ell)$ are isomorphic. We call this the *identical vtree rule*. The VS-SDD in Fig. 1(d) satisfies this rule. Such rule is unique to VS-SDDs, since in SDDs all identical structures are fully merged (i.e. reduced). This rule is crucial for guaranteeing some attractive properties of VS-SDDs introduced in later sections.

6 Properties of VS-SDD

We show here some basic VS-SDD properties. First, we prove the canonicity of some classes of VS-SDD. Then we give proofs on VS-SDD size.

6.1 Canonicity

We say a class of VS-SDD is canonical iff, given a vtree, for any Boolean function f , there is exactly one VS-SDD in this class representing f . We first introduce two classes of VS-SDDs, both have counterparts in SDDs.

► **Definition 7.** We say VS-SDD (α, k) is compressed iff for each VS-SDD (β, ℓ) appearing in (α, k) where β is a decomposition, it forms compressed X -partition. We say a VS-SDD (α, k) is trimmed if it contains no decompositions with form of $\{([\top, \cdot], [\beta, d])\}$ and $\{([\beta, d], [\top, \cdot]), ([\neg\beta, d], [\perp, \cdot])\}$. We also say VS-SDD is lightly trimmed if it contains no decompositions with form of $\{([\top, \cdot], [\top, \cdot])\}$ and $\{([\top, \cdot], [\perp, \cdot])\}$. We say VS-SDD (α, k) is normalized iff for each VS-SDD (β, ℓ) appearing in (α, k) where β is a decomposition, every prime $[p_i, d_i]$ ensures that $ID^{-1}(d_i + \ell)$ is the left child of vtree node $ID^{-1}(\ell)$ and every sub $[s_i, e_i]$ ensures that $ID^{-1}(e_i + \ell)$ is the right child of vtree node $ID^{-1}(\ell)$.

The proof of canonicity is almost identical to that for SDDs. We first introduce some concepts and notations. We use $(\alpha, k) \equiv (\beta, \ell)$ to represent that the corresponding Boolean functions are identical.

► **Definition 8.** A Boolean function f essentially depends on vtree node v if f is not trivial and f is a deepest node that includes all variables that f essentially depends on.

► **Lemma 9 ([9]).** A non-trivial function essentially depends on exactly one vtree node.

► **Lemma 10.** Let (α, k) be a trimmed and compressed VS-SDD. If $(\alpha, k) \equiv \text{false}$, then $\alpha = \perp$. If $(\alpha, k) \equiv \text{true}$, then $\alpha = \top$. Otherwise, $ID^{-1}(k)$ always equals to the vtree node v that $\langle \alpha, k \rangle$ essentially depends on.


The above lemma suggests that compressed and trimmed VS-SDDs can be partitioned into groups depending on the offset. We can prove the canonicity by exploiting this fact.

► **Theorem 11.** Compressed and trimmed VS-SDDs with the same vtree, v , are canonical. Also, compressed, lightly trimmed, and normalized VS-SDDs with the same vtree, v , are canonical.

Proof. Here we give the proof for the case of compressed and trimmed VS-SDDs. The proof for compressed, lightly trimmed and normalized SDDs can be constructed in a similar way.

If two compressed SDDs (α, k) and (β, ℓ) satisfy $(\alpha, k) = (\beta, \ell)$, then $(\alpha, k) \equiv (\beta, \ell)$ from the definition. Suppose $\langle \alpha, k \rangle = \langle \beta, \ell \rangle$ and let $f = \langle \alpha, k \rangle = \langle \beta, \ell \rangle$. If $f = \text{true}$, then $\alpha = \beta = \top$ and they are canonical. Similarly, if $f = \text{false}$, then $\alpha = \beta = \perp$.

Next we consider the case of f being non-trivial. From Lemma 10, $ID^{-1}(k) = w = ID^{-1}(\ell)$ where w is the vtree node that f essentially depends on. Suppose w is a leaf, then VS-SDDs must be literals and hence $(\alpha, k) = (\beta, \ell)$. Suppose now that w is internal and

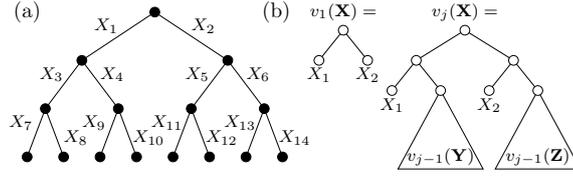

■ **Figure 2** (a) A complete binary tree with variable-labeled edges. (b) The recursive structure of vtree $v_j(\mathbf{X})$. Here X_1 and X_2 indicate the first and second (resp.) variables of \mathbf{X} .

that the theorem holds for VS-SDDs whose offsets correspond to descendant nodes of $ID^{-1}(k)$. Let w^l and w^r be the left and the right subtree of w , respectively. Let \mathbf{X} be variables in w^l , \mathbf{Y} be variables in w^r , $\alpha = \{([p_1, d_1], [s_1, e_1]), \dots, ([p_n, d_n], [s_n, e_n])\}$ and $\beta = \{([q_1, b_1], [r_1, c_1]), \dots, ([q_m, b_m], [r_m, c_m])\}$. By the definition, offsets $d_i + k$ and $b_j + \ell$ correspond to vtree nodes in w^l and offsets $e_i + k$ and $c_j + \ell$ correspond to vtree nodes in w^r . Since compressed \mathbf{X} -partitions $\{(\langle p_1, d_1 \rangle, \langle s_1, e_1 \rangle), \dots, (\langle p_n, d_n \rangle, \langle s_n, e_n \rangle)\}$ and $\{(\langle q_1, b_1 \rangle, \langle r_1, c_1 \rangle), \dots, (\langle q_m, b_m \rangle, \langle r_m, c_m \rangle)\}$ are identical (see Theorem 3 of [9]), $n = m$ and there is a one-to-one \equiv -correspondence between the primes and subs. From the inductive hypothesis, this means there is a one-to-one \equiv -correspondence between the primes and subs. This implies $\alpha = \beta$ and thus $(\alpha, k) = (\beta, \ell)$. ◀

6.2 About the Size: Exponential Compression

We here compare VS-SDD size with SDD size. First of all, we observe that VS-SDD is always smaller than SDDs since it is made by sharing substitution-equivalent nodes in SDDs and no other size changes occur.

► **Proposition 12.** *For any SDD α defined with vtree v , there exists a VS-SDD whose size is not larger than $|\alpha|$.*

We turn our focus to the best compression ratio of the VS-SDD. Since a vtree has M leaves where M is the number of variables, a vtree might have at most M isomorphic subtrees. Thus the lower bound of VS-SDD size is $1/M$ of SDD when we employ the identical vtree rule. Here we prove that there is a series of functions that almost achieves this compression ratio asymptotically.

► **Theorem 13.** *There exists a sequence of Boolean functions f_1, f_2, \dots such that f_j uses $O(2^j)$ variables, the size of a compressed SDD representing f_j is $\Omega(2^j)$ with any vtree, and that of a compressed VS-SDD representing f_j is $O(j)$ with a particular vtree.*

The compression ratio is $O(j/2^j) = O(\log M/M)$. Theorem 13 makes a stronger statement, because “any” vtree can be considered for SDD.

One of the sequences satisfying Theorem 13 is as follows:

$$f_j(\mathbf{X}) = (\neg X_1 \vee \neg X_2) \wedge \bigwedge_{i=1}^{2^j-2} ((\neg X_i \vee \neg X_{2i+1}) \wedge (\neg X_i \vee \neg X_{2i+2}) \wedge (\neg X_{2i+1} \vee \neg X_{2i+2})).$$

By considering a complete binary tree like Fig. 2(a), we observe that $f_j(\mathbf{x}) = \text{true}$ iff the edges whose corresponding variables are set to *true* constitute a matching.

We outline the proof here; details are given in the Appendix. Since the first part of Theorem 13 can easily be proved, we refer to the second part. We define vtree $v_j(\mathbf{X})$ in a recursive manner as shown in Fig. 2(b). Here \mathbf{Y} includes the variables corresponding to the edges below X_1 when considering the complete binary tree as in Fig. 2(a) (namely X_3, X_4, \dots)

■ **Algorithm 1** $\text{Apply}(\alpha, \beta, k, \circ)$, which computes a VS-SDD representing $\langle \alpha, k \rangle \circ \langle \beta, k \rangle$ for two normalized VS-SDDs $(\alpha, k), (\beta, k)$ and a binary operator \circ .

$\text{Cache}(\cdot, \cdot, \cdot) = \text{nil}$ initially. $\text{Expand}(\alpha)$ returns $\{([\top, \cdot], [\top, \cdot])\}$ if $\alpha = \top$; $\{([\top, \cdot], [\perp, \cdot])\}$ if $\alpha = \perp$; else α . $\text{UniqueD}(\gamma)$ returns \top if $\gamma = \{([\top, \cdot], [\top, \cdot])\}$; \perp if $\gamma = \{([\top, \cdot], [\perp, \cdot])\}$; else the unique VS-SDD with elements γ .

```

1: if  $\alpha$  and  $\beta$  are either of  $\top, \perp, \mathbf{v}, \neg \mathbf{v}$  then
2:   return the pair of corresponding value and offset.
3: else if  $\text{Cache}(\alpha, \beta, \circ) \neq \text{nil}$  then
4:    $\lambda \leftarrow \text{Cache}(\alpha, \beta, \circ)$ 
5:   return  $(\lambda, k)$ 
6: else
7:    $\gamma \leftarrow \{\}$ 
8:   for all elements  $([p_i, d], [s_i, e])$  in  $\text{Expand}(\alpha)$  do
9:     for all elements  $([q_j, d], [r_j, e])$  in  $\text{Expand}(\beta)$  do
10:       $(p, \ell_p) \leftarrow \text{Apply}(p_i, q_j, d + k, \circ)$ 
11:      if  $(p, \ell_p)$  is consistent then
12:         $(s, \ell_s) \leftarrow \text{Apply}(s_i, r_j, e + k, \circ)$ 
13:        add element  $([p, \ell_p - k], [s, \ell_s - k])$  to  $\gamma$ 
14:  $\lambda \leftarrow \text{UniqueD}(\gamma), \text{Cache}(\alpha, \beta, \circ) \leftarrow \lambda$ 
15: return  $(\lambda, k)$ 

```

and \mathbf{Z} includes those corresponding to the edges below X_2 (X_5, X_6, \dots). Now we decompose $f_j(\mathbf{X})$ with respect to $v_j(\mathbf{X})$ by using $f_{j-1}(\mathbf{Y}), f_{j-1}(\mathbf{Z})$ and some other subfunctions. We then use the fact that $f_{j-1}(\mathbf{Y})$ and $f_{j-1}(\mathbf{Z})$ are substitution-equivalent with $\pi_{v_{j-1}(\mathbf{Y}), v_{j-1}(\mathbf{Z})}$. By repetitively applying this argument, we observe that by decomposing f_j with respect to v_j , the SDD of f_j has 2^i nodes that represent $f_{j-i}(\cdot)$, which all represent substitution-equivalent functions, and thus the VS-SDD reduces the size exponentially.

7 Operations of VS-SDD

The most important property of VS-SDDs is that they support numerous key operations in polytime. We focus here on the important queries and transformations shown in [10]. Most of these operations are based on Apply . Apply takes, given a vtree, two VS-SDDs $(\alpha, k), (\beta, \ell)$ and binary operation \circ such as \vee (disjunction), \wedge (conjunction) and \oplus (exclusive-or), and returns a VS-SDD of $\langle \alpha, k \rangle \circ \langle \beta, \ell \rangle$. By repeating Apply operations, we can flexibly construct VS-SDDs representing various Boolean functions.

To simplify the explanation of Apply , we assume that VS-SDDs are normalized and thus have the same offset value k . Given two normalized VS-SDDs $(\alpha, k), (\beta, k)$, Alg. 1 provides pseudocode for the function $\text{Apply}(\alpha, \beta, k, \circ)$. The mechanism behind the Apply computation of VS-SDDs is as follows. Let f, g be Boolean functions with the same variable set, and suppose that f is \mathbf{X} -partitioned as $f = \bigvee_{i=1}^n [p_i(\mathbf{X}) \wedge s_i(\mathbf{Y})]$ and g is also \mathbf{X} -partitioned (with the same \mathbf{X}) as $g = \bigvee_{j=1}^m [q_j(\mathbf{X}) \wedge r_j(\mathbf{Y})]$. Then, $f \circ g$ can be expressed as $\bigvee_{i=1}^n \bigvee_{j=1}^m [(p_i(\mathbf{X}) \wedge q_j(\mathbf{X})) \wedge (s_i(\mathbf{Y}) \circ r_j(\mathbf{Y}))]$, where $(p_i(\mathbf{X}) \wedge q_j(\mathbf{X})) \wedge (p_{i'}(\mathbf{X}) \wedge q_{j'}(\mathbf{X})) = \text{false}$ for $(i, j) \neq (i', j')$ and $\bigvee_{i=1}^n \bigvee_{j=1}^m (p_i(\mathbf{X}) \wedge q_j(\mathbf{X})) = \text{true}$. Thus, computing $p_i \wedge q_j$ and $s_i \circ r_j$ for each (i, j) pair and ignoring the pairs such that $p_i \wedge q_j = \text{false}$ yields the \mathbf{X} -partition of $f \circ g$. Alg. 1 follows this recursive definition.

► **Proposition 14.** $\text{Apply}(\alpha, \beta, k, \circ)$ runs in $O(|\alpha||\beta|)$ time.

The above result is the same as in the case of Apply for SDDs. The key to achieving this result is that we use Cache without using offset k as a key. We use the fact that if a pair of functions $f(\mathbf{X}), f'(\mathbf{Y})$ and $g(\mathbf{X}), g'(\mathbf{Y})$, where \mathbf{X} and \mathbf{Y} are non-overlapping, are substitution-equivalent with permutation π , then the composed functions $f \circ g$ and

■ **Table 1** List of supported (a) queries and (b) transformations for SDDs (S), VS-SDDs (V), compressed SDDs (S(C)) and compressed VS-SDDs (V(C)). ✓ indicates the existence of a polytime algorithm, while • indicates such polytime algorithm is shown to be impossible.

(a) Query		S	V	S(C)	V(C)	(b) Transformation		S	V	S(C)	V(C)
CO	consistency	✓	✓	✓	✓	$\wedge\mathbf{C}$	conjunction	•	•	•	•
VA	validity	✓	✓	✓	✓	$\wedge\mathbf{BC}$	bounded conjunction	✓	✓	•	•
CE	clausal entailment	✓	✓	✓	✓	$\vee\mathbf{C}$	disjunction	•	•	•	•
IM	implicant check	✓	✓	✓	✓	$\vee\mathbf{BC}$	bounded disjunction	✓	✓	•	•
EQ	equivalence check	✓	✓	✓	✓	$\neg\mathbf{C}$	negation	✓	✓	✓	✓
CT	model counting	✓	✓	✓	✓	CD	conditioning	✓	✓	•	•
SE	sentential entailment	✓	✓	✓	✓	FO	forgetting	•	•	•	•
ME	model enumeration	✓	✓	✓	✓	SFO	singleton forgetting	✓	✓	•	•

$f' \circ g'$ are also substitution-equivalent with the same permutation π . For example, let $f = A \wedge B$, $f' = C \wedge D$, $g = \neg A$ and $g' = \neg C$, in which f and f' , and g and g' (resp.) are substitution-equivalent with permutation $\pi_{\text{ID}^{-1}(2), \text{ID}^{-1}(5)}$ defined with the vtree in Fig. 1(a). Then $f \vee g = \neg A \vee B$ and $f' \vee g' = \neg C \vee D$ are also substitution-equivalent with $\pi_{\text{ID}^{-1}(2), \text{ID}^{-1}(5)}$. This means the results of $\text{Apply}(\alpha, \beta, k, \circ)$ with different k are all substitution-equivalent. Therefore, we can reuse the result obtained with different offsets.

If VS-SDDs are trimmed, we can also define Apply operations for them. While similar to the case for trimmed SDDs, the Apply for trimmed VS-SDDs are more complicated than that of normalized VS-SDDs since we have to take different operations depending on the combination of offset values of input VS-SDDs. However, the complexity of Apply for trimmed VS-SDDs is also $O(|\alpha||\beta|)$. We detail the Apply for trimmed VS-SDDs in the Appendix B.

Note that even if two VS-SDDs are compressed, the resulting VS-SDD cannot be assumed to be compressed since the same sub may appear. It is said in [4] that there is a case in which compression makes an SDD exponentially larger, and thus a similar statement holds for VS-SDDs. Therefore, if we oblige the output to be compressed, Prop. 14 does not hold. Note that during Apply , compression can be performed by taking the disjunction of primes when the same subs emerge.

By extensively using Prop. 14 with some other algorithms, it can be shown that the various important queries and transformations in [10] can be performed in polytime. The proof is in the Appendix.


► **Proposition 15.** *The results in Table 1 hold.*

Note that some applications, e.g. probabilistic inference [25, 10], need *weighted* model counting, where each variable has a weight. Though this cannot be performed in $O(|\alpha|)$ time for VS-SDD α , it can be performed at least as fast as is possible by using the corresponding SDD, by preparing, for each node, as many counters as the number of unified nodes in the original SDD. Moreover, if the weights of variables are the same for the same vtree structures, we can share counters, which speeds up the computation.

8 Implementation

We should address implementation in order to ensure space-efficiency. One suspects that even if VS-SDD size is never larger than SDD size, the memory usage may increase because we store the information of respecting vtree node ids in the edges of a diagram (differentially) instead of in the nodes. This is true if VS-SDDs are implemented as is.

However, a small modification avoids this problem. First, for a normalized VS-SDD, we simply ignore the differences of vtree node ids attached to the edges. Even so, we can recover

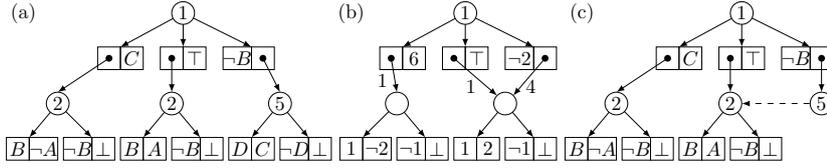

■ **Figure 3** (a)(b) An SDD and a VS-SDD that are the same as Fig. 1. (c) The example of the representation of VS-SDD (b) using original SDD structure (a). The dashed arrow indicates a pointer to the representative node.

the respecting vtree node because if an SDD node respects vtree v , its primes respect the left child of v and its subs respect the right child of v . Second, for a general VS-SDD, we just reuse the structure of the original SDD. Among the SDD nodes that are merged into one in the VS-SDD structure, we just leave one representative (e.g. the one with the smallest respecting vtree node id). Then each of the other nodes has a pointer to the representative node instead of storing the prime-sub pairs. An example of such a structure is drawn in Fig. 3(c). Here the dashed arrow indicates a pointer to the representative node described above. Since each decomposition node has at least one prime-sub pair that typically uses two pointers, replacing it by single pointer will never increase memory usage. Working with such a structure does not violate any properties about VS-SDDs, including the operations described above.

9 Evaluation

We use some benchmarks of Boolean functions to evaluate how our approach reduces the size of an SDD. we compile a CNF into an SDD with the dynamic vtree search [7] and then compare the sizes yielded by the SDD and its VS form (VS-SDD). To compile a CNF, we use the SDD package version 2.0 [8] with a balanced initial vtree. Here note that we use for both SDD and VS-SDD the same vtree, which is searched to suit for SDD. All the experiments are conducted on a 64-bit macOS (High Sierra) machine with 2.5 GHz Intel Core i7 CPU (1 thread) and 16 GB RAM.

Here we focus on the planning CNF dataset that was used in the experiment of Sym-DDG [2]. The planning problem naturally exhibits symmetries, e.g. see [23]. Given time horizon T , this data represents a deterministic planning problem with varying initial and goal states. Here we can choose an action from a fixed action set for each time point, and a plan for this problem is a time series of actions for $t = 0, \dots, T - 1$ that leads from the initial state to the goal state. For more details, see [2]. We use the planning problems that were also used in the experiment of Sym-DDG: “blocks-2”, “bomb-5-1”, “comm-5-2”, “emptyroom-4/8”, and “safe-5/30”, with varying time horizons $T = 3, 5, 7, 10$.

The next focus is on the benchmarks with apparent symmetries. The first one is the N -queens problem, that is, given an $N \times N$ chessboard, place N queens such that no two queens attack each other. We assign a variable to each square in the chessboard, and consider a Boolean function that evaluates *true* iff the *true* variables constitute one answer for this problem. This problem is used as a benchmark in Zero-suppressed BDD and other DD studies [19, 6]. The second one is enumerating matchings of grid graphs. Subgraph enumeration with decision diagrams has several applications; see [16] and [21]. Here the grid graph is often used as a benchmark [15], because it is closely related to self-avoiding walk [17], and subgraph enumeration becomes much harder for larger grids despite their simplicity. We can observe that both the chessboard and the grid have line symmetries and

■ **Table 2** Results for experiments. The “S” column represents SDD size, “V” represents VS-SDD size, and “ratio” indicates the ratio of VS-SDD size compared to SDD size.

Problem	#vars	S	V	ratio
blocks-2_t3	248	8811	7057	80.1%
blocks-2_t5	406	31861	28858	90.6%
bomb-5-1_t3	348	3798	2278	60.0%
bomb-5-1_t5	564	6327	3960	62.6%
bomb-5-1_t7	780	11212	7287	65.0%
bomb-5-1_t10	1104	16514	10426	63.1%
comm-5-2_t3	488	20584	18033	87.6%
emptyroom-4_t3	116	1822	1146	62.9%
emptyroom-4_t5	188	3090	1885	61.0%
emptyroom-4_t7	260	5073	3001	59.2%
emptyroom-4_t10	368	106737	103417	96.8%
emptyroom-8_t3	244	10511	8549	81.3%
safe-5_t3	54	567	441	77.8%
safe-5_t5	86	898	640	71.2%
safe-5_t7	118	1710	1314	76.8%
safe-5_t10	166	2506	1756	70.1%
safe-30_t3	304	5476	4067	74.3%
safe-30_t5	486	8710	6328	72.7%
safe-30_t7	668	14449	10371	71.8%
safe-30_t10	941	23469	17421	74.2%
8-Queens	64	2222	1624	73.1%
9-Queens	81	5559	4767	85.8%
10-Queens	100	10351	9159	88.5%
11-Queens	121	30611	28876	94.3%
Matching-6x6	60	13091	12671	96.8%
Matching-8x8	112	98200	97103	98.8%
Matching-6x18	192	36228	34241	94.5%

point symmetry. Again we exploit dynamic vtree search implemented in the SDD package.

Table 2 shows the results of our experiments. The “S” column represents SDD size, “V” represents VS-SDD size, and “ratio” indicates the ratio of VS-SDD size compared to SDD size. Here the problems in which the SDD compilation took more than 10 minutes are omitted. For planning problems, the suffix “_tn” stands for $T = n$, and for matching problems, the suffix indicates the grid size. It is observed that for many planning problems, the VS-SDD reduces the size to around 60% to 80% of the original SDD. We observe that for these cases, many nodes representing substitution-equivalent functions are found among the bottom nodes of the original SDD, which yields the substantial size decrease. These compression ratios are competitive to, and for some cases better than, that of the Sym-DDG [2] compared to the DDG. For the N -queens problems, still better compression ratios are achieved except for $N = 11$. However, for matching enumeration problems, the effect of variable shift is relatively small. One reason is the asymmetry of primes and subs, that is, primes must form a partition while subs do not have such a limitation. The success in planning datasets may be explained as follows. The dynamic vtree search typically gathers variables with strong dependence locally to achieve succinctness. For planning problems, the variables with near time points are gathered, which captures the symmetric nature of the problem.

10 Conclusion

We proposed a variable shift SDD (VS-SDD), a more succinct variant of SDD that is obtained by changing the way in which respecting vtree nodes are indicated. VS-SDD keeps the two important properties of SDDs, the canonicity and the support of many useful operations. The size of a VS-SDD is always smaller than or equal to that of an SDD, and there are cases where the VS-SDD is exponentially smaller than the SDD. Experiments show that our idea effectively captures the symmetries of Boolean functions, which leads to succinct compilation.

References

- 1 Anuchit Anuchitanukul, Zohar Manna, and Tomás E. Uribe. Differential BDDs. In *Computer Science Today*, pages 218–233, 1995.
- 2 Anicet Bart, Frédéric Koriche, Jean-Marie Lagniez, and Pierre Marquis. Symmetry-driven decision diagrams for knowledge compilation. In *ECAI*, pages 51–56, 2014.
- 3 Simone Bova. SDDs are exponentially more succinct than OBDDs. In *AAAI*, pages 929–935, 2016.
- 4 Guy Van den Broeck and Adnan Darwiche. On the role of canonicity in knowledge compilation. In *AAAI*, pages 1641–1648, 2015.
- 5 Randal E. Bryant. Graph-based algorithms for boolean function manipulation. *IEEE Trans. Comput.*, C-35:677–691, 1986.
- 6 Randal E. Bryant. Chain reduction for binary and zero-suppressed decision diagrams. In *TACAS*, pages 81–98, 2018.
- 7 Arthur Choi and Adnan Darwiche. Dynamic minimization of sentential decision diagrams. In *AAAI*, pages 187–194, 2013.
- 8 Arthur Choi and Adnan Darwiche. The SDD package: version 2.0. <http://reasoning.cs.ucla.edu/sdd/>, 2018.
- 9 Adnan Darwiche. SDD: a new canonical representation of propositional knowledge bases. In *AAAI*, pages 819–826, 2011.
- 10 Adnan Darwiche and Pierre Marquis. A knowledge compilation map. *J. Artif. Intell. Res.*, 17:229–264, 2002.
- 11 Leonardo Duenas-Osorio, Kuldeep S. Meel, Roger Paredes, and Moshe Y. Vardi. Counting-based reliability estimation for power-transmission. In *AAAI*, pages 4488–4494, 2017.
- 12 Héiène Fragier and Pierre Marquis. On the use of partially ordered decision graphs for knowledge compilation and quantified Boolean formulae. In *AAAI*, pages 42–47, 2006.
- 13 Jordan Gergov and Christoph Meinel. Efficient Boolean manipulation with OBDD’s can be extended to FBDD’s. *IEEE Trans. Comput.*, 43:1197–1209, 1994.
- 14 Dov Harel and Robert E. Tarjan. Fast algorithms for finding nearest common ancestors. *SIAM J. Comput.*, 13:338–355, 1984.
- 15 Hiroaki Iwashita, Yoshio Nakazawa, Jun Kawahara, Takeaki Uno, and Shin-ichi Minato. Efficient computation of the number of paths in a grid graph with minimal perfect hash functions. Technical Report TCS-TR-A-13-64, Division of Computer Science, Hokkaido University, 2013.
- 16 Donald E. Knuth. *The Art of Computer Programming*, volume 4A: Combinatorial Algorithms, Part I. Addison-Wesley, 2011.
- 17 Neal Madras and Gordon Slade. *The Self-Avoiding Walk*. Birkhäuser Basel, 2011.
- 18 Jean-Christophe Madre and Jean-Paul Billon. Proving circuit correctness using formal comparison between expected and extracted behaviour. In *DAC*, pages 205–210, 1988.
- 19 Shin-ichi Minato. Zero-suppressed BDDs for set manipulation in combinatorial problems. In *DAC*, pages 272–277, 1993.
- 20 Shin-ichi Minato, Nagisa Ishiura, and Shuzo Yajima. Shared binary decision diagram with attributed edges for efficient boolean function manipulation. In *DAC*, pages 52–57, 1990.
- 21 Masaaki Nishino, Norihito Yasuda, Shin-ichi Minato, and Masaaki Nagata. Compiling graph substructures into sentential decision diagrams. In *AAAI*, pages 1213–1221, 2017.
- 22 Umut Oztok and Adnan Darwiche. A top-down compiler for sentential decision diagrams. In *IJCAI*, pages 3141–3148, 2015.
- 23 Héctor Palacios, Blai Bonet, Adnan Darwiche, and Héctor Geffner. Pruning conformant plans by counting models on compiled d-DNNF representations. In *ICAPS*, pages 141–150, 2005.
- 24 Knot Pipatsrisawat and Adnan Darwiche. New compilation languages based on structured decomposability. In *AAAI*, pages 517–522, 2008.
- 25 Tian Sang, Paul Beame, and Henry Kautz. Performing Bayesian inference by weighted model counting. In *AAAI*, pages 475–481, 2005.

26 Jonas Vlasselaer, Joris Renkens, Guy Van den Broeck, and Luc De Raedt. Compiling probabilistic logic programs into sentential decision diagrams. In *PLP*, 2014.

A Appendix: Detailed Proofs

Proof of Theorem 13. The first part can be proved by the following general claim.

▷ **Claim 16.** Let $f(\mathbf{X})$ be a Boolean function such that for any variable X_i in \mathbf{X} , the conditioned functions $f|_{X_i=true}$ and $f|_{X_i=false}$ are different. Then any SDD representing f has size $\Omega(M)$, where M is the number of variables in \mathbf{X} . This holds for any vtree.

Proof. We prove that for any variable X_i in \mathbf{X} , the SDD of f contains at least either X_i or $\neg X_i$ (as a literal SDD). If this holds, there are at least m literals in the SDD of f and thus at least $\lceil M/2 \rceil$ prime-sub pairs, which suggests that its size is at least $\lceil M/2 \rceil = \Omega(M)$.

Suppose the SDD of f does not contain X_i and $\neg X_i$. Recall the definition (semantics) of SDD. By recursively applying the definition of $\langle \cdot \rangle$, we obtain an expression of f by using conjunctions, disjunctions, and literals. If the SDD does not contain X_i and $\neg X_i$, this expression also does not contain X_i . This means that $f|_{X_i=true}$ and $f|_{X_i=false}$ are equivalent, since the assignment of X_i is not mentioned in f . This contradicts the condition, thus the SDD contains at least one of X_i and $\neg X_i$. ◁

Now we refer to the second part. We use the vtree $v_j(\mathbf{X})$ explained in the main article and drawn in Fig. 2(b). We give a proof by inductively showing that functions $f_j(\mathbf{X})$, $\neg f_j(\mathbf{X})$, $f'_j(\mathbf{X})$ and $\neg f'_j(\mathbf{X})$ can be represented with $O(j)$ size VS-SDDs, where $f'_j(\mathbf{X}) = \neg X_1 \wedge \neg X_2 \wedge f_j(\mathbf{X})$.


If $j \leq 2$, then the size of VS-SDDs representing $f_j(\mathbf{X})$, $\neg f_j(\mathbf{X})$, $f'_j(\mathbf{X})$ and $\neg f'_j(\mathbf{X})$ are constant. If $j \geq 3$, then the $(\{X_1\} \cup \mathbf{Y})$ -partition of $f_j(\mathbf{X})$ defined with vtree node $v_j(\mathbf{X})$ becomes

$$\begin{aligned} & \left((X_1 \wedge f'_{j-1}(\mathbf{Y})) \wedge (\neg X_2 \wedge f_{j-1}(\mathbf{Z})) \right) \vee \\ & \left((\neg X_1 \wedge f_{j-1}(\mathbf{Y})) \wedge ((X_2 \wedge f'_{j-1}(\mathbf{Z})) \vee (\neg X_2 \wedge f_{j-1}(\mathbf{Z}))) \right) \vee \\ & \left(((X_1 \wedge \neg f'_{j-1}(\mathbf{Y})) \vee (\neg X_1 \wedge \neg f_{j-1}(\mathbf{Y}))) \wedge false \right). \end{aligned}$$

The prime of the first element $X_1 \wedge f'_{j-1}(\mathbf{Y})$ becomes *true* iff the corresponding edges form a matching in the left half of the binary tree having edges X_1, X_3, X_4, \dots and $X_1 = true$. The prime of the second element $\neg X_1 \wedge f_{j-1}(\mathbf{Y})$ becomes *true* iff the selected edges form a matching in the left half tree and $X_1 = false$. The prime of the third element becomes *true* iff the selected edges do not form a matching in the left half tree. The above partition is compressed since $f_{j-1}(\mathbf{Z}) \neq false$ and $f'_{j-1}(\mathbf{Z}) \neq false$. If we were to depict this decomposition as an SDD, it would look like Fig. 4. The point is that pairs of $f_{j-1}(\mathbf{Y})$ and $f_{j-1}(\mathbf{Z})$, and $f'_{j-1}(\mathbf{Y})$ and $f'_{j-1}(\mathbf{Z})$ are substitution-equivalent with $\pi_{v_{j-1}(\mathbf{Y}), v_{j-1}(\mathbf{Z})}$, and thus the VS-SDD representation prepares only one node for f_{j-1} and f'_{j-1} (see Fig. 4). Therefore, the size of the VS-SDD representing $f_j(\mathbf{X})$ equals the sum of sizes of VS-SDDs representing $f_{j-1}(\mathbf{Y})$, $f'_{j-1}(\mathbf{Y})$, and $\neg f'_{j-1}(\mathbf{Y})$ plus a constant. Similarly, $f'_j(\mathbf{X})$ can be decomposed as

$$\left((\neg X_1 \wedge f_{j-1}(\mathbf{Y})) \wedge (\neg X_2 \wedge f_{j-1}(\mathbf{Z})) \right) \vee \left(((X_1 \wedge true) \vee (\neg X_1 \wedge \neg f_{j-1}(\mathbf{Y}))) \wedge false \right).$$

Here $f_{j-1}(\mathbf{Y})$ and $f_{j-1}(\mathbf{Z})$ are substitution-equivalent with $\pi_{v_{j-1}(\mathbf{Y}), v_{j-1}(\mathbf{Z})}$ and thus the size of a VS-SDD representing $f'_i(\mathbf{X})$ equals the size of the VS-SDD representing $f_{j-1}(\mathbf{Y})$ plus a constant. The $(\{X_1\} \cup \mathbf{Y})$ -partitions of $\neg f_j(\mathbf{X})$ and $\neg f'_j(\mathbf{X})$ are represented in almost the same way. Therefore, from the inductive hypothesis, VS-SDDs representing $f_j(\mathbf{X})$, $f'_j(\mathbf{X})$, $\neg f_j(\mathbf{X})$ and $\neg f'_j(\mathbf{X})$ have $O(j)$ size. ◀

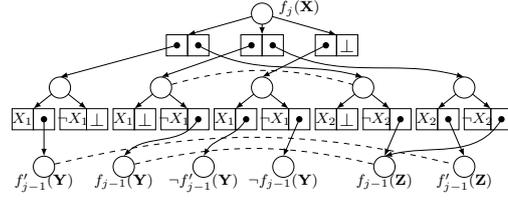

■ **Figure 4** The recursive structure of the compressed SDD of $f_j(\mathbf{X})$ respecting $v_j(\mathbf{X})$ in Fig. 2(b). Dashed lines indicate that the nodes on both ends represents substitution-equivalent functions. Here X_1 and X_2 indicate the first and second (resp.) variables of \mathbf{X} .

■ **Algorithm 2** $\text{Count}(\alpha, k)$, which computes the model count of the Boolean function $\langle \alpha, k \rangle$.

Input: A decomposition VS-SDD (α, k) .

Output: The model count of the Boolean function $\langle \alpha, k \rangle$.

```

1: if Cache( $\alpha$ )  $\neq$  nil then
2:   return Cache( $\alpha$ )
3: else
4:    $w \leftarrow \text{ID}^{-1}(k)$ 
5:    $r \leftarrow 0$ 
6:   for all elements  $([p_i, d_i], [s_i, e_i])$  in  $\alpha$  do
7:     if  $p_i = \perp$  then  $n_p \leftarrow 0$ 
8:     else if  $p_i = \top$  then  $n_p \leftarrow 2^{L(w^l)}$   $\{w^l$  is the left child of  $w\}$ 
9:     else if  $p_i \in \{\mathbf{v}, \neg\mathbf{v}\}$  then  $n_p \leftarrow 2^{L(w^l)-1}$ 
10:    else  $n_p \leftarrow \text{Count}(p_i, k + d_i) \cdot 2^{L(w^l)-L(\text{ID}^{-1}(k+d_i))}$ 
11:    if  $s_i = \perp$  then  $n_s \leftarrow 0$ 
12:    else if  $s_i = \top$  then  $n_s \leftarrow 2^{L(w^r)}$   $\{w^r$  is the right child of  $w\}$ 
13:    else if  $s_i \in \{\mathbf{v}, \neg\mathbf{v}\}$  then  $n_s \leftarrow 2^{L(w^r)-1}$ 
14:    else  $n_s \leftarrow \text{Count}(s_i, k + e_i) \cdot 2^{L(w^r)-L(\text{ID}^{-1}(k+e_i))}$ 
15:     $r \leftarrow r + n_p n_s$ 
16:   return Cache( $\alpha$ )  $\leftarrow r$ 

```

Proof of Prop. 15. First, we consider the queries in Table 1(a). The first concern is the polytime solvability of model counting, i.e. **CT**. The *model count* of Boolean function f is the number of satisfying assignments of f . Model counting, also known as #SAT, is applicable to wider research areas, e.g. network reliability estimation [11]. For SDD α , model count can be performed with $O(|\alpha|)$ time dynamic programming. Similarly, we can show that the model count of the function represented by a VS-SDD (α, k) can be computed by dynamic programming that runs in $O(|\alpha|)$ time. The pseudocode for model counting with VS-SDD is shown in Alg. 2. The key is that substitution-equivalent Boolean functions have the same model count.

ME can also be solved by an algorithm similar to **CT**. For **SE**, we are given two VS-SDDs (α, k) and (β, ℓ) , and check whether $\langle \alpha, k \rangle$ implies $\langle \beta, \ell \rangle$ or not. This can be solved by the algorithm shown in [24]. That is, we take the conjunction $\langle \alpha, k \rangle \wedge \langle \beta, \ell \rangle$, and then perform model counting. If the model count of this conjunction equals that of $\langle \alpha, k \rangle$, we can say $\langle \alpha, k \rangle$ implies $\langle \beta, \ell \rangle$. Since conjunction and model counting can be performed in polytime for VS-SDDs, **SE** can also be solved in polytime. Note that even for compressed VS-SDDs that do not support $\wedge\mathbf{BC}$, the procedure described above can be performed in polytime because during this procedure the conjunction VS-SDD is not obliged to be compressed, since it is only used for model counting. **EQ**, **CO**, **VA**, **IM**, and **CE** can be solved by **SE**.

We next consider the transformations in Table 1(b). First, the negation $\neg\mathbf{C}$ of a VS-SDD (α, k) can be computed by taking exclusive-or with \top , which can be done in $O(|\alpha| \cdot 1) = O(|\alpha|)$ time and thus VS-SDDs support polytime $\neg\mathbf{C}$. Note that this procedure

■ **Algorithm 3** $\text{Cond}(\alpha, k, S)$, which performs a conditioning of (α, k) with the literals in S .

Input: A VS-SDD (α, k) , and a set of literals S .

Output: A VS-SDD structure of the Boolean function obtained by conditioning (α, k_α) with the literals in S .

```

1: if  $v(\text{ID}^{-1}(k))$  does not contain variables appearing in  $S$  then
2:   return  $\alpha$ 
3: else if  $\text{Cache}(\alpha, k) \neq \text{nil}$  then
4:   return  $\text{Cache}(\alpha, k)$ 
5: else
6:   if  $\alpha \in \{\top, \perp\}$  then return  $\alpha$ 
7:   else if  $(\alpha = \mathbf{v}$  and  $l(\text{ID}^{-1}(k)) \in S$ ) or  $(\alpha = \neg\mathbf{v}$  and  $\neg l(\text{ID}^{-1}(k)) \in S)$  then return  $\top$ 
8:   else if  $(\alpha = \mathbf{v}$  and  $\neg l(\text{ID}^{-1}(k)) \in S)$  or  $(\alpha = \neg\mathbf{v}$  and  $l(\text{ID}^{-1}(k)) \in S)$  then return  $\perp$ 
9:    $\gamma \leftarrow \{\}$ 
10:  for all elements  $([p_i, d_{p_i}], [s_i, d_{s_i}])$  in  $\alpha$  do
11:    add element  $([\text{Cond}(p_i, k + d_{p_i}, S), d_{p_i}], [\text{Cond}(s_i, k + d_{s_i}, S), d_{s_i}])$  to  $\gamma$ 
12:  if  $\text{UniqTable}(e(\text{ID}^{-1}(k)), \gamma) = \text{nil}$  then
13:     $\text{UniqTable}(e(\text{ID}^{-1}(k)), \gamma) \leftarrow \text{CreateNewNode}(\gamma)$ 
14:  return  $\text{Cache}(\alpha, k) \leftarrow \text{UniqTable}(e(\text{ID}^{-1}(k)), \gamma)$ 

```

produces a compressed VS-SDD if α is also compressed since if $s_i \neq s_j$ for all $i \neq j$, $\neg s_i \neq \neg s_j$ for all $i \neq j$. Therefore compressed VS-SDDs also support polytime $\neg\mathbf{C}$.

The negative results for VS-SDDs and compressed VS-SDDs in Table 1(b) can be proved in a similar manner as those of SDDs and compressed SDDs in [4]. Thereafter, we focus on uncompressed VS-SDDs.

Positive results for $\wedge\mathbf{BC}$ and $\vee\mathbf{BC}$ are exactly as stated in Prop. 14. For \mathbf{CD} , given VS-SDD (α, k) and term S (a conjunction of literals), we return a VS-SDD representing $(\alpha, k)|_S$, where $f|_S$ is the Boolean function obtained by replacing each occurrence of X_i in f with *true* if S contains X_i , or with *false* if S contains $\neg X_i$. We follow the procedure for conditioning in an uncompressed SDD as detailed in the full version of [4].

Conditioning may unpack a VS-SDD node to at most $(|S| + 1)$ nodes if we apply the identical vtree rule, and we can perform conditioning in $O(|S||\alpha|)$ time, which is still polynomial with regard to $|S|$ and $|\alpha|$. Thus VS-SDDs support polytime \mathbf{CD} . The pseudocode for conditioning on VS-SDD is written in Alg. 3. The support for \mathbf{SFO} follows from the support for \mathbf{CD} and $\vee\mathbf{BC}$. ◀

B Appendix: The Apply Operation for Trimmed VS-SDDs

In this appendix, we detail the **Apply** operation for trimmed VS-SDDs. The simplicity of the **Apply** for normalized VS-SDDs is due to the fact that we can assume that the offsets of two VS-SDDs are always equal. For trimmed VS-SDDs, this assumption does not hold and thus we should consider the case that the offsets of two VS-SDDs are different. Now the **Apply** operation takes five arguments $\text{Apply}(\alpha, \beta, k_\alpha, k_\beta, \circ)$ to compute the VS-SDD of $(\alpha, k_\alpha) \circ (\beta, k_\beta)$.

To deal with the case $k_\alpha \neq k_\beta$, we should consider the *expansion* at vtree node w . Let \mathbf{Z} and \mathbf{W} be the variables corresponding to the left and right (resp.) descendant leaves of w . Then, we can make the \mathbf{Z} -partition of the function $H_l(\mathbf{Z}, \mathbf{W}) := h_l(\mathbf{Z})$ as $[h_l(\mathbf{Z}) \wedge \text{true}] \vee [(\neg h_l(\mathbf{Z})) \wedge \text{false}]$ (called *left expansion*). We can also make the \mathbf{Z} -partition of the function $H_r(\mathbf{Z}, \mathbf{W}) := h_r(\mathbf{W})$ as $[\text{true} \wedge h_r(\mathbf{W})]$ (called *right expansion*). By following this, we can form a decomposition of a VS-SDD (α, k_α) at the ancestor vtree node of $\text{ID}^{-1}(k_\alpha)$ (β can also be handled in the same way). If $k_\alpha \neq k_\beta$, we expand either or both of (α, k_α) and (β, k_β) at the *lowest common ancestor* (LCA) node of $\text{ID}^{-1}(k_\alpha)$ and $\text{ID}^{-1}(k_\beta)$ to make

\mathbf{X} -partition with the same \mathbf{X} . Note that for SDDs, **Apply** is also based on the following mechanism.

The **Apply** $(\alpha, \beta, k_\alpha, k_\beta, \circ)$ procedure can be classified into five cases depending on the relation of k_α and k_β . The full pseudocode for the VS-SDDs' **Apply** is given in Alg. 4. Here for the simplicity, the offsets of constants are considered as 0, and $\text{ID}^{-1}(0)$ is considered as a right descendant of any other vtree node. Note that the cases that (α, k_α) and (β, k_β) are exchanged can be handled in the same manner. Let w be the LCA of $\text{ID}^{-1}(k_\alpha)$ and $\text{ID}^{-1}(k_\beta)$. Then the returned offset is $\text{ID}(w)$, unless otherwise specified.

- (1) If both (α, k_α) and (β, k_β) are constants, either one is a constant and the other is a literal, or both are literals with $k_\alpha = k_\beta$, then the returned VS-SDD structure is $\alpha \circ \beta$, which is either constant or literal. For example, $\top \wedge \mathbf{v} = \mathbf{v}$ and $\mathbf{v} \oplus \mathbf{v} = \perp$. The returned offset is 0 if $\alpha \circ \beta$ is a constant, and $\max\{k_\alpha, k_\beta\}$ otherwise.
- (2) If $k_\alpha = k_\beta$, then $\text{ID}(w) = k_\alpha = k_\beta$. Let $(\lambda_{i,j}, k_{\lambda_{i,j}})$ be the returned VS-SDD of **Apply** $(p_i, q_j, k_\alpha + d_{p_i}, k_\beta + d_{q_j}, \wedge)$ and $(\mu_{i,j}, k_{\mu_{i,j}})$ be that of **Apply** $(s_i, r_j, k_\alpha + d_{s_i}, k_\beta + d_{r_j}, \circ)$, where $([p_i, d_{p_i}], [s_i, d_{s_i}]) \in \alpha$ and $([q_j, d_{q_j}], [r_j, d_{r_j}]) \in \beta$. The resultant VS-SDD structure is $\{([\lambda_{i,j}, \max\{k_{\lambda_{i,j}} - \text{ID}(w), 0\}], [\mu_{i,j}, \max\{k_{\mu_{i,j}} - \text{ID}(w), 0\}]) \mid i, j\}$. Note that $\max\{\cdot, 0\}$ deals with the case that $\lambda_{i,j}$ or $\mu_{i,j}$ is a constant.
- (3) If $\text{ID}^{-1}(k_\alpha)$ is a left descendant of $\text{ID}^{-1}(k_\beta)$, then $\text{ID}(w) = k_\beta$. Here α is *left expanded* to $\alpha' = \{([\alpha, 0], [\top, 0]), ([\neg\alpha, 0], [\perp, 0])\}$, and the same computation as case (2) runs except that α is replaced with α' .
- (4) If $\text{ID}^{-1}(k_\alpha)$ is a right descendant of $\text{ID}^{-1}(k_\beta)$, then $\text{ID}(w) = k_\beta$. Here α is *right expanded* to $\alpha' = \{([\top, 0], [\alpha, 0])\}$, and the same computation as case (2) runs except that α is replaced with α' .
- (5) If $\text{ID}^{-1}(k_\alpha)$ and $\text{ID}^{-1}(k_\beta)$ are left and right descendants of w (resp.), α is left expanded to α' , β is right expanded to β' , and the same computation as case (2) runs except that α and β are replaced with α' and β' (resp.)

Here we analyze the time complexity of the **Apply** algorithm. Now for each $(\gamma, \delta, k_\gamma, k_\delta, \circ)$, the cost of the **Apply** call other than the recursion is bounded by $O(t_\gamma t_\delta)$ where t_γ and t_δ are the decomposition sizes of γ and δ (resp.), and there are at most $O(M)$ candidates for each of the offsets k_γ, k_δ . Here cases (3) and (5) must deal with the negation of a VS-SDD node, but this only increases the complexity by a constant factor; the details are described later. However, it seems that the overall cost of **Apply** $(\alpha, \beta, k_\alpha, k_\beta, \circ)$ can only be bounded by $O(\sum_{\gamma \in \alpha} \sum_{\delta \in \beta} t_\gamma t_\delta) \cdot O(M^2) = O(M^2 |\alpha| |\beta|)$, which is not a polytime of $|\alpha|$ and $|\beta|$. Note that the **Apply** described above needs LCA indexing [14] of a vtree, which needs $O(M)$ preprocessing time where M is the number of variables¹.

However, we can omit some “isomorphic” computations with VS-SDDs, as described in the main article before Prop. 14. More formally, the key is the following lemma. From now, for two vtree nodes u, w in the vtree v , $u \sim w$ means that the subtree rooted at u and that rooted at w are isomorphic.

► **Lemma 17.** *Given vtree v , and two VS-SDD structures α, β , we consider nodes $\gamma \in \alpha$ and $\delta \in \beta$. Let k_γ, k'_γ be the possible offsets of γ and k_δ, k'_δ be those of δ . Let w be the LCA of $\text{ID}^{-1}(k_\gamma)$ and $\text{ID}^{-1}(k_\delta)$ and w' be that of $\text{ID}^{-1}(k'_\gamma)$ and $\text{ID}^{-1}(k'_\delta)$. Then if (I) $\gamma \in \{\top, \perp\}$ or $k_\gamma - \text{ID}(w) = k'_\gamma - \text{ID}(w')$, (II) $\delta \in \{\top, \perp\}$ or $k_\delta - \text{ID}(w) = k'_\delta - \text{ID}(w')$, and (III) $w \sim w'$, **Apply** $(\gamma, \delta, k_\gamma, k_\delta, \dots)$ and **Apply** $(\gamma, \delta, k'_\gamma, k'_\delta, \dots)$ result in an identical structure.*

¹ The **Apply** of (trimmed) SDDs also needs such LCA indexing. Typically, the same vtree is repetitively used many times, and so such LCA indexing is considered to be just a preprocessing step for SDDs' **Apply** in [9]. Therefore, we also consider this cost as a preprocessing step for VS-SDDs' **Apply**.

Proof. The proof is by the induction of the depths of w and w' in v (note that since $w \sim w'$, w and w' have the same depth). The base case is that w and w' are both leaves or $\text{ID}(w) = \text{ID}(w') = 0$, which corresponds to case (1) and thus holds trivially.

The step case is that w and w' are internal nodes. First, we deal with the case $k_\gamma = k_\delta = \text{ID}^{-1}(w)$, which corresponds to case (2). Then from conditions (I) and (II), $k'_\gamma = k'_\delta = \text{ID}^{-1}(w')$, which also corresponds to case (2). Let $(\lambda_{i,j}, k_{\lambda_{i,j}}) = \text{Apply}(p_i, q_j, k_\gamma + d_{p_i}, k_\delta + d_{q_j}, \wedge)$, $(\mu_{i,j}, k_{\mu_{i,j}}) = \text{Apply}(s_i, r_j, k_\gamma + d_{s_i}, k_\delta + d_{r_j}, \circ)$ and let $(\lambda'_{i,j}, k_{\lambda'_{i,j}}) = \text{Apply}(p_i, q_j, k'_\gamma + d_{p_i}, k'_\delta + d_{q_j}, \wedge)$, $(\mu'_{i,j}, k_{\mu'_{i,j}}) = \text{Apply}(s_i, r_j, k'_\gamma + d_{s_i}, k'_\delta + d_{r_j}, \circ)$, where $([p_i, d_{p_i}], [s_i, d_{s_i}]) \in \gamma$, $([q_j, d_{q_j}], [r_j, d_{r_j}]) \in \delta$. Then $\text{Apply}(\gamma, \delta, k_\gamma, k_\delta, \circ)$ and $\text{Apply}(\gamma, \delta, k'_\gamma, k'_\delta, \circ)$ are

$$\begin{aligned} & (\{([\lambda_{i,j}, \max\{k_{\lambda_{i,j}} - \text{ID}(w), 0\}], [\mu_{i,j}, \max\{k_{\mu_{i,j}} - \text{ID}(w), 0\}]) \mid i, j\}, \text{ID}(w)) \text{ and} \\ & (\{([\lambda'_{i,j}, \max\{k_{\lambda'_{i,j}} - \text{ID}(w'), 0\}], [\mu'_{i,j}, \max\{k_{\mu'_{i,j}} - \text{ID}(w'), 0\}]) \mid i, j\}, \text{ID}(w')), \end{aligned}$$

respectively. Since $w \sim w'$ (this suggests the topologies of the subtrees rooted at w and w' are identical), $\text{ID}^{-1}(k_{\lambda_{i,j}}) = \text{LCA}(\text{ID}^{-1}(k_\alpha + d_{p_i}), \text{ID}^{-1}(k_\beta + d_{q_j}))$ and $\text{ID}^{-1}(k_{\lambda'_{i,j}}) = \text{LCA}(\text{ID}^{-1}(k'_\alpha + d_{p_i}), \text{ID}^{-1}(k'_\beta + d_{q_j}))$ satisfies $\text{ID}^{-1}(k_{\lambda_{i,j}}) \sim \text{ID}^{-1}(k_{\lambda'_{i,j}})$ and $k_{\lambda_{i,j}} - \text{ID}(w) = k_{\lambda'_{i,j}} - \text{ID}(w')$. Thus we can use the induction hypothesis for $(\lambda_{i,j}, k_{\lambda_{i,j}})$ and $(\lambda'_{i,j}, k_{\lambda'_{i,j}})$: $\lambda_{i,j}$ and $\lambda'_{i,j}$ result in an identical structure. Similarly, $\mu_{i,j}$ and $\mu'_{i,j}$ result in an identical structure and $k_{\mu_{i,j}} - \text{ID}(w) = k_{\mu'_{i,j}} - \text{ID}(w')$. Therefore $\text{Apply}(\gamma, \delta, k_\gamma, k_\delta, \circ)$ and $\text{Apply}(\gamma, \delta, k'_\gamma, k'_\delta, \circ)$ also result in an identical structure.

The other cases ((3), (4) and (5)) can be treated in almost the same way. Note that case (4) involves the case in which γ, γ' are constants but δ, δ' are non-constants. In this case, $w = \text{ID}^{-1}(k_\delta)$, $w' = \text{ID}^{-1}(k'_\delta)$ and consequently the same argument holds. \blacktriangleleft

Now the pseudocode of the **Apply** of VS-SDDs can be written as Alg. 4. Here the Boolean variables f_α and f_β are additionally included in the arguments of **Apply**, because in the left expansion (appearing in cases (3) and (5)) the negation of a VS-SDD node should be considered. Here we stress that this only increases the computational cost by a constant factor, and thus the asymptotical complexity does not change. Note that such handlings of negation should also be needed for the SDDs' **Apply**.

Now we explain the pseudocode. Here for simplicity, the offset of the constant VS-SDDs is considered to be always 0. Lines 1–2 deal with constants and literals with negation flag; for them, the negation can be easily handled, e.g. $(\alpha, f_\alpha) = (\neg \mathbf{v}, \text{true})$ is converted into $(\mathbf{v}, \text{false})$. Lines 3–4 specify the offset of the constants to 0. Line 5 computes the LCA, w , of $\text{ID}^{-1}(k_\alpha)$ and $\text{ID}^{-1}(k_\beta)$, which can be computed in $O(1)$ time with $O(M)$ preprocessing for the vtree [14], and Lines 6–7 compute the differences of vtree node ids corresponding to conditions (I) and (II) in Lemma 17. Note that in Line 6, if (α, k_α) is constant, i.e. $k_\alpha = 0$, then $e_\alpha = 0$, and otherwise $e_\alpha = k_\alpha - \text{ID}(w)$. Lines 8–11 correspond to case (1). For example, $\top \wedge \mathbf{v} = \mathbf{v}$ and $\mathbf{v} \oplus \mathbf{v} = \perp$. Lines 12–13 are important: since when fixing $(\alpha, \beta, f_\alpha, f_\beta)$, if e_α, e_β and $e(w) = \arg \min\{\text{ID}(u) \mid u \sim w\}$ are equal, then the resultant structures are identical due to Lemma 17, the computation cache is called, and if already computed the computed result is returned with offset $\text{ID}(w)$. If not computed, (α, k_α) and (β, k_β) are left or right expanded if needed (see Alg. 5). That is, if $\text{ID}^{-1}(k_\alpha)$ is a left (resp. right) descendant of w then (α, k_α) is left (resp. right) expanded in Line 14. The expansion of β (Line 15) is conducted in the same way. After that, the node representing $\langle \alpha, k_\alpha \rangle \circ \langle \beta, k_\beta \rangle$ is recursively computed in Lines 17–22. Here the formula $\max\{\cdot, 0\}$ in Line 22 deals with the case the computed p (or s) is a constant. In Line 20, it is checked if the computed prime p is *false*. If $p = \text{false}$, the corresponding sub is not computed since such (p, s) pair does not constitute an \mathbf{X} -partition. Such checking can be performed via the **Consistent** algorithm described

■ **Algorithm 4** $\text{Apply}(\alpha, \beta, k_\alpha, k_\beta, f_\alpha, f_\beta, \circ)$, which computes a VS-SDD representing $\langle \alpha, k_\alpha \rangle \circ \langle \beta, k_\beta \rangle$ for two VS-SDDs $(\alpha, k_\alpha), (\beta, k_\beta)$ and a binary operator \circ .

Input: VS-SDDs $(\alpha, k_\alpha), (\beta, k_\beta)$, Boolean values f_α, f_β , a binary operator \circ .

Output: A VS-SDD representing $\langle \alpha, k_\alpha \rangle \circ \langle \beta, k_\beta \rangle$. If $f_\alpha = \text{true}$ ($f_\beta = \text{true}$), $\langle \alpha, k_\alpha \rangle$ ($\langle \beta, k_\beta \rangle$) is replaced by $\neg \langle \alpha, k_\alpha \rangle$ ($\neg \langle \beta, k_\beta \rangle$). If the output VS-SDD structure is either \top or \perp , the output offset is 0.

```

1: if  $\alpha \in \{\top, \perp, \mathbf{v}, \neg\mathbf{v}\}$  and  $f_\alpha = \text{true}$  then  $\alpha \leftarrow \neg\alpha, f_\alpha \leftarrow \text{false}$ 
2: if  $\beta \in \{\top, \perp, \mathbf{v}, \neg\mathbf{v}\}$  and  $f_\beta = \text{true}$  then  $\beta \leftarrow \neg\beta, f_\beta \leftarrow \text{false}$ 
3: if  $\alpha \in \{\top, \perp\}$  then  $k_\alpha \leftarrow 0$ 
4: if  $\beta \in \{\top, \perp\}$  then  $k_\beta \leftarrow 0$ 
5:  $w \leftarrow \text{LCA}(\text{ID}^{-1}(k_\alpha), \text{ID}^{-1}(k_\beta))$ 
6:  $e_\alpha \leftarrow \max\{k_\alpha - \text{ID}(w), 0\}$ 
7:  $e_\beta \leftarrow \max\{k_\beta - \text{ID}(w), 0\}$ 
8: if  $\alpha, \beta \in \{\top, \perp, \mathbf{v}, \neg\mathbf{v}\}$  and ( $k_\alpha = 0$  or  $k_\beta = 0$  or  $k_\alpha = k_\beta$ ) then
9:    $\gamma \leftarrow \alpha \circ \beta$  {This computation must result in  $\top, \perp, \mathbf{v}$  or  $\neg\mathbf{v}$ }
10:  if  $\gamma \in \{\top, \perp\}$  then return  $(\gamma, 0)$ 
11:  else return  $(\gamma, \max\{k_\alpha, k_\beta\})$ 
12: else if  $\text{ConvTable}(\alpha, \beta, f_\alpha, f_\beta, e_\alpha, e_\beta, e(w), \circ) \neq \text{nil}$  then
13:   return  $(\text{ConvTable}(\alpha, \beta, f_\alpha, f_\beta, e_\alpha, e_\beta, e(w), \circ), \text{ID}(w))$ 
14:  $\alpha' \leftarrow \text{Expand}(\alpha, f_\alpha, k_\alpha, w)$ 
15:  $\beta' \leftarrow \text{Expand}(\beta, f_\beta, k_\beta, w)$ 
16:  $\gamma \leftarrow \{\}$ 
17: for all elements  $([p_i, d_{p_i}], [s_i, d_{s_i}], f_{p_i}, f_{s_i})$  in  $\alpha'$  do
18:   for all elements  $([q_j, d_{q_j}], [r_j, d_{r_j}], f_{q_j}, f_{r_j})$  in  $\beta'$  do
19:      $(p, k_p) \leftarrow \text{Apply}(p_i, q_j, k_\alpha + d_{p_i}, k_\beta + d_{q_j}, f_{p_i}, f_{q_j}, \wedge)$ 
20:     if  $\text{Consistent}(p)$  then
21:        $(s, k_s) \leftarrow \text{Apply}(s_i, r_j, k_\alpha + d_{s_i}, k_\beta + d_{r_j}, f_{s_i}, f_{r_j}, \circ)$ 
22:       add element  $([p, \max\{k_p - \text{ID}(w), 0\}], [s, \max\{k_s - \text{ID}(w), 0\}])$  to  $\gamma$ 
23: if  $\text{UniqTable}(e(w), \gamma) = \text{nil}$  then
24:    $\text{UniqTable}(e(w), \gamma) \leftarrow \text{CreateNewNode}(\gamma)$ 
25: return  $\text{ConvTable}(\alpha, \beta, f_\alpha, f_\beta, e_\alpha, e_\beta, e(w), \circ) \leftarrow \text{UniqTable}(e(\text{ID}^{-1}(j)), \gamma)$ 

```

■ **Algorithm 5** $\text{Expand}(\alpha, f, k, w)$, which expands VS-SDD (α, k) at the level of vtree node w and returns the structure.

```

1: if  $k = \text{ID}(w)$  then
2:   return  $\{([p_i, d_{p_i}], [s_i, d_{s_i}], \text{false}, f_\alpha) \mid ([p_i, d_{p_i}], [s_i, d_{s_i}]) \in \alpha\}$ 
3: else if  $k < \text{ID}(w^r)$  and  $k \neq 0$  then  $\{w^r$  is the right child of  $w\}$ 
4:   return  $\{([\alpha, 0], [\top, 0], f, \text{false}), ([\alpha, 0], [\perp, 0], \neg f, \text{false})\}$  {left expansion}
5: else
6:   return  $\{([\top, 0], [\alpha, 0], \text{false}, f)\}$  {right expansion}

```

in Alg. 6. It runs in time linear to the size of its decomposition (other than the recursion), and thus with the power of cache ($\text{Cache}(\cdot)$ in Alg. 6), the total cost of calling Consistent is bounded linear to the resultant structure of Apply , which does not incur an increase on the time complexity of Apply . The hash UniqTable returns the output node if an identical substructure satisfying the identical vtree rule is already constructed. If not yet constructed, the decomposition node with γ is generated in Line 24.

Using Lemma 17, the time complexity can be proved as follows.

Proof of Prop. 14 for trimmed VS-SDDs. Since the cost of computations involving \top and \perp is absorbed in other costs, we consider that among literals and decomposition nodes. For literals (\mathbf{v} and $\neg\mathbf{v}$) or decomposition nodes λ , let t_λ be the size of decomposition (here $t_{\mathbf{v}} = t_{\neg\mathbf{v}} = 0$) and T_λ be the number of incoming edges of λ (here for the root VS-SDD node r , let $T_r = 1$). Then we observe that $\sum_{\gamma \in \alpha} t_\gamma = |\alpha|$ and $\sum_{\gamma \in \alpha} T_\gamma = O(|\alpha|)$, and as is the case with β . Now we analyze the total cost of all calls $\text{Apply}(\gamma, \delta, k_\gamma, k_\delta, \dots)$

■ **Algorithm 6** $\text{Consistent}(\alpha)$, which decides whether the Boolean function that the VS-SDD α represents is not *false*.

Input: VS-SDD α .

Output: *false* if the Boolean function α represents is *false*, or *true* otherwise.

```

1: if  $\alpha = \perp$  then
2:   return false
3: else if  $\alpha \in \{\top, \mathbf{v}, \neg\mathbf{v}\}$  then
4:   return true
5: else if  $\text{Cache}(\alpha) \neq \text{nil}$  then
6:   return  $\text{Cache}(\alpha)$ 
7: else
8:   for all elements  $([p_i, d_{p_i}], [s_i, d_{s_i}])$  in  $\alpha$  do
9:     if  $\text{Consistent}(p_i)$  and  $\text{Consistent}(q_i)$  then
10:      return  $\text{Cache}(\alpha) \leftarrow \text{true}$ 
11:   return  $\text{Cache}(\alpha) \leftarrow \text{false}$ 

```

(other than the recursion) for fixed $\gamma \in \alpha$ and $\delta \in \beta$ (but varying k_γ and k_δ) when calling $\text{Apply}(\alpha, \beta, k_\alpha, k_\beta, \text{false}, \text{false}, \circ)$ at the top level. Let $w_\gamma = \text{ID}^{-1}(k_\gamma)$ and $w_\delta = \text{ID}^{-1}(k_\delta)$. Then there are multiple possibilities for w_γ and w_δ as described above. However, from the identical vtree rule, the candidates of w_γ are all equivalent up to the relation \sim , and as is the case with w_δ . Now we divide the pair of the candidates of (w_γ, w_δ) into four cases.

(i) $w_\gamma = w_\delta$. This corresponds to case (2). For this case, it takes $O(t_\gamma t_\delta)$ time to compute if Line 13 is not executed. Note that if Line 13 is executed, the cost of this Apply call is absorbed in that of the preceding Apply call. Since in this case $w_\gamma = w_\delta = w$ and the candidates of w_γ are equivalent up to \sim , the conditions (I)–(III) of Lemma 17 are satisfied among the candidates of $w_\gamma = w_\delta$, and thus in this case we need to proceed after Line 14 only once. Therefore, the total cost of this type of computation for fixed γ and δ is bounded by $O(t_\gamma t_\delta)$.

(ii) w_γ is a (proper) descendant of w_δ . This corresponds to cases (3) and (4). For this case, it takes $O(t_\delta)$ time per one call if Line 13 is not executed, since γ is expanded to a decomposition of constant size. If γ is the root node of α , it is trivial that $\text{Apply}(\gamma, \delta, \dots)$ is called only a constant number of times, since $k_\gamma = k_\alpha$, and among many candidates of k_δ , the condition w_δ is an ancestor of w_γ uniquely determines k_δ . Otherwise, let λ be one of the parent nodes of γ (i.e. nodes such that the decomposition has $[\gamma, d_*]$ as a prime or a sub). Now consider the case $\text{Apply}(\lambda, \cdot, k_\lambda, \cdot, \dots)$ precedes $\text{Apply}(\gamma, \delta, k_\gamma, k_\delta, \dots)$, i.e. the situation the edge directed from λ to γ is traversed. Then we claim the following.

▷ **Claim 18.** $w_\lambda := \text{ID}^{-1}(k_\lambda)$ is a proper ancestor of w_δ .

Proof. Suppose w_λ is a (not necessarily proper) descendant of w_δ . Then, $\text{Apply}(\lambda, \delta, k_\lambda, k_\delta, \dots)$ should be called before $\text{Apply}(\gamma, \dots)$, and since the decomposition of δ is processed in this call (i.e. δ is not expanded), $\text{Apply}(\gamma, \delta, k_\gamma, k_\delta, \dots)$ is not called. Suppose w_λ is neither an ancestor nor a descendant of w_δ . Then, since $\text{ID}^{-1}(k_\gamma)$ is a descendant of w_λ , it is also neither an ancestor nor a descendant of w_δ , which contradicts the assumption. ◁

For all candidates of w_λ , the relative position of w_γ compared to w_λ (i.e. $k_\gamma - k_\lambda$) is always equal to the difference d_{p_i} or d_{s_i} . Moreover, since all candidates of w_λ are equivalent up to \sim , and w_δ is a descendant of w_λ and an ancestor of w_γ , the relative position of w_δ compared to w_λ (i.e. $k_\delta - k_\lambda$) is also always equal. Thus $k_\gamma - k_\delta = k_\gamma - \text{ID}(w)$ is always equal, which satisfies condition (I) of Lemma 17. Therefore, we need to proceed after Line 14 only once given that the call $\text{Apply}(\lambda, \cdot, k_\lambda, \cdot, \dots)$ precedes. Since γ has T_γ parents, the total cost of this type of computation for fixed γ and δ is bounded by $O(T_\gamma t_\delta)$.

(iii) w_δ is a descendant of w_γ . By reversing the argument of (ii), the total cost of this type of computation for fixed γ and δ is bounded by $O(t_\gamma T_\delta)$.

(iv) w_γ and w_δ have no ancestor-descendant relation. This corresponds to case (5). Even if Line 13 is not executed, it takes only constant time (other than the recursion) since both γ and δ are expanded to constant size decompositions. If γ and δ are root nodes of α and β , respectively, $\text{Apply}(\gamma, \delta, \dots)$ is called only once, since $k_\gamma = k_\alpha$ and $k_\delta = k_\beta$. Otherwise, there must be a preceding Apply call. The preceding Apply call does not fall into case (iv), because once case (5) occurs, successive computations must involve constants. Thus, the cost of this Apply call is absorbed in that of the preceding Apply call.

Now the total cost of $\text{Apply}(\alpha, \beta, k_\alpha, k_\beta, \text{false}, \text{false}, \circ)$ is $\sum_{\gamma \in \alpha} \sum_{\delta \in \beta} O(t_\gamma t_\delta + T_\gamma t_\delta + t_\gamma T_\delta) = O(|\alpha||\beta|)$, which proves Prop. 14. \blacktriangleleft