
A Simple Language Model for Task-Oriented Dialogue

Ehsan Hosseini-Asl
ehosseiniasl@salesforce.com
Salesforce Research

Bryan McCann
bmccann@salesforce.com
Salesforce Research

Chien-Sheng Wu
wu.jason@salesforce.com
Salesforce Research

Semih Yavuz
syavuz@salesforce.com
Salesforce Research

Richard Socher
rsocher@salesforce.com
Salesforce Research

Abstract

Task-oriented dialogue is often decomposed into three tasks: understanding user input, deciding actions, and generating a response. While such decomposition might suggest a dedicated model for each sub-task, we find a simple, unified approach leads to state-of-the-art performance on the MultiWOZ dataset. SimpleTOD is a simple approach to task-oriented dialogue that uses a single, causal language model trained on all sub-tasks recast as a single sequence prediction problem. This allows SimpleTOD to fully leverage transfer learning from pre-trained, open domain, causal language models such as GPT-2. SimpleTOD improves over the prior state-of-the-art in joint goal accuracy for dialogue state tracking, and our analysis reveals robustness to noisy annotations in this setting. SimpleTOD also improves the main metrics used to evaluate action decisions and response generation in an end-to-end setting: inform rate by 8.1 points, success rate by 9.7 points, and combined score by 7.2 points.

1 Introduction

Conversational AI has been a long-standing area of exploration in computer science, and has gained more attention recently in both academia and industries with the current advances of neural approaches [15]. There are broadly two categories of dialogue. Open-domain dialogue systems focus on making chit-chat, open-ended conversations with humans more natural and engaging. They are usually trained end-to-end using large-scale data from social media [1, 42]. Task-oriented dialogue (TOD) systems accomplish a goal described by a user in natural language. They often use a pipeline approach [46, 58]. The pipeline requires natural language understanding (NLU) for belief state tracking, dialogue management (DM) for deciding which actions to take based on those beliefs, and natural language generation (NLG) for generating responses [50].

Traditionally, each component of task-oriented dialogue systems is trained independently with different supervision. The NLU module is trained on domain and intent labels. The DM module employs dialogue belief and dialogue act labels. The NLG module accesses templated or natural responses. The modular dependencies of these components can lead to error propagation when information is not provided to subsequent modules in the pipeline [27]. For example, many systems do not consider the entire dialogue history at every turn, but rather rely on the NLU module to pass belief states reliably to following module components [60].

We propose recasting task-oriented dialogue as a simple, causal (unidirectional) language modeling task. We show that such an approach can solve all the sub-tasks in a unified way using multi-task

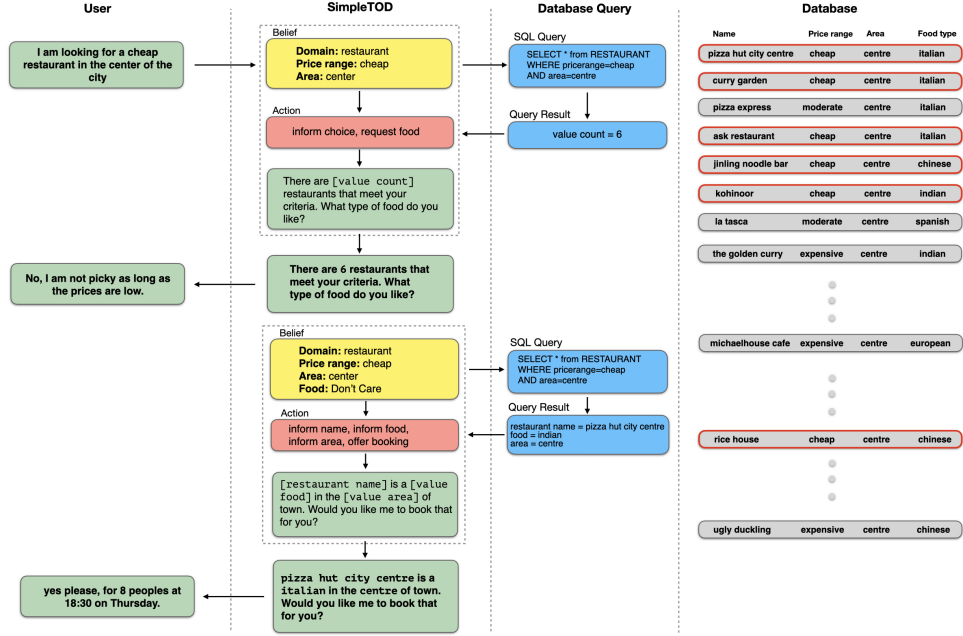


Figure 1: SimpleTOD is a simple approach to task-oriented dialogue that uses a single causal language model to generate all outputs given the dialogue context and retrieved database search results. The delexicalized response can then be lexicalized into a human-readable response by using information from the belief state and DB search results.

maximum likelihood training. The proposed Simple Task-Oriented Dialogue (SimpleTOD) approach enables modeling of the inherent dependencies between the sub-tasks of task-oriented dialogue, by optimizing for all tasks in an end-to-end manner. SimpleTOD also opens the path towards fully leveraging large language models such as GPT-2 [39] for task-oriented dialogue. The success of SimpleTOD demonstrates a strong connection between the implicit language understanding in the open domain required of high-quality causal language models and the kind of understanding required for a full task-oriented dialogue system.

Evaluation results demonstrate the advantages of SimpleTOD. It achieves 55.76 joint goal accuracy on MultiWOZ, which surpasses all prior work for the dialogue state tracking (i.e. belief state tracking) sub-task. In the setting closest to testing a full task-oriented dialogue system, in which belief states and action decisions are generated rather than retrieved from an oracle, SimpleTOD performance surpasses prior work on each individual action and response generation metric (+8.1 inform rate, +9.7 success rate).

The contributions of this work are summarized as follows:

- SimpleTOD – a state-of-the-art generative model for dialogue state tracking (DST).
- SimpleTOD is also the first model to achieve state-of-the-art performance for dialogue state tracking, action decisions, and response generation metrics together in an end-to-end setting.
- Analysis showing SimpleTOD is a robust dialogue state tracker in the presence of noisy-labeled annotations.
- Ablations showing the importance of *user/system* and *endoff(segment)* tokens.
- Ablations showing the importance of pre-training that also show larger versions of SimpleTOD are not always better for end-to-end MultiWOZ.
- A list of discovered noisy annotations in MultiWOZ 2.1 alongside a cleaned version of the test set, code for training and evaluation, are provided at <https://github.com/salesforce/simpletod>

2 Related Work

Task-Oriented Dialogue Most works on task-oriented dialogue focus on a specific module and evaluates only for that module. These components include understanding user intent via intent detection [26], tracking the constraints imposed by the user via dialogue state tracking [20, 32, 41, 34, 53, 59, 64, 8, 19], determining system actions via dialogue policy [51], and using dedicated response generation components [49].

Some recent works have started to bridge multiple sub-tasks by connecting modules together and evaluating in settings that hand off generated results from one module to another. Chen et al. [9] proposed a joint action-response generation using oracle dialogue states. Peng et al. [37] used GPT-2 to learn a response generator conditioned on oracle dialogue acts which did not evaluate on dialogue state tracking.

Towards End-to-End Task-Oriented Dialogue Dependencies between these independent modules make pipeline approaches vulnerable to error propagation across components [28]. Recent approaches have increasingly shifted towards end-to-end solutions, which aim to reduce human effort and task-specific design. Several works used both dialogue history and knowledge bases as input and optimized neural encoder-decoder models to generate or retrieve system responses without modular supervision [13, 62, 29, 54, 56]. Some systems are mostly end-to-end, but still need to call out additional APIs or skip intermediate tasks like dialogue state tracking [5]. Others have incorporated additional supervision and trained in multi-task settings. Lei et al. [24] and Shu et al. [45] incorporated dialogue state tracking and jointly trained with response generation using a sequence-to-sequence approach. Liu et al. [28] proposed a hybrid imitation and reinforcement learning method, by jointly learning a policy for dialogue management with response generation. Wen et al. [50], Liang et al. [25] trained language understanding, dialogue state tracking, and dialogue policy modules with a shared encoder. Many other works fall somewhere in between by jointly training some tasks. Neelakantan et al. [33] modeled dialogue management and response generation jointly, incorporating latent knowledge reasoning through attention without using belief states. Zhao et al. [63] proposed to model system actions as latent variables, inducing a latent action space with variational inference methods. Zhang et al. [60] proposed a domain-aware multi-decoder model (DAMD) using augmented dialogue data, which achieved state-of-the-art combined score for dialogue management and response generation on the MultiWOZ dataset. Although all these approaches have come closer to unifying the stack, none are as simple as SimpleTOD: treating all of task-oriented dialogue as a single sequence prediction problem, using a single model, trained with a single, joint, multi-task loss.

Unsupervised pre-training for natural language processing Pre-training approaches for natural language processing focus on transferable representations for contextualized word vectors [30, 38], generative models [39, 23], or a combination of both [12, 57]. Variants of pre-trained, bidirectional Transformers like BERT [11] are often evaluated on classification tasks such as those in the GLUE benchmark [48] or span-based question answering tasks [40]. Unidirectional (causal) pre-trained language models such as GPT-2 [39] or CTRL [23] resemble the decoder from the original Transformer architecture [47]. They aim to learn a distribution for next-word prediction, which makes them particularly useful for tasks that require text generation. In dialogue, Zhang et al. [61] built on GPT-2 by further pre-training it on Reddit data for open-domain response generation. Henderson et al. [21] also pre-trained on Reddit data with a dual Transformer encoder for response selection. Bao et al. [3] used both Twitter and Reddit data to pre-train a Transformer model with discrete latent variables. Wu et al. [55] proposed a response selection model by pre-training BERT model on multiple task-oriented corpora.

Budzianowski and Vulić [6] employed GPT-2 to leverage a pre-trained language model for dialogue response generation. They prepended dialogue context with belief state and DB search results. Their evaluation is only for context-to-response generation, and it is not applicable to the end-to-end setting. Wu et al. [56] used GPT2 in an alternating roles for the user and system, without using belief state or action annotation. It achieved better results than its predecessor on context-to-response generation (dialogue policy), but it requires oracle belief states to evaluate inform and success rate which is not applicable to end-to-end evaluation. It is also not designed for dialogue state tracking.

Ham et al. [17] fine-tuned GPT-2 on the MultiWOZ dataset and achieved lower performance on dialogue state tracking and end-to-end evaluation compared to the previous single-task and modularized models. They employed delimiter tokens for different segments: <usr>, <sys>, <ds> and <sa>. However, this differs from our tokenization, which is based on choosing semantic words which help the model to learn the semantic role of each segments – belief state, action, and response – and end of segment tokens such as <lendofbelief>. They also made use of token-type embeddings for user and system sequences, whereas our model does not use this type of embedding layer. Their proposed model achieved lower performance than previous baselines for dialogue state tracking and in the end-to-end evaluation, whereas we outperform all previous models.

Peng et al. [36] proposed a GPT2-based model for end-to-end training (SOLOIST) by removing actions from the input sequence, and used token-type embedding for user and system responses as well. It is additionally pretrained on seven more dialogue datasets before fine-tuning on MultiWOZ. They used data augmentation during training using contrastive learning, similar to DAMD [60], where they combined dialogue context and belief states with a negative response and used the final token for classification to improve end-to-end performance. However, SOLOIST did not report end-to-end performance without pretraining on other dialogue datasets. Their "w/o pretraining" setting is only evaluated in a low resource setting, and they do not evaluate on dialogue state tracking as well.

In summary, our proposed model is much simpler than previous language model based approaches, in terms of (1) input sequence definition, (2) embedding layers, (3) training algorithm, and (4) pretraining, which make it easy to reproduce the results, and outperformed previous models on DST and end-to-end setting.

3 Methods

This section describes task-oriented dialogue, how we frame it for SimpleTOD, the model architecture, training details, dataset details, and evaluation metrics.

3.1 Task-Oriented Dialogue

Task-oriented dialogue (TOD) is evaluated on three sub-tasks: dialogue state (belief state) tracking, dialogue management (action/decision prediction) and response generation. This decomposition has made it possible to create dedicated models for each sub-task, which is the dominant approach. By contrast, we explore the possibility of using a single-model, end-to-end approach, SimpleTOD.

Dialogues consist of multiple turns. In a turn t , the user provides input U_t and the system generates a response S_t . To generate a response during inference, SimpleTOD reads all previous turns as context, $C_t = [U_0, S_0, \dots, U_t]$. It generates a belief state B_t ,

$$B_t = \text{SimpleTOD}(C_t) \quad (1)$$

which is a list of triplets recording values for slots in a particular domain: $(domain, slot_name, value)$. This belief state is used to query a database for information. The database search returns rows from the database that satisfy the conditions of the belief state. The rows returned can later be used to lexicalize the response (filling in generated placeholders), but SimpleTOD only takes as input the aggregated database search results, D_t . D_t includes how many rows were returned and, depending on the experimental setting, whether booking status information. SimpleTOD then conditions on C_t , B_t , and D_t concatenated together as a single sequence to decide actions, A_t .

$$A_t = \text{SimpleTOD}([C_t, B_t, D_t]) \quad (2)$$

These actions are generated as another list of triplets: $(domain, action_type, slot_name)$. A delexicalized response S_t is generated conditioned on all prior information concatenated as a single sequence.

$$S_t = \text{SimpleTOD}([C_t, B_t, D_t, A_t]) \quad (3)$$

When combined with information from the belief state and database search results, the response can be lexicalized to recover human readable response text. Figure 2 depicts training of SimpleTOD and generation during inference.

3.2 Causal Language Modeling

A single training sequence consists of the concatenation $x^t = [C_t; B_t; D_t; A_t; S_t]$ ¹, allowing us to model the joint probability over the sequence x^t . Given example sequences of the form $x = (x_1, \dots, x_n)$ where each x_i comes from a fixed set of symbols, the goal of language modeling is to learn $p(x)$. It is natural to factorize this distribution using the chain rule of probability [4] and train a neural network with parameters θ to minimize the negative log-likelihood over a dataset $D = \{x^1, \dots, x^{|D|}\}$ where sequence x^t has length n_t :

$$p(x) = \prod_{i=1}^n p(x_i | x_{<i}) \quad \mathcal{L}(D) = - \sum_{t=1}^{|D|} \sum_{i=1}^{n_t} \log p_{\theta}(x_i^t | x_{<i}^t) \quad (4)$$

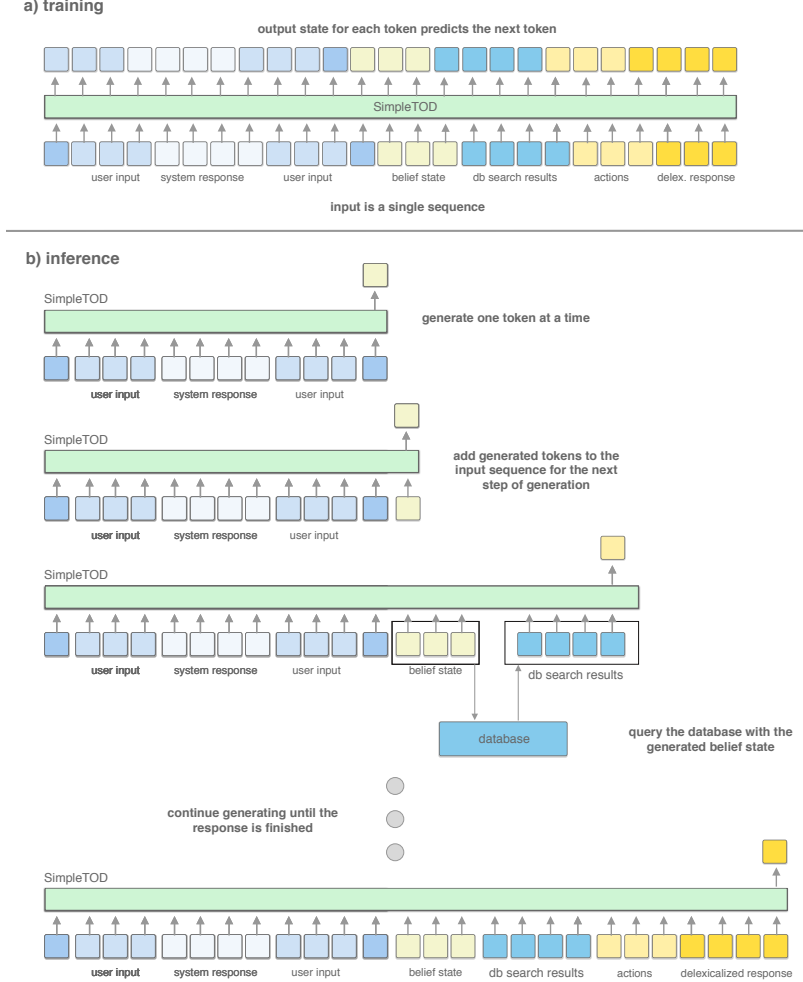


Figure 2: SimpleTOD is a simple approach to task-oriented dialogue that approaches all of task-oriented dialogue as a single sequence generation problem, querying a database for necessary information.

3.3 Architecture

We train a variant of the Transformer [47] to learn these conditional distributions. A sequence containing n tokens is embedded as a sequence of n vectors in \mathbb{R}^d . Each vector is the sum of a

¹During inference, D_t comes from a database. See Sec. 4 for experimental results revealing that it can be advantageous to exclude this from training.

learned token embedding and a sinusoidal positional embedding. The sequence of vectors is stacked into a matrix $X_0 \in \mathbb{R}^{n \times d}$ and processed by l attention layers. The i th layer consists of two blocks, each preserving model dimension d . The first block uses multi-head attention with k heads. A causal mask precludes attending to future tokens:

$$\text{Attention}(X, Y, Z) = \text{softmax} \left(\frac{\text{mask}(XY^\top)}{\sqrt{d}} \right) Z$$

$$\text{MultiHead}(X, k) = [h_1; \dots; h_k] W_o$$

$$\text{where } h_j = \text{Attention}(XW_j^1, XW_j^2, XW_j^3)$$

The second block uses a feedforward network with ReLU activation that projects inputs to an inner dimension f . This operation is parameterized by $U \in \mathbb{R}^{d \times f}$ and $V \in \mathbb{R}^{f \times d}$:

$$FF(X) = \max(0, XU)V$$

Each block precedes core functionality with layer normalization [2, 10] and follows it with a residual connection [18]. Together, they yield X_{i+1} :

Block 1	Block 2
$\bar{X}_i = \text{LayerNorm}(X_i)$	$\bar{H}_i = \text{LayerNorm}(H_i)$
$H_i = \text{MultiHead}(\bar{X}_i) + \bar{X}_i$	$X_{i+1} = \text{FF}(\bar{H}_i) + \bar{H}_i$

Scores are then computed from the output of the last layer:

$$\text{Scores}(X_0) = \text{LayerNorm}(X_l) W_{vocab}$$

During training, these scores are the inputs of a cross-entropy loss function. During generation, the scores corresponding to the final token are normalized with a softmax, yielding a distribution for sampling a new token.

3.4 Training Details

The input to the model is tokenized with pretrained BPE codes [44] associated with DistilGPT2 [43], a distilled version of GPT-2 [39]. According to experimental results, Experiments for SimpleTOD use default hyperparameters for GPT-2 and DistilGPT2 in Huggingface Transformers[52]. Sequences longer than 1024 tokens are truncated.

3.5 Dataset Details

We evaluate on the Multi-domain Wizard-of-Oz (MultiWOZ) [7], a large-scale, multi-domain dialogue dataset of human-human conversations. It contains 10438 multi-turn dialogues with 13.68 average turns, spanning over seven domains (restaurant, train, attraction, hotel, taxi, hospital, police). Police and hospital domains are excluded from evaluation, since they do not have valid/test splits. This leaves 30 domain-slot pairs for the remaining five domain with 4,500 possible values. SimpleTOD is trained on delexicalized system responses according to the pre-processing explained in [7]. Recently, [14] released MultiWOZ 2.1 which removes some noisy state values from dialogue state (belief state) tracking annotations. For dialogue state tracking evaluation, we used 2.1 version in order to compare to recent state-of-the-art methods. To the best of our knowledge, all prior work on action and response generation has evaluated on 2.0, so we include those results for direct comparison. But, we also include results for 2.1 so future work can compare to SimpleTOD on the improved version as well.

3.6 Evaluation Details

We follow the original MultiWOZ [7] guidance for all individual metrics and follow Mehri et al. [31] for the combined score. Joint goal accuracy is used to evaluate the performance of dialogue state tracking (i.e. belief state tracking). It measures the accuracy of the generated belief states as they compare to oracle belief states. Model outputs are only counted as correct when all the predicted values exactly match the oracle values. Action and response generation uses three metrics. The first two are inform and success rates. They are designed to capture how well the task was completed. Inform rate measures how often the entities provided by the system are correct. Success rate refers to how often the system is able to answer all the requested attributes by user. BLUE score [35] is used to measure the fluency of the generated responses. The combined score for action and response generation is computed as $(BLEU + 0.5 * (Inform + Success))$.

Model	Decoder	Context Encoder	Extra Supervision	Joint Accuracy
TRADE*	Generative + Classifier	Bidirectional	-	45.6
DSTQA**	Classifier	Bidirectional	knowledge graph	51.17
DST-Picklist*	Classifier	Bidirectional	-	53.3
SST*	Generative	Bidirectional	schema graph	55.23
TripPy [†]	Classifier	Bidirectional	action decision	55.3
SimpleTOD ^o	Generative	Unidirectional	-	55.72
SimpleTOD*	Generative	Unidirectional	-	55.76
SimpleTOD ⁺	Generative	Unidirectional	-	57.47

Table 1: Evaluation of Dialogue State Tracking (DST) on MultiWOZ 2.1 using joint accuracy metric. * uses test label cleaning proposed by Wu et al. [53] and recommended by MultiWOZ authors. [†] uses label normalization and equivalent matching proposed in Heck et al. [19]. ** uses the cleaning of * models plus additional accounting for label variants. ⁺ performs cleaning of Type 2 and partial cleaning of Type 4 noisy annotations as outlined in Section 5, which is currently non-standard and so left unbolded. ^o no label-cleaning.

4 Experimental Results and Discussion

SimpleTOD is a Unified System for Task-Oriented Dialogue SimpleTOD is, to the best of our knowledge, the first system that generates state-of-the-art results judged according to dialogue state tracking as well as end-to-end metrics for action and response generation for MultiWOZ.

4.1 Dialogue State Tracking

Table 1 compares the joint goal accuracy to previous methods. We compare to TRADE [53], DSTQA [64], DST-Picklist [59], SST [8], and TripPy [19]. All previous models propose a bidirectional encoder to learn a better representation of the dialogue context, but SimpleTOD uses a unidirectional (causal) decoder and no additional bidirectional encoder. It also makes no use of extra supervision. It nonetheless achieves state-of-the-art.

Many models use some form of test-label cleaning. TRADE, DSTQA, DST-Picklist, and SST use the script proposed by Wu et al. [53]². DSTQA also accounts for label variations that would have originally been considered incorrect. TripPy apply their own format normalization, typo corrections, and process for accounting for label variations. SimpleTOD achieves the best performance without any cleaning or normalization, simply on the raw, original annotations. Applying the script from Wu et al. [53] improves the result to 55.76. Analysis of further noisy annotation is presented in section 5. Further cleaning those annotations more accurately reflects performance at 57.47. We will release the list of noisy annotations that need to be fixed along with their corrections, but we reiterate that SimpleTOD does not need this cleaning to surpass prior methods.

4.2 Action and Response Generation

Table 2 and Table 3 demonstrate the effectiveness of SimpleTOD for action and response generation in the most realistic, fully end-to-end³ setting – when models must generate belief states, actions, and responses. SimpleTOD targets replacing modularized and pipelined methods that evaluate different components evaluated with oracle information. For reference, oracle settings compare across a variety of settings against HDSA [9], ARDM [56], LaRL [63], PARG [16] can be found in the Supplementary Materials, but these comparisons are not essential for end-to-end contributions. In fact, SimpleTOD is state-of-the-art in the end-to-end setting compared to the only prior work, DAMD [60], without achieving state-of-the-art in settings that partially utilize oracle information. This highlights that partial, oracle evaluation does not reliably transfer to the end-to-end evaluation of full systems – only end-to-end evaluation accurately describes the performance of a full system.

²https://github.com/jasonwu0731/trade-dst/blob/master/utils/fix_label.py

³The term "end-to-end" is overloaded in the literature. Evaluation that does not use oracle belief states, actions, or response is considered end-to-end even when the system itself is not trained end-to-end. SimpleTOD is trained end-to-end and achieves state-of-the-art in end-to-end evaluation.

Model	Belief State	DB Search	Action	Inform	Success	BLEU	Combined
DAMD+augmentation	generated	oracle	generated	76.3	60.4	16.6	85
SimpleTOD (ours)	generated	oracle	generated	78.1	63.4	16.91	87.66
SimpleTOD (ours)	generated	dynamic	generated	81.4	69.7	16.11	91.66
SimpleTOD (ours)	generated	-	generated	84.4	70.1	15.01	92.26

Table 2: Action and response generation on MultiWOZ 2.0 reveals that SimpleTOD, a single, causal language model, is sufficient to surpass prior work.

Belief State	DB Search	Action	Inform	Success	BLEU	Combined
generated	oracle	generated	79.3	65.4	16.01	87.36
generated	dynamic	generated	83.4	67.1	14.99	90.24
generated	-	generated	85	70.5	15.23	92.98

Table 3: Action and response generation on MultiWOZ 2.1 for SimpleTOD.

Prior work uses oracle DB Search results as supervision during training and as input during inference. We include directly comparable experiments using oracle DB Search results. We also include experiments that completely ignore the DB Search results to show the surprising effectiveness of SimpleTOD without DB Search information. We also show a setting with dynamic DB Search results. In this setting, we train with the number of matched DB entries and compute this dynamically at inference from generated belief states. In all variations, SimpleTOD outperforms prior work.

DAMD [60] is the only prior work that has evaluated with generated belief states from dialogue state tracking during inference. We found in additional ablation experiments that we could increase scores for individual metrics like inform rate and success rate by training three separate SimpleTOD language models: one for dialogue state tracking, one for action generation, and one for response generation. However, the combined scores remained nearly identical to the full end-to-end, single model approach. For example, separating the models might improve inform rate, but hurt response generation measured by BLEU. Regardless, in this most realistic setting SimpleTOD achieves state-of-the-art on inform and success metric. SimpleTOD performs lower only on BLEU by 1.59 points, perhaps due to lack of action/response augmentation employed by DAMD.

Regarding Oracle DB Search Results In the case where we dynamically compute partial DB Search results (number of entries matched only), the results are actually lower than ignoring them entirely. Using oracle DB information likewise leads to lower performance. The best result ignores DB Search results entirely. We have found that in some cases, the generated belief states conflict in some way with the information in the database. For example, there can be discrepancies between the two in the name of restaurants: ‘pizza hut fenditton’ in the target belief states but ‘pizza hut fen ditton’ in the database. We have consulted with the authors of the dataset, but there is currently no course of action planned to remedy this.

5 Analysis and Further Discussion

The Role of Special Tokens Table 4 evaluates SimpleTOD with different special tokens used to identify components of the input corresponding to different sub-tasks. Analysis revealed that without end tokens, SimpleTOD tended to generate much longer belief state, action, and response generations. Even more important is clearly differentiating user and system text for SimpleTOD.

Pre-training Table 5 highlights the importance of initializing SimpleTOD with pre-trained weights. A major advantage of recasting as single sequence prediction is the ability to leverage the understanding learned by these pre-trained models in the open-domain setting.

Robustness to Noisy Annotations To understand the source of dialogue state tracking errors, we investigated MultiWOZ 2.1 annotations in depth. In the process, we have defined four primary types of noisy-labels that could be considered mis-annotations:

1. User provided multiple options, but context does not provide sufficient information to determine the true belief state.

End token	User/System token	Joint Acc	Inform	Success	BLEU	Combined
No	No	16.79	33.8	10.6	4.53	26.73
Yes	No	21.5	54.5	41.2	9.48	57.33
No	Yes	22.22	61.9	52.7	9.57	66.87
Yes	Yes	55.76	85	70.5	15.23	92.98

Table 4: Ablations on MultiWOZ 2.1 comparing the presence and absence of different special tokens when representing TOD as a single sequence. Performance on all metrics drops without `<endof(segment)>` and `<user/system>` tokens.

Layers	Pretrained	Joint Acc	Inform	Success	BLEU	Combined
6	Random	16.45	63.5	49.6	6.34	62.89
6	DistilGPT2	54.54	85	70.5	15.23	92.98
12	Random	20.17	58.7	37.4	8.9	59.65
12	GPT2	55.76	88	61.7	15.9	90.75

Table 5: Ablations on MultiWOZ 2.1 comparing the importance of pretraining. Recasting as single sequence prediction enables fully leveraging pre-trained models for the language understanding they have gathered in an open-domain setting.

2. Belief state is not labeled, but context provides sufficient information.
3. Belief state is labeled, but context lacks necessary information.
4. Belief state value is misspelled according to the context information.

Together experimental results and this analysis indicate that SimpleTOD can track dialogue state and generate the correct output even in the presence of noisy labels. Concrete examples of noisy-labeled annotation in MultiWOZ can be found in the Supplementary Materials. All mis-annotated examples along with all code for replication are provided⁴.

Decoding Initialized from pre-trained weights, SimpleTOD does not need to employ an advanced, more costly decoding strategy such as beam search, diverse beam search, and top-k sampling as opposed to HDSA [9] and DAMD [60]. Our results are reported with simple greedy decoding. In initial experiments, we also tried nucleus sampling [22], but we found it degraded performance. This relates to the observations in Keskar et al. [23] around controllable generation: when precision is required, sampling from the distribution is inherently less reliable than greedily sampling.

Full Dialogues, Multiple Turns, and Long Contexts In further analysis, we found that SimpleTOD accurately tracks dialogue state over multiple turns and long contexts. In some cases, earlier belief state errors are remedied later on when additional turns provide increased context. Examples of full dialogues and those with many turns or especially long context can be found in Supplementary Materials, but we do not consider this further analysis as a primary contribution listed for the work.

6 Conclusion

We explored a simple approach to task-oriented dialogue (SimpleTOD) that uses a single, causal language model. To do this, during training we treat all inputs for dialogue state tracking, action and response generation as a single sequence to the model. SimpleTOD can then directly leverage pre-trained models like GPT-2 to transfer language understanding from open-domain settings where data is more readily available. Empirical results on the multi-domain dialogue dataset (MultiWOZ) showed that the proposed approach outperformed all prior methods in dialogue state tracking as well as in action and response generation in the end-to-end setting. We found that the pre-trained weights were essential, but to leverage these weights fully we had to guide the system with special tokens that mark user and system responses as well as different portions of the sequence related to different sub-tasks. We found that SimpleTOD was effective at tracking dialogue state over long context with many turns and required no more than greedy decoding to achieve new state-of-the-art results despite noisy annotations. We hope that these results and the code, models, and discovered noisy annotations will encourage further exploration of simple, unified approaches for dialogue systems.

⁴<https://github.com/salesforce/simpletod>

7 Broader Impact

This work may have implications for the simplification of conversational agents. In the narrow sense, this work addresses task-oriented dialogue, but similar results might also hold for open-domain conversational systems. If so, the improvement of these systems and easier deployment would amplify both the positive and negative aspects of conversational AI. Positively, conversational agents might play a role in automating predictable communications, thereby increasing efficiency in areas of society that currently lose time navigating the multitude of APIs, webpages, and telephonic systems that are used to achieve goals. Negatively, putting conversational agents at the forefront might dehumanize communication that can be automated and might lead to frustration where human agents could provide more efficient solutions – for example, when predicted solutions do not apply. These consequences are not specific to this work, but should be considered by the field of conversational AI more broadly.

References

- [1] D. Adiwardana, M.-T. Luong, D. R. So, J. Hall, N. Fiedel, R. Thoppilan, Z. Yang, A. Kulshreshtha, G. Nemade, Y. Lu, et al. Towards a human-like open-domain chatbot. *arXiv preprint arXiv:2001.09977*, 2020.
- [2] J. Ba, R. Kiros, and G. E. Hinton. Layer normalization. *CoRR*, abs/1607.06450, 2016.
- [3] S. Bao, H. He, F. Wang, and H. Wu. Plato: Pre-trained dialogue generation model with discrete latent variable. *arXiv preprint arXiv:1910.07931*, 2019.
- [4] Y. Bengio, R. Ducharme, P. Vincent, and C. Jauvin. A neural probabilistic language model. *Journal of machine learning research*, 3(Feb):1137–1155, 2003.
- [5] A. Bordes, Y.-L. Boureau, and J. Weston. Learning end-to-end goal-oriented dialog. In *International Conference on Learning Representations*, 2017.
- [6] P. Budzianowski and I. Vulić. Hello, it’s gpt-2—how can i help you? towards the use of pretrained language models for task-oriented dialogue systems. *arXiv preprint arXiv:1907.05774*, 2019.
- [7] P. Budzianowski, I. Casanueva, B.-H. Tseng, and M. Gasic. Towards end-to-end multi-domain dialogue modelling. 2018.
- [8] L. Chen, B. Lv, C. Wang, S. Zhu, B. Tan, and K. Yu. Schema-guided multi-domain dialogue state tracking with graph attention neural networks. 2020.
- [9] W. Chen, J. Chen, P. Qin, X. Yan, and W. Y. Wang. Semantically conditioned dialog response generation via hierarchical disentangled self-attention. *arXiv preprint arXiv:1905.12866*, 2019.
- [10] R. Child, S. Gray, A. Radford, and I. Sutskever. Generating long sequences with sparse transformers. *arXiv preprint arXiv:1904.10509*, 2019.
- [11] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [12] L. Dong, N. Yang, W. Wang, F. Wei, X. Liu, Y. Wang, J. Gao, M. Zhou, and H.-W. Hon. Unified language model pre-training for natural language understanding and generation. In *Advances in Neural Information Processing Systems*, pages 13042–13054, 2019.
- [13] M. Eric and C. D. Manning. Key-value retrieval networks for task-oriented dialogue. *arXiv preprint arXiv:1705.05414*, 2017.
- [14] M. Eric, R. Goel, S. Paul, A. Sethi, S. Agarwal, S. Gao, and D. Hakkani-Tur. Multiwoz 2.1: Multi-domain dialogue state corrections and state tracking baselines. *arXiv preprint arXiv:1907.01669*, 2019.
- [15] J. Gao, M. Galley, L. Li, et al. Neural approaches to conversational ai. *Foundations and Trends® in Information Retrieval*, 13(2-3):127–298, 2019.
- [16] S. Gao, Y. Zhang, Z. Ou, and Z. Yu. Paraphrase augmented task-oriented dialog generation. *arXiv preprint arXiv:2004.07462*, 2020.
- [17] D. Ham, J.-G. Lee, Y. Jang, and K.-E. Kim. End-to-end neural pipeline for goal-oriented dialogue system using gpt-2. *ACL*, 2020.

- [18] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [19] M. Heck, C. van Niekerk, N. Lubis, C. Geishauser, H.-C. Lin, M. Moresi, and M. Gašić. Trippy: A triple copy strategy for value independent neural dialog state tracking. *arXiv preprint arXiv:2005.02877*, 2020.
- [20] M. Henderson, B. Thomson, and S. Young. Deep neural network approach for the dialog state tracking challenge. In *Proceedings of the SIGDIAL 2013 Conference*, 2013.
- [21] M. Henderson, I. Casanueva, N. Mrkšić, P.-H. Su, I. Vulić, et al. Convert: Efficient and accurate conversational representations from transformers. *arXiv preprint arXiv:1911.03688*, 2019.
- [22] A. Holtzman, J. Buys, L. Du, M. Forbes, and Y. Choi. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*, 2019.
- [23] N. S. Keskar, B. McCann, L. R. Varshney, C. Xiong, and R. Socher. Ctrl: A conditional transformer language model for controllable generation. *arXiv preprint arXiv:1909.05858*, 2019.
- [24] W. Lei, X. Jin, M.-Y. Kan, Z. Ren, X. He, and D. Yin. Sequicity: Simplifying task-oriented dialogue systems with single sequence-to-sequence architectures. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics*, 2018.
- [25] W. Liang, Y. Tian, C. Chen, and Z. Yu. Moss: End-to-end dialog system framework with modular supervision. *arXiv preprint arXiv:1909.05528*, 2019.
- [26] B. Liu and I. Lane. Attention-based recurrent neural network models for joint intent detection and slot filling. In *INTERSPEECH*, 2016.
- [27] B. Liu and I. Lane. End-to-end learning of task-oriented dialogs. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Student Research Workshop*, pages 67–73, 2018.
- [28] B. Liu, G. Tür, D. Hakkani-Tür, P. Shah, and L. Heck. Dialogue learning with human teaching and feedback in end-to-end trainable task-oriented dialogue systems. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 2018.
- [29] A. Madotto, C.-S. Wu, and P. Fung. Mem2seq: Effectively incorporating knowledge bases into end-to-end task-oriented dialog systems. *arXiv preprint arXiv:1804.08217*, 2018.
- [30] B. McCann, J. Bradbury, C. Xiong, and R. Socher. Learned in translation: Contextualized word vectors. In *Advances in Neural Information Processing Systems*, pages 6294–6305, 2017.
- [31] S. Mehri, T. Srinivasan, and M. Eskenazi. Structured fusion networks for dialog. *arXiv preprint arXiv:1907.10016*, 2019.
- [32] N. Mrkšić, D. Ó Séaghdha, T.-H. Wen, B. Thomson, and S. Young. Neural belief tracker: Data-driven dialogue state tracking. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics*, 2017.
- [33] A. Neelakantan, S. Yavuz, S. Narang, V. Prasad, B. Goodrich, D. Duckworth, C. Sankar, and X. Yan. Neural assistant: Joint action prediction, response generation, and latent knowledge reasoning. In *NeurIPS 2019 Conversational AI Workshop*, 2019.
- [34] E. Nouri and E. Hosseini-Asl. Toward scalable neural dialogue state tracking model. In *NeurIPS 2018 Conversational AI Workshop*, 2018.
- [35] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu. Bleu: A method for automatic evaluation of machine translation. In *ACL*, 2002.
- [36] B. Peng, C. Li, J. Li, S. Shayandeh, L. Liden, and J. Gao. Soloist: Few-shot task-oriented dialog with a single pre-trained auto-regressive model. *arXiv preprint arXiv:2005.05298*, 2020.
- [37] B. Peng, C. Zhu, C. Li, X. Li, J. Li, M. Zeng, and J. Gao. Few-shot natural language generation for task-oriented dialog, 2020.
- [38] M. E. Peters, M. Neumann, M. Iyyer, M. Gardner, C. Clark, K. Lee, and L. Zettlemoyer. Deep contextualized word representations. *arXiv preprint arXiv:1802.05365*, 2018.

- [39] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8):9, 2019.
- [40] P. Rajpurkar, J. Zhang, K. Lopyrev, and P. Liang. Squad: 100,000+ questions for machine comprehension of text. *arXiv preprint arXiv:1606.05250*, 2016.
- [41] A. Rastogi, D. Hakkani-Tur, and L. Heck. Scalable multi-domain dialogue state tracking. In *Proceedings of IEEE ASRU*, 2017.
- [42] S. Roller, E. Dinan, N. Goyal, D. Ju, M. Williamson, Y. Liu, J. Xu, M. Ott, K. Shuster, E. M. Smith, et al. Recipes for building an open-domain chatbot. *arXiv preprint arXiv:2004.13637*, 2020.
- [43] V. Sanh, L. Debut, J. Chaumond, and T. Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108*, 2019.
- [44] R. Sennrich, B. Haddow, and A. Birch. Neural machine translation of rare words with subword units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany, Aug. 2016. Association for Computational Linguistics. doi: 10.18653/v1/P16-1162. URL <https://www.aclweb.org/anthology/P16-1162>.
- [45] L. Shu, P. Molino, M. Namazifar, B. Liu, H. Xu, H. Zheng, , and G. Tur. Incorporating the structure of the belief state in end-to-end task-oriented dialogue systems. In *NeurIPS 2018 Conversational AI Workshop*, 2018.
- [46] R. W. Smith and D. R. Hipp. *Spoken natural language dialog systems: A practical approach*. Oxford University Press on Demand, 1994.
- [47] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008, 2017.
- [48] A. Wang, A. Singh, J. Michael, F. Hill, O. Levy, and S. R. Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018.
- [49] T.-H. Wen, M. Gašić, N. Mrkšić, P.-H. Su, D. Vandyke, and S. Young. Semantically conditioned LSTM-based natural language generation for spoken dialogue systems. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 2015.
- [50] T.-H. Wen, D. Vandyke, N. Mrksic, M. Gasic, L. M. Rojas-Barahona, P.-H. Su, S. Ultes, and S. Young. A network-based end-to-end trainable task-oriented dialogue system. *arXiv preprint arXiv:1604.04562*, 2016.
- [51] T.-H. Wen, Y. Miao, P. Blunsom, and S. Young. Latent intention dialogue models. In *Proceedings of the 34th International Conference on Machine Learning*, 2017.
- [52] T. Wolf, L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, P. Cistac, T. Rault, R. Louf, M. Funtowicz, et al. Transformers: State-of-the-art natural language processing. *arXiv preprint arXiv:1910.03771*, 2019.
- [53] C.-S. Wu, A. Madotto, E. Hosseini-Asl, C. Xiong, R. Socher, and P. Fung. Transferable multi-domain state generator for task-oriented dialogue systems. *arXiv preprint arXiv:1905.08743*, 2019.
- [54] C.-S. Wu, R. Socher, and C. Xiong. Global-to-local memory pointer networks for task-oriented dialogue. *arXiv preprint arXiv:1901.04713*, 2019.
- [55] C.-S. Wu, S. Hoi, R. Socher, and C. Xiong. Tod-bert: Pre-trained natural language understanding for task-oriented dialogues. *arXiv preprint arXiv:2004.06871*, 2020.
- [56] Q. Wu, Y. Zhang, Y. Li, and Z. Yu. Alternating recurrent dialog model with large-scale pre-trained language models. *arXiv preprint arXiv:1910.03756*, 2019.
- [57] Z. Yang, Z. Dai, Y. Yang, J. Carbonell, R. R. Salakhutdinov, and Q. V. Le. Xlnet: Generalized autoregressive pretraining for language understanding. In *Advances in neural information processing systems*, pages 5754–5764, 2019.
- [58] S. Young, M. Gašić, B. Thomson, and J. D. Williams. Pomdp-based statistical spoken dialog systems: A review. *Proceedings of the IEEE*, 101(5):1160–1179, 2013.
- [59] J.-G. Zhang, K. Hashimoto, C.-S. Wu, Y. Wan, P. S. Yu, R. Socher, and C. Xiong. Find or classify? dual strategy for slot-value predictions on multi-domain dialog state tracking. *arXiv preprint arXiv:1910.03544*, 2019.

- [60] Y. Zhang, Z. Ou, and Z. Yu. Task-oriented dialog systems that consider multiple appropriate responses under the same context. *arXiv preprint arXiv:1911.10484*, 2019.
- [61] Y. Zhang, S. Sun, M. Galley, Y.-C. Chen, C. Brockett, X. Gao, J. Gao, J. Liu, and B. Dolan. Dialogpt: Large-scale generative pre-training for conversational response generation. *arXiv preprint arXiv:1911.00536*, 2019.
- [62] T. Zhao, A. Lu, K. Lee, and M. Eskenazi. Generative encoder-decoder models for task-oriented spoken dialog systems with chatting capability. In *Proceedings of the 18th Annual SIGdial Meeting on Discourse and Dialogue*, 2017.
- [63] T. Zhao, K. Xie, and M. Eskenazi. Rethinking action spaces for reinforcement learning in end-to-end dialog agents with latent variable models. *arXiv preprint arXiv:1902.08858*, 2019.
- [64] L. Zhou and K. Small. Multi-domain dialogue state tracking as dynamic knowledge graph enhanced question answering. *arXiv preprint arXiv:1911.06192*, 2019.

A Input Representation and Method Overview

As described in Section 3, a single training sequence consists of the concatenation of context C_t , belief states B_t , database search results D_t , action decisions A_t , and system response S_t . A schematic overview of each segment is shown in Table 6 together with special tokens marking transition points. SimpleTOD is optimized by minimizing the negative likelihood over the joint sequence $x^t = [C_t; B_t; D_t; A_t; S_t]$. The output state associated with each input token is used to predict the next token, see Figure 1a.

During inference, SimpleTOD generates this sequence token by token, but we stop after belief states are generated to query from a database. The outputs of the database are summarized and concatenated to the end of the input sequence and generation resumes token by token. This results in a delexicalized response, see Figure 1b. This response can then be lexicalized by replacing slots and values with information from the database results. This process is described more formally in the equations of Section 6.

Context	[context] [user] <i>user input</i> [system] <i>system response</i> ... [user] <i>user input</i> [endofcontext]
Belief State	[belief] <i>domain slot_name value, domain slot_name value, ...</i> [endofbelief]
DB Search	[db] <i>#_matches, booking_status</i> [endofdb]
Action	[action] <i>domain action_type slot_name, domain action_type slot_name, ...</i> [endofaction]
Response	[response] <i>system delexicalized response</i> [endofresponse]

Table 6: A schematic representation of the different components of inputs/outputs in task-oriented dialogue. When training SimpleTOD, these are concatenated together into a single sequence.

B SimpleTOD with Oracle information

This section reports the performance of SimpleTOD for action and response generation, in the presence of different oracle information, i.e. oracle belief and oracle action. These settings are not end-to-end as in the main text, and SimpleTOD is designed to be end-to-end. We report results in these settings for a complete understanding of SimpleTOD, but we note that only the end-to-end settings in the main text evaluate the full system together. In these oracle settings, other methods can outperform SimpleTOD, but this simply highlights the importance of end-to-end evaluation: there is a disconnect between performance with oracle information and performance without it. In practical use, oracle information is not available, and that is where SimpleTOD excels.

We report results in Table 7 for two different settings regularly employed in the literature. These settings are determined by how much oracle information is used. The first setting uses oracle belief states and oracle actions. The second uses oracle belief states, but requires the system to generate its own actions.

Note that all prior works use oracle DB Search results as supervision during training and as input during inference in all these settings. We include directly comparable experiments using oracle DB Search results for all settings. We also include experiments that completely ignore the DB Search results in all settings to show the surprising effectiveness of SimpleTOD without DB Search results.

The evaluation results on MultiWOZ 2.1, as shown in Table 8, also follow the same patterns as discussed in section 4.2. We provide these results for future comparisons on the improved version of the dataset.

Model	Belief State	DB Search	Action	Inform	Success	BLEU	Combined
DAMD+augmentation	oracle	oracle	oracle	95.4	87.2	27.3	118.5
PARG	oracle	oracle	oracle	91.1	78.9	18.8	103.8
SimpleTOD (ours)	oracle	oracle	oracle	93.4	83.2	17.78	106.08
SimpleTOD (ours)	oracle	-	oracle	92.3	85.8	18.61	107.66
HDSA	oracle	oracle	generated	82.9	68.9	23.6	99.5
DAMD+augmentation	oracle	oracle	generated	89.2	77.9	18.6	102.5
ARDM	oracle	oracle	-	87.4	72.8	20.6	100.7
LaRL	oracle	oracle	generated	82.78	79.2	12.8	93.79
SimpleTOD (ours)	oracle	oracle	generated	84	72.8	16.1	94.5
SimpleTOD (ours)	oracle	-	generated	88.9	67.1	16.9	94.9

Table 7: SimpleTOD results on MultiWOZ 2.0 using oracle information.

Belief State	DB Search	Action	Inform	Success	BLEU	Combined
oracle	oracle	oracle	92.8	84.5	18.9	107.55
oracle	-	oracle	92.6	86.1	17.67	107.2
oracle	oracle	generated	85.1	73.5	16.22	95.52
oracle	-	generated	89.6	68.6	15.46	94.56

Table 8: SimpleTOD results on MultiWOZ 2.1 using oracle information.

C Dialogue State Tracking Analysis

This section provides more detailed analysis of Dialogue State Tracking (DST) task performance by SimpleTOD, as mentioned in section 5.

Understanding Long, Multi-domain Context Table 9 indicates the DST performance of SimpleTOD in case of multi-domain and long context. This example also shows understanding dialogue states, where slots across domains are related. For example, *taxi departure* and *taxi destination* should be inferred from *attraction name* and *hotel name*.

Context ('MUL1015', turn 10)	<p><context> <user> i am looking for a pool somewhere in the south of cambridge . <system> i am sorry , but it does not look like we have a pool that matches your criteria . <user> how about some type of theater ? <system> the junction theatre is in the south area . would you like the address ? <user> yes , please provide the address and postcode as well . <system> the junction theatre is located on clifton way at postcode cb17gx . is there anything else i can assist you with ? <user> thanks . yes , i also need to find a guesthouse for my stay there . <system> are you needing the guesthouse in the south , also ? do you have a preference in price range ? <user> the area should be the centre . i need it to be cheap and have free parking . <system> i have 2 guesthouses that fit your criteria . 1 is the alexander bed and breakfast and the other is el shaddai . <user> what is the star rating -s for them ? <system> the alexander bed and breakfast has a 4 star rating while the el shaddai has 0 stars . would you like to book a room with either of these ? <user> ok great , thank you . i also need to book a taxi to get back and forth . <system> where did you want to leave from and go to ? <user> i'll be leaving the theatre at 14:45 and going to the guesthouse . <system> let s back up a moment . which lodgings did you prefer , so we know where the taxi will be taking you ? <user> let s go with the alexander bed and breakfast . <system> your booking is complete , a grey volkswagen will be picking you up , contact number 07753429052 . can i help with anything else ? <user> cool beans ! sorry i was so much trouble . thanks so much for all of your help , you need a raise dealing with customers like me ! <endofcontext></p>
Target	<p><belief> attraction area south, attraction name the junction, attraction type theatre, hotel area centre, hotel name alexander bed and breakfast, hotel parking yes, hotel pricerange cheap, hotel type guesthouse, taxi departure the junction, taxi destination alexander bed and breakfast, taxi leaveat 14:45 <belief> <action> general bye none <endofaction> <responsel> it was no trouble at all ! i hope you have a fantastic trip and enjoy your stay ! <endofresponsel></p>
SimpleTOD	<p><belief> attraction area south, attraction name the junction, attraction type theatre, hotel area centre, hotel name alexander bed and breakfast, hotel parking yes, hotel pricerange cheap, hotel type guesthouse, taxi departure the junction, taxi destination alexander bed and breakfast, taxi leaveat 14:45 <endofbelief> <action> general bye none <endofaction> <responsel> thank you for using our service <endofresponsel></p>

Table 9: Example of multi-domain dialogue state tracking for long context, where dialogue context spanning over 3 domains, i.e. attraction, hotel, and taxi. The belief states for taxi departure and destination (highlighted) should be inferred from hotel and attraction domains.

Regarding Noisy Annotations Concrete examples of four types of noisy-labeled annotation defined in section 5, are shown in Tables 10, 11, 12, 13 and 14. The results indicate that SimpleTOD is robust to noisy annotation and can often generate the correct belief state in situations where annotation is incorrect. As mentioned in section 4.1, the list of noisy annotations is released with this paper.

Full Dialogue Example Table 15 and Table 16 include several turns as part of a full dialogue for delexicalized and lexicalized outputs. These are from our strongest SimpleTOD model in the setting that requires it to generate all outputs, which means that it ignores all DB Search results.

Context ('SNG01608', turn 2)	<context> <user> are there any portuguese restaurant -s in cambridge ? <system> yes there is a portuguese restaurant in cambridge with 2 different location -s , would you like the addresses ? <user> if 1 of them has a moderate price range please give me that address . if not tell me about turkish restaurant -s instead . <endofcontext>
Target	<belief> restaurant food turkish , restaurant pricerange moderate <endofbelief>
SimpleTOD	<belief> restaurant food portugese , restaurant pricerange moderate<endofbelief>
Context ('MUL1575', turn 3)	<context> <user> i would like to find a particular restaurant in cambridge . the name of the restaurant is restaurant 2 two . could you give me the location ? <system> restaurant 2 two is nice french restaurant located at 22 chesterton road chesterton . would like me to book you a table ? <user> that would be great . i need it for 8 on friday . <system> do you have a time preference ? <user> yes at 11:15 if that s not available i can do 10:15 <endofcontext>
Target	<belief> restaurant book day friday , restaurant book people 8 , restaurant book time 10:15 , restaurant name restaurant 2 two<endofbelief>
SimpleTOD	<belief> restaurant book day friday , restaurant book people 8 , restaurant book time 11:15 , restaurant name restaurant 2 two <endofbelief>
Context ('PMUL1194', turn 6)	<context> <user> hello , i need information about old schools . <system> there are 5 local colleges , do you have a particular area you are interested in ? <user> i do not have an area preference . <system> old schools is an architectural attraction in the center of town . they are located on trinity lane , in postcode cb21tt . <user> what is the phone number ? <system> the phone number is 01223332320 . do you need any more information ? <user> yes , i am looking for a train that leaves on wednesday for cambridge <system> i have over 200 entries . let s try to narrow that down . what time would you like to arrive ? <user> monday at 11:00 for 5 people please <system> just to confirm , you want to leave on monday , or wednesday ? and where are you departing from ? <user> leaving ely anytime after 15:15 and i need to know how long the ride is and the specific arrival time please . <endofcontext>
Target	<belief> attraction name old schools , train book people 5 , train day monday , train departure ely , train destination cambridge , train leaveat 15:15 <endofbelief> 0
SimpleTOD	<belief> attraction name old schools , train book people 5 , train day wednesday , train departure ely , train destination cambridge , train leaveat 15:15 <endofbelief>
Context ('MUL1024', turn 7)	<context> <user> i am looking for a theatre to visit in the centre of cambridge . can you help me with this ? <system> i can recommend the adc theatre on park street or the cambridge arts theatre located at 6 st edward s passage <user> are either in the city center ? <system> both are located in the city centre . <user> can you give me the address of the adc theatre please ? <system> the address is park street . <user> what films are playing today ? <system> i am sorry . i do not have that information . can i help you with anything else ? <user> i am looking for a particular hotel called avalon . <system> avalon is located at 62 gilbert road . would you like me to book a reservation ? <user> great , can i book that for 6 people for 3 nights starting on tuesday . <system> i am sorry , the booking was unsuccessful . would you like to try for another date or a shorter stay ? <user> would you be interested in staying at the avalon for 1 night ? if not we can find another hotel available for a 3 night stay for 6 guests . <endofcontext>
Target	<belief> attraction area centre , attraction name adc theatre , attraction type theatre , hotel book day tuesday , hotel book people 6 , hotel book stay 3 , hotel name avalon <endofbelief>
SimpleTOD	<belief> attraction area centre , attraction name adc theatre , attraction type theatre , hotel book day tuesday , hotel book people 6 , hotel book stay 1 , hotel name avalon <endofbelief>

Table 10: Examples of Type 1 noisy-labeled annotation, context lacks enough information to infer the true belief state.

Context ('MUL0088', turn 2)	<context> <user> i am looking for a cheap hotel with free parking near cambridge . <system> i have multiple cheap hotel -s with free parking . what part of town are you interested in staying in ? <user> i would like to stay close to the center area , but the hotel should be 3 star . <endofcontext>
Target	<belief> hotel parking yes, hotel pricerange cheap <endofbelief>
SimpleTOD	<belief> hotel area centre, hotel parking yes, hotel pricerange cheap, hotel stars 3 <endofbelief>
Context ('PMUL2437', turn 3)	<context> <user> i want to find a moderate -ly priced restaurant . <system> i have many options available for you ! is there a certain area or cuisine that interests you ? <user> yes i would like the restaurant to be located in the center of the attractions . <system> there are 21 restaurant -s available in the centre of town . how about a specific type of cuisine ? <user> i need to know the food type and postcode and it should also have multiple sports <endofcontext>
Target	<belief> restaurant area centre, restaurant pricerange moderate <endofbelief>
SimpleTOD	<belief> attraction type multiple sports, restaurant area centre, restaurant pricerange moderate <endofbelief>
Context ('PMUL2437', turn 3)	<context> <user> i want to find a moderate -ly priced restaurant . <system> i have many options available for you ! is there a certain area or cuisine that interests you ? <user> yes i would like the restaurant to be located in the center of the attractions . <system> there are 21 restaurant -s available in the centre of town . how about a specific type of cuisine ? <user> i need to know the food type and postcode and it should also have multiple sports <endofcontext>
Target	<belief> restaurant area centre, restaurant pricerange moderate <endofbelief>
SimpleTOD	<belief> attraction type multiple sports, restaurant area centre, restaurant pricerange moderate <endofbelief>
Context ('MUL1060', turn 4)	<context> <user> hello , i would like to find a hotel that include -s free parking . <system> most of the hotel -s in town offer free parking . is there a certain area you would like to stay in , or do you have a price range in mind ? <user> yes . the centre would be nice and also free wifi . <system> the university arms is an expensive , 4 star hotel with free wifi . comparatively , the alexander bed and breakfast is a cheap -ly priced guesthouse , also 4 stars . <user> please book me some rooms for the university arms to accommodate 8 people for 3 nights starting on wednesday . can you also provide me the reference number after you book ? <system> your reference number is x5ny66zv . <user> thank you . can you please help me find a place to go in town in the same area as the hotel ? preferably a college . <endofcontext>
Target	<belief> attraction area centre, attraction name college, hotel area centre, hotel book day wednesday, hotel book people 8, hotel book stay 3, hotel name university arms hotel, hotel parking yes <endofbelief>
SimpleTOD	<belief> attraction area centre, attraction type college, hotel area centre, hotel book day wednesday, hotel book people 8, hotel book stay 3, hotel internet yes, hotel name university arms hotel, hotel parking yes <endofbelief>
Context ('MUL1642', turn 5)	<context> <user> hello , i am trying to find a train that goes from cambridge to london kings cross . can you help me book a ticket ? <system> i can help with that . can you tell me what day you will be traveling ? <user> i need to leave on saturday after 18:45 . <system> the soonest departure time would be at 19:00 on saturday , is that okay ? <user> yes , that s perfect . can you book that for 8 people ? <system> you are all booked with reference number 144vdbm . the cost of 151.04 gbp will be payable at the station . can i be of further assistance today ? <user> i am looking for an expensive place to eat in the centre , what is there that fits that criteria ? <system> there 33 place -s that fit your criteria . do you have a particular cuisine type in mind so that i can narrow the results down ? <user> it does not matter what kind of food . what would you recommend for a large group of 8 people ? <endofcontext>
Target	<belief> restaurant area centre, restaurant pricerange expensive, train book people 8, train day saturday, train departure cambridge, train destination london kings cross, train leaveat 18:45 <endofbelief>
SimpleTOD	<belief> restaurant area centre, restaurant book people 8, restaurant pricerange expensive, train book people 8, train day saturday, train departure cambridge, train destination london kings cross, train leaveat 18:45 <endofbelief>
Context ('MUL0088', turn 7)	<context> <user> i am looking for a cheap hotel with free parking near cambridge . <system> i have multiple cheap hotel -s with free parking . what part of town are you interested in staying in ? <user> i would like to stay close to the center area , but the hotel should be 3 star . <system> we do not have any hotel -s that match your search . do you want to try something else ? <user> are there any moderate 3 star hotel -s with free parking ? <system> we do not have any hotel -s that match your search . do you want to try something else ? <user> how about 1 in the moderate price range ? <system> we have 3 entries that match your preferences . would you prefer north , south , or west ? <user> i do not have a preference but i would also like to find a restaurant called the cow pizza kitchen and bar . <system> before i book your restaurant would you like to book your lodging ? i think you will like hamilton lodge . it meets your needs . <user> does it have internet ? <system> yes , the hamilton lodge has internet . <user> sounds great . what is the address and contact information ? <endofcontext>
Target	<belief> hotel internet yes, hotel parking yes, hotel pricerange moderate, hotel stars 3, restaurant name cow pizza kitchen and bar <endofbelief>
SimpleTOD	<belief> hotel internet yes, hotel name hamilton lodge, hotel parking yes, hotel pricerange moderate, hotel stars 3, restaurant name cow pizza kitchen and bar <endofbelief>

Table 11: Examples of Type 2 noisy-labeled annotation, belief state is not labeled, while context contains the information.

Context ('MUL1926', turn 1)	<context> <user> yes hello ! i am looking for a train leaving on tuesday from norwich to cambridge . <endofcontext>
Target	<belief> train departure norwich, train destination cambridge <endofbelief>
SimpleTOD	<belief> train day tuesday, train departure norwich, train destination cambridge <endofbelief>
Context ('MUL1650', turn 3)	<context> <user> i am looking for a chinese restaurant in the centre of cambridge . <system> there are quite a few chinese restaurant -s in the area ! do you have a price range you would like to stay within ? <user> no , anything is fine . can you suggest a great 1 ? <system> jinling noodle bar looks like a good place . <user> can i have their phone number and address ? also , are there any trains that go from peterborough to cambridge ? <endofcontext>
Target	<belief> restaurant area centre, restaurant food chinese, restaurant name jinling noodle bar <endofbelief>
SimpleTOD	<belief> restaurant area centre, restaurant food chinese, restaurant name jinling noodle bar, train departure peterborough, train destination cambridge <endofbelief>
Context ('MUL2376', turn 3)	<context> <user> where would i find the museum of archaeology and anthropology ? <system> the museum of archaeology and anthropology is located at university of cambridge , downing street . their phone number is 01223333516 . do you need anything else ? <user> and the attraction type is a museum , right ? <system> yes , it is a museum . <user> sounds great . thank you for the info ! <endofcontext>
Target	<belief> attraction name museum of archaeology and anthropology <endofbelief>
SimpleTOD	<belief> attraction name museum of archaeology and anthropology, attraction type museum <endofbelief>
Context ('MUL1076', turn 9)	<context> <user> yes i am looking for some hotel -s that include free parking and cheap rates in the cambridge area . <system> there are 10 hotel -s , do you have any other preferences to narrow it down ? <user> sure . i would like a guesthouse . <system> there are 9 options available . do you have a preference for how many stars or what area specifically ? <user> i do not care . please book 1 that you recommend . <system> ok , how about the allenbell ? to book a stay i'll need to know the first day you want to stay , how many days , and how many guests . <user> i need it for 8 people , and for 4 nights starting saturday . <system> great , i have booked your stay for 8 people for 4 nights . your reference number is pb41wuot . may i help with anything else ? <user> i also would like to find a museum in the west . <system> there are several museums there , any preferences ? <user> i would like to find the museum of science , please . <system> i am sorry , but i am having trouble locating your requested attraction . can you please restate your request ? <user> is there a museum of science ? <system> i am not finding 1 , sorry . <user> are there any other museums in that area ? <system> yes there are 7 museums in the west area of town for your pleasure . is there anything else you would like to narrow them down with ? <user> the museum i want should be in the west side of town and can i have the postcode for the museum . <endofcontext>
Target	<belief> attraction area west, attraction type museum, hotel book day saturday, hotel book people 8, hotel book stay 4, hotel parking yes, hotel pricerange cheap, hotel type guesthouse <endofbelief>
SimpleTOD	<belief> attraction area west, attraction type museum, hotel book day saturday, hotel book people 8, hotel book stay 4, hotel name allenbell, hotel parking yes, hotel pricerange cheap, 'hotel type guesthouse <endofbelief>

Table 12: Examples of Type 2 noisy-labeled annotation, belief state is not labeled, while context contains the information.

Context ('SNG1036', turn 1)	<context> <user> i was not planning to stay in town tonight , but it looks like i am going to have to . can you help me find a pretty cheap room ? <endofcontext>
Target	<belief> hotel pricerange cheap, hotel type hotel <endofbelief>
SimpleTOD	<belief> hotel pricerange cheap <endofbelief>
Context ('PMUL1194', turn 1)	<context> <user> hello , i need information about old schools . <endofcontext>
Target	<belief> attraction type college <endofbelief>
SimpleTOD	<belief> attraction name old schools <endofbelief>
Context ('SNG0284', turn 2)	<context> <user> i want a train from london liverpool street arriving at 9:30 <system> which day will you be traveling ? <user> i want to leave on thursday .
Target	<belief> train arriveby 09:30, train book people 2, train day thursday, train departure london liverpool street <endofbelief>
SimpleTOD	<belief> train arriveby 09:30, train day thursday, train departure london liverpool street
Context ('PMUL0069', turn 2)	<context> <user> i am looking for some hungarian food restaurant -s near the centre , please . <system> i am sorry there are no hungarian restaurant -s near centre . <user> what kind of expensive restaurant -s are in the center of town ?
Target	<belief> restaurant area centre, restaurant food hungarian, restaurant pricerange expensive <endofbelief>
SimpleTOD	<belief> restaurant area centre, restaurant pricerange expensive <endofbelief>
Context ('PMUL3688', turn 3)	<context> <user> i am looking for a place to go in the centre of town . <system> is there any type of attraction you would like to see ? <user> any of your choice . get me the address and entrance fee <system> the holy trinity church is located on market street . the entrance fee is free . is there anything else i can help with ? <user> i also need a train out to the airport on friday . <endofcontext>
Target	<belief> attraction area centre, train day friday, train destination stansted airport <endofbelief>
SimpleTOD	<belief> attraction area centre, train day friday <endofbelief>

Table 13: Examples of Type 3 noisy-labeled annotation, belief state is labeled, while context lacks the information.

Context ('SNG02207', turn 1)	<context> <user> i need to book a tax departing from gandhi . <endofcontext>
Target	<belief> taxi departure the gandhi <endofbelief>
SimpleTOD	<belief> taxi departure gandhi <endofbelief>
Context ('MUL1811', turn 2)	<context> <user> i am looking for something to do in town . are there any interesting attraction in the north part of town ? <system> yes , there are several places: i see a boat , a park , and 2 swimming pools . would 1 of these work for you ? <user> ooh , a pool would be fun . can you give me their contact info ? <endofcontext>
Target	<belief> attraction area north, attraction type pool <endofbelief>
SimpleTOD	<belief> attraction area north, attraction type swimming pool <endofbelief>
Context ('PMUL0548', turn 4)	<context> <user> hello , i would like some information on a restaurant . <system> do you have a certain cuisine or area in mind ? <user> i want british food . in the east , please . <system> the graffton hotel restaurant is in the east and serves british food . it s location is 619 newmarket rd . fen ditton . <user> i will need it for saturday , 7 people at 17:45 please . <system> i have successfully booked a table for 7 on saturday at 17:45 for you . the table will be reserved for 15 minutes and your reference number is r8cv0hu9 . <user> i am also looking for a train on sunday . <endofcontext>
Target	<belief> restaurant area east, restaurant book day saturday, restaurant book people 7, restaurant book time 17:45, restaurant food british, restaurant name graffton hotel restaurant, train day sunday <endofbelief>
SimpleTOD	<belief> restaurant area east, restaurant book day saturday, restaurant book people 7, restaurant book time 17:45, restaurant food british, restaurant name graffton hotel restaurant, train day sunday <endofbelief>
Context ('PMUL0550', turn 7)	<context> <user> hey i am looking for a train from cambridge to bishops stortford . mind helping out ? <system> many trains are leaving on friday . mind choosing the time ? <user> i want to leave on monday and arrive by 18:45 . <system> i have train tr4283 that leaves cambridge at 5:29 and arrives in bishops stortford at 6:07 . would you like to make reservations ? <user> could you give me the travel time and price of that train please ? <system> the cost is 10.10 pounds . the duration of the trip is 38 minutes , leaving cambridge at 5:29 and arriving at 6:07 in bishops stortford . <user> i also want a cheap chinese restaurant . <system> there are 4 great restaurant -s to choose from . do you prefer 1 on the south side of town or in the centre ? <user> i would like to be in the centre please . <system> i recommend charlie chan . would you like to reserve a table ? <user> yes . monday , 8 people , 10:30 . <system> booking was successful . the table will be reserved for 15 minutes . reference number is : ifjmbkli . <user> thank you very much . that will be all for today . i appreciate all your help . <endofcontext>
Target	<belief> restaurant area centre, restaurant book day monday, restaurant book people 8, restaurant book time 10:30, restaurant food chinese, restaurant name charlie, restaurant pricerange cheap, train arriveby 18:45, train day monday, train departure cambridge, train destination bishops stortford <endofbelief>
SimpleTOD	<belief> restaurant area centre, restaurant book day monday, restaurant book people 8, restaurant book time 10:30, restaurant food chinese, restaurant name charlie chan, restaurant pricerange cheap, train arriveby 18:45, train day monday, train departure cambridge, train destination bishops stortford <endofbelief>

Table 14: Examples of Type 4 noisy-labeled annotation, belief state value is misspelled.

Turn 1	Context	<context> <user> hello , i need a train to ely on sunday please <endofcontext>
	Target	<belief> train destination ely <endofbelief> <action> train inform choice, train inform day, train inform dest, train request arrive <endofaction> <response> we have [value_count] trains traveling to [value_place] on [value_day] . what time would you like to arrive ? <endofresponse>
	SimpleTOD	<belief> train day sunday, train destination ely <endofbelief> <action> train inform choice, train inform day, train inform leave, train inform depart, train inform dest, train inform id, train offerbook none <endofaction> <response> there are [value_count] trains leaving [value_place] on [value_day]. [train_id] leaves [value_place] at [value_time] and arrives in [value_place] at [value_time]. would you like to book a ticket? <endofresponse>
Turn 2	Context	<context> <user> hello , i need a train to ely on sunday please <system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . <endofcontext>
	Target	<belief> train destination ely, train day sunday, train arriveby 13:00, train departure cambridge <endofbelief> <action> train inform arrive, train inform day, train inform dest, train inform id, train offerbook none <endofaction> <response> [train_id] will get you to [value_place] by [value_time] on [value_day] . should i book you a ticket ? <endofresponse>
	SimpleTOD	<belief> train day sunday, train destination ely, train departure cambridge, train arriveby 13:00 <endofbelief> <action> train inform arrive, train inform leave, train inform id, train offerbook none <endofaction> <response> [train_id] leaves at [value_time] and arrives at [value_time]. would you like me to book it for you? <endofresponse>
Turn 3	Context	<context> <user> hello , i need a train to ely on sunday please <system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . <system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? <endofcontext>
	Target	<belief> train destination ely, train day sunday, train arriveby 13:00, train departure cambridge, train book people 8 <endofbelief> <action> train offerbooked ref, train offerbooked ticket <endofaction> <response> booking was successful , the total fee is [value_price] gbp payable at the station . reference number is [train_reference] . <endofresponse>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> general reqmore none, train offerbooked ref, train offerbooked ticket <endofaction> <response> booking was successful, the total fee is [value_price] gbp payable at the station. reference number is [train_reference]. is there anything else i can help you with? <endofresponse>
Turn 4	Context	<context> <user> hello , i need a train to ely on sunday please <system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . <system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? <system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? <endofcontext>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> attraction recommend name, general greet none <endofaction> <response> how about [attraction_name] ? it looks lovely <endofresponse>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> attraction recommend name, attraction recommend area, attraction recommend fee, attraction recommend addr, attraction recommend phone <endofaction> <response> i would recommend the [attraction_name] in the [value_area]. it is located at [attraction_address]. the entrance fee is [value_count] pounds. the phone number is [attraction_phone] <endofresponse>
Turn 5	Context	<context> <user> hello , i need a train to ely on sunday please <system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . <system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? <system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? <system> how about cafe jello gallery ? it looks lovely <user> that will work . could you get me the phone number and area its in ? <endofcontext>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> general greet none, general reqmore none, attraction inform phone, attraction inform area <endofaction> <response> sure ! it s in the [value_area] area of town , and the phone number is [attraction_phone] . can i help you with anything else ? <endofresponse>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> attraction inform phone, attraction inform area, attraction inform name <endofaction> <response> [attraction_name] is in the [value_area] area and the phone number is [attraction_phone] <endofresponse>
Turn 6	Context	<context> <user> hello , i need a train to ely on sunday please <system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . <system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? <system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? <system> how about cafe jello gallery ? it looks lovely <user> that will work . could you get me the phone number and area its in ? <system> sure ! it s in the west area of town , and the phone number is 01223312112 . can i help you with anything else ? <user> you were great today . thanks so much for all the help . that is all . goodbye . <endofcontext>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> general bye none, general welcome none, general greet none <endofaction> <response> it was a pleasure to help . have a good day . goodbye . <endofresponse>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely <endofbelief> <action> general bye none <endofaction> <response> thank you for using our service <endofresponse>

Table 15: SimpleTOD end-to-end generation (delexicalized) on MultiWOZ (dialogue 'PMUL3663').

Turn 1	Context	<context> <user> hello , i need a train to ely on sunday please </context>
	Target	<belief> train destination ely </belief> <action> train inform choice, train inform day, train inform dest, train request arrive </action> <response> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? </response>
	SimpleTOD	<belief> train day sunday, train destination ely </belief> <action> train inform choice, train inform day, train inform leave, train inform depart, train inform dest, train inform arrive, train inform id, train offerbook none </action> <response> there are 10 trains leaving cambridge on sunday. tr3177 leaves cambridge at 9:50 and arrives in ely at 10:07. would you like to book a ticket? </response>
Turn 2	Context	<context> <user> hello , i need a train to ely on sunday please </system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . </context>
	Target	<belief> train destination ely, train day sunday, train arriveby 13:00, train departure cambridge </belief> <action> train inform arrive, train inform day, train inform dest, train inform id, train offerbook none </action> <response> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? </response>
	SimpleTOD	<belief> train day sunday, train destination ely, train departure cambridge, train arriveby 13:00 </belief> <action> train inform arrive, train inform leave, train inform id, train offerbook none </action> <response> tr1159 leaves at 11:50 and arrives at 12:07. would you like me to book it for you? </response>
Turn 3	Context	<context> <user> hello , i need a train to ely on sunday please </system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . </system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? </context>
	Target	<belief> train destination ely, train day sunday, train arriveby 13:00, train departure cambridge, train book people 8 </belief> <action> train offerbooked ref, train offerbooked ticket </action> <response> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is hdx8ix63. </response>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, train day sunday, train departure cambridge, train destination ely </belief> <action> general reqmore none, train offerbooked ref, train offerbooked ticket </action> <response> booking was successful, the total fee is 28.16 gbp payable at the station. reference number is hdx8ix63. is there anything else i can help you with? </response>
Turn 4	Context	<context> <user> hello , i need a train to ely on sunday please </system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . </system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? </system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? </context>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> attraction recommend name, general greet none </action> <response> how about cafe jello gallery ? it looks lovely </response>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> attraction recommend name, attraction recommend area, attraction recommend fee, attraction recommend addr, attraction recommend phone </action> <response> i would recommend the cafe jello gallery in the west. it is located at 13 magdalene street. the entrance fee is 0 pounds. the phone number is 01223464646 </response>
Turn 5	Context	<context> <user> hello , i need a train to ely on sunday please </system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . </system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? </system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? </system> how about cafe jello gallery ? it looks lovely <user> that will work . could you get me the phone number and area its in ? </context>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> general greet none, general reqmore none, attraction inform phone, attraction inform area </action> <response> sure ! it s in the west area of town , and the phone number is 01223464646 . can i help you with anything else ? </response>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> attraction inform phone, attraction inform area, attraction inform name </action> <response> cafe jello gallery is in the west area and the phone number is 01223464646 </response>
Turn 6	Context	<context> <user> hello , i need a train to ely on sunday please </system> we have 10 trains traveling to ely on sunday . what time would you like to arrive ? <user> how about 1 arriving by 13:00 departing from cambridge . </system> tr1159 will get you to ely by 12:07 on sunday . should i book you a ticket ? <user> yes , that would be great . i'll need tickets for 8 people . do you have a reference number ? </system> booking was successful , the total fee is 28.16 gbp payable at the station . reference number is : hdx8ix63 . <user> i am also looking for a museum . can you recommend 1 ? </system> how about cafe jello gallery ? it looks lovely <user> that will work . could you get me the phone number and area its in ? </system> sure ! it s in the west area of town , and the phone number is 01223312112 . can i help you with anything else ? <user> you were great today . thanks so much for all the help . that is all . goodbye . </context>
	Target	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> general bye none, general welcome none, general greet none </action> <response> it was a pleasure to help . have a good day . goodbye . </response>
	SimpleTOD	<belief> train book people 8, train arriveby 13:00, attraction type museum, train day sunday, train departure cambridge, train destination ely </belief> <action> general bye none </action> <response> thank you for using our service </response>

Table 16: SimpleTOD end-to-end generation (lexicalized) on MultiWOZ (dialogue 'PMUL3663').