

The localization of non-backtracking centrality in networks and its physical consequences

Romualdo Pastor-Satorras¹ and Claudio Castellano²

¹*Departament de Física, Universitat Politècnica de Catalunya,*

Campus Nord B4, 08034 Barcelona, Spain

²*Istituto dei Sistemi Complessi (ISC-CNR),*

Via dei Taurini 19, I-00185 Roma, Italy

Corresponding author: romualdo.pastor@upc.edu

Abstract

The spectrum of the non-backtracking matrix plays a crucial role in determining various structural and dynamical properties of networked systems, ranging from the threshold in bond percolation and non-recurrent epidemic processes, to community structure, to node importance. Here we calculate the largest eigenvalue of the non-backtracking matrix and the associated non-backtracking centrality for uncorrelated random networks, finding expressions in excellent agreement with numerical results. We show however that the same formulas do not work well for many real-world networks. We identify the mechanism responsible for this violation in the localization of the non-backtracking centrality on network subgraphs whose formation is highly unlikely in uncorrelated networks, but rather common in real-world structures. Exploiting this knowledge we present an heuristic generalized formula for the largest eigenvalue, which is remarkably accurate for all networks of a large empirical dataset. We show that this newly uncovered localization phenomenon allows to understand the failure of the message-passing prediction for the percolation threshold in many real-world structures.

I. INTRODUCTION

The non-backtracking (NB) operator is a binary matricial representation of the topology of a network, whose elements represent the presence of *non-backtracking* paths between pairs of different nodes, traversing a third intermediate one [1, 2]. By means of a message-passing approach [3], the NB matrix finds a natural use in the representation of dynamical processes on networks, such as percolation [4, 5] and non-recurrent epidemics [6], where a spreading process cannot affect twice a given node, and therefore backtracking propagation paths are inhibited [7, 8]. Within this approach, the bond percolation threshold and the epidemic threshold in the SIR model [6] are found to be inversely proportional to the largest eigenvalue (LEV) of the NB matrix, μ_M . The spectrum of the non-backtracking matrix is relevant also for other problems in network science, such as community structure [9] and node importance [2, 10–12].

The principal eigenvector (PEV) associated to the LEV of the NB matrix has been recently used to build a new measure of node importance or centrality [13]. A classical measure of node centrality is given by eigenvector centrality, based on the idea that a node is central if it is connected to other central nodes. In this perspective, eigenvector centrality of node i is defined as the i -th component of the principal eigenvector of the adjacency matrix [14]. Eigenvector centrality has the drawback of being strongly affected by the presence of large hubs, which exhibit an exceedingly large component of the adjacency matrix PEV because of a peculiar self-reinforcing bootstrap effect. The hub is highly central since it has a large number of mildly central neighbors; the neighbors are in their turn central just because of their vicinity with the highly central hub [2, 15]. In terms of the adjacency matrix this self-reinforcement is revealed by the localization of the PEV on a star graph composed by the largest hub and its immediate neighbors. To correct for this feature, in Ref. [2] it was proposed to build a centrality measure using the NB matrix, in such a way as to avoid backtracking paths that could artificially inflate a hub's centrality. In this way, an alternative non-backtracking centrality (NBC) of nodes was defined, in which the effect of hubs is strongly suppressed.

Consider an unweighted undirected complex network with N nodes and E edges. The non-backtracking (NB) matrix $\mathbf{B}$ is a representation of the network topology in terms of a $2E \times 2E$ non-symmetric matrix in which rows and columns represent virtual directed edges

$j \rightarrow i$ pointing from node j to node i , taking the value

$$B_{j \rightarrow i, m \rightarrow \ell} = \delta_{j\ell}(1 - \delta_{im}), \quad (1)$$

where δ_{ij} represents the Kronecker symbol. Each NB matrix element represents a possible walk in the network composed by a pair of directed edges, one pointing from node m to node ℓ , and the other from node j to node i . The element is nonzero when the edges share the central node ($j = \ell$), and when the walk does not return to the first node ($m \neq i$).

The principal eigenvector $v_{j \rightarrow i}$ of the NB matrix, associated to the largest eigenvalue (LEV) μ_M , is given by the relation

$$\mu_M v_{j \rightarrow i} = \sum_{m \rightarrow l} B_{j \rightarrow i, m \rightarrow l} v_{m \rightarrow l}. \quad (2)$$

Since $\mathbf{B}$ is a non-negative matrix, the Perron-Frobenius theorem [16] guarantees that μ_M and all components $v_{j \rightarrow i}$ are positive, provided that the matrix is irreducible.

The element $v_{j \rightarrow i}$ expresses the centrality of node j , disregarding the possible contribution of node i . The non-backtracking centrality x_i of node i is defined as [2]

$$x_i = \sum_j A_{ij} v_{j \rightarrow i}, \quad (3)$$

where A_{ij} is the network adjacency matrix. If the PEV of the NB matrix is normalized as $\sum_{j \rightarrow i} v_{j \rightarrow i} = \sum_{j,i} A_{ji} v_{j \rightarrow i} = 1$, which is valid if $\mathbf{B}$ is irreducible, then the natural normalization $\sum_i x_i = 1$ emerges.

RESULTS

Theory for uncorrelated random networks

The NBC can be practically calculated by using the Ihara-Bass determinant formula [2, 17], which shows that the NBC values x_i correspond to the first N elements of the PEV of the $2N \times 2N$ matrix

$$\mathbf{M} = \begin{pmatrix} \mathbf{A} & \mathbf{I} - \mathbf{D} \\ \mathbf{I} & \mathbf{0} \end{pmatrix}, \quad (4)$$

where $\mathbf{A}$ is the adjacency matrix, $\mathbf{I}$ is the identity matrix, and $\mathbf{D}$ is a diagonal matrix of elements $D_{ij} = \delta_{ij} k_i$. Using the Ihara-Bass formalism [18] (see Method IM1) one can express,

in full generality, the leading eigenvalue μ_M in terms of the NBC as

$$\mu_M = \frac{\sum_i k_i x_i}{\sum_i x_i} - 1. \quad (5)$$

Following Ref. [2] (see Method IM1), it is possible to argue that, for uncorrelated random networks, i.e., networks with a given degree sequence but completely random in all other respects [13], the dependence of the components of the NB matrix PEV is

$$v_{j \rightarrow i} \sim k_j - 1. \quad (6)$$

Introducing this relation into the definition of the NBC, Eq. (3), and applying the normalization $\sum_i x_i = 1$, we obtain

$$x_i^{\text{un}} = \frac{\sum_j A_{ij}(k_j - 1)}{\sum_j k_j(k_j - 1)}, \quad (7)$$

that, inserted into Eq. (5), leads to

$$\mu_M^{\text{un}} = \frac{\sum_{ij} (k_i - 1) A_{ij} (k_j - 1)}{\sum_j k_j (k_j - 1)}. \quad (8)$$

These expressions constitute an improvement over previous results [2, 9, 18], namely

$$x_i^{\text{an}} = \frac{k_i}{\langle k \rangle N}, \quad \text{and} \quad \mu_M^{\text{an}} = \frac{\langle k^2 \rangle}{\langle k \rangle} - 1, \quad (9)$$

($\langle k^n \rangle$ is the n -th moment of the degree distribution), which can be recovered from Eqs. (7) and (8) by replacing the network adjacency matrix with its annealed approximated value $\bar{A}_{ij} = k_i k_j / (\langle k \rangle N)$ [19, 20].

Test on synthetic networks

We now check the predictions developed above with the LEV μ_M and the NBC x_i determined numerically by applying the power iteration method [21] to the Ihara-Bass matrix $\mathbf{M}$ for random uncorrelated networks with a power-law degree distribution $P(k) \sim k^{-\gamma}$, generated using the uncorrelated configuration model (UCM) [22]. In Fig 1 we present, as a function of the network size N , a comparison between the NB LEV, μ_M , evaluated numerically and our theoretical prediction Eq. (8). The match between theory and simulation is excellent. However, also Eq. (9) gives very accurate results, differing in average by less than 0.5% from the theoretical result Eq. (8). A much more noticeable improvement is observed instead for

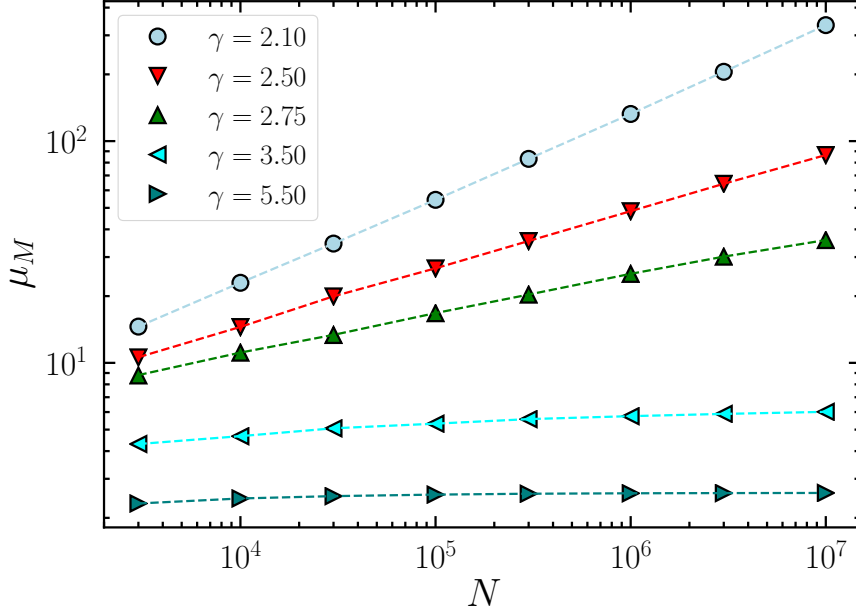


Figure 1. μ_M **for uncorrelated networks.** Scaling of the LEV of the NB matrix, μ_M , as a function of network size N in power law UCM networks with different degree exponent γ . Dashed lines correspond to the theoretical prediction Eq. (8). Simulations results correspond to the average over 25 different network realizations. Error bars are smaller than symbols size.

the NB centrality x_i , for which annealed network approximation does not provide accurate predictions (see Fig. 2, bottom row). In Fig. 2 (top row) we show the dependence of the NBC x_i on the structure of the adjacency matrix, as given by Eq. (7), namely $x_i \sim \sum_j A_{ij}(k_j - 1)$. The analytical expression is extremely accurate for values of $\gamma < 3$. For $\gamma > 3$, although some scattering can be observed with respect to the expected value, the prediction is still good, much more accurate than the annealed network approximation. More evidence about the superior accuracy of our approach is found considering the inverse participation ratio $Y_4(N)$ as a function of network size (see Method IM2).

Non-backtracking principal eigenvalue of characteristic subgraphs

The non-backtracking centrality was introduced with the goal of overcoming the flaws of eigenvector centrality, due to the localization of the adjacency matrix principal eigenvector on star graphs surrounding hubs of large degree, that artificially inflate their own eigenvector centrality [2]. For the NBC the addition of a large hub to an otherwise homogeneous network

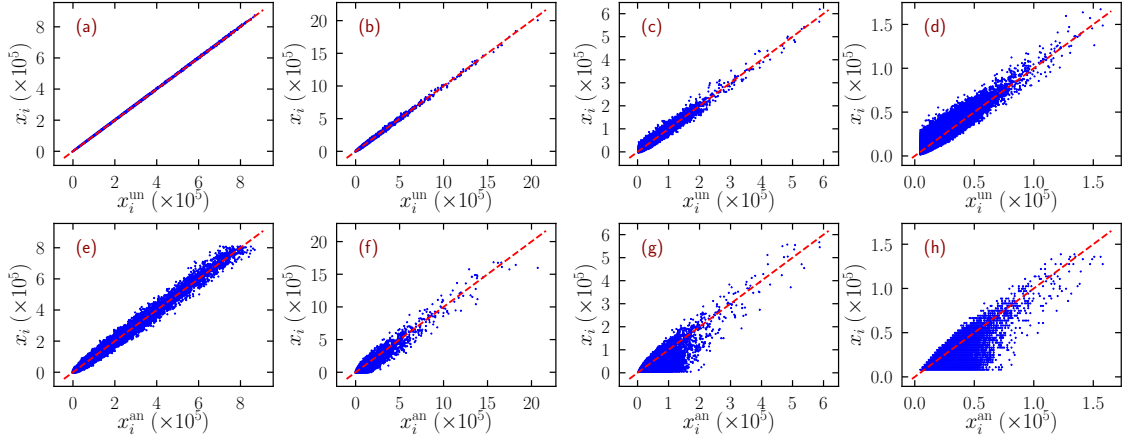


Figure 2. **NBC for uncorrelated networks.** Scatter plot of the numerical NBC x_i in power-law UCM networks of size $N = 10^6$ with different degree exponent γ , as a function of the theoretical predictions x_i^{un} in Eq. (7) (top row) and x_i^{an} in Eq. (9) (bottom row). The dashed lines represent the curve $y = x$. Degree exponents considered are $\gamma = 2.10$ (a) and (e); $\gamma = 2.75$ (b) and (f); $\gamma = 3.50$ (c) and (g); $\gamma = 4.50$ (d) and (h).

has a limited impact. Indeed, the addition of a dangling hub of degree K , connected to $K - 1$ leaves of degree 1 and to a generic network by a single edge, does not alter at all the value of μ_M [2, 9] (see Method IM3). In the case of a hub integrated into the network, connected to K other random nodes in the graph, Ref. [2] argued, from the perspective of the annealed network approximation, that its effect is irrelevant in the thermodynamic limit. A more elaborate analysis (see Method IM3) shows that this is true unless $K \gg (N/\langle k \rangle)^{1/2}$. Only in this case an integrated hub has an effect and leads to a PEV significantly larger than the PEV of the original network and scaling as $[\langle k \rangle K(K - 1)/N]^{1/3}$.

However, it is possible that other types of subgraphs play for the NB centrality the same role that star graphs play for eigenvector centrality: They can have, alone, large values of μ_M , so that, if present within an otherwise random network, they determine μ_M of the whole structure, with the overall NBC localized on them. We now show that these subgraphs actually exist and can have dramatic effects.

As noticed in Ref. [2], the simplest example is a clique of size K_c , which is associated to $\mu_M^{\text{clique}} = K_c - 2$. If K_c is large enough, μ_M^{clique} can dominate over μ_M^{un} . But also a homogeneous (Poisson) subgraph of average degree $\langle k \rangle$, for which $\mu_M = \langle k \rangle$ [2, 9], can become the substrate of a localized NB PEV if $\langle k \rangle$ is sufficiently large.

Apart from these simple examples, a less trivial one is the case of *overlapping hubs*, i.e., a set of n hubs of degree K , connected to the same K leaves of degree n , see Supplementary Figure SF1. The intrinsic LEV associated to such a structure is (see Method IM3)

$$\mu_M^{\text{oh}} = \sqrt{(n-1)(K-1)}. \quad (10)$$

This last case is particularly important, since μ_M^{oh} can become very large due to a few overlapping hubs of very large degree K , or due to a large number of hubs with moderate overlap K .

Localization in real-world networks

In Fig. 3(a) and 3(b) we compare the theoretical predictions derived for uncorrelated and annealed networks with the values of μ_M computed numerically for a set of 109 real-world networks of diverse origin (see Supplementary Table ST1 for details). In opposite ways, both predictions, μ_M^{an} and μ_M^{un} , fail to provide an accurate approximation of empirical results for many networks. In the most noticeable cases, the networks *Zhishi* and *DBpedia*, the uncorrelated prediction Eq. (8) largely underestimates the value of μ_M , while the annealed network prediction Eq. (9) largely overestimates it.

To shed light on the origin of these discrepancies, in Supplementary Figure SF2 we compare the empirical NBC, x_i , with the theoretical prediction x_i^{un} for four real-world networks in which the predictions largely fail. We observe that, in all networks, a few nodes assume an exceedingly large value of x_i , i.e., the NBC is localized on a very small subset of nodes, which includes the largest hubs.

It is clear that, in order to obtain an accurate prediction of μ_M in real-world networks, it is necessary to take into account the possible localization of the NB centrality on subgraphs which, despite being relatively small, may determine μ_M for the whole structure. In previous paragraphs, we have seen that two special subgraphs, a large clique/relatively dense homogeneous graph, or a set of overlapping hubs, may become the set where NBC gets localized if the associated μ_M is larger than the one for the rest of the network. It is then natural to postulate (in analogy with what happens for the adjacency matrix [23]) that the overall μ_M is well approximated by the maximum among Eq. (8) and the $\mu_M^{(s)}$ values associated to each possible network subgraph s ¹. An exhaustive search among all subgraphs is computationally

¹ We note here that, while in the case of the adjacency matrix this result is exact due to the Rayleigh's

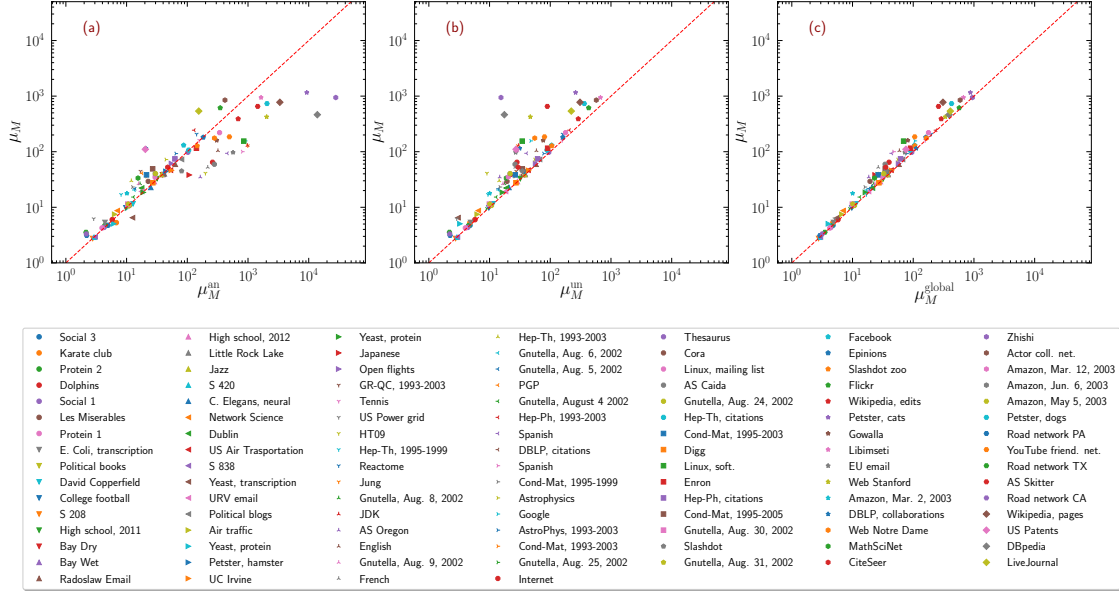


Figure 3. **Test of theoretical approaches for real-world networks.** LEV of the NB matrix, μ_M , as a function of the theoretical predictions μ_M^{un} [Eq. (8)] (a) μ_M^{an} [Eq. (9)] (b), and μ_M^{global} [Eq. (11)] (c), for the set of 109 real-world networks described in Supplementary Table ST1.

impractical. However, if we limit ourselves to the types of subgraphs discussed above, it is numerically easy to find reasonable estimates of their maximum LEVs. The hubs, either dangling or integrated, provide a negligible contribution, as we can check numerically. The K -core decomposition (see Method IM4) provides, as the core with maximum index, an approximation of the densest subgraph in the network. The value μ_M^{core} associated to such max K -core, which can be either a clique or a relatively dense homogeneous graph, is a good estimate of the maximum LEV among these types of subgraphs. Concerning μ_M^{oh} , the pair of n and K values maximizing Eq. (10) can be well approximated by a heuristic greedy algorithm described in Method IM5.

Following this line of reasoning, we can then write an approximate expression for the NB LEV in generic networks as

$$\mu_M^{\text{global}} = \max \{ \mu_M^{\text{un}}, \mu_M^{\text{oh}}, \mu_M^{\text{core}} \}, \quad (11)$$

where μ_M^{core} is computed as the largest eigenvalue of the NB matrix defined by the subgraph spanned by the maximum K -core. The comparison of Eq. (11) with empirical results in

inequality [24], for the NB matrix we simply proceed by analogy. As we will see later on, however, the conjecture turns out to be quite accurate.

real-world networks, displayed in Fig. 3(c), reveals a striking accuracy in all cases and substantiates the predictive power of Eq. (11) for the LEV of the non-backtracking matrix on generic real-world networks. The spontaneous formation of large cliques or sets of overlapping hubs is exceedingly improbable in uncorrelated networks. A K -core structure exists only for $\gamma < 3$ [25] but in that case $\mu_M^{\text{core}} \simeq \mu_M^{\text{un}}$. As a consequence, for all uncorrelated networks Eq. (11) gives back Eq. (8).

Application to percolation

Spectral properties of the non-backtracking matrix are at the heart of the message-passing theory for bond percolation [7]: For locally tree-like networks, the percolation threshold is given by the inverse of the NB matrix LEV,

$$p_c = \frac{1}{\mu_M}. \quad (12)$$

A comparison of this prediction with results obtained numerically for our set of real-world networks is presented² in Fig. 4, where the percolation threshold p_c is obtained as the position of the main susceptibility peak (see Method IM6). In the majority of cases p_c and $1/\mu_M$ differ by less than 50%, but for the remaining networks the discrepancy is larger, in some cases by more than one order of magnitude. These failures of prediction (12) can be understood by applying the knowledge acquired in the previous Sections. Most (and the largest) of the violations occur when the NBC is localized on small subgraphs, either overlapping hubs or the max K -core, which determine the overall value of μ_M . In these cases the system actually undergoes what can be seen as a double percolation transition [26], reflected, in Fig. 5, by the presence of two distinct peaks of the susceptibility $\chi_2(p)$ (see also Ref. [27] for the effect of mesoscopic structures on percolation). In the networks considered in this figure, the message-passing value $p = 1/\mu_M$ signals the buildup of the connected subgraph of relatively small size where NBC is localized, originating the first susceptibility peak. The second and largest peak occurs for much larger values of p and signals the formation of a percolating cluster encompassing a larger fraction of the nodes. Two (or even multiple) peaks are present also in other networks. The message-passing theory accurately predicts only the

² A similar test was already performed in Ref. [18].

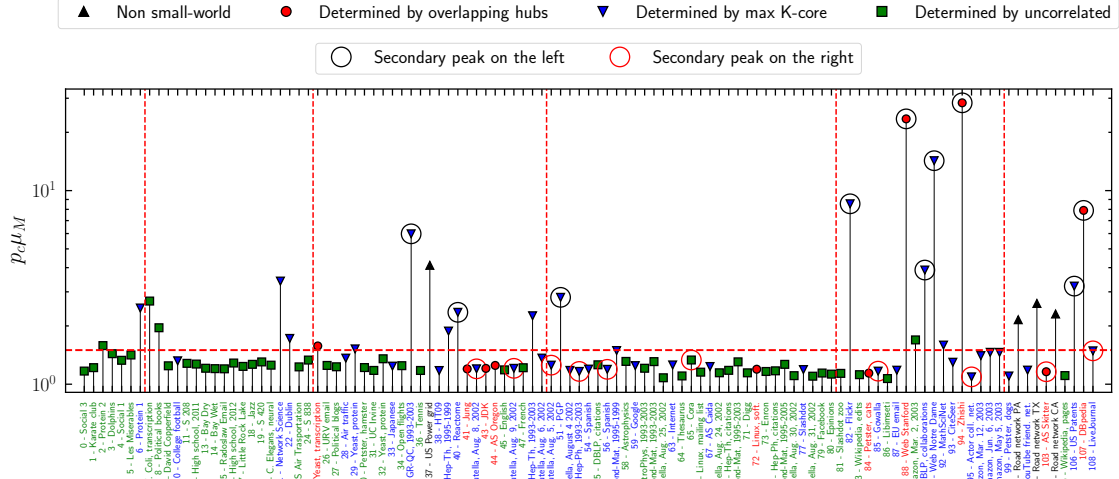


Figure 4. **Test of message-passing prediction for bond percolation threshold in real-world networks.** The bond percolation threshold p_c determined numerically from the main peak of the susceptibility is divided by the message-passing prediction [Eq. (12)] and plotted for the 109 real-world networks considered. Below the horizontal dashed red line the prediction is accurate within 50%. Vertical dashed lines represent the size scale of the networks: from left to right $N = 10^2$, 10^3 , 10^4 , 10^5 , and 10^6 . Symbols show which of the terms in Eq. (11) is maximal. Symbols are surrounded by a black (red) circle in case a secondary peak appears in the susceptibility on the left (right) of the main peak.

leftmost of these peaks (see Fig. 5), while it does not give any information about the position of other peaks and the associated transition.

Some other networks exhibit quite large discrepancies between p_c and $1/\mu_M$ but in the absence of a secondary peak. Our theory does not provide an explanation for these cases. However, it must be remarked that this phenomenology occurs for small networks, for which the very concept of localization on a subgraph is not well defined. Moreover, in these cases the peak of the susceptibility is wide and it may hide the presence of another peak (see Supplementary Figure SF3).

Finally, an ample discrepancy between p_c and $1/\mu_M$ is observed also for a few networks (Road network TX, Road 512 network CA, Road network PA and US Power grid) having very large values of the average shortest path length $\langle \ell \rangle$ and thus not possessing the small-world property. This is not surprising, as the almost planar nature of these topologies makes

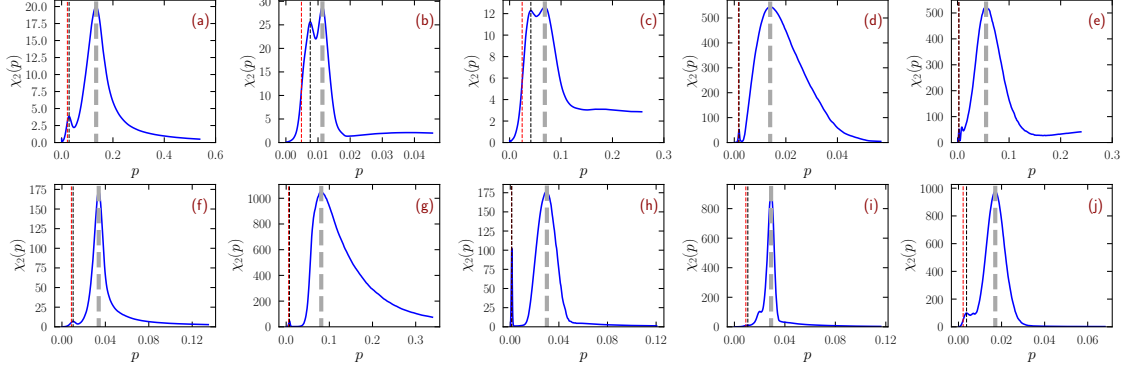


Figure 5. **Susceptibility plots for networks exhibiting a secondary peak on the left.** Numerical bond percolation susceptibility for the networks (a): GR-QC, 1993-2003; (b): Reactome; (c): PGP; (d): Flickr; (e): Web Stanford; (f): DBLP, collaborations; (g): Web Notre Dame; (h): Zhishi; (i): US Patents; and (j): DBpedia. The global maximum of the susceptibility $\chi_2(p)$, indicating the percolation threshold, is marked by a gray vertical bar. Black vertical lines indicate the position of the secondary peak. Red vertical lines signal the value of the prediction $1/\mu_M$. Notice that for three of the networks (Web Stanford, Zhishi and DBpedia) the NBC is localized on overlapping hubs, while for the others localization occurs on the max K-core.

our framework inapplicable to them.

In summary, realizing that localization of the NB centrality can determine the value of μ_M for the whole structure allows us to understand the presence of a double percolation transition in several real-world networks. In these cases message-passing theory captures only the first of the transitions, corresponding to the emergence of a localized subgraph, while the occurrence of the second transition is completely missed by the theory [28, 29].

DISCUSSION

Our results show that the non-backtracking centrality, which was introduced to avoid the pathological self-reinforcement mechanism that plagues standard eigenvector centrality, is affected by the same problem. The NBC may also get localized on specific network subgraphs, with the same bootstrap mechanism at work: Some nodes are highly central because they are in “contact” with other central nodes and the latter are central because they are in contact with the former. The only difference is that for the adjacency matrix the relevant subgraphs

are stars and self-reinforcement takes place among the hub and its direct neighbors [23]. For the NB matrix the relevant subgraphs are groups of nodes sharing many neighbors and self-reinforcement occurs at distance 2. The possibility of localization also for the NB matrix was overlooked so far, because it is exceedingly unlikely in random uncorrelated networks. However, as we show here, in real-world topologies these structures are rather common. Indeed, cliques and sets of overlapping hubs are, respectively, complete unipartite and bipartite subgraphs, which naturally arise in many networks, for structural or functional reasons.

The results presented here have a number of implications. Which of the three contributions determines μ_M^{global} in Eq. (11) allows to rapidly estimate also the relevant non-backtracking centralities in the network. If μ_M^{un} dominates, then the NBC are given by Eq. (7). If instead μ_M^{oh} is largest, then non-backtracking centralities are given by Eq. (41) in the subset of overlapping hubs and are essentially zero elsewhere. Similarly, when μ_M^{core} dominates in Eq. (11), NBC is approximately constant in the max K -core and much smaller elsewhere. Additionally, our results allow to shed light of the LEV of the adjacency matrix, Λ_M . In Ref. [23], it was argued that Λ_M is determined by two subgraphs that have associated a large LEV, and that correspond to the node of maximum degree k_{max} (hub), taken as an isolated star graph, and the maximum K -core. Thus, in the spirit of Rayleigh's inequality [24], it was proposed the approximation $\Lambda_M \simeq \max\{\sqrt{k_{\text{max}}}, \Lambda_M^{\text{core}}\}$, where $\sqrt{k_{\text{max}}}$ is the LEV of star graph of degree k_{max} and Λ_M^{core} is the LEV of the maximum K -core, approximated by its average degree $\langle k \rangle_{\text{core}}$ [23]. The subgraph composed by n overlapping hubs of degree K turns out to possess also a large LEV of the adjacency matrix, given by $\Lambda_M^{\text{oh}} = \sqrt{nK}$. We can then propose an improved approximation, taking into account the effect of overlapping hub, of the form $\Lambda_M \simeq \max\{\sqrt{k_{\text{max}}}, \Lambda_M^{\text{core}}, \Lambda_M^{\text{oh}}\}$. In Supplementary Figure SF4 we check this new expression, observing that it provides some improvement in the estimation of the adjacency matrix LEV, particularly for networks of large size.

The localization phenomenon of the NB matrix has also strong implications for percolation and thus for the related susceptible-infected-removed model for epidemic dynamics. Quite surprisingly, this reveals strong analogies with what happens in some regions of the phase-diagram of the paradigmatic susceptible-infected-susceptible model for epidemic dynamics (SIS) [30]. The formation (under appropriate conditions) of localized clusters below the global epidemic transition is a striking common feature of both types of dynamics, which

they share despite their completely different nature. This intriguing similarity extends to the predictive power of theoretical approaches. For SIS dynamics quenched mean-field theory predicts when localized clusters of activity start to appear, but misses the formation of an overall endemic state [30]. For percolation (and SIR dynamics) message-passing theory captures the formation of localized clusters but is not predictive for what concerns the possible second transition involving a much larger fraction of the network. The quest for theoretical approaches able to understand and predict this nontrivial second transition is a challenging avenue for future research.

Another related line for future research is the exploitation of the improved understanding presented here to devise targeted immunization strategies [12].

METHODS

M1. Theory for uncorrelated networks

Denoting the PEV of the matrix $\mathbf{M}$ as $\vec{f} = \{\vec{x}, \vec{w}\}$, we can rewrite Eq. (4) as [18]

$$\sum_j A_{ij}x_j + w_i - k_i w_i = \mu_M x_i, \quad (13)$$

$$x_i = \mu_M w_i, \quad (14)$$

which translates into

$$\mu_M \sum_j A_{ij}x_j + x_i - k_i x_i = \mu_M^2 x_i. \quad (15)$$

Summing over i and rearranging, we obtain

$$(\mu_M - 1) \sum_i k_i x_i = (\mu_M^2 - 1) \sum_i x_i. \quad (16)$$

Discarding the solution $\mu_M = 1$, which is always an eigenvalue, we have

$$\sum_i k_i x_i = (\mu_M + 1) \sum_i x_i, \quad (17)$$

leading to

$$\mu_M = \frac{\sum_i k_i x_i}{\sum_i x_i} - 1, \quad (18)$$

which allows us to compute μ_M once the NBC is known.

Following Ref. [2], we can obtain an approximation for the NB matrix PEV (and hence for the NBC) by expanding the eigenvalue relation

$$\mu_M v_{k \rightarrow l} = \sum_{i \rightarrow j} B_{k \rightarrow l, i \rightarrow j} v_{i \rightarrow j}, \quad (19)$$

that, after some transformations can be written as [2]

$$\mu_M v_{i \rightarrow l} = \sum_j A_{ij} (1 - \delta_{jl}) v_{j \rightarrow i} = \sum_{j \neq l} A_{ij} v_{j \rightarrow i}. \quad (20)$$

Let us now compute the average value of $v_{i \rightarrow l}$ over all outgoing nodes i with a fixed degree $k_i = k$, that is

$$v_{\text{out}}(k) = \frac{1}{kNP(k)} \sum_{\substack{i \rightarrow l \\ k_i = k}} v_{i \rightarrow l} = \frac{1}{kNP(k)} \sum_{\substack{i, l \\ k_i = k}} A_{il} v_{i \rightarrow l}, \quad (21)$$

where $kNP(k)$ represents the number of edges emanating from nodes of degree k . Applying Eq. (20) to the previous equation we can write

$$v_{\text{out}}(k) = \frac{1}{kNP(k)\mu_M} \sum_{\substack{i, l \\ k_i = k}} \sum_{j \neq l} A_{ij} A_{il} v_{j \rightarrow i} \quad (22)$$

$$= \frac{1}{kNP(k)\mu_M} \sum_{\substack{i, j \\ k_i = k}} A_{ij} v_{j \rightarrow i} \sum_{l \neq j} A_{il} \quad (23)$$

$$= \frac{k-1}{kNP(k)\mu_M} \sum_{\substack{i, j \\ k_i = k}} A_{ij} v_{j \rightarrow i}. \quad (24)$$

Assuming now [2] that the components $v_{j \rightarrow i}$ departing from nodes of degree $k_i = k$ have the same distribution as in the whole network (assumption valid in the limit of random uncorrelated networks), we can substitute $v_{j \rightarrow i} \simeq \langle v \rangle = \sum_{i \rightarrow j} v_{i \rightarrow j} / (2E)$, where E is the number of undirected edges in the original network. With this assumption, we can write

$$\begin{aligned} v_{\text{out}}(k) &\simeq \frac{\langle v \rangle (k-1)}{kNP(k)\mu_M} \sum_{\substack{i, j \\ k_i = k}} A_{ij} \\ &= \frac{\langle v \rangle (k-1)}{kNP(k)\mu_M} kNP(k) = \frac{\langle v \rangle}{\mu_M} (k-1). \end{aligned} \quad (25)$$

Analogously, we can compute the average of $v_{i \rightarrow l}$ over all ingoing nodes l with fixed degree $k_l = k$,

$$v_{\text{in}}(k) = \frac{1}{kNP(k)} \sum_{\substack{i \rightarrow l \\ k_l = k}} v_{i \rightarrow l} = \frac{1}{kNP(k)} \sum_{\substack{i, l \\ k_l = k}} A_{il} v_{i \rightarrow l}. \quad (26)$$

Applying again Eq. (20), we can write

$$\begin{aligned}
v_{\text{in}}(k) &= \frac{1}{kNP(k)\mu_M} \sum_{\substack{i,l \\ k_l=k}} \sum_{j \neq l} A_{il} A_{ij} v_{j \rightarrow i} \\
&\simeq \frac{\langle v \rangle}{kNP(k)\mu_M} \sum_{\substack{l \\ k_l=k}} \sum_{j \neq l} \sum_i A_{li} A_{ij} \\
&\simeq \frac{\langle v \rangle}{kNP(k)\mu_M} \sum_{\substack{l \\ k_l=k}} \sum_{j \neq l} (A^2)_{lj}.
\end{aligned} \tag{27}$$

The matrix element $(A^2)_{lj}$ counts the number of walks of length 2 between nodes l and j [13], and

$$\sum_{\substack{l \\ k_l=k}} \sum_{j \neq l} (A^2)_{lj}$$

counts those walks that start at nodes of degree k and are non-backtracking. In a tree-like network, the number of such walks is equal to the number of next-nearest neighbors of nodes of degree k , that is in average $kNP(k)(\langle k^2 \rangle - \langle k \rangle) / \langle k \rangle$ [13]. Therefore, we have

$$v_{\text{in}}(k) \simeq \frac{\langle v \rangle}{\mu_M} \frac{\langle k^2 \rangle - \langle k \rangle}{\langle k \rangle}. \tag{28}$$

That is, in random uncorrelated networks, we have $v_{\text{out}}(k) \sim k - 1$ and $v_{\text{in}}(k) \sim \text{const.}$. Extending this relation at the level of individual edges, we can approximate the normalized dependence of the components of the NB matrix PEV as

$$v_{i \rightarrow j} \simeq \frac{k_i - 1}{\sum_l k_l(k_l - 1)}. \tag{29}$$

In Supplementary Figure SF5 we check the dependence obtained for the components $v_{i \rightarrow j}$ of the PEV of the NB matrix as a function of the outgoing k_i and ingoing k_j degree, namely $v_{i \rightarrow j} \sim k_i - 1$. The averaged components v_{out} and v_{in} , defined in Eqs. (21) and (26), correctly fulfill the scaling forms $v_{\text{out}} \sim k - 1$ and $v_{\text{in}} \sim \text{const.}$, respectively. Indeed, for UCM networks, the theoretical predictions in Eq. (25) and Eq. (28) are extremely well fulfilled.

M2. Localization of the non-backtracking centrality

The concept of vector localization/delocalization refers to whether the components x_i of a vector are evenly distributed over the network or they attain a large value on some subset of

nodes V of size N_V and are much smaller in the rest of the network. In the first scenario we have $x_i \sim \text{const.}$ for all nodes i , and we say the vector is delocalized. In the second scenario, one has $x_i \sim \text{const.}$ for $i \in V$, and $x_i \sim 0$ for $i \notin V$, and we say the vector is localized on V . For the NBC x_i , defined with a Euclidean normalization $\sum_i x_i^2 = 1$, localization can be measured in terms of the inverse participation ratio Y_4 [2, 15], defined as

$$Y_4(N) = \sum_i x_i^4. \quad (30)$$

For a delocalized vector, $x_i \sim N^{-1/2}$, so one has $Y_4(N) \sim N^{-1}$; on the other hand, for a vector localized on a subgraph of size N_V , we have $Y_4(N) \sim N_V^{-1}$. Therefore, fitting the inverse participation ratio to a power-law form $Y_4(N) \sim N^{-\alpha}$, a value $\alpha \simeq 1$ indicates delocalization, while $\alpha < 1$ implies localization on a subextensive set of nodes of size $N_V \sim N^\alpha$ [31]. In the extreme case of localization on a finite set of nodes (independent of N), one has instead $Y_4(N) \sim \text{const.}$

The functional form derived for x_i in Eq. (7) helps to explain the localization properties of the NBC for UCM networks observed in Ref. [31]. In Supplementary Figure SF6 we show a comparison of the inverse participation ratio $Y_4(N)$ numerically obtained in power-law UCM networks with the theoretical prediction computed from Eq. (7), $Y_4^{\text{un}}(N)$, and with the prediction obtained from the annealed network approximation Eq. (4), $Y_4^{\text{an}}(N)$. As we can see, the prediction from our expression, $Y_4^{\text{un}}(N)$, provides an almost perfect match for the numerical observation, while the annealed network approximation exhibits sizeable inaccuracies, particularly in the range $2.5 < \gamma < 3.5$.

M3. Largest non-backtracking eigenvalue of characteristic subgraphs

Dangling star graph

Let us consider a dangling star network, see Supplementary Figure SF1(a), formed by a hub h of degree K connected to $K - 1$ leaves l of degree 1 and by one edge to a connector node n of a generic network. By applying Eq. (15), we obtain the following equations for the

LEV μ_M and the NBC:

$$\mu_M[(K-1)x_l + x_n] - (K-1)x_h = \mu_M^2 x_h, \quad (31)$$

$$\mu_M x_h = \mu_M^2 x_l, \quad (32)$$

$$\mu_M \left[\sum_{i \neq h} A_{ni} x_i + x_h \right] - k_n x_n = \mu_M^2 x_n, \quad (33)$$

where k_n is the degree of node n , x_l is the NBC centrality of each leaf, and the equations corresponding to the rest of the nodes $i \neq n$ are the same as in the absence of the dangling star.

From the first two equations, assuming $\mu_M \neq 0$, we obtain $x_h = \mu_M x_l$ and $x_n = \mu_M x_h$. Introducing the last equality into the third equation, the dependence on x_h drops out and the equation takes the form of Eq. (15) in the absence of the dangling star. We conclude therefore that a dangling star is unable to alter the value of the overall LEV μ_M and its NBC depends only on the centrality of the connector node n . The reason for this is the absence of non-backtracking paths between the hub and the leaves, so that the hub has the effect of a node of degree one [2, 9].

Integrated star graph

The case of an integrated star of degree K , i.e., a star connected by K edges to K randomly chosen connector nodes in a network, Supplementary Figure SF1(b), is more difficult to analyze. To simplify calculations, we consider the case of a regular network with fixed degree q . For symmetry reasons, the nodes connected to the hub, of degree $q+1$, have approximately the same NBC, x_1 , different from the centrality x_2 of the nodes not connected to the hub, and also from x_0 , the centrality of the hub. Applying the Ihara-Bass determinant formula, Eq. (15), we can write

$$\begin{aligned} \mu_M K x_1 &= (K + \mu_M^2 - 1)x_0, \\ \mu_M \left[x_0 + q \frac{K}{N} x_1 + q \left(1 - \frac{K}{N} \right) x_2 \right] &= (q + \mu_M^2) x_1, \\ \mu_M \left[q \frac{K}{N} x_1 + q \left(1 - \frac{K}{N} \right) x_2 \right] &= (q + \mu_M^2 - 1)x_2, \end{aligned}$$

where, to ease calculations, we have made the mean-field assumption that nodes in the network are neighbors of nodes connected to the hub with probability K/N , and otherwise

with probability $1 - K/N$, which is valid in the limit of large K and N . These conditions lead to the equation for μ_M

$$\begin{aligned} \mu_M^5 + \mu_M^4(1 - q) + \mu_M^3(q - 1) - \mu_M^2 \left[\frac{Kq(K - 1)}{N} + (q - 1)^2 \right] \\ + \mu_M \frac{q(K - 1)(N - K)}{N} - q(K - 1)(q - 1) = 0 \end{aligned} \quad (34)$$

where we have factorized the trivial solution $\mu_M = 1$. This is an algebraic equation of fifth order than cannot be solved analytically in general. However, for $K(K - 1)q \gg N$, assuming $\mu_M \gg q - 1$, it reduces to

$$\mu_M^5 + \mu_M^2 \frac{Kq(K - 1)}{N} = 0, \quad (35)$$

leading to the solution

$$\mu_M^h \simeq \left(\frac{qK(K - 1)}{N} \right)^{1/3}. \quad (36)$$

Instead for $K(K - 1)q \ll N$, assuming $\mu_M = q - 1 + \epsilon$ and expanding Eq. (34) to first order in ϵ , we obtain

$$\epsilon = \frac{(q - 1)^2 + (q - 1)}{(q - 1)^4 + (q - 1)^3 + q(K - 1)} \frac{Kq(K - 1)}{N}. \quad (37)$$

Hence the value of μ_M is very close to the value $q - 1$ of the original random regular network, with a correction that vanishes with N . We conclude that the addition of a finite integrated hub does not change the value μ_M of the whole network unless $K(K - 1)q \gg N$, a case which may be relevant in small networks. Not surprisingly, the uncorrelated expression Eq. (8) fails here, since it predicts a finite value $\mu_M^{\text{un}} \sim 2q$, in the limit of large K .

While we considered a star integrated into a homogeneous network, Supplementary Figure SF7 shows that the same picture is valid also in the case of power-law distributed synthetic networks, replacing q by the network average degree $\langle k \rangle$: for K up to values of the order of $(N/\langle k \rangle)^{1/2}$ the addition of the hub has no effect on μ_M ; for larger values, Eq. (36) holds.

Overlapping hubs

Let us consider now a graph composed of n hubs, sharing all their K leaves, see Supplementary Figure SF1(c). We can evaluate μ_M and x_i by applying again the Ihara-Bass determinant formula. For symmetry reasons, the components x_h of the hubs are equal, and

correspondingly the components x_ℓ of the leaves. Thus, from Eq. (15) we can write

$$\mu_M K x_\ell = (K + \mu_M^2 - 1)x_h, \quad (38)$$

$$\mu_M n x_h = (n + \mu_M^2 - 1)x_\ell, \quad (39)$$

Imposing that the components x_h and x_ℓ are non-zero, we obtain the largest eigenvalue

$$\mu_M^{\text{oh}} = \sqrt{(n-1)(K-1)}, \quad (40)$$

while the NB centralities fulfill

$$\frac{x_\ell^2}{x_h^2} = \frac{K-1}{K^2} \frac{n^2}{n-1}. \quad (41)$$

That is, for large K , the NBC becomes strongly localized in the hubs.

In Supplementary Figure SF8 we check the effects of adding n overlapping hubs of degree K to power-law distributed synthetic networks. As we can see, as soon as μ_M^{oh} is large enough (in practice, when $K > 1 + \left(\frac{\langle k^2 \rangle}{\langle k \rangle} - 1\right)^2 / (n-1)$), the actual value of the NB LEV is dominated by the presence of the overlapping hubs.

M4. K -core decomposition

The K -core decomposition [32] is an iterative classification process of the vertices of a network in layers of increasing density of mutual connections, denoted by increasing values of the index K . One starts removing the vertices of degree $k = 1$, repeating the process until only nodes with degree $k \geq 2$ are left. The removed nodes constitute the $K = 1$ shell, and the remaining ones are the $K = 2$ core. At the next step, all vertices with degree $k = 2$ are iteratively removed, thus leaving the $K = 3$ core. The procedure is repeated until the maximum K -core (of index K_M) is reached, such that one more iteration removes all nodes in the network. The maximum K -core of generic networks is usually a homogeneous subgraph [23]. The K -core structure of networks has been proposed as a classification of node importance in dynamical processes on complex topologies [33].

M5. Algorithm to determine optimal n and K values for overlapping hubs

The determination of the set of all overlapping hubs in a real-world network is highly time consuming. We can however obtain a working approximation using the following greedy

algorithm: We order the nodes in decreasing order of their degree, $i_1, i_2, \dots, i_N$. Starting from node i_α , we visit the set of nodes $i_\alpha, i_{\alpha+1}, \dots, i_{\alpha+q}$ and identify the number of common neighbors K_q^α , that are common neighbors of the set of nodes $i_\alpha, i_{\alpha+1}, \dots, i_{\alpha+q}$. Repeating this process for all nodes in the network, we compute the values K_q^α for all nodes α and all sets of nodes (in decreasing order of degree) of length $q + 1$. We choose as values of n and K the values of $q + 1$ and K_q^α that maximize the product $q(K_q^\alpha - 1)$.

M6. Numerical simulations of bond percolation

We consider the bond percolation process in which network edges are randomly kept with probability p and removed with probability $1 - p$. For each realization of this process with a given value of p , one considers the largest cluster remaining in the network, of size S_p . The average of this quantity over independent realization is denoted by $\langle S_p \rangle$. The critical percolation point p_c separates a subcritical phase at $p < p_c$, in which only clusters of small size are present, so that $\langle S_p \rangle / N \rightarrow 0$ in the thermodynamic limit $N \rightarrow \infty$, from a supercritical phase at $p > p_c$, in which there is a finite spanning cluster leading to $\langle S_p \rangle / N \rightarrow \text{const.}$ [34].

In order to estimate the value of the percolation point, one considers the susceptibility $\chi_2(p)$, defined as [18, 35]

$$\chi_2(p) = \frac{\langle S_p^2 \rangle - \langle S_p \rangle^2}{\langle S_p \rangle}. \quad (42)$$

The percolation threshold p_c is defined as the value of p for which $\chi_2(p)$ shows a maximum [35]. To compute numerically $\chi_2(p)$ in real-world networks we perform the averages on bond percolation experiments applying the Newman-Ziff algorithm [36].

ACKNOWLEDGMENTS

C. C. thanks Abolfazl Ramezanpour for useful comments and suggestions. We acknowledge financial support from the Spanish Government's MINECO, under project FIS2016-76830-C2-1-P and MICINN, under project PID2019-106290GB-C21.

AUTHOR CONTRIBUTIONS

Both authors designed the research and developed the theoretical analysis. R. P.-S. performed the numerical analysis. Both authors analyzed the results and wrote the paper.

COMPETING INTERESTS

The authors declare no competing interests.

REFERENCES

- [1] Hashimoto, K. Zeta functions of finite graphs and representations of p -adic groups. In *Automorphic Forms and Geometry of Arithmetic Varieties*, Hashimoto, K. & Namikawa, Y., editors, volume 15 of *Advanced Studies in Pure Mathematics*, 211–280. Academic Press, Tokyo, Japan (1989).
- [2] Martin, T., Zhang, X. & Newman, M. E. J. Localization and centrality in networks. *Phys. Rev. E* **90**, 052808 Nov (2014).
- [3] Mezard, M. & Montanari, A., *Information, Physics, and Computation*, (Oxford University Press, Inc., Oxford, 2009).
- [4] Cohen, R., Erez, K., ben-Avraham, D. & Havlin, S. Resilience of the internet to random breakdowns. *Phys. Rev. Lett.* **85**, 4626–4628 Nov (2000).
- [5] Callaway, D. S., Newman, M. E., Strogatz, S. H. & Watts, D. J. Network robustness and fragility: percolation on random graphs. *Physical review letters* **85**, 5468–71 December (2000).
- [6] Pastor-Satorras, R., Castellano, C., Van Mieghem, P. & Vespignani, A. Epidemic processes in complex networks. *Rev. Mod. Phys.* **87**, 925–979 Aug (2015).
- [7] Karrer, B., Newman, M. E. J. & Zdeborová, L. Percolation on sparse networks. *Phys. Rev. Lett.* **113**, 208702 Nov (2014).
- [8] Karrer, B. & Newman, M. E. J. Message passing approach for general epidemic models. *Physical Review E* **82**(1), 016101 July (2010).
- [9] Krzakala, F., Moore, C., Mossel, E., Neeman, J., Sly, A., Zdeborová, L. & Zhang, P. Spectral redemption in clustering sparse networks. *Proceedings of the National Academy of Sciences* **110**(52), 20935–40 (2013).

- [10] Morone, F. & Makse, H. A. Influence maximization in complex networks through optimal percolation. *Nature* **524**(7563), 65 (2015).
- [11] Radicchi, F. & Castellano, C. Leveraging percolation theory to single out influential spreaders in networks. *Phys. Rev. E* **93**, 062314 Jun (2016).
- [12] Torres, L., Chan, K. S., Tong, H. & Eliassi-Rad, T. Node immunization with non-backtracking eigenvalues, (2020).
- [13] Newman, M., *Networks: An Introduction*, (Oxford University Press, Inc., New York, NY, USA, 2010).
- [14] Bonacich, P. Factoring and weighting approaches to status scores and clique identification. *Journal of Mathematical Sociology* **2**, 113–120 (1972).
- [15] Goltsev, A. V., Dorogovtsev, S. N., Oliveira, J. G. & Mendes, J. F. F. Localization and spreading of diseases in complex networks. *Phys. Rev. Lett.* **109**, 128702 Sep (2012).
- [16] Gantmacher, F. R., *The theory of matrices*, volume II, (Chelsea Publishing Company, New York, 1974).
- [17] Bass, H. The ihara-selberg zeta function of a tree lattice. *International Journal of Mathematics* **3**(717–797) (1992).
- [18] Radicchi, F. Predicting percolation thresholds in networks. *Phys. Rev. E* **91**, 010801 Jan (2015).
- [19] Dorogovtsev, S. N., Goltsev, A. V. & Mendes, J. F. F. Critical phenomena in complex networks. *Rev. Mod. Phys.* **80**, 1275–1335 Oct (2008).
- [20] Boguñá, M., Castellano, C. & Pastor-Satorras, R. Langevin approach for the dynamics of the contact process on annealed scale-free networks. *Phys. Rev. E* **79**, 036110 (2009).
- [21] Golub, G. H. & Van Loan, C. F., *Matrix computations*, (Johns Hopkins University Press, Baltimore, 2013). 4th edition.
- [22] Catanzaro, M., Boguñá, M. & Pastor-Satorras, R. Generation of uncorrelated random scale-free networks. *Phys. Rev. E* **71**, 027103 Feb (2005).
- [23] Castellano, C. & Pastor-Satorras, R. Relating topological determinants of complex networks to their spectral properties: Structural and dynamical effects. *Phys. Rev. X* **7**, 041024 Oct (2017).
- [24] Van Mieghem, P., *Graph Spectra for Complex Networks*, (Cambridge University Press, Cambridge, U.K., 2011).

- [25] Dorogovtsev, S. N., Goltsev, A. V. & Mendes, J. F. F. k-core organization of complex networks. *Phys. Rev. Lett.* **96**(4), 040601 feb (2006).
- [26] Colomer-de Simon, P. & Boguñá, M. Double percolation phase transition in clustered complex networks. *Phys. Rev. X* **4**, 041020 (2014).
- [27] Hébert-Dufresne, L. & Allard, A. Smeared phase transitions in percolation on real complex networks. *Phys. Rev. Research* **1**, 013009 Aug (2019).
- [28] Timár, G., da Costa, R. A., Dorogovtsev, S. N. & Mendes, J. F. F. Nonbacktracking expansion of finite graphs. *Phys. Rev. E* **95**, 042322 Apr (2017).
- [29] Allard, A. & Hébert-Dufresne, L. On the accuracy of message-passing approaches to percolation in complex networks, (2019).
- [30] Castellano, C. & Pastor-Satorras, R. Cumulative merging percolation and the epidemic transition of the susceptible-infected-susceptible model in networks. *Phys. Rev. X* **10**, 011070 Mar (2020).
- [31] Pastor-Satorras, R. & Castellano, C. Distinct types of eigenvector localization in networks. *Sci. Rep.* **6**, 18847 jan (2016).
- [32] Seidman, S. B. Network structure and minimum degree. *Social Networks* **5**, 269–287 (1983).
- [33] Kitsak, M., Gallos, L. K., Havlin, S., Liljeros, F., Muchnik, L., Stanley, H. E. & Makse, H. A. Identification of influential spreaders in complex networks. *Nature Physics* **6**, 888–893 (2010).
- [34] Stauffer, D. & Aharony, A., *Introduction to Percolation Theory*, (Taylor & Francis, London, 1994). 2nd edition.
- [35] Castellano, C. & Pastor-Satorras, R. On the numerical study of percolation and epidemic critical properties in networks. *Eur. Phys. J. B* **89**(11), 243 (2016).
- [36] Newman, M. E. & Ziff, R. M. Efficient Monte Carlo algorithm and high-precision results for percolation. *Physical Review Letters* **85**(19), 4104–4107 November (2000).

Supplementary Information

SUPPLEMENTARY TABLE

Supplementary Table ST1: Topological and spectral properties of the 109 real-world networks in Ref. [18] for which we test our theory. We report the following properties of this set of networks: N : network size; $\langle k \rangle$: average degree; $k_{\max}$: maximum degree; μ_M : LEV of the NBC; μ_M^{an} : theoretical approximation for μ_M within the annealed network approximation, Eq. (9); μ_M^{un} : theoretical approximation for μ_M in uncorrelated networks, Eq. (8); μ_M^{oh} : theoretical approximation for μ_M taking into account the effect of overlapping hubs, Eq. (10); μ_M^{core} : LEV of the NBC for the maximum K -core of the network; p_c^{-1} : inverse of the numerical percolation threshold p_c , estimated as the position of the principal peak of the susceptibility χ_2 .

Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
0 Social 3	32	5.00	13	4.74	4.94	4.76	1.41	3.96	4.0572
1 Karate club	34	4.59	17	5.29	6.77	4.75	2.00	4.18	4.3472
2 Protein 2	53	4.64	8	4.68	4.39	4.52	1.73	4.29	2.9545
3 Dolphins	62	5.13	12	5.99	5.81	5.75	2.00	5.74	4.1694
4 Social 1	67	4.24	11	4.36	4.25	4.38	1.73	3.00	3.2801
5 Les Miserables	77	6.60	36	10.75	11.06	10.04	5.29	9.40	7.5977
6 Protein 1	95	4.48	7	4.25	3.95	4.01	1.41	4.23	1.7169
7 E. Coli, transcription	97	4.37	10	5.34	4.41	4.86	1.73	4.83	1.9855
8 Political books	105	8.40	25	10.63	10.93	10.40	3.61	8.97	5.4306
9 David Copperfield	112	7.59	49	11.54	12.77	11.44	4.47	10.32	9.2696
10 College football	115	10.66	12	9.77	9.73	9.75	3.46	9.75	7.3987
11 S 208	122	3.10	10	2.75	2.77	2.76	1.00	2.75	2.1438
12 High school, 2011	126	27.13	55	32.85	31.79	32.13	9.59	26.09	25.8514
13 Bay Dry	128	32.42	110	38.44	39.11	38.04	13.86	34.69	31.7995

Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
14 Bay Wet	128	32.91	110	38.91	39.50	38.53	12.37	33.64	32.3371
15 Radoslaw Email	167	38.92	139	59.43	63.46	58.35	26.72	52.81	49.4981
16 High school, 2012	180	24.67	56	29.01	28.55	28.72	6.93	22.69	22.5561
17 Little Rock Lake	183	26.60	105	40.06	41.89	38.37	16.12	34.70	32.4229
18 Jazz	198	27.70	100	38.82	37.64	37.83	10.39	28.00	30.6470
19 S 420	252	3.17	14	2.89	2.91	2.90	1.00	2.89	2.2160
20 C. Elegans, neural	297	14.46	134	22.76	25.05	20.87	7.35	20.02	18.1451
21 Network Science	379	4.82	34	8.71	7.02	6.53	4.00	7.00	2.5558
22 Dublin	410	13.49	50	22.24	17.72	18.75	6.00	21.31	12.9029
23 US Air Trasportation	500	11.92	145	46.54	52.78	43.04	15.30	31.58	37.8733
24 S 838	512	3.20	22	2.94	3.03	2.96	1.00	2.94	2.2063
25 Yeast, transcription	662	3.21	71	6.50	12.51	3.02	5.57	5.09	4.1265
26 URV email	1133	9.62	71	19.27	17.69	18.37	4.00	10.00	15.4127
27 Political blogs	1222	27.36	351	72.56	80.26	66.72	13.82	42.71	58.9779
28 Air traffic	1226	3.93	34	7.48	6.36	6.26	2.24	6.70	5.4898
29 Yeast, protein	1458	2.67	56	5.05	6.13	3.25	1.00	4.00	3.3193
30 Petster, hamster	1788	13.96	272	44.31	44.55	40.19	14.00	34.73	36.3558
31 UC Irvine	1893	14.62	255	46.25	54.64	43.70	9.27	35.39	39.2625
32 Yeast, protein	2172	6.05	215	18.54	18.79	16.31	4.36	10.66	13.6990
33 Japanese	2698	5.93	725	38.16	107.61	23.46	14.32	23.56	30.7833
34 Open flights	2905	10.77	242	61.33	54.84	57.28	14.14	32.02	49.2010
35 GR-QC, 1993-2003	4158	6.46	81	44.44	16.98	27.64	20.20	42.00	7.4308


Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
36 Tennis	4338	37.74	451	160.17	157.91	158.09	17.38	124.14	136.0226
37 US Power grid	4941	2.67	19	6.23	2.87	2.88	1.41	5.06	1.5142
38 HT09	5352	6.91	1287	41.01	198.98	9.06	13.27	25.42	34.8533
39 Hep-Th, 1995-1999	5835	4.74	50	17.01	8.12	9.41	6.48	17.00	9.0419
40 Reactome	5973	48.81	855	206.88	142.31	160.58	91.04	197.41	87.9832
41 Jung	6120	16.43	5655	128.35	990.77	29.33	103.36	77.46	107.0054
42 Gnutella, Aug. 8, 2002	6299	6.60	97	26.51	16.66	17.60	4.69	22.35	22.0829
43 JDK	6434	16.68	5923	129.28	981.71	29.92	103.74	77.46	107.1269
44 AS Oregon	6474	3.88	1458	35.04	163.81	14.68	18.52	14.96	28.0308
45 English	7377	11.98	2568	104.34	319.70	59.17	32.83	58.34	87.9832
46 Gnutella, Aug. 9, 2002	8104	6.42	102	26.56	15.82	16.65	5.10	23.39	21.9957
47 French	8308	5.74	1891	52.46	217.01	26.58	18.49	23.12	43.1321
48 Hep-Th, 1993-2003	8638	5.74	65	30.01	11.99	14.42	13.75	30.00	13.2956
49 Gnutella, Aug. 6, 2002	8717	7.23	115	20.47	13.40	14.02	8.37	16.94	15.0067
50 Gnutella, Aug. 5, 2002	8842	7.20	88	21.58	13.79	14.01	5.29	18.62	17.2084
51 PGP	10680	4.55	205	41.03	17.88	26.19	9.49	35.73	14.6018
52 Gnutella, August 4 2002	10876	7.35	103	15.28	12.97	12.86	4.36	13.19	12.9654
53 Hep-Ph, 1993-2003	11204	21.00	491	243.75	129.88	206.61	113.67	237.00	209.4101
54 Spanish	11558	7.45	2986	93.51	456.58	40.68	32.19	44.11	78.1537
55 DBLP, citations	12495	7.93	709	38.06	42.77	33.58	14.56	31.19	30.2164
56 Spanish	12643	8.70	5169	100.13	806.66	28.19	35.37	47.63	83.9067
57 Cond-Mat, 1995-1999	13861	6.44	107	23.14	12.54	14.83	6.00	16.00	15.5067

Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
58 Astrophysics	14845	16.12	360	72.21	44.46	55.60	19.60	55.00	55.0700
59 Google	15763	18.85	11401	156.61	900.63	47.71	86.99	106.57	125.5953
60 AstroPhys, 1993-2003	17903	22.00	504	92.54	64.70	77.74	16.55	55.00	76.5451
61 Cond-Mat, 1993-2003	21363	8.55	279	35.80	21.47	26.02	12.73	24.00	27.3670
62 Gnutella, Aug. 25, 2002	22663	4.83	66	9.38	9.75	8.96	2.45	8.87	8.6900
63 Internet	22963	4.22	2390	64.68	260.46	28.28	24.25	39.97	51.4491
64 Thesaurus	23132	25.69	1062	97.70	102.29	94.53	15.17	82.91	88.5512
65 Cora	23166	7.70	377	29.28	22.68	19.42	8.06	16.91	21.9551
66 Linux, mailing list	24567	12.88	2989	220.15	339.98	178.45	46.66	121.12	190.7713
67 AS Caida	26475	4.03	2628	59.41	279.24	26.29	24.62	34.41	48.1394
68 Gnutella, Aug. 24, 2002	26498	4.93	355	10.78	11.03	10.77	2.24	10.34	9.4122
69 Hep-Th, citations	27400	25.69	2468	106.82	105.40	88.46	54.94	43.36	90.5805
70 Cond-Mat, 1995-2003	27519	8.44	202	38.30	21.29	26.52	12.45	23.00	29.3631
71 Digg	29652	5.72	283	27.63	27.07	27.22	4.24	23.52	24.1307
72 Linux, soft.	30817	13.84	9338	154.98	851.62	34.55	69.53	58.94	129.6788
73 Enron	33696	10.73	1383	115.48	141.36	90.59	15.30	79.03	99.2556
74 Hep-Ph, citations	34401	24.46	846	74.33	62.50	61.91	19.85	33.57	63.3955
75 Cond-Mat, 1995-2005	36458	9.42	278	49.17	26.88	34.58	14.66	28.00	38.8247
76 Gnutella, Aug. 30, 2002	36646	4.82	55	11.39	10.46	9.93	2.83	6.00	10.2897
77 Slashdot	51083	4.56	2915	44.95	80.57	34.72	9.49	35.63	37.7581
78 Gnutella, Aug. 31, 2002	62561	4.73	95	11.48	10.60	10.05	2.00	9.57	10.4354
79 Facebook	63392	25.77	1098	130.82	87.05	105.41	12.37	100.56	114.5491


Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
80 Epinions	75877	10.69	3044	181.65	182.88	161.62	23.22	129.54	161.1385
81 Slashdot zoo	79116	11.82	2534	127.57	145.30	106.05	23.94	80.90	112.1438
82 Flickr	105722	43.83	5425	614.42	348.21	429.50	68.08	572.00	71.8799
83 Wikipedia, edits	113123	35.82	20153	389.69	688.54	289.34	96.31	216.89	347.9713
84 Petster, cats	148826	73.21	80634	1160.43	9291.62	261.40	873.92	664.31	1017.3354
85 Gowalla	196591	9.67	14730	159.86	305.58	76.47	35.33	81.48	136.8895
86 Libimseti	220970	155.98	33389	943.38	1639.96	671.28	140.18	572.24	882.0520
87 EU email	224832	3.02	7636	97.09	566.65	26.93	9.85	72.95	82.2030
88 Web Stanford	255265	15.21	38625	423.82	2029.74	46.88	336.93	130.43	18.0571
89 Amazon, Mar. 2, 2003	262111	6.87	420	17.80	10.14	10.04	5.10	7.92	10.5122
90 DBLP, collaborations	317080	6.62	343	114.72	20.75	31.33	40.00	112.00	29.5135
91 Web Notre Dame	325729	6.69	10721	175.66	279.68	55.53	70.99	164.69	12.3073
92 MathSciNet	332689	4.93	496	33.53	15.43	18.85	6.71	23.00	21.0558
93 CiteSeer	365154	9.43	1739	52.54	47.45	29.49	10.25	35.33	40.4606
94 Zhishi	372840	12.43	127066	942.98	27908.59	15.43	942.62	295.29	33.1929
95 Actor coll. net.	374511	80.18	3956	847.55	417.32	573.14	61.48	592.15	776.8318
96 Amazon, Mar. 12, 2003	400727	11.73	2747	35.03	29.33	20.30	16.25	31.68	24.9309
97 Amazon, Jun. 6, 2003	403364	12.11	2752	40.31	29.55	21.73	17.15	33.06	27.5921
98 Amazon, May 5, 2003	410236	11.89	2760	40.36	29.93	21.81	17.38	32.59	27.6319
99 Petster, dogs	426485	40.06	46503	734.01	2054.76	363.83	427.47	427.52	665.8499
100 Road network PA	1087562	2.83	9	3.11	2.20	2.24	1.41	2.90	1.4442
101 YouTube friend. net.	1134890	5.27	28754	185.14	493.53	80.41	56.99	105.78	156.6161

Network	N	$\langle k \rangle$	$k_{\max}$	μ_M	μ_M^{an}	μ_M^{un}	μ_M^{oh}	μ_M^{core}	p_c^{-1}
102 Road network TX	1351137	2.78	12	3.56	2.15	2.19	1.41	3.51	1.3623
103 AS Skitter	1694616	13.09	35455	653.66	1444.15	89.41	260.77	154.76	563.5708
104 Road network CA	1957027	2.82	12	3.32	2.17	2.21	1.41	3.17	1.4409
105 Wikipedia, pages	2070367	40.90	230040	775.44	3345.71	308.90	190.21	302.35	699.8880
106 US Patents	3764117	8.77	793	110.45	20.34	27.28	55.41	75.82	34.3938
107 DBpedia	3915921	6.42	469692	462.92	13856.37	17.53	388.33	28.30	58.5652
108 LiveJournal	5189808	18.76	15016	537.93	154.42	221.84	43.89	408.16	361.7945


SUPPLEMENTARY FIGURES

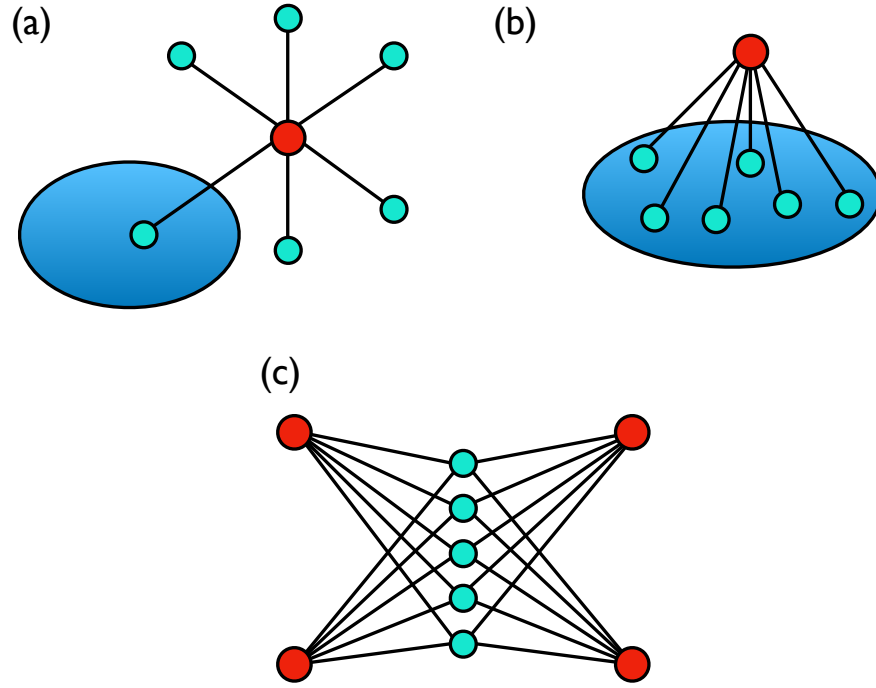


Supplementary Figure SF1. Graphical representation of star subgraphs. (a) Dangling hub of degree K , connected to $K - 1$ leaves of degree 1 and to a connector node in a generic network. $K = 6$. (b) Integrated hub of degree K connected to K connector nodes in a generic network. $K = 6$. (c) Example of n overlapping hubs of degree K , sharing the same set of leaves of degree n . $n = 4$, $K = 5$.

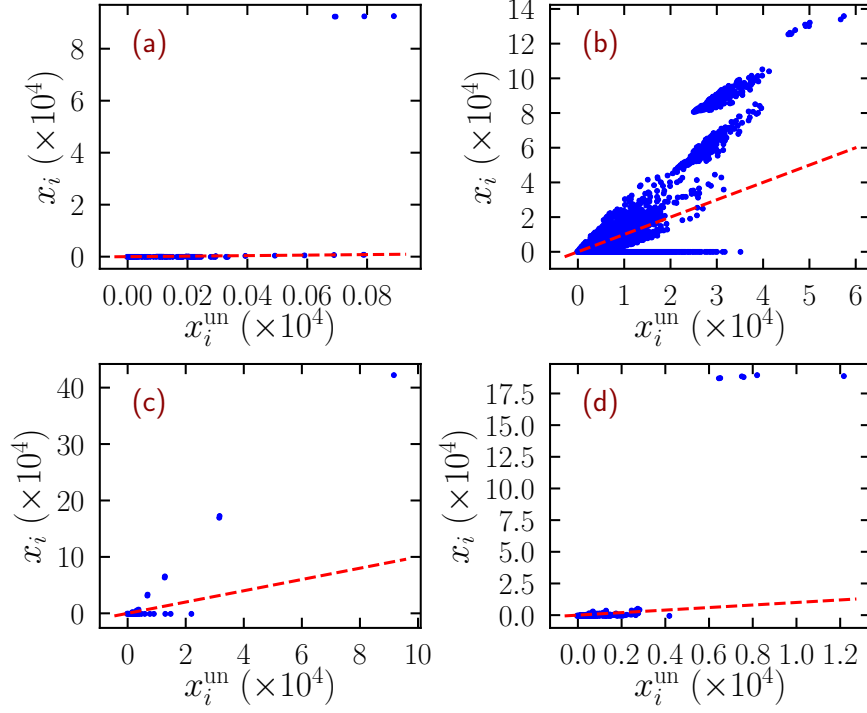


Supplementary Figure SF2. NBC localization in real-world networks. Scatter plot of the NBC x_i as a function of the theoretical prediction x_i^{un} , Eq. (7) in four examples of real-world networks (a) Zhishi; (b) Flickr; (c) Web Notre Dame; (d) Web Stanford. The dashed line represents the behavior $y = x$.

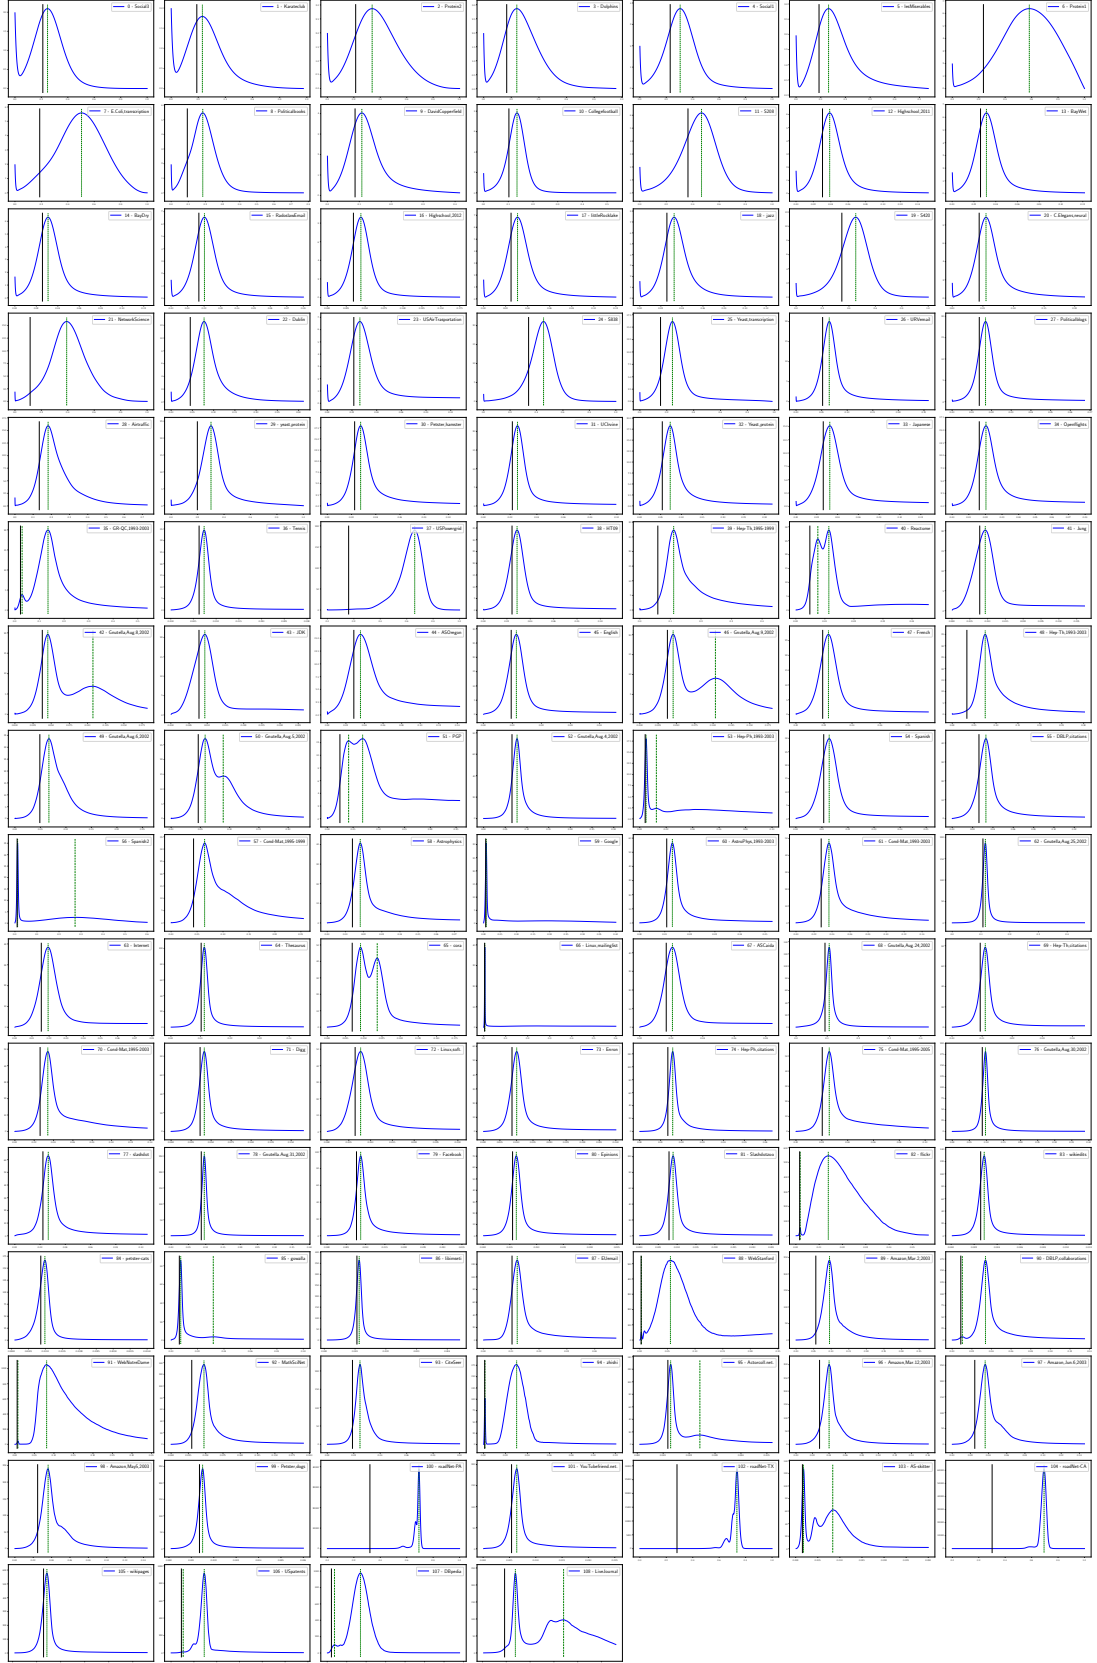


Supplementary Figure SF3. Susceptibility $\chi_2(p)$ for all 109 networks considered. In each plot, the green dashed vertical line(s) denote the position(s) of the peak(s), the black continuous vertical line denotes the value of $1/\mu_M$.

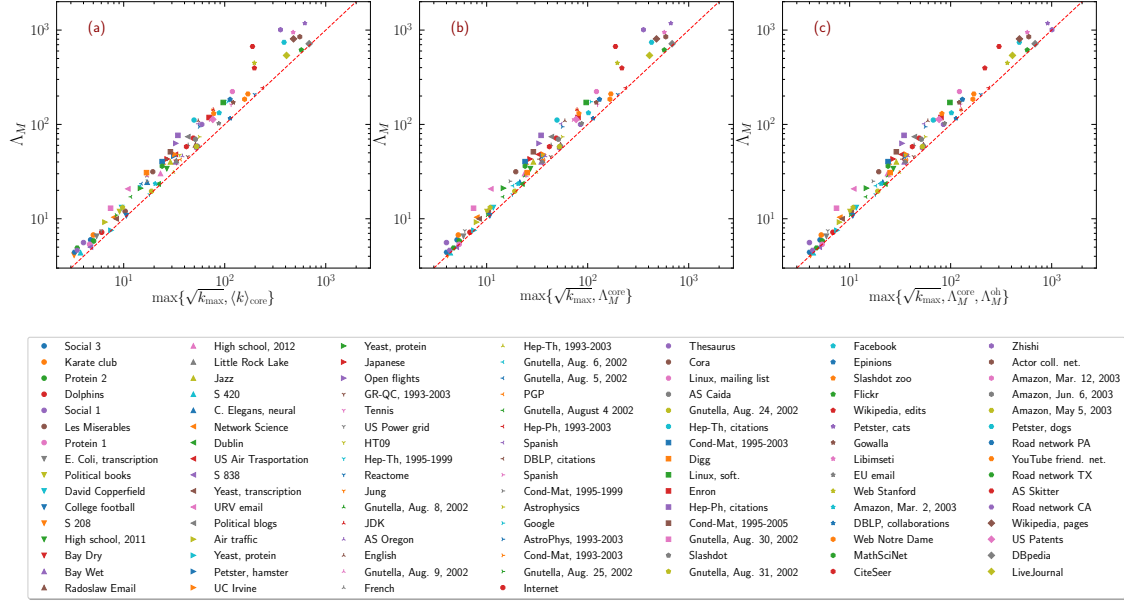


Supplementary Figure SF4. Check of the theoretical approximations for the LEV of the adjacency matrix in real networks. (a) Value of the LEV Λ_M of the adjacency matrix as a function of the theoretical prediction in Ref. [23], given as the maximum between the square root of the maximum degree and the LEV Λ_M^{core} of the maximum K -core, approximated by its average degree $\langle k \rangle_{\text{core}}$; (b) same expression, considering the LEV of the maximum K -core computed numerically; (c) an improved version taking into account the LEV Λ_M^{oh} of the maximal set of n overlapping hubs of degree K .

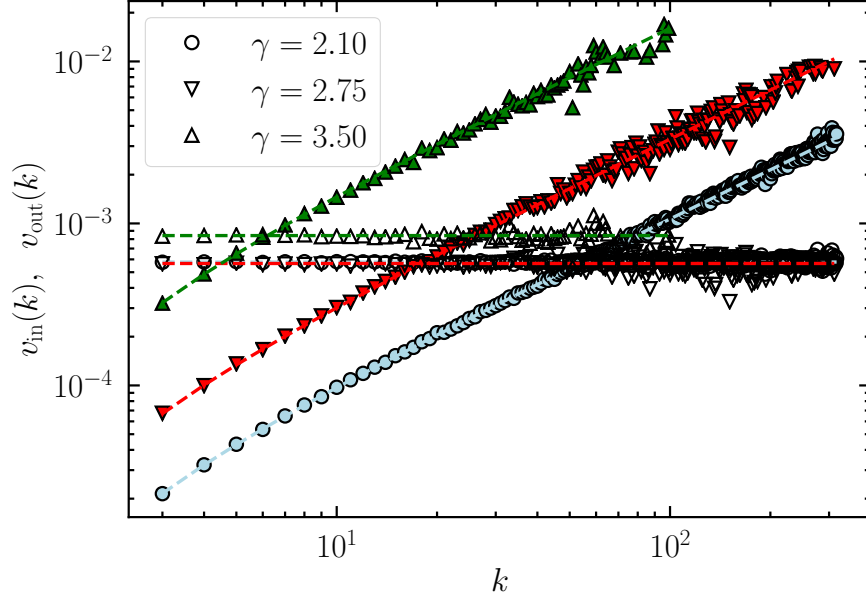


Supplementary Figure SF5. Behavior of $v_{\text{out}}(k)$ and $v_{\text{in}}(k)$. Check of the scaling of $v_{\text{out}}(k)$ (filled symbols) and $v_{\text{in}}(k)$ (hollow symbols) with degree k in power-law UCM networks of size $N = 10^5$ and different γ exponents. Dashed lines denote the theoretical behaviors predicted for $v_{\text{out}}(k)$, Eq. (25) and for $v_{\text{in}}(k)$, Eq. (28).

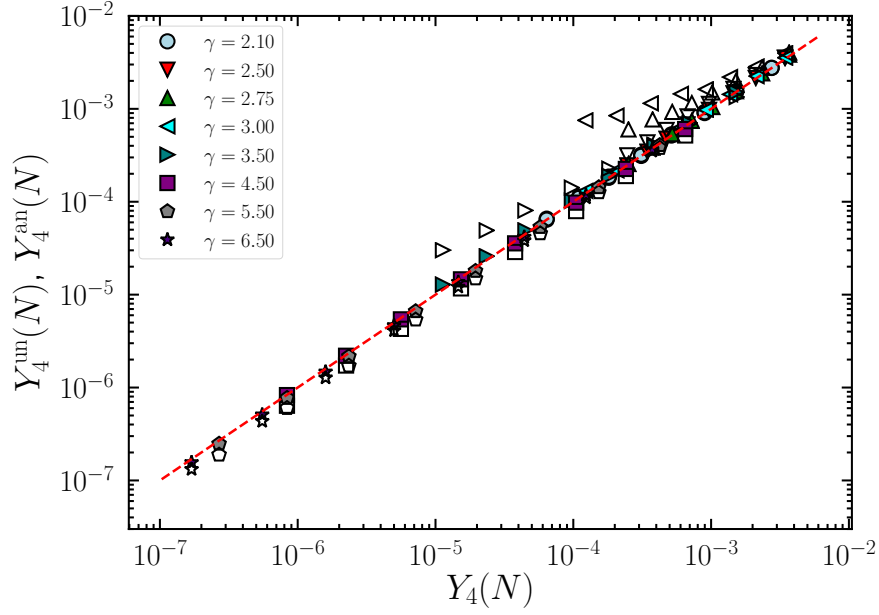

Supplementary Figure SF6. Localization in synthetic uncorrelated networks. Inverse participation ratio $Y_4(N)$ of the NBC x_i in power-law UCM networks with different degree exponent γ . We compare, for different network sizes, the results from numerical evaluation with the theoretical prediction $Y_4^{\text{un}}(N)$ computed from the expression $x_i \sim \sum_j A_{ij}(k_j - 1)$ (full symbols), and with the prediction $Y_4^{\text{an}}(N)$ from the annealed network approximation $x_i \sim k_i$ (hollow symbols). The dashed line represents the behavior $y = x$. Simulations results correspond to the average over 25 different network realizations of sizes ranging between $N = 3000$ and $N = 10^7$.

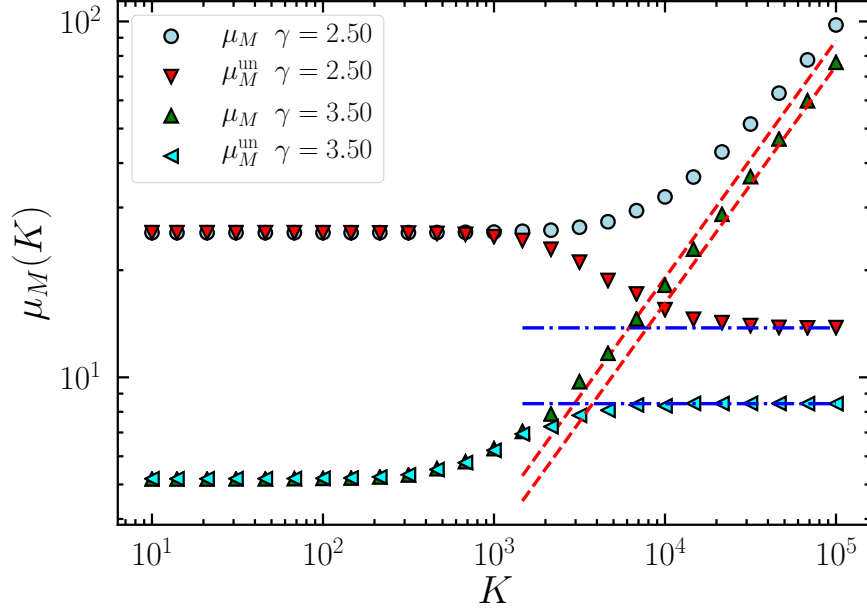

Supplementary Figure SF7. Effects of the addition of an integrated hub. Value of μ_M for power-law UCM networks with different degree exponent added with an integrated hub of degree K . Dashed lines represent the theoretical prediction, $\mu_M^h = \left(\frac{\langle k \rangle K(K-1)}{N} \right)^{1/3}$. Dot-dashed lines represent the estimation $\mu_M^{\text{un}} \sim 2 \langle k \rangle$, large values of K according to the uncorrelated theory, Eq. (8). Network size $N = 10^5$.

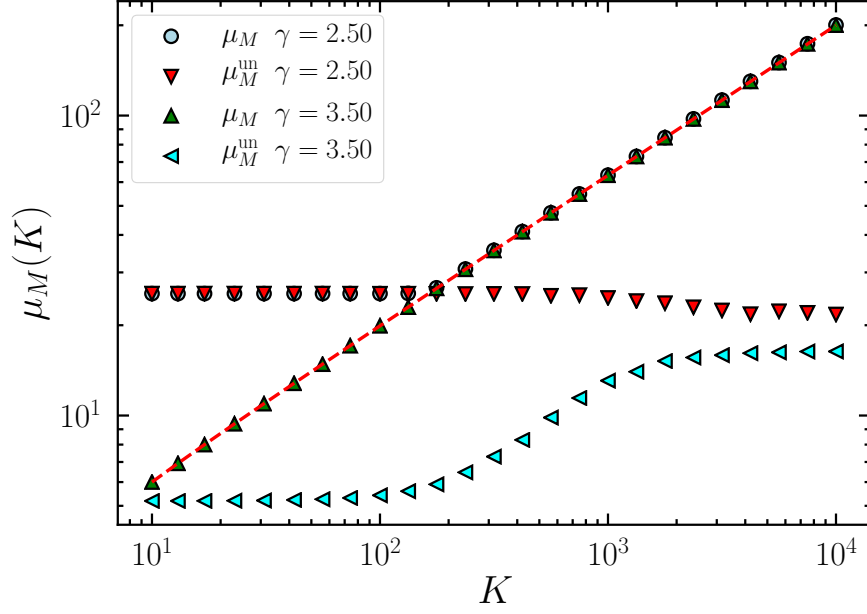

Supplementary Figure SF8. Effect of the addition of overlapping hubs. Value of μ_M for power-law UCM networks with different degree exponent, added with $n = 5$ overlapping hubs of degree K . The dashed line represents the theoretical prediction, $\mu_M^{\text{oh}} = [(n-1)(K-1)]^{1/2}$, independent of γ . Network size $N = 10^5$.