

# Comparison and Benchmark of Graph Clustering Algorithms

Lizhen Shi<sup>1</sup>, Bo Chen<sup>2</sup>

<sup>1</sup>Department of Computer Science, Florida State University, Tallahassee, FL, USA

<sup>2</sup>bochen0909@gmail.com

## Abstract

Graph clustering is widely used in analysis of biological networks, social networks and etc. For over a decade many graph clustering algorithms have been published, however a comprehensive and consistent performance comparison is not available. In this paper we benchmarked more than 70 graph clustering programs to evaluate their runtime and quality performance for both weighted and unweighted graphs. We also analyzed the characteristics of ground truth that affects the performance. Our work is capable to not only supply a start point for engineers to select clustering algorithms but also could provide a viewpoint for researchers to design new algorithms.

**Keywords**— Network, Graph Clustering, Benchmark

## 1 Introduction

Comparison of graph clustering algorithms is not new and has been discussed in academic literature, but not thoroughly. Most of comparisons are only for a few of them and seldom report runtime performance. [31] leveraged LFR benchamrk to test clustering perfomrance for about 11 algorithms up to year 2010. [29] tested community detection algorithms for overlapped graphs with CPM algorithm. [75] benchmarked 8 algorithms available in iGraph [12].

When we were working on our previous work of Sparc [60, 38], it was demanding to know a better algorithm than LPA that works on large graphs. However we can not find a comprehensive study which resulting initiating this work. In this paper we tested on more than 70 clustering programs published in last decade. We both analyzed their quality performance and runtime performance.

## Definition

A *graph*  $G$  is defined as a set of vertices  $V$  and a set of edges  $E$  where  $E = \{(u, v) | u \in V, v \in V\}$ . We use  $m = |E|$  and  $n = |V|$  to denote the number of edges and number of vertices.

An *undirected graph* does not distinguish the order of the vertices of an edge  $(u, v)$ , while a *directed graph* takes  $(u, v)$  and  $(v, u)$  as two different edges. To be uniform we always put both  $(u, v)$  and  $(v, u)$  in  $E$  for an undirected graph. If it is not specified in this text, it always assumes undirected graphs.

A weighted function may defined on edges as  $w : E \rightarrow \mathbb{R}$  to consider the importance of edges. Most commonly weights are always positive. If it is not specified in this text, it always assumes unweighted graphs.

A *clustering*  $\mathcal{C}$  of a graph is a collection of subset of  $V$ , that is  $\mathcal{C} = \{c | c \subset V\}$ . Each element in  $\mathcal{C}$  is called a *cluster* or a *community*. It usually assumes that the union of clusters of a clustering covers  $V$  (otherwise we can always create a new cluster for the remaining vertices). If  $\forall c_1 \in \mathcal{C}, \forall c_2 \in \mathcal{C}, c_1 \cap c_2 = \emptyset$ ,  $\mathcal{C}$  is not overlapped, others it is *overlapped*. If it is not specified in this text, it always assumes it is not overlapped.

## 1.1 Graph Properties

Here is some commonly used properties of a graph.

### Density

The density of a graph is defined as  $\frac{m}{n(n-1)}$

### Diameter

The *diameter* of a graph is the length of its longest shortest path among all pairs of nodes. *effect diameter* is more stable and defined as 90th of the distribution of shortest path lengths.

### Centrality

*Degree centrality* of a vertex  $v$  is defined as  $\frac{\deg(v)}{(n-1)}$ . *Farness centrality* of a vertex  $v$  is the average shortest path length to all other nodes that reside in the same connected component as  $v$ . *Farness centrality* is the reciprocal of farness centrality.

### Eccentricity

*Eccentricity* of a vertex  $v$  is the largest shortest-path distance from the node to any other node in the Graph.

### Clustering coefficient

*Global clustering coefficient* is defined as the ratio between the number of closed triplets and the number of all triplets. *Local clustering coefficient* is defined in [69] to determine whether a graph is a small-world network.

## 2 Clustering Measures

To evaluate the quality of a clustering, both *fitness measures* and *score measures* can be used.

## 2.1 Fitness Measures

Fitness measures evaluate the performance of a clustering by inspecting the properties of intraconnection and interconnection of clusters. Fitness measures are defined on a graph or a subgraph. Many algorithms depend on certain measures to make a decision. Although they are vital in designing algorithms, we found that they are not very useful when evaluating clustering result. However we put them here briefly for completeness. Please refer to [73] which provides a more detailed description for some of them.

### sum of intra weights

The summation of intra weights for a cluster  $c$  is defined as

$$\text{sum\_intra\_weight}(c) = \sum_{v \in c, u \in c} w(v, u)$$

where  $w$  is weight function.

### sum of out weights

The summation of out weights for a cluster  $c$  is defined as

$$\text{sum\_out\_weight}(c) = \sum_{v \in c, u \notin c} w(v, u)$$

where  $w$  is weight function.

### expansion

*Expansion* of a cluster  $c$  is defined as

$$\text{expansion}(c) = \frac{\text{sum\_out\_weight}(c)}{|c|}$$

.

### cut ratio

*Cut ratio* of a cluster  $c$  is defined as

$$\text{cut\_ratio}(c) = \frac{\text{sum\_out\_weight}(c)}{|c|(n - |c|)}$$

.

### intra cluster density

*Intra cluster density* of a cluster  $c$  for a unweighted graph is defined as

$$\text{intra\_cluster\_density}(c) = \frac{|E_c|}{|c|(|c| + 1)}$$

where  $E_c$  is the edge set of subgraph induced by  $c$ .

## inter cluster density

*Inter cluster density* of a cluster  $c$  for a unweighted graph is defined as

$$\text{inter\_cluster\_density}(c) = \frac{|\{(u, v) | u \in c_i, v \in c_j, i \neq j, c_i \in \mathcal{C}, c_j \in \mathcal{C}\}|}{n(n-1) + \sum_{c \in \mathcal{C}} |V_c|(n - |V_c|)}$$

where  $V_c$  is the vertices set of subgraph induced by  $c$ .

## relative cluster density

*relative cluster density* of a cluster  $c$  is defined as

$$\text{relative\_cluster\_density}(c) = \frac{1}{1 + \frac{\text{sum\_out\_weight}(c)}{\text{sum\_intra\_weight}(c)}}$$

.

## modularity

The modularity of a unweighted graph is defined as

$$\frac{\sum_{c \in \mathcal{C}} \text{sum\_intra\_weight}(c)}{A} - \frac{\sum_{v \in V} \text{sum\_degree}(v)^2}{A^2}$$

where  $A = \sum_{v \in V} \text{deg}(v)$  is the sum of weights. For unweighted graph it is identical to

$$\frac{1}{m} \sum_{i,j} (A_{ij} - \frac{k_i k_j}{m}) 1_{(i=j)}$$

where  $A$  is the adjacency matrix,  $1$  is indicator function,  $k_i k_j$  is the expected number of random edges between the two nodes.

## conductance

*Conductance* of a cluster  $c$  is defined as

$$\text{conductance}(c) = \frac{\text{sum\_out\_weight}(c)}{\text{sum\_out\_weight}(c) + \text{sum\_intra\_weight}(c)}$$

## normalized cut

*Normalized cut* of a cluster  $c$  is defined as

$$\begin{aligned} \text{normalized\_cut}(c) = & \frac{\text{sum\_out\_weight}(c)}{\text{sum\_out\_weight}(c) + \text{sum\_intra\_weight}(c)} \\ & + \frac{\text{sum\_out\_weight}(c)}{\text{sum\_out\_weight}(c) + m - \text{sum\_intra\_weight}(c)} \end{aligned}$$

## out degree fraction

*Maximum out degree fraction* of a cluster  $c$  is defined as

$$\text{max\_ODF}(c) = \max_{u \in c} \frac{|\{(u, v) | (u, v) \in E, v \notin c\}|}{\deg(u)}$$

*Average out degree fraction* of a cluster  $c$  is defined as

$$\text{avg\_ODF}(c) = \frac{1}{|C|} \sum_{u \in c} \frac{|\{(u, v) | (u, v) \in E, v \notin c\}|}{\deg(u)}$$

*Flake out degree fraction* of a cluster  $c$  is defined as

$$\text{flake\_ODF}(c) = \frac{|\{u \in c; |(u, v) \in E, v \in c| < \deg(u)\}|}{|c|}$$

## separability

The *separability* of a cluster  $c$  is defined as

$$\text{separability}(c) = \frac{\text{sum\_intra\_weight}(c)}{\text{sum\_inter\_weight}(c)}$$

## coefficient

For a cluster, similar to a graph, *global clustering coefficient* and *local clustering coefficient* can be defined on the induced subgraph of the cluster.

## 2.2 Score Measures

Score Measures evaluate performance by comparing clusters to its corresponding ground truth. Score measures are better choices to evaluate performance when ground truth is available (e.g. benchmark graphs)

### mutual information (MI)

Assume  $A, B$  are two clusterings of a graph  $G = (V, E)$ , the mutual information between the two clusters is defined as

$$mi(A, B; G) = \sum_{i=1}^{|A|} \sum_{j=1}^{|B|} \frac{|A_i \cap B_j|}{|V|} \log \frac{|V| |A_i \cap B_j|}{|A_i| |B_j|}$$

## normalized mutual info score (NMI)

Assume  $A, B$  are two clusterings of a graph  $G = (V, E)$ , the normalized mutual information between the two clusters is defined as

$$nmi(A, B; G) = \frac{2 * mi(A, B; G)}{H(A) + H(B)}$$

where  $H(.)$  is the entropy function.

## adjusted mutual information (ami)

Assume  $A, B$  are two clusterings of a graph  $G = (V, E)$ , the adjusted normalized mutual information between the two clusters is defined as

$$ami(A, B; G) = \frac{mi(A, B; G) - E(mi(A, B; G))}{\frac{H(A) + H(B)}{2} - E(mi(A, B; G))}$$

where  $H(.)$  is the entropy function and  $E(.)$  is the adjustment for mutual information [68].

## adjusted rand score (ARS)

Rand index is defined as

$$RI(A, B) = \frac{TP + TN}{TP + TN + FP + FN}$$

where TP is the number of true positives, TN is the number of true negatives, FP is the number of false positives, and FN is the number of false negatives.

Adjusted rand score is the corrected-for-chance version of the rand index [68, 25] by using the expected similarity of all pair-wise comparisons between clusterings specified by a random model

## V-measure score

Support  $A$  is the ground truth, and  $C$  is a clustering, V-measure score [53] is the harmonic mean between homogeneity (or purification) and completeness, that is

$$\text{V-measure} = \frac{\text{homogeneity} * \text{completeness}}{\text{homogeneity} + \text{completeness}}$$

where  $\text{homogeneity}(A, C) = 1 - \frac{H(A|C)}{H(A)}$ ,  $\text{completeness}(A, C) = 1 - \frac{H(C|A)}{H(C)}$  where  $H(.)$  is entropy function and  $H(.|.)$  is conditional entropy function.

## 3 Algorithms

This section describes a few of algorithms that were tested in this paper. The descriptions are mainly excerpted from the original papers and not all the algorithms are covered. Please find references by Table 6 or online documentation.

## Infomap

Infomap [54] introduced an information theoretic approach that reveals community structure in weighted and directed graphs. To find a partition  $M$  of a graph, the algorithm minimizes the expected description length of a random walk (a.k.a map equation) defined as

$$L(M) = qH(\mathcal{Q}) + \sum_{i=1}^m p^i H(\mathcal{P}^i)$$

where the first part is the entropy of the movement between partitions, and the second part is the entropy of movements within partitions.

## Hierarchical Infomap (infohiermap)

Hierarchical map equation [56] extended map equation to enable multiple levels partitions of a graph.

$$L(M) = qH(\mathcal{Q}) + \sum_{i=1}^m p^i L(M^i)$$

where  $L(M^i)$  is the description length of submap  $M^i$  which is defined recursively until the finest level

$$L(M^{ij\dots}) = \sum_{i=1}^m p^{ij\dots} L(M^{ij\dots})$$

## Order Statistics Local Optimization Method (OSLM)

OSLOM [34] is capable to detect clusters in networks accounting for edge directions, edge weights, overlapping communities, hierarchies and community dynamics. It is based on the local optimization of a fitness function expressing the statistical significance of clusters with respect to random fluctuations, which is estimated with tools of Extreme and Order Statistics.

## COPRA (Community Overlap PPropagation Algorithm)

COPRA [21] finds overlapping community structure by extending the label propagation algorithm to include information about more than one community.

## Louvain

Louvain [5] is method that greedily optimize the modularity of a graph. The algorithm initially assigns a partition for each vertex, then a two-step process are repeated until maximum modularity is achieved.

In the first step it greedily merges partitions until no gain got. In the second step, a new graph is built whose nodes are partitions in the first step.

## Label Propagation Method/Algorithm(LPM, LPA)

LPA or LPM [49] is a simple algorithm that propagates the labels (partition ids) to neighbors, then updates the labels by voting.

## GANXiSw (SLPA)

SLPA [71] (Speaker-listener Label Propagation Algorithm) is an extension of LPA that discovers overlapping structures according to dynamic interaction rules

## HiReCS

HiReCS <sup>1</sup> a C++ clustering library for the multi-scale hierarchical community structure discovery with crisp overlaps.

## LabelRank

LabelRank [70] proposed strategies to stabilize the LPA and to extend MCL approach to resolve the randomness issue in traditional label propagation algorithms (LPA).

## CONGA

CONGA [20] (Cluster-Overlap Newman Girvan Algorithm) is a method that discovers overlapping communities in networks, by extending Girvan and Newman's well-known algorithm based on the betweenness centrality measure.

## CliquePercolation

CliquePercolation [28] is a fast community detection method in weighted and unweighted networks, for cliques of a chosen size. It is based on sequentially inserting the constituent links to the network and simultaneously keeping track of the emerging community structure.

## Connected Iterative Scan(CIS)

Connected Iterative Scan is also known at times as Locally Optimal Sets. Refer to [26] for details.

## DEMON

DEMON (Democratic Estimate of the Modular Organization of a Network) [10] is a local-first approach to cluster discovery. It first democratically let each node vote for the communities in its limited surrounding view of the global system using a label propagation algorithm. Then the local communities are merged into a global collection.

---

<sup>1</sup><http://www.lumais.com/hirecs>



## EAGLE

EAGLE (agglomerative hierarchical clustering based on maximal clique) [59] is an algorithm that detects both the overlapping and hierarchical properties of complex community structure together. It deals with the set of maximal cliques and adopts an agglomerative framework, where the quality function of modularity is extended to evaluate the goodness of a cover.

## FastCpm

FastCpm [51] is a simple algorithm to conduct clique percolation via the Bron Kerbosch algorithm. It claimed to perform much better than Sequential Clique Percolation (SCP) algorithm [28], especially for higher values of  $k$ .

## Greedy Clique Expansion (GCE) Community Finder

GCE [36] first detects a set of seeds in graph  $G$ , then expanding these seeds in series by greedily maximizing a local community fitness function, and then finally accepts only those communities that are not near-duplicates of communities that have already been accepted. The fitness function of community  $S$  is defined as

$$F_S = \frac{k_{in}^S}{(k_{in}^S + k_{out}^S)^\alpha}$$

where  $k_{in}$  and  $k_{out}$  is the internal and external degrees of  $S$ .

## Hierarchical Demon (HDEMON)

Hierarchical Demon [11] extended the DEMON algorithm by introducing the possibility of returning the hierarchical organization of the communities.

## Link communities algorithm

Link communities algorithm [1] is a hierarchical clustering algorithm through link dendrogram by a similarity function between links

$$S(e_{ik}, e_{jk}) = \frac{|n_+(i) \cap n_+(j)|}{|n_+(i) \cup n_+(j)|}$$

where  $n_+(i)$  is the the neighbor nodes of node  $i$ .

## Model-based Overlapping Seed Expansion (MOSE)

MOSE [43] algorithm is based on a statistical model of community structure, which is capable of detecting highly overlapping community structure, especially when there is variance in the number of communities each node is in.

## Fast Multi-Scale Community Detection Tools (MSCD)

MSCD [35] is a method compatible with global and local criteria that enables fast multi-scale community detection on large networks. It was implemented with 6 known criteria of HSLSW, LFK, RB, RN, SO and AFG.

## Model-based Overlapping Seed Expansion (ParCPM)

ParCPM [19] is a novel, parallel k-clique community detection method, based on an innovative technique which enables connected components of a network to be obtained from those of its subnetworks.

## SVINET

SVINET [18] implements sampling based algorithms that derive from stochastic variational inference under the (assortative) mixed-membership stochastic blockmodel.

## Top Graph Clusters (TopGC)

TopGC [40] implements probabilistically finds the best well connected, clique-like clusters within large graphs. It is inherently parallelizable, and runs in linear time on the graph size.

## Clique Modularity

Clique modularity algorithm [72] optimizes modularity by detecting disjoint cliques and then merges these.

## CGGC (Core Groups Graph ensemble Clustering)

CGGC [45] is an ensemble learning algorithm to learn several weak classifiers and use these weak classifiers to determine a strong classifier.

# 4 Benchmark Graphs

We used several types of simulated graphs in our benchmark tests. Our focus is on undirected graphs since they are most commonly used graphs and are supported by most of algorithms.

## 4.1 Lancichinetti-Fortunato-Radicchi (LFR) Benchmark

LFR[33] is an algorithm that generates benchmark networks with a priori known communities. Overlapped and/or weighted LFR benchmark networks are described in [30].

LFR requires specifying at least four parameters  $N$ ,  $k$ ,  $max_k$  and  $\mu$  for unweighted graphs, where  $N$  is the number of node,  $k$  is the average in-degree,  $max_k$  is the maximum in-degree and  $\mu$  is a mixing

parameter (which controls how clusters "mix" together"). For weighted graphs, weight mixing parameter  $\mu_t$  is introduced.

Symbols of  $\text{LFR}(N, k, \max_k, \mu)$  and  $\text{WLFR}(N, k, \max_k, \mu, \mu_t)$  is used for unweighted and weighted LFR graphs in the following sections.

## 4.2 Random Graph

A random graph itself does not has any structure, but it is a baseline and can be used to evaluate how algorithms scale with graph size.

We use  $\text{RAND}(n, m)$  to denote a random graph where  $n$  and  $m$  are number of nodes and number of edges.

## 4.3 SIMPLE Graph

The performance of a clustering algorithm might not behavior evenly. It might be affected by

- graph size
- cluster sizes
- inner degrees
- inter degrees
- other factors

While LFR is a widely used benchmark, it mixed these factors together so that it is hard to do analysis like performance attribution.

We introduce a simple structural graph,  $\text{SIMPLE}(nc, cz, k_i, k_o)$ , for our analysis where  $nc$  is the number of cluster,  $cz$  is the cluster size,  $k_i$  is the internal degree for each node in a cluster and  $k_o$  is the number of inter-edges between two clusters. We also define  $\gamma = k_o/k_i$  which measures how well a cluster is separated from its peers.

# 5 Benchmark Result Analysis

We collected 70+ graph clustering programs for our tests. These programs origin from sources of github, open source graph libraries or sharing by paper authors. An algorithm might be implemented by different authors or be improved in some way for performance reason.

To distinguish these programs we use name convenience of "*prefix.name*" where "prefix" is the source of the code and "name" is the algorithm name that used by the source which is easy for readers to identify it. A summary of prefixes can be found in Table 1 and further details can be found in our code repository of [https://bitbucket.org/LizhenShi/graph\\_clustering\\_toolkit](https://bitbucket.org/LizhenShi/graph_clustering_toolkit).

Table 1: Description of algorithms prefixes

Prefix	Description
mcl	<a href="https://micans.org/mcl/">https://micans.org/mcl/</a>
igraph [12]	<a href="https://igraph.org/">https://igraph.org/</a>
sklearn [46]	<a href="https://scikit-learn.org/">https://scikit-learn.org/</a>
scan	scan family (scan, pscan, anyscan etc)
dct	<a href="https://github.com/kit-algo/distributed_clustering_thrill">https://github.com/kit-algo/distributed_clustering_thrill</a>
cgcc	<a href="https://github.com/eXascaleInfolab/CGGC">https://github.com/eXascaleInfolab/CGGC</a>
networkit [62]	<a href="https://networkit.github.io/">https://networkit.github.io/</a>
snap [37]	<a href="https://snap.stanford.edu">https://snap.stanford.edu</a>
cdc	<a href="https://github.com/RapidsAtHKUST/CommunityDetectionCodes">https://github.com/RapidsAtHKUST/CommunityDetectionCodes</a>
oslom	<a href="http://www.oslom.org/index.html">http://www.oslom.org/index.html</a>
pycabem	<a href="https://github.com/eXascaleInfolab/PyCABeM">https://github.com/eXascaleInfolab/PyCABeM</a>
karateclub [57]	<a href="https://github.com/benedekrozemberczki/karateclub">https://github.com/benedekrozemberczki/karateclub</a>
alg	others

## 5.1 Graph Supports

A graph could be undirected/directed, weighted/unweighted and clustering could also be unoverlapped or overlapped. An algorithm usually does not support all these types. Unfortunately sources and papers may do not specifies its support clearly. We have to "guess" it by tests.

To determine the support of directed graph for an algorithm, a directed graph  $G_d$  is made first, then is converted to its corresponding undirected graph  $G_{ud}$ . The algorithm is applied to both graphs and the clustering results are compared, where the algorithm is considered supporting directed graph if the results are not consistent. A similar approach is applied to determine the support of weighted graph. However be aware that this method might not be 100% accurate.

The results are presented in Table 6, which shows of all the algorithms, 25% support directed graph, 51% support weighted graph and 11% support overlapped graph.

## 5.2 Runtime Benchmark

Nowadays graph data is common to have number of edges up to millions and billions, so runtime is a big concern when choosing algorithms. Despite the fact that most clustering algorithms are only capable for small or medium graph size, we are still interested in which algorithms have lesser runtime cost, so that we can try them first or try to implement a parallel version when being necessary.

We benchmarked algorithms on three types of graphs (RAND, SIMPLE, LRF) where graph sizes (#node) ranging from 32 to 100K. The maximum runtime is limited up to 1 hour and the core number is limited to 1 to be fair.

The results in Table 7 shows the ranks that are sorted by the median of the three. Half of the algorithms can handle 100K node graph in 1 hour while the slowest `igraph.community.optimal_modularity` can only handle hundreds of nodes. The actual maximum runtime ranges from 1 second to 1 hour and the top 30 finished in 100 seconds. From the table we can see that most of the tops are based on LPM, scan and louvain methods.

Be warned that the result is not highly accurate might because of the facts like

- code languages make big difference (c/c++, java, python)
- algorithm may pre-process the graph into binary format
- algorithm is designed for parallel processing, while it is limited to 1 core

### 5.3 Clustering Quality Benchmark

Clustering quality is critical for algorithms. We tested for the quality with both LFR and SIMPLE graphs. NMI is selected as criterion since ground truth is available (it was found that measures solely based on clusters have their drawbacks and have to be used with other measures together). Overlapped clustering was transferred to an unoverlapped one by randomly choosing one label for overlapped nodes when computing NMI.

### 5.4 LFR benchmark

#### Unweighted Graph

We tested the graphs of  $LFR(N, N/4, N/2, \mu)$  where  $N \in \{128, 512, 1024\}$  and  $\mu$  ranges from 0.1 to 0.9. Table 2 shows top-rank algorithms (full list in Table 8).

Table 2: NMI ranks for LFR weighted benchmark (short)

Algorithm	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	Median
oslom_OSLOM	1	1	6	5	1	2	1	2	3	2
igraph_community_spinglass	2	2	2	1	3	4	2	8	16	4
dct_dlplm	1	1	1	3	4	5	5	13	16	5
oslom_modopt	1	1	1	2	4	5	3	10	16	5
igraph_community_walktrap	1	1	1	4	3	1	4	10	17	5
igraph_community_leading_eigenvector	1	3	4	4	10	8	6	6	13	6
dct_dlslm_no.contraction	1	1	3	8	5	6	8	11	14	6
oslom_louvain_method	1	1	3	7	4	6	5	12	16	6
dct_dlslm	1	1	1	5	5	5	3	13	16	6
dct_seq_louvain	1	1	1	7	2	5	7	12	16	6
dct_dlslm_with_seq	1	1	1	4	6	4	5	13	16	6
networkit_PLM	1	1	1	4	7	5	7	13	16	6
igraph_community_multilevel	1	1	1	8	3	4	7	13	16	6
karateclub_EgoNetSplitter	8	4	2	6	6	4	4	10	15	7
alg_los_cluster	1	1	5	10	9	7	11	14	15	8
igraph_community_fastgreedy	1	3	6	9	8	8	10	11	16	8
snap_Clauset_Newman_Moore	1	5	8	12	12	9	9	6	14	8
oslom_Infohiermap	1	1	13	22	18	10	2	1	2	8
karateclub_DANMF	13	13	9	13	15	12	4	1	1	9

OSLOM is the best one which ranks top for all the  $\mu$ 's. Several algorithms from iGraph are also good. If

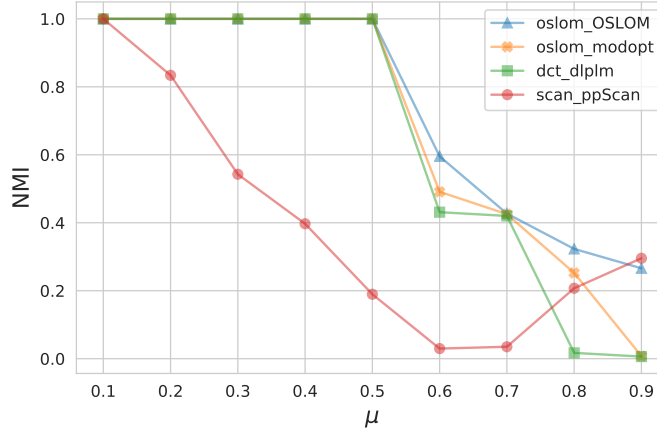


Figure 1: Selective Comparison of NMI Performance for LFR Benchmark

being interested in large graphs, algorithms from dct family are worth trying since they support distributed computing.

Ranks does not reveal the whole story, actually NMI's for all the algorithms drop quickly when  $\mu$  goes beyond 0.5. Figure 1 shows a few examples of algorithms based on OSLOM, modularity optimization, Louvain and scan.

## Weighted Graph

We used similar configuration of  $WLFR(N, N/4, N/2, \mu, \mu)$  where  $N \in \{128, 512, 1024\}$  and  $\mu$  ranges from 0.1 to 0.9. Table 3 shows the top-rank algorithms (full list in Table 11). NMI's also drop quickly when  $\mu$  is higher than 0.5. Figure 2 shows a few examples.

## 5.5 SIMPLE benchmark

SIMPLE benchmark was performed with graphs of 1024 nodes while  $cz$  (cluster size) varies from 4 to 256, and with a set of  $(k_i, k_o)$ .

### Cluster Size Effect

Table 4 (full in Table 9) shows the NMI ranking by cluster size. We see that OSLOM performs the best and Louvain based algorithms are also in the tops. Another observation is that some algorithms behave better for larger cluster size, while a few of them behave better for smaller graph size.

Figure 3 shows examples how NMI changes along with cluster sizes.

Table 3: NMI ranks for LFR weighted benchmark (short)

Algorithm	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	Mean
igraph_community_walktrap	1	1	2	3	1	1	1	3	5	2
oslom_OSLOM	3	2	4	4	7	6	1	1	2	3
oslom_modopt	1	1	3	3	2	4	2	8	12	4
dct_dlplm	1	1	1	1	3	2	6	8	13	4
dct_dlslm	1	1	2	1	3	5	5	9	13	4
dct_seq_louvain	1	1	1	2	3	2	7	9	13	4
igraph_community_leading_eigenvector	2	1	1	5	9	7	3	8	7	5
igraph_community_spinglass	2	1	5	3	5	7	5	8	12	5
karateclub_EgoNetSplitter	4	3	3	1	3	7	7	9	12	5
igraph_community_multilevel	1	1	6	3	3	3	4	9	12	5
networkit_PLM	1	1	6	3	3	3	4	9	12	5
alg_iso_cluster	1	1	6	3	2	5	6	7	11	5
karateclub_EdMot	1	4	6	3	2	5	4	9	12	5
oslom_Infohiermap	1	5	8	10	12	9	1	1	2	5
oslom_louvain_method	1	4	6	3	4	8	6	9	11	6
igraph_community_fastgreedy	5	6	7	4	6	6	6	8	12	7
karateclub_SymmNMF	14	9	11	7	10	12	3	2	1	8
sklearn_SpectralClustering	12	9	9	6	8	11	9	7	12	9

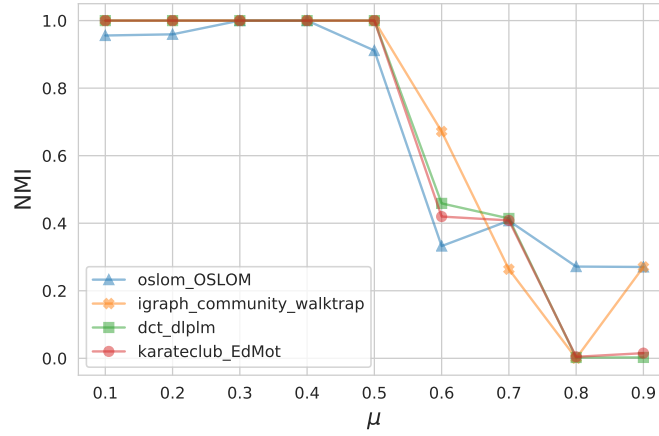


Figure 2: Selective Comparison of NMI Performance for LFR Weighted Benchmark

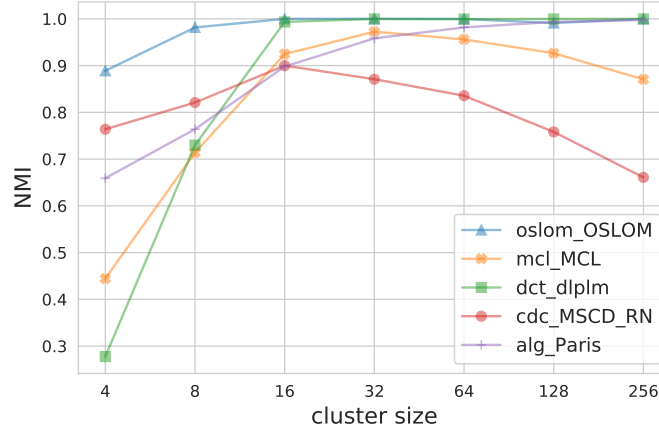


Figure 3: Selective Comparison of NMI Performance by cluster size for SIMPLE Benchmark

Table 4: NMI ranks by cluster size for SIMPLE benchmark (short)

Algorithm	cz004	cz008	cz016	cz032	cz064	cz128	cz256	Mean
oslom_OSLOM	1	2	1	1	1	2	1	1
oslom_Infohiermap	1	3	1	1	1	3	2	2
alg_Paris	4	7	9	5	3	2	1	4
dct_dlplm	13	9	2	1	1	1	1	4
dct_dlslm_with_seq	15	16	2	1	1	1	1	5
karateclub_EdMot	14	14	2	1	1	1	1	5
dct_seq_louvain	13	14	2	1	1	1	1	5
dct_dlslm	13	15	2	1	1	1	1	5
igraph_community_walktrap	19	11	1	1	1	1	1	5
dct_dlslm_no_contraction	10	12	2	2	3	4	3	5
oslom_louvain_method	12	8	2	2	3	3	3	5
networkkit_PLM	16	18	4	1	1	1	1	6
cdc_MSCD_RB	8	11	5	5	4	3	3	6
igraph_community_multilevel	15	18	4	1	1	1	1	6
cdc_MOSES	28	1	1	2	2	5	9	7
cdc_MSCD_AFG	12	17	5	5	4	3	3	7
cdc_MSCD_SO	13	15	5	5	4	3	3	7
cdc_MSCD_SOM	15	13	5	5	4	3	3	7
oslom_modopt	21	27	2	2	2	1	1	8
cdc_GCE	29	4	1	1	5	7	7	8
mcl_MCL	7	10	7	4	5	8	12	8
pycabem_LabelRank	1	8	14	2	4	10	19	8
igraph_community_spinglass	18	22	13	6	2	1	1	9



## Gamma Effect

Recall  $\gamma = k_o/k_i$  which measures how well a cluster is separated from others. Since  $\gamma$  is a continuous number, it was categorized into 5 bins from 0 to 1.

Table 5 (full in Table 10) shows the ranks for the bins and Figure 4 displays the actual changes. OSOM still outperforms others.

Table 5: NMI ranks by  $\gamma$  for SIMPLE benchmark (short)

Algorithm	$\gamma(0.0-0.2)$	$\gamma(0.2-0.4)$	$\gamma(0.4-0.6)$	$\gamma(0.6-0.8)$	$\gamma(0.8-1.0)$	Mean
oslom_OSLOM	1	2	1	1	1	1
igraph_community_walktrap	1	1	2	3	3	2
dct_dlplm	1	1	2	3	2	2
karateclub_EdMot	1	1	2	3	4	2
dct_seq_louvain	1	1	2	3	4	2
dct_dlslm	1	1	2	3	4	2
dct_dlslm_with_seq	1	1	2	4	4	2
oslom_Infohiermap	1	2	2	2	2	2
igraph_community_multilevel	1	1	3	4	5	3
networkkit_PLM	1	1	3	4	5	3
dct_dlslm_map_eq	1	2	4	5	5	3
oslom_modopt	1	3	4	4	5	3
alg_Paris	1	3	4	3	6	3
dct_infomap	1	3	4	5	8	4
dct_dlslm_no.contraction	1	3	6	6	6	4
oslom_louvain_method	1	2	6	5	5	4
igraph_community_infomap	1	2	4	5	8	4
oslom_lpm	1	3	4	6	8	4
cdc_MSCD_AFG	3	4	5	6	7	5
cdc_MSCD_RB	3	4	5	5	6	5
igraph_community_spinglass	2	4	6	6	7	5
cdc_MSCD_HSLSW	3	4	6	6	8	5
cdc_MSCD_SO	3	4	5	5	6	5
oslom_copra	1	4	5	6	11	5
igraph_community_label_propagation	1	4	4	7	8	5
cdc_MSCD_SOM	3	4	5	5	6	5

## 6 Summary

In this paper we benchmarked more than 70 graph clustering programs for unweighted and weighted graphs. We tested their runtimes up to 100K nodes . When evaluating the quality of clustering, we focused on NMI metric and tested with LFR and SIMPLE benchmarks. Specifically we introduced SIMPLE benchmark to investigate how performance varies with cluster size, intra-degree and inter-degree. Our work is able to not

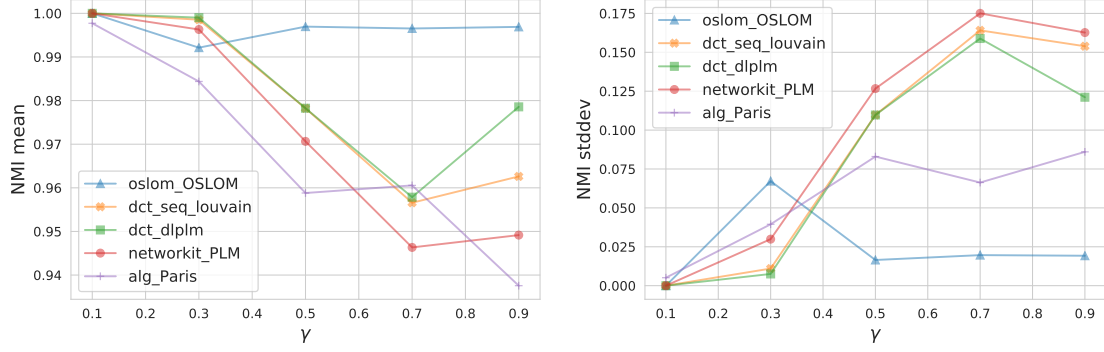


Figure 4: Selective Comparison of NMI Performance by  $\gamma$  for SIMPLE Benchmark

only supply a start point for engineers to select clustering algorithms but also could provide a viewpoint for researchers to design new algorithms.

We opened the source code which is shared at [https://bitbucket.org/LizhenShi/graph\\_clustering\\_toolkit](https://bitbucket.org/LizhenShi/graph_clustering_toolkit) where documents and docker image are also provided.

## References

- [1] Yong-Yeol Ahn, James P Bagrow, and Sune Lehmann. 2010. Link communities reveal multiscale complexity in networks. *nature* 466, 7307 (2010), 761–764.
- [2] A. Arenas, A. Fernández, and S. Gómez. 2008. Analysis of the structure of complex networks at different resolution levels. *New Journal of Physics* 10 (2008). <https://doi.org/10.1088/1367-2630/10/5/053039> arXiv:physics/0703218
- [3] Seung-Hee Bae, Daniel Halperin, Jevin West, Martin Rosvall, and Bill Howe. 2013. Scalable flow-based community detection for large-scale network analysis. In *2013 IEEE 13th International Conference on Data Mining Workshops*. IEEE, 303–310.
- [4] Seung Hee Bae and Bill Howe. 2015. GossipMap: A distributed community detection algorithm for billion-edge directed graphs. In *International Conference for High Performance Computing, Networking, Storage and Analysis, SC*, Vol. 15-20-Nove. <https://doi.org/10.1145/2807591.2807668>
- [5] Vincent D Blondel, Jean Loup Guillaume, Renaud Lambiotte, and Etienne Lefebvre. 2008. Fast unfolding of communities in large networks. *Journal of Statistical Mechanics: Theory and Experiment* 2008, 10 (2008). <https://doi.org/10.1088/1742-5468/2008/10/P10008> arXiv:0803.0476
- [6] Thomas Bonald, Bertrand Charpentier, Alexis Galland, and Alexandre Hollocou. 2018. Hierarchical Graph Clustering using Node Pair Sampling. (jun 2018). arXiv:1806.01664 <http://arxiv.org/abs/1806.01664>
- [7] Lijun Chang, Wei Li, Lu Qin, Wenjie Zhang, and Shiyu Yang. 2017. PSCAN : Fast and Exact Structural Graph Clustering. *IEEE Transactions on Knowledge and Data Engineering* 29, 2 (feb 2017), 387–401. <https://doi.org/10.1109/TKDE.2016.2618795>
- [8] Yulin Che, Shixuan Sun, and Qiong Luo. 2018. Parallelizing pruning-based graph structural clustering. In *Proceedings of the 47th International Conference on Parallel Processing*. 1–10.
- [9] Aaron Clauset, M. E.J. Newman, and Cristopher Moore. 2004. Finding community structure in very large networks. *Physical Review E - Statistical Physics, Plasmas, Fluids, and Related Interdisciplinary Topics* 70, 6 (dec 2004), 6. <https://doi.org/10.1103/PhysRevE.70.066111> arXiv:cond-mat/0408187
- [10] Michele Coscia, Giulio Rossetti, Fosca Giannotti, and Dino Pedreschi. 2012. DEMON: A local-first discovery method for overlapping communities. In *Proceedings of the ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. 615–623. <https://doi.org/10.1145/2339530.2339630> arXiv:1206.0629
- [11] Michele Coscia, Giulio Rossetti, Fosca Giannotti, and Dino Pedreschi. 2014. Uncovering hierarchical and overlapping communities with a local-first approach. *ACM Transactions on Knowledge Discovery from Data* 9, 1 (aug 2014), 1–27. <https://doi.org/10.1145/2629511>
- [12] Gabor Csardi and Tamas Nepusz. 2006. The igraph software package for complex network research. *InterJournal Complex Systems* (2006), 1695. <http://igraph.org>
- [13] Alessandro Epasto, Silvio Lattanzi, and Renato Paes Leme. 2017. Ego-splitting framework: From non-overlapping to overlapping clusters. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*. 145–154.
- [14] Gary William Flake, Robert E. Tarjan, and Kostas Tsioutsoulis. 2004. Graph clustering and minimum cut trees. *Internet Mathematics* 1, 4 (2004), 385–408. <https://doi.org/10.1080/15427951.2004.10129093>

- [15] Brendan J Frey and Delbert Dueck. 2007. Clustering by passing messages between data points. *science* 315, 5814 (2007), 972–976.
- [16] M Girvan and M. E.J. Newman. 2002. Community structure in social and biological networks. *Proceedings of the National Academy of Sciences of the United States of America* 99, 12 (2002), 7821–7826. <https://doi.org/10.1073/pnas.122653799> arXiv:cond-mat/0112110
- [17] Joseph E Gonzalez, Danny Bickson, and Carlos Guestrin. [n. d.]. PowerGraph : Distributed Graph-Parallel Computation on Natural Graphs. 12 ([n. d.]), 17.
- [18] Prem K Gopalan and David M Blei. 2013. Efficient discovery of overlapping communities in massive networks. *Proceedings of the National Academy of Sciences* 110, 36 (2013), 14534–14539.
- [19] Enrico Gregori, Luciano Lenzini, and Simone Mainardi. 2013. Parallel  $\kappa$ -clique community detection on large-scale networks. *IEEE Transactions on Parallel and Distributed Systems* 24, 8 (aug 2013), 1651–1660. <https://doi.org/10.1109/TPDS.2012.229>
- [20] Steve Gregory. 2007. An Algorithm to Find Overlapping Community Structure in Networks. *Lecture Notes in Computer Science* 4702 (2007), 91. <https://doi.org/10.1007/978-3-540-87479-9>
- [21] Steve Gregory. 2010. Finding overlapping communities in networks by label propagation. *New Journal of Physics* 12, 10 (oct 2010), 103018. <https://doi.org/10.1088/1367-2630/12/10/103018>
- [22] Michael Hamann, Ben Strasser, Dorothea Wagner, and Tim Zeitz. 2018. Distributed Graph Clustering Using Modularity and Map Equation. In *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, Vol. 11014 LNCS. 688–702. [https://doi.org/10.1007/978-3-319-96983-1\\_49](https://doi.org/10.1007/978-3-319-96983-1_49) arXiv:1710.09605
- [23] Alexandre Hollocou, Julien Maudet, Thomas Bonald, and Marc Lelarge. 2017. A Streaming Algorithm for Graph Clustering. (dec 2017). arXiv:1712.04337 <http://arxiv.org/abs/1712.04337>
- [24] Jianbin Huang, Heli Sun, Yaguang Liu, Qinbao Song, and Tim Weninger. 2011. Towards online multiresolution community detection in large-scale networks. *PLoS ONE* 6, 8 (aug 2011). <https://doi.org/10.1371/journal.pone.0023829>
- [25] L. Hubert and P. Arabie. 1985. Comparing partitions. *Journal of classification* 2, 1 (1985), 193–218. <http://scholar.google.de/scholar.bib?q=info:IkrWWF2JxwoJ:scholar.google.com/&output=citation&hl=de&ct=citation&cd=0>
- [26] Stephen Kelley. 2009. *The existence and discovery of overlapping communities in large-scale networks*. Ph.D. Dissertation.
- [27] Da Kuang, Chris Ding, and Haesun Park. 2012. Symmetric nonnegative matrix factorization for graph clustering. In *Proceedings of the 2012 SIAM international conference on data mining*. SIAM, 106–117.
- [28] Jussi M Kumpula, Mikko Kivelä, Kimmo Kaski, and Jari Saramäki. 2008. Sequential algorithm for fast clique percolation. *Physical Review E* 78, 2 (2008). <https://doi.org/10.1103/physreve.78.026109> arXiv:0805.1449
- [29] Andrea Lancichinetti and Santo Fortunato. [n. d.]. Benchmarks for testing community detection algorithms on directed and weighted graphs with overlapping communities. arXiv:0904.3940v2 <https://arxiv.org/pdf/0904.3940.pdf>
- [30] Andrea Lancichinetti and Santo Fortunato. 2009. Benchmarks for testing community detection algorithms on directed and weighted graphs with overlapping communities. *Physical Review E* 80, 1 (2009), 016118.

- [31] Andrea Lancichinetti and Santo Fortunato. 2009. Community detection algorithms: A comparative analysis. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 80, 5 (aug 2009). <https://doi.org/10.1103/PhysRevE.80.056117> arXiv:0908.1062
- [32] Andrea Lancichinetti, Santo Fortunato, and János Kertész. 2009. Detecting the overlapping and hierarchical community structure in complex networks. *New Journal of Physics* 11 (2009). <https://doi.org/10.1088/1367-2630/11/3/033015> arXiv:0802.1218
- [33] Andrea Lancichinetti, Santo Fortunato, and Filippo Radicchi. 2008. Benchmark graphs for testing community detection algorithms. *Physical Review E* 78, 4 (Oct. 2008), 046110+. <https://doi.org/10.1103/physreve.78.046110>
- [34] Andrea Lancichinetti, Filippo Radicchi, José J. Ramasco, and Santo Fortunato. 2011. Finding statistically significant communities in networks. *PLoS ONE* 6, 4 (2011). <https://doi.org/10.1371/journal.pone.0018961> arXiv:1012.2363
- [35] E. Le Martelot and C. Hankin. 2013. Fast Multi-Scale Detection of Relevant Communities in Large-Scale Networks. *Comput. J.* 56, 9 (sep 2013), 1136–1150. <https://doi.org/10.1093/comjnl/bxt002>
- [36] Conrad Lee, Fergal Reid, Aaron McDaid, and Neil Hurley. 2010. Detecting highly overlapping community structure by greedy clique expansion. (2010). <https://doi.org/10.1.1/770.7354> arXiv:1002.1827
- [37] Jure Leskovec and Rok Sosič. 2016. SNAP: A General-Purpose Network Analysis and Graph-Mining Library. *ACM Transactions on Intelligent Systems and Technology (TIST)* 8, 1 (2016), 1.
- [38] Kexue Li, Yakang Lu, Li Deng, Lili Wang, Lizhen Shi, and Zhong Wang. 2020. Deconvolute individual genomes from metagenome sequences through short read clustering. *PeerJ* 8 (2020), e8966.
- [39] Pei-Zhen Li, Ling Huang, Chang-Dong Wang, and Jian-Huang Lai. 2019. EdMot: An Edge Enhancement Approach for Motif-aware Community Detection. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 479–487.
- [40] Kathy Macropol and Ambuj Singh. 2010. Scalable discovery of best clusters on large graphs. *Proceedings of the VLDB Endowment* 3, 1 (2010), 693–702. <https://doi.org/10.14778/1920841.1920930>
- [41] Son T. Mai, Martin Storgaard Dieu, Ira Assent, Jon Jacobsen, Jesper Kristensen, and Mathias Birk. 2017. Scalable and interactive graph clustering algorithm on multicore CPUs. In *Proceedings - International Conference on Data Engineering*. 349–360. <https://doi.org/10.1109/ICDE.2017.94>
- [42] Erwan Le Martelot and Chris Hankin. 2013. Fast Multi-Scale Detection of Relevant Communities. *Comput. J.* 56 (2013), 1136. arXiv:1204.1002 <http://arxiv.org/abs/1204.1002>
- [43] Aaron McDaid and Neil Hurley. 2010. Detecting Highly Overlapping Communities with Model-Based Overlapping Seed Expansion. In *2010 International Conference on Advances in Social Networks Analysis and Mining*. IEEE, 112–119. <https://doi.org/10.1109/ASONAM.2010.77>
- [44] M. E.J. Newman. 2006. Finding community structure in networks using the eigenvectors of matrices. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 74, 3 (2006). <https://doi.org/10.1103/PhysRevE.74.036104> arXiv:physics/0605087
- [45] Michael Ovelgönne and Andreas Geyer-Schulz. 2013. An ensemble learning strategy for graph clustering. 187–205. <https://doi.org/10.1090/conm/588/11701>

- [46] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. 2011. Scikit-learn: Machine Learning in Python. *Journal of Machine Learning Research* 12 (2011), 2825–2830.
- [47] Pascal Pons and Matthieu Latapy. 2006. Computing communities in large networks using random walks. *Journal of Graph Algorithms and Applications* 10, 2 (2006), 191–218. <https://doi.org/10.7155/jgaa.00124> arXiv:physics/0512106
- [48] Arnau Prat-Pérez, David Dominguez-Sal, and Josep-Lluís Larriba-Pey. 2014. High quality, scalable and parallel community detection for large real graphs. In *Proceedings of the 23rd international conference on World wide web*. 225–236.
- [49] Usha Nandini Raghavan, Réka Albert, and Soundar Kumara. 2007. Near linear time algorithm to detect community structures in large-scale networks. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 76, 3 (2007). <https://doi.org/10.1103/PhysRevE.76.036106> arXiv:0709.2938
- [50] Jörg Reichardt and Stefan Bornholdt. 2006. Statistical mechanics of community detection. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 74, 1 (2006). <https://doi.org/10.1103/PhysRevE.74.016110> arXiv:cond-mat/0603718
- [51] Fergal Reid, Aaron Mcdaid, and Neil Hurley. 2012. Percolation computation in complex networks. In *Proceedings of the 2012 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining, ASONAM 2012*. 274–281. <https://doi.org/10.1109/ASONAM.2012.54> arXiv:1205.0038
- [52] Peter Ronhovde and Zohar Nussinov. 2010. Local resolution-limit-free Potts model for community detection. *Physical Review E* 81, 4 (2010), 046114.
- [53] Andrew Rosenberg and Julia Hirschberg. 2007. V-Measure: A Conditional Entropy-Based External Cluster Evaluation Measure.. In *EMNLP-CoNLL*, Vol. 7. 410–420.
- [54] Martin Rosvall and Carl T. Bergstrom. 2008. Maps of random walks on complex networks reveal community structure. *Proceedings of the National Academy of Sciences of the United States of America* 105, 4 (jan 2008), 1118–1123. <https://doi.org/10.1073/pnas.0706851105> arXiv:0707.0609
- [55] Martin Rosvall and Carl T Bergstrom. 2008. Maps of random walks on complex networks reveal community structure. *Proceedings of the National Academy of Sciences* 105, 4 (2008), 1118–1123.
- [56] Martin Rosvall and Carl T. Bergstrom. 2011. Multilevel compression of random walks on networks reveals hierarchical organization in large integrated systems. *PLoS ONE* 6, 4 (2011). <https://doi.org/10.1371/journal.pone.0018209> arXiv:1010.0431
- [57] Benedek Rozemberczki, Oliver Kiss, and Rik Sarkar. 2020. An API Oriented Open-source Python Framework for Unsupervised Learning on Graphs. arXiv:cs.LG/2003.04819
- [58] Marta Sales-Pardo, Roger Guimera, André A Moreira, and Luís A Nunes Amaral. 2007. Extracting the hierarchical organization of complex systems. *Proceedings of the National Academy of Sciences* 104, 39 (2007), 15224–15229.
- [59] Huawei Shen, Xueqi Cheng, Kai Cai, and Mao Bin Hu. 2009. Detect overlapping and hierarchical community structure in networks. *Physica A: Statistical Mechanics and its Applications* 388, 8 (2009), 1706–1712. <https://doi.org/10.1016/j.physa.2008.12.021> arXiv:0810.3093
- [60] Lizhen Shi, Xiandong Meng, Elizabeth Tseng, Michael Mascagni, and Zhong Wang. 2019. SpaRC: scalable sequence clustering using Apache Spark. *Bioinformatics* 35, 5 (2019), 760–768.

- [61] Hiroaki Shiokawa, Yasuhiro Fujiwara, and Makoto Onizuka. 2015. SCAN++: Efficient Algorithm for Finding Clusters , Hubs and Outliers on Large-scale Graphs. *Proceedings of the VLDB Endowment* (2015), 3–9. <https://doi.org/10.14778/2809974.2809980>
- [62] Christian L Staudt, Aleksejs Sazonovs, and Henning Meyerhenke. 2016. NetworKit: A tool suite for large-scale complex network analysis. *Network Science* 4, 4 (2016), 508–530.
- [63] X Yu Stella and Jianbo Shi. 2003. Multiclass spectral clustering. In *null*. IEEE, 313.
- [64] Bing-Jie Sun, Huawei Shen, Jinhua Gao, Wentao Ouyang, and Xueqi Cheng. 2017. A non-negative symmetric encoder-decoder approach for community detection. In *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management*. 597–606.
- [65] V A Traag and Jeroen Bruggeman. 2009. Community detection in networks with positive and negative links. *Physical Review E - Statistical, Nonlinear, and Soft Matter Physics* 80, 3 (2009). <https://doi.org/10.1103/PhysRevE.80.036115> arXiv:0811.2329
- [66] Stijn Marinus Van Dongen. 2000. *Graph clustering by flow simulation*. Ph.D. Dissertation.
- [67] Twan van Laarhoven and Elena Marchiori. 2013. Graph clustering with local search optimization: The resolution bias of the objective function matters most. *Phys. Rev. E* 87 (Jan 2013), 012812. Issue 1. <https://doi.org/10.1103/PhysRevE.87.012812>
- [68] Nguyen Xuan Vinh, Julien Epps, and James Bailey. 2010. Information theoretic measures for clusterings comparison: Variants, properties, normalization and correction for chance. *The Journal of Machine Learning Research* 11 (2010), 2837–2854.
- [69] Duncan J. Watts and Steven Strogatz. 1998. Collective dynamics of ‘small-world’ networks. *Nature* 393 (June 1998), 440–442.
- [70] Jierui Xie and Boleslaw K Szymanski. 2013. Labelrank: A stabilized label propagation algorithm for community detection in networks. In *2013 IEEE 2nd Network Science Workshop (NSW)*. IEEE, 138–143.
- [71] Jierui Xie, Boleslaw K Szymanski, and Xiaoming Liu. 2011. SLPA: Uncovering overlapping communities in social networks via a speaker-listener interaction dynamic process. In *Proceedings - IEEE International Conference on Data Mining, ICDM*. 344–349. <https://doi.org/10.1109/ICDMW.2011.154> arXiv:1109.5720
- [72] Bowen Yan and Steve Gregory. 2009. Detecting communities in networks by Merging Cliques. In *Proceedings - 2009 IEEE International Conference on Intelligent Computing and Intelligent Systems, ICIS 2009*, Vol. 1. 832–836. <https://doi.org/10.1109/ICICISYS.2009.5358036>
- [73] Jaewon Yang and Jure Leskovec. 2012. Defining and Evaluating Network Communities Based on Ground-Truth. In *2012 IEEE 12th International Conference on Data Mining*. 745–754. <https://doi.org/10.1109/ICDM.2012.138>
- [74] Jaewon Yang and Jure Leskovec. 2013. Overlapping community detection at scale: a nonnegative matrix factorization approach. In *Proceedings of the sixth ACM international conference on Web search and data mining*. 587–596.
- [75] Zhao Yang, René Algesheimer, and Claudio J Tessone. 2016. A comparative analysis of community detection algorithms on artificial networks. *Scientific Reports* 6 (2016), 30750.
- [76] Fanghua Ye, Chuan Chen, and Zibin Zheng. 2018. Deep autoencoder-like nonnegative matrix factorization for community detection. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management*. 1393–1402.

## A Full Tables of Benchmarks

Table 6: Graph Support of Algorithms

Algorithm	Directed?	Weighted?	Overlapped?
oslom_Infomax [56]	Y	Y	N
oslom_Infomap [54]	N	Y	N
oslom.OSLOM [34]	N	Y	Y
oslom_copra [21]	Y	Y	Y
oslom_louvain_method [5]	N	Y	N
oslom_lpm [49]	N	Y	N
oslom_modopt [58]	N	Y	N
pycabem_GANXiSw [71]	Y	Y	Y
pycabem_HiReCS	Y	Y	Y
pycabem_LabelRank [70]	N	N	N
cdc_CONGA [20]	Y	Y	Y
cdc_Connected_Iterative_Scan [26]	Y	Y	Y
cdc_EAGLE [59]	Y	Y	Y
cdc_FastCpm [51]	Y	Y	Y
cdc_GCE [36]	N	N	N
cdc_LinkCommunities [1]	Y	Y	?
cdc_MOSES [43]	N	Y	Y
cdc_MSCD_AFG [2, 42]	N	Y	N
cdc_MSCD_HLSW [24, 42]	N	Y	N
cdc_MSCD_LFK [32, 42]	N	Y	N
cdc_MSCD_LFK2 [32, 42]	Y	Y	Y
cdc_MSCD_RB [50, 42]	N	Y	N
cdc_MSCD_SO [50, 42]	N	Y	N
cdc_MSCD_SOM [50, 42]	N	Y	N
cdc_ParCPM [19]	N	N	Y
cdc_SVINET [18]	Y	Y	Y
cdc_TopGC [40]	Y	Y	Y
cdc_clique_modularity [72]	N	N	N
cgcc_CGIC [45]	N	N	N
dct_dlplm [22]	Y	Y	N
dct_dlslm [22]	Y	Y	N
dct_dlslm_map_eq [22]	N	Y	N
dct_dlslm_no_contraction [22]	N	Y	N
dct_dlslm_with_seq [22]	N	Y	N
dct_infomap [22]	N	Y	N
dct_seq_louvain [22]	N	Y	N
igraph_community_label_propagation [49]	N	Y	N
igraph_community_splglass [50, 65]	N	Y	N
igraph_community_walktrap [47]	N	Y	N
networkit_CutClustering [14]	N	Y	N
networkit_LPDegreeOrdered	N	N	N
networkit_PLM	N	Y	N

Continued on next page



Table 6 – continued from previous page

Algorithm	Directed?	Weighted?	Overlapped?
networkit_PLP [45]	Y	Y	N
alg_GossipMap [4]	N	Y	N
alg_RelaxMap [3]	N	Y	N
alg_pg_label_propagation [17]	Y	Y	N
scan_AnyScan_Scan [41]	N	N	N
scan_AnyScan_anyScan [41]	N	N	N
scan_AnyScan_anyScanParl [41]	N	N	N
scan_AnyScan_pScan [41]	N	N	N
scan_Scanpp [61]	N	N	N
scan_pScan [7]	N	N	N
scan_ppScan [8]	N	N	N
scan_ppScanSSE [8]	N	N	N
sklearn_AffinityPropagation [15]	Y	Y	N
sklearn_SpectralClustering [63]	Y	Y	N
alg_lso_cluster [67]	Y	Y	N
alg_streamcom [23]	Y	Y	N
cdc_CliquePercolation [28]	N	N	N
cdc_DEMON [10]	N	Y	?
cdc_HDEMON [11]	N	N	N
cdc_MSCD_RN [52]	N	N	N
igraph_community_edge_betweenness [16]	N	Y	N
igraph_community_fastgreedy [9]	N	Y	N
igraph_community_infomap [55]	N	Y	N
igraph_community_leading_eigenvector [44]	N	Y	N
igraph_community_multilevel [5]	N	Y	N
igraph_community_optimal_modularity	N	Y	N
karateclub_BigClam [74]	N	Y	N
karateclub_DANMF [76]	N	Y	N
karateclub_EdMot [39]	N	Y	N
karateclub_EgoNetSplitter [13]	N	Y	Y
karateclub_NNSED [64]	N	Y	N
karateclub_SCD [48]	N	N	N
karateclub_SymmNMF [27]	N	Y	N
mcl_MCL [66]	N	Y	N
snap_Clauset_Newman_Moore [9]	N	N	N
snap_Girvan_Newman [16]	N	N	N
alg_Paris [6]	N	Y	N

Table 7: Runtime Benchmark Ranks

Algorithm	RAND	SIMPLE	LFR	Median
scan_ppScanSSE	1	1	8	1
scan_ppScan	2	2	9	2
Continued on next page				

Table 7 – continued from previous page

<b>Algorithm</b>	<b>RAND</b>	<b>SIMPLE</b>	<b>LFR</b>	<b>Median</b>
networkit_PLP	3	4	3	3
igraph_community_label_propagation	12	3	2	3
alg_streamcom	4	5	5	5
networkit_LPDegreeOrdered	69	6	4	6
scan_pScan	5	7	28	7
igraph_community_multilevel	41	8	7	8
scan_Scanpp	8	9	10	9
dct_seq_louvain	23	10	6	10
scan_AnyScan_pScan	10	11	26	11
alg_pg_label_propagation	15	12	11	12
scan_AnyScan_anyScanParl	11	13	37	13
cdc_MSCD_RB	36	14	14	14
scan_AnyScan_anyScan	7	16	38	15
cdc_MSCD_RN	17	17	34	16
alg_iso_cluster	25	18	12	17
networkit_PLM	18	62	1	17
dct_dlslm_with_seq	22	19	18	19
dct_dlslm_no_contraction	20	20	17	20
dct_dlslm_map_eq	29	23	16	21
cdc_TopGC	21	27	23	21
oslom_louvain_method	31	24	20	23
dct_dlslm	24	21	30	23
dct_infomap	43	25	22	25
scan_AnyScan_Scan	9	26	40	26
dct_dlplm	26	22	29	26
cdc_MSCD_AFG	34	15	27	28
alg_RelaxMap	33	28	19	29
oslom_lpm	28	45	13	29
oslom_Infomiermap	56	29	24	31
oslom_copra	35	30	31	32
cdc_MSCD_LFK2	16	31	49	32
igraph_community_leading_eigenvector	32	44	15	34
igraph_community_infomap	66	32	33	35
oslom_Infomap	51	34	21	36
alg_GossipMap	75	33	35	37
cdc_MSCD_LFK	38	35	51	38
mcl_MCL	54	39	36	39
cdc_CliquePercolation	13	40	60	40
alg_Paris	37	41	45	41
karateclub_SymmNMF	42	36	43	42
karateclub_BigClam	47	37	44	43
cdc_MSCD_HSLSW	45	43	59	44
cgcc_CGGC	59	46	32	45
karateclub_EgoNetSplitter	46	48	62	46
snap_Clauset_Newman_Moore	64	50	25	47

Continued on next page

Table 7 – continued from previous page

<b>Algorithm</b>	<b>RAND</b>	<b>SIMPLE</b>	<b>LFR</b>	<b>Median</b>
cdc_SVINET	40	51	50	47
karateclub_DANMF	52	55	47	49
pycabem_GANXiSw	50	52	53	49
igraph_community_walktrap	58	53	52	51
karateclub_SCD	49	54	67	52
karateclub_EdMot	55	38	61	53
cdc_MSCD_SO	65	49	55	53
cdc_MOSES	27	56	65	55
igraph_community_fastgreedy	48	58	56	55
pycabem_HiReCS	60	42	57	57
cdc_clique_modularity	67	57	41	57
karateclub_NNSED	62	47	58	59
pycabem_LabelRank	57	59	64	60
oslom_modopt	71	60	54	61
sklearn_AffinityPropagation	68	61	42	62
networkit_CutClustering	61	69	46	62
cdc_LinkCommunities	30	63	70	64
igraph_community_spinglass	63	65	63	64
sklearn_SpectralClustering	70	64	39	66
cdc_DEMON	44	66	69	67
cdc_Connected_Iterative_Scan	53	68	66	67
oslom_OSLOM	73	67	68	69
cdc_MSCD_SOM	72	70	48	70
cdc_GCE	14	71	72	71
cdc_HDEMON	39	76	71	71
cdc_FastCpm	19	72	73	73
cdc_ParCPM	6	73	77	74
igraph_community_edge_betweenness	76	74	74	75
cdc_EAGLE	74	75	78	76
cdc_CONGA	78	77	75	77
snap_Girvan_Newman	77	78	76	77
igraph_community_optimal_modularity	79	79	79	79

Table 8: NMI ranks for LFR unweighted benchmark (full)

<b>Algorithm</b>	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	<b>Median</b>
oslom_OSLOM	1	1	6	5	1	2	1	2	3	2
igraph_community_spinglass	2	2	2	1	3	4	2	8	16	4
dct_dlplm	1	1	1	3	4	5	5	13	16	5
oslom_modopt	1	1	1	2	4	5	3	10	16	5
igraph_community_walktrap	1	1	1	4	3	1	4	10	17	5
igraph_community_leading_eigenvector	1	3	4	4	10	8	6	6	13	6
dct_dlslm_no_contraction	1	1	3	8	5	6	8	11	14	6
oslom_louvain_method	1	1	3	7	4	6	5	12	16	6

Continued on next page

Table 8 – continued from previous page

Algorithm	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	Median
dct_dlslm	1	1	1	5	5	5	3	13	16	6
dct_seq_louvain	1	1	1	7	2	5	7	12	16	6
dct_dlslm_with_seq	1	1	1	4	6	4	5	13	16	6
networkit_PLM	1	1	1	4	7	5	7	13	16	6
igraph_community_multilevel	1	1	1	8	3	4	7	13	16	6
karateclub_EgoNetSplitter	8	4	2	6	6	4	4	10	15	7
alg_iso_cluster	1	1	5	10	9	7	11	14	15	8
igraph_community_fastgreedy	1	3	6	9	8	8	10	11	16	8
snap_Clauset_Newman_Moore	1	5	8	12	12	9	9	6	14	8
oslom_Infohiermap	1	1	13	22	18	10	2	1	2	8
karateclub_DANMF	13	13	9	13	15	12	4	1	1	9
cgcc_CGGC	21	17	15	11	11	3	3	8	16	12
scan_AnyScan_Scan	5	7	11	19	22	18	22	4	4	12
dct_dlslm_map_eq	1	1	7	11	14	16	24	18	17	12
scan_AnyScan_pScan	5	7	11	19	22	18	22	4	4	12
karateclub_SCD	1	1	12	15	25	19	22	7	12	13
scan_AnyScan_anyScan	5	7	11	20	22	18	22	4	4	13
cdc_clique_modularity	8	9	10	16	16	13	12	13	16	13
scan_AnyScan_anyScanParl	5	7	11	20	22	18	22	4	4	13
sklearn_SpectralClustering	15	17	17	14	13	11	9	10	16	14
scan_pScan	8	8	14	22	23	21	22	5	6	14
scan_ppScan	8	8	14	22	23	21	22	5	6	14
scan_ppScanSSE	8	8	14	22	23	21	22	5	6	14
cdc_GCE	1	1	1	17	24	27	24	18	17	14
pycabem_LabelRank	11	12	16	19	18	15	16	9	11	14
alg_Paris	9	12	18	18	20	17	13	10	15	15
karateclub_NNSED	12	19	22	24	28	20	19	6	5	17
alg_streamcom	22	23	28	23	21	14	9	3	8	17
mcl_MCL	1	1	15	35	33	27	24	18	2	17
cdc_MOSES	14	18	19	21	17	16	14	14	16	17
karateclub_EdMot	10	19	21	26	19	22	19	13	13	18
dct_infomap	1	1	19	35	33	27	24	18	17	19
cdc_HDEMON	25	25	30	25	23	16	12	5	7	19
cdc_Connected_Iterative_Scan	3	16	22	23	24	25	24	18	17	19
sklearn_AffinityPropagation	18	20	27	27	26	22	19	14	11	20
oslom_lpm	1	11	20	25	33	27	24	18	17	20
igraph_community_label_propagation	6	6	24	29	33	27	24	18	17	20
networkit_LPDegreeOrdered	4	14	26	30	33	27	24	18	17	21
pycabem_GANXiSw	6	15	22	25	33	27	24	18	17	21
oslom_copra	1	16	30	35	33	27	24	18	7	21
cdc_CONGA	24	24	25	28	25	22	18	15	13	22
alg_pg_label_propagation	7	13	23	35	33	27	24	18	17	22
cdc_ParCPM	20	23	28	31	22	24	17	14	17	22
igraph_community_infomap	1	10	29	35	33	27	24	18	17	22
cdc_SVINET	16	22	30	27	30	22	18	17	16	22

Continued on next page

Table 8 – continued from previous page

Algorithm	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	Median
karateclub_SymmNMF	23	26	32	31	29	22	16	10	9	22
cdc_MSCD_RN	28	28	33	29	27	19	15	8	10	22
cdc_TopGC	26	27	31	32	28	23	19	13	14	24
networkit_PLP	19	21	34	35	33	27	24	18	17	25
pycabem_HiReCS	29	30	35	33	31	26	22	16	15	26
cdc_MSCD_SO	30	30	35	34	31	26	21	16	15	26
cdc_MSCD_AFG	30	30	35	33	31	25	21	16	15	26
cdc_MSCD_SOM	30	30	35	33	31	26	22	16	15	26
cdc_MSCD_LFK2	29	29	35	33	31	26	23	16	16	26
cdc_MSCD_RB	30	30	35	33	31	24	20	14	14	26
cdc_MSCD_LFK	30	30	35	34	32	26	23	17	16	27
alg_RelaxMap	17	32	37	35	33	27	24	18	17	27
cdc_MSCD_HSLSW	30	30	35	34	32	26	23	17	16	27
alg_GossipMap	25	32	37	35	33	27	24	18	17	28
karateclub_BigClam	32	31	36	34	33	27	24	18	17	28
cdc_DEMON	32	32	37	35	33	27	24	18	17	28
scan_Scanpp	32	32	37	35	33	27	24	18	17	28
cdc_CliquePercolation	32	32	37	35	33	27	24	18	17	28
cdc_LinkCommunities	32	32	37	35	33	27	24	18	17	28
oslom_Infomap	27	32	37	35	33	27	24	18	17	28
networkit_CutClustering	32	32	37	35	33	27	24	18	17	28
cdc_FastCpm	32		37	35	33	27	23	18	16	28

Table 9: NMI ranks by cluster size for SIMPLE benchmark

Algorithm	cz004	cz008	cz016	cz032	cz064	cz128	cz256	Mean
oslom_OSLOM	1	2	1	1	1	2	1	1
oslom_Infomiermap	1	3	1	1	1	3	2	2
alg_Paris	4	7	9	5	3	2	1	4
dct_dlplm	13	9	2	1	1	1	1	4
dct_dlslm_with_seq	15	16	2	1	1	1	1	5
karateclub_EdMot	14	14	2	1	1	1	1	5
dct_seq_louvain	13	14	2	1	1	1	1	5
dct_dlslm	13	15	2	1	1	1	1	5
igraph_community_walktrap	19	11	1	1	1	1	1	5
dct_dlslm_no_contraction	10	12	2	2	3	4	3	5
oslom_louvain_method	12	8	2	2	3	3	3	5
networkit_PLM	16	18	4	1	1	1	1	6
cdc_MSCD_RB	8	11	5	5	4	3	3	6
igraph_community_multilevel	15	18	4	1	1	1	1	6
cdc_MOSES	28	1	1	2	2	5	9	7
cdc_MSCD_AFG	12	17	5	5	4	3	3	7
cdc_MSCD_SO	13	15	5	5	4	3	3	7
cdc_MSCD_SOM	15	13	5	5	4	3	3	7

Continued on next page

Table 9 – continued from previous page

Algorithm	cz004	cz008	cz016	cz032	cz064	cz128	cz256	Mean
oslom_modopt	21	27	2	2	2	1	1	8
cdc_GCE	29	4	1	1	5	7	7	8
mcl_MCL	7	10	7	4	5	8	12	8
pycabem_LabelRank	1	8	14	2	4	10	19	8
igraph_community_spinglass	18	22	13	6	2	1	1	9
cgcc_CGGC	22	21	1	2	3	5	13	10
igraph_community_infomap	29	32	5	1	1	1	1	10
cdc_Connected_Iterative_Scan	29	24	10	1	2	3	3	10
karateclub_SCD	29	19	2	3	5	7	8	10
oslom_lpm	29	34	6	1	1	1	1	10
alg_RelaxMap	27	23	8	3	3	4	4	10
cdc_MSCD_HLSLW	29	16	5	5	5	4	3	10
dct_infomap	29	33	5	1	1	1	1	10
dct_dlslm_map_eq	29	33	2	1	1	1	1	10
alg_GossipMap	29	23	3	3	3	4	5	10
cdc_MSCD_RN	3	5	9	12	9	13	19	10
cdc_MSCD_LFK	29	28	5	5	4	4	3	11
oslom_Infomap	29	25	6	3	3	4	4	11
cdc_clique_modularity	18	24	19	14	8	1	3	12
oslom_copra	29	39	12	1	1	1	1	12
igraph_community_label_propagation	29	38	11	1	1	1	1	12
alg_lso_cluster	12	32	20	11	4	1	1	12
pycabem_HiReCS	19	26	15	7	5	9	11	13
igraph_community_fastgreedy	24	35	22	10	1	1	1	13
cdc_MSCD_LFK2	29	31	10	6	6	6	6	13
networkkit_LPDegreeOrdered	29	43	21	4	1	1	1	14
snap_Clauset_Newman_Moore	25	36	23	10	1	1	1	14
cdc_DEMON	9	20	21	15	10	11	13	14
karateclub_EgoNetSplitter	5	16	17	17	18	15	17	15
alg_streamcom	2	6	18	18	23	21	24	16
networkkit_CutClustering	7	10	16	19	20	19	20	16
pycabem_GANXiSw	29	43	26	6	3	2	1	16
igraph_community_leading_eigenvector	23	37	25	13	7	3	1	16
alg_pg_label_propagation	29	43	31	9	4	1	1	17
sklearn_SpectralClustering	17	33	27	22	12	1	14	18
cdc_ParCPM	29	27	18	8	11	12	18	18
cdc_CliquePercolation	11	30	24	20	19	14	16	19
karateclub_DANMF	20	37	33	25	17	1	10	20
karateclub_SymmNMF	6	28	29	21	13	17	23	20
karateclub_NNSED	9	29	29	23	22	20	22	22
scan_AnyScan_anyScan	29	43	28	14	14	18	21	24
cdc_SVINET	26	40	32	24	21	12	12	24
scan_AnyScan_pScan	29	43	28	14	14	18	21	24
scan_AnyScan_anyScanParl	29	43	28	14	14	18	21	24
scan_AnyScan_Scan	29	43	28	14	14	18	21	24

Continued on next page

Table 9 – continued from previous page

Algorithm	cz004	cz008	cz016	cz032	cz064	cz128	cz256	Mean
scan_ppScanSSE	29	43	30	16	15	19	22	25
scan_ppScan	29	43	30	16	16	19	22	25
scan_pScan	29	43	30	16	15	19	22	25
networkit_PLP	29	43	36	26	24	16	15	27
cdc_TopGC	29	41	35	27	25	23	25	29
sklearn_AffinityPropagation	29	43	34	28	26	22	26	30
karateclub_BigClam	29	42	37	29	28	25	27	31
cdc_LinkCommunities	29	43	38	30	27	24	23	31
scan_Scanpp	29	43	38	30	29	25	27	32

Table 10: NMI ranks by  $\gamma$  for SIMPLE benchmark

Algorithm	$\gamma(0.0-0.2)$	$\gamma(0.2-0.4)$	$\gamma(0.4-0.6)$	$\gamma(0.6-0.8)$	$\gamma(0.8-1.0)$	Mean
oslom_OSLOM	1	2	1	1	1	1
igraph_community_walktrap	1	1	2	3	3	2
dct_dlplm	1	1	2	3	2	2
karateclub_EdMot	1	1	2	3	4	2
dct_seq_louvain	1	1	2	3	4	2
dct_dlslm	1	1	2	3	4	2
dct_dlslm_with_seq	1	1	2	4	4	2
oslom_Infohiermap	1	2	2	2	2	2
igraph_community_multilevel	1	1	3	4	5	3
networkit_PLM	1	1	3	4	5	3
dct_dlslm_map_eq	1	2	4	5	5	3
oslom_modopt	1	3	4	4	5	3
alg_Paris	1	3	4	3	6	3
dct_infomap	1	3	4	5	8	4
dct_dlslm_no_contraction	1	3	6	6	6	4
oslom_louvain_method	1	2	6	5	5	4
igraph_community_infomap	1	2	4	5	8	4
oslom_lpm	1	3	4	6	8	4
cdc_MSCD_AFG	3	4	5	6	7	5
cdc_MSCD_RB	3	4	5	5	6	5
igraph_community_spinglass	2	4	6	6	7	5
cdc_MSCD_HLSW	3	4	6	6	8	5
cdc_MSCD_SO	3	4	5	5	6	5
oslom_copra	1	4	5	6	11	5
igraph_community_label_propagation	1	4	4	7	8	5
cdc_MSCD_SOM	3	4	5	5	6	5
cdc_GCE	1	4	11	9	6	6
alg_GossipMap	2	4	8	8	10	6
cdc_Connected_Iterative_Scan	1	3	6	8	11	6
cdc_MOSES	1	5	9	9	8	6

Continued on next page

Table 10 – continued from previous page

Algorithm	$\gamma(0.0-0.2)$	$\gamma(0.2-0.4)$	$\gamma(0.4-0.6)$	$\gamma(0.6-0.8)$	$\gamma(0.8-1.0)$	Mean
alg_RelaxMap	2	4	7	8	11	6
oslom_Infomap	2	4	6	7	11	6
cdc_MSCD_LFK	3	4	8	8	9	6
cgcc_CGGC	8	7	9	9	9	8
alg_Iso_cluster	1	7	10	8	14	8
karateclub_SCD	2	6	10	10	12	8
networkit_LPDegreeOrdered	1	6	6	11	15	8
igraph_community_fastgreedy	1	5	10	9	14	8
snap_Clauset_Newman_Moore	1	5	10	10	15	8
cdc_MSCD_LFK2	3	7	11	11	12	9
pycabem_GANXiSw	1	6	11	12	17	9
mcl_MCL	3	8	11	11	16	10
cdc_clique_modularity	5	8	12	11	13	10
alg_pg_label_propagation	1	7	15	13	19	11
igraph_community_leading_eigenvector	3	9	14	13	18	11
pycabem_HiReCS	9	10	13	13	16	12
cdc_DEMON	2	10	17	17	25	14
pycabem_LabelRank	17	11	14	13	16	14
sklearn_SpectralClustering	12	14	16	14	20	15
cdc_MSCD_RN	13	15	17	15	22	16
karateclub_DANMF	11	15	18	15	23	16
karateclub_EgoNetSplitter	10	16	19	18	24	17
cdc_ParCPM	18	13	17	16	21	17
cdc_SVINET	6	15	20	21	28	18
cdc_CliquePercolation	2	12	21	24	29	18
networkit_CutClustering	4	17	26	24	29	20
scan_AnyScan_pScan	14	19	24	21	30	22
scan_AnyScan_anyScan	14	19	24	21	30	22
scan_AnyScan_Scan	14	19	24	21	30	22
karateclub_SymmNMF	21	19	22	19	27	22
networkit_PLP	7	18	27	25	32	22
scan_AnyScan_anyScanParl	14	19	24	21	30	22
scan_pScan	15	20	25	23	31	23
scan_ppScanSSE	15	20	25	23	31	23
scan_ppScan	16	21	25	23	31	23
karateclub_NNSED	19	22	24	22	28	23
alg_streamcom	22	23	23	20	26	23
cdc_TopGC	23	24	28	27	33	27
sklearn_AffinityPropagation	24	25	29	26	34	28
cdc_LinkCommunities	20	26	30	28	35	28
karateclub_BigClam	25	27	31	29	35	29
scan_Scanpp	26	28	32	29	36	30



Table 11: NMI ranks for LFR weighted benchmark

Algorithm	$\mu_{0.1}$	$\mu_{0.2}$	$\mu_{0.3}$	$\mu_{0.4}$	$\mu_{0.5}$	$\mu_{0.6}$	$\mu_{0.7}$	$\mu_{0.8}$	$\mu_{0.9}$	Mean
igraph_community_walktrap	1	1	2	3	1	1	1	3	5	2
oslom_OSLOM	3	2	4	4	7	6	1	1	2	3
oslom_modopt	1	1	3	3	2	4	2	8	12	4
dct_dlplm	1	1	1	1	3	2	6	8	13	4
dct_dslm	1	1	2	1	3	5	5	9	13	4
dct_seq_louvain	1	1	1	2	3	2	7	9	13	4
igraph_community_leading_eigenvector	2	1	1	5	9	7	3	8	7	5
igraph_community_spinglass	2	1	5	3	5	7	5	8	12	5
karateclub_EgoNetSplitter	4	3	3	1	3	7	7	9	12	5
igraph_community_multilevel	1	1	6	3	3	3	4	9	12	5
networkit_PLM	1	1	6	3	3	3	4	9	12	5
alg_lso_cluster	1	1	6	3	2	5	6	7	11	5
karateclub_EdMot	1	4	6	3	2	5	4	9	12	5
oslom_Infohiermap	1	5	8	10	12	9	1	1	2	5
oslom_louvain_method	1	4	6	3	4	8	6	9	11	6
igraph_community_fastgreedy	5	6	7	4	6	6	6	8	12	7
karateclub_SymmNMF	14	9	11	7	10	12	3	2	1	8
sklearn_SpectralClustering	12	9	9	6	8	11	9	7	12	9
cdc_MOSES	11	7	10	8	11	13	11	9	13	10
sklearn_AffinityPropagation	19	18	14	9	13	10	8	4	3	11
alg_Paris	16	13	13	9	14	13	10	6	9	11
karateclub_DANMF	8	12	15	11	15	15	10	7	8	11
karateclub_NNSED	13	11	16	12	17	17	13	5	4	12
cdc_Connected_Iterative_Scan	7	8	18	16	16	19	18	11	14	14
mcl_MCL	1	10	12	24	25	21	18	11	5	14
dct_infomap	1	1	14	19	25	21	18	11	14	14
cdc_CONGA	18	18	19	15	17	14	12	7	11	15
oslom_lpm	10	15	13	12	25	21	18	11	14	15
networkit_PLP	9	17	14	13	25	21	18	11	14	16
cdc_SVINET	12	16	19	17	20	20	16	10	14	16
alg_pg_label_propagation	15	18	17	14	19	21	18	11	14	16
cdc_TopGC	21	20	20	18	18	16	14	8	10	16
igraph_community_label_propagation	17	14	21	14	25	21	18	11	14	17
pycabem_GANXiSw	6	19	17	20	25	21	18	11	14	17
igraph_community_infomap	1	13	22	24	25	21	18	11	14	17
oslom_copra	20	21	22	23	21	21	18	11	6	18