

Personalized Chatbot Trustworthiness Ratings

Biplav Srivastava¹, *Senior Member, IEEE*, Francesca Rossi², Sheema Usmani³ and Mariana Bernagozzi³

Abstract—In this paper, we address a setting where a conversation agent, also known as a chatbot, cannot be modified and its training data cannot be accessed, and yet a neutral party wants to assess and communicate its trustworthiness to a user in a way that is tailored to the user’s priorities over the various trust issues (such as bias, abusive language, information leakage, or inappropriate communication complexity). Such a rating can help users choose among alternative chatbots, developers test their systems, business leaders price their offerings, and regulators set policies. We describe a chatbot rating methodology that relies on separate rating modules for each trust issue, and on users’ priority orderings among the relevant trust issues, to generate an aggregate personalized rating for the trustworthiness of a chatbot. The method is independent of the specific trust issues and is parametric to the aggregation procedure, thereby allowing for seamless generalization. We illustrate its general use, integrate it with a live chatbot, and evaluate it on four dialog datasets and representative user profiles, validated with a user survey.

Index Terms—Artificial intelligence, Ethical Aspects, Conversation Systems, AI Trust, Fairness and Bias

I. INTRODUCTION

Conversation is a hallmark of intelligence and a major way in which humans communicate. This is why conversation agents, commonly referred to as chatbots, are increasingly deployed in many domains to allow people to have a natural interaction with machines while trying to solve a specific problem. Businesses wanting to build AI-based systems to increase productivity and improve customer experience are therefore interested in building various forms of automated conversation systems, dialog systems, or chatbots. There are many platforms available to create chatbots [2], [21].

However, chatbots can be fraught with ethical issues. An extreme example is the Tay [24], [1] Twitter chatbot, released by Microsoft in 2016, that was designed to engage with people on open topics and learn from feedback, but ended up getting manipulated by users to exhibit unacceptable behavior via its extreme responses. During the COVID19 pandemic, some people have interacted with chatbots to overcome loneliness and found solace but this has raised various issues[22]. Another example is shown in Figure 1, where a chatbot to answer train delay information may raise unexpected trust issues [23]. It can become abusive, leak user travel information to other users and developers and have incomprehensible conversational style (see more examples in Illustration section later). More generally, several potential ethical issues in dialogue systems built using learning methods can be identified, such as showing implicit biases from data, being prone to adversarial

TDEBot

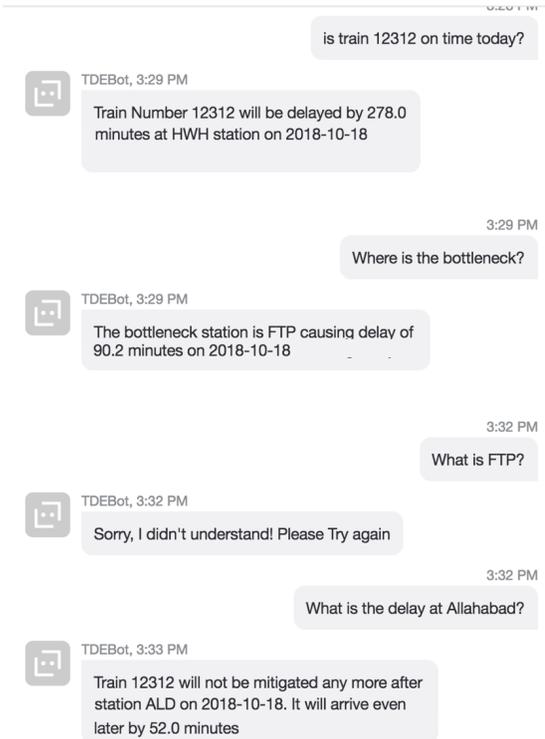


Fig. 1. Sample interaction of a user with a train assistance chatbot for Indian railways [23]. Trust issues: chatbot becoming abusive, leaking user travel information to other users and developers, having incomprehensible conversational style.

examples, being vulnerable to privacy violation, the need to maintain safety of people, and concerns about explainability and reproducibility of responses [13].

Given the widespread and increasing use of chatbots, it is important to address such ethical concerns and provide users with methods and tools to increase awareness of various properties, including non-functional properties that users may however consider important in order to trust a chatbot. For example, users may want to use chatbots that are not biased, that do not use abusive language, that do not leak information to other users, and that respond in a style which is appropriate for the user’s cognitive level.

A. Interested Parties and Their Concerns

After a chatbot is built, it is usually deployed as a shared service available to users via Internet-connected devices (such

¹AI Institute, University of South Carolina, Most of the work was done while Biplav Srivastava was at IBM. ²IBM T. J. Watson Research Center, ³IBM Global Business Services.

Manuscript submitted on January 23, 2020.

Bias	High	Score	Low	Score
Ubuntu	Mint seems better	1	no i just configured it	0
Insurance	Which Company Has The Best Retirement Plan?	1	What Does Split Limits Mean In Auto Insurance?	0
HR	Works pretty well needs some work with, better answers fantastic for simple questions and quick info	0.69	I need to search the intranet to find an answer to your question.	0.01
Restaurant	i hope prefer expensive restaurant	0.72	You are looking for a restaurant is that right?	0
Abuse	High	Score	Low	Score
Ubuntu	bazang is a f*g ^l	1	and then take a look at the iptables?	0
Insurance	no you not can get Life Insurance on a fetus the child have be born in most case at least 14 day old old before you can consider ...	1	Can A Life Insurance Claim Be Denied?	0
HR	Hi Chip, hoe do I setup Lotus notes?	0.5	I don't know the answer to your question. Let me try to find it on the intranet for you.	0
Restaurant	-	-	pizza hut cherry hinton is a great restaurant	0
Complexity	High	Score	Low	Score
Ubuntu	sudo adduser user group	1	that's my impressions	0.25
Insurance	will homeowners insurance cover flooring?	1	what are some examples of annuities?	0.5
HR	are company email addresses case sensitive?	0.92	where am i?	0.33
Restaurant	the lucky star serves Chinese food	0.94	coke it is	0.33

TABLE I
EXAMPLES OF UTTERANCES WITH HIGH AND LOW SCORES BY ISSUES.

as computers or mobiles) or embodied systems (such as robots, Amazon Alexa, or Google Home). In the process of interaction, data is passed between the user and the chatbot service provider. Many interested parties could be concerned about the chatbot's behavior. They include at least the following ones:

Users: Users are concerned with the value they derive by interacting with the chatbot and expect it to follow social and business norms similar to those they expect from human assistants. One example is that the user's information, whether sensitive or otherwise, be not revealed to other users without their permission. The repercussion of such a breach is not only loss of trust but can also be illegal, depending on the type of user (such as child, adult, patient, celebrity, government official) and context of usage. This is further complicated by the fact that, over time, a chatbot may get personalized to a user's need but the person may not want to share her personalized information with the developers. Another user's concern is the possible use of abusive language by the chatbot. Yet another issue could be the use of language that the user does not understand, because too complex or not appropriate for his/her knowledge of the subject.

Developers: Developers want the chatbot to perform as per design and may worry that it could say something which gives an unintended perception to human users. Examples of developers' concerns are related to bias behavior (that is, the chatbot should not be prone to erratic response in the presence of protected variables like gender or race) and language usage (that is, the chatbot should not respond with hateful or abusive language).

Data providers: They provide data that is used by chatbots' developers for the training phase, ranging from the domain of discourse (e.g., financial data), encyclopedic information (e.g., Wikipedia), to language (e.g., Word embeddings). Data providers want to make sure their data is of the best quality

feasible.

B. Approach and Contributions

In this paper, we address the setting where a chatbot cannot be modified and its training data cannot be accessed, and a neutral party wants to assess and communicate the trustworthiness of chatbots in the context of a user's priorities over the issues. Such a rating can help users choose among alternative chatbots, developers test their systems, business leaders price their offerings, and regulators set policies. We envision a personalized rating methodology for chatbots that relies on separate rating modules for each issue, and users' detected priority orderings among the issues, to generate an aggregate personalized rating for the trustworthiness of a chatbot for a certain user profile. We focus on 4 issues: Fairness and bias (*B*), Information leakage (*IL*), Hate and Abusive language (*AL*), and Conversation Complexity (*CC*). Table I illustrates these issues on some dialog datasets. However, our framework and methodology is general and can be extended to other issues.

We make the following contributions: (a) introduce the notion of a contextualized rating of the trustworthiness of a chatbot; (b) propose a method to compute the rating by using relative importance rankings over issues, provided by users; (c) present an architecture to implement the rating approach as a service; (d) integrate the method with a live chatbot; (e) evaluate our approach on four dialog datasets and representative user profiles which we validate in a user survey.

II. RELATED WORK

The brittleness of machine learning models is well known, and chatbots represent a specific usage of such models. For NLP models, [26] presented a method to generate syntactically

different but semantically equivalent test cases that can flip the prediction of the model. This can be a cause of concern to application developers for usability reasons, and addressing it can prevent the system from being exploited by an adversary. In the context of chatbots, the concern is that its output can be manipulated by changing the input and this is what the sensitivity test can detect.

The authors in [13] systematically survey a number of potential ethical issues in dialogue systems built using learning methods. However, they do not consider a method to communicate a trustworthiness rating based on the analysis of such issues.

There is a rich body of work on studying issues influencing online services and AI methods. In information spreading, the seminal work is described in [16] where the authors looked at the spread of information in social networks and how to maximize it by engaging the effective influencer nodes. In studying abusive language online, the authors in [29] explore the prevalence of cursing on Twitter which serves as a platform for utterance and conversation. They found that people curse more online than in physical environment, among same gender, when they are angry or sad, as their activities increase during the day, and when in relaxed or formal environments. But users may not want the chatbots they are interacting with to exhibit the same behavior, especially when the users are children.

The closest prior work to what we describe in this paper is on rating AI services[27]. There, the authors propose a 2-step bias rating procedure for invocable one-shot AI services (like translation service), as well as a composition method to build sequences of such services. However, that work does not consider: (a) multiple issues and users, (b) personalized rating based on users' ranking of issues, (c) dialog setting of a series of interactions, and not just a single invocation, and (d) conversations leading to completion of tasks.

III. DIALOG SYSTEMS AND RESPONSE GENERATION

A *dialog* is made up of a series of *turns*, where each turn is a series of *utterances* by one or more participants playing one or more *roles*. For example, in the customer support setting, the roles are the *customer* and the *support chatbot*.

The core problem in building chatbots is that of dialog management (DM), i.e., creating useful dialog responses to the user's utterances [21]. There are many approaches to tackle DM in literature, including finite-space, frame-based, inference-based, and statistical learning-based [6], [5], [15], [32], of which finite-space and frame-based are the most popular ones with mainstream developers. In a representative invocation, the user's utterance is analyzed to detect her intent and a policy for response is selected. This policy may call for querying a database and the result of query execution is then used by the response generator to create a response, usually using some templates. The system can dynamically create one or more queries, which involves selecting tables and attributes, filtering values, and testing for conditions, and assume defaults for missing values. It may also decide not to answer a request if it is unsure of the correctness of a query's result. Note that the DM module may use one or more domain-specific

databases as well as one or more domain-independent sources like language models and word embeddings. The latter has been found to be a possible source of human bias [4].

IV. TRUST ISSUES IN DIALOG SERVICES

Trust is a very important factor in AI development, deployment, and usage. Users and stakeholders should be able to have a justified trust in the AI systems they use, otherwise they will not adopt them in their everyday life. In general, there are various dimensions of trust to be considered, that range from robustness to reliability, and from transparency to explainability and fairness. We focus on a subset of issues whose checkers are available and robust.

Abusive Language: An important issue in the usage of a chatbot is the possibility of hate and abusive speech. This can make the chatbot unacceptable or inappropriate to some users, harm people in unintended ways, and expose service providers to unknown risks and costs. There is a growing body of work to detect hate speech[7] and abusive language[29] online using words and phrases which people have annotated. The authors in the former paper define hate speech as *language that is used to express hatred towards a targeted group or is intended to be derogatory, to humiliate, or to insult the members of the group*. Their checker, which we use in our work, has a logistic regression with L2 regularization to achieve automatic detection of hate speech and offensive language.

Bias: Another issue with AI services is the presence of bias. Bias can result in an unfair treatment for certain groups compared to others, which is undesirable and often illegal. There are many definitions of fairness, each one suitable for certain scenarios. [10] introduces notations and a few definitions of fairness while [13] discusses bias in dialog systems. Also, [9] introduces a software testing framework for bias where they use the notions of group and causal bias, and in [3] the authors describe a tool to explore fairness using a sample of data, methods, and criteria. In this paper, we use the bias checker implemented by [14].

Information Leakage: This issue involves ensuring that information given by users to a chatbot is not released, even inadvertently, to other users of the same chatbot or the same platform. This is further complicated by the fact that over time, a chatbot may get personalized to a user's need but the person may not want to share her personalized information with the developers. Moreover, shared information may spread when other users interact [16] over time. We use the framework discussed in [13] to check this issue.

Conversation Style and Complexity: This issue has to do with making sure that AI services interact with users in the most useful and seamless way. If a chatbot responds to user's questions with a terminology that the user is not familiar with, she will not get the required information and will not be able to solve the problem at hand.

In [18], the authors propose a measure of *dialog complexity* to characterize how participants in a conversation use words to express themselves (utterances), switch roles and talk iteratively to create turns, and span the dialog. They measure the complexity of service dialogs at the levels of utterances, turns

and overall dialogs. The method takes into consideration the concentration of domain-specific terms as a reflection of user request specificity, as well as the structure of the dialogs as a reflection of user’s demand for (service) actions. We use their checker for implementation.

V. OUR SETTING AND THE RATING METHOD

In this section, we describe our approach to chatbot trust rating. In particular, we describe the considered setting, the system architecture, and the five steps of our approach. We also highlight the four choice dimensions that need to be instantiated when creating one instance of the general approach.

We consider a setting where a dialog system is rated for its behavior with a list of *configurable* k issues, such as bias (B), abusive language (AL), conversation complexity (CC), and information leakage (IL). The system is conceptually illustrated in Figure 2. Its inputs are the issues to be considered, the details of the chatbot to be rated, a user profile, and the (query) datasets to use for the test, and its output is a rating for the chatbot, conveying its level of trustworthiness for a specific user or user’s profile. We will now describe the modules and steps of the proposed rating methodology:

1. Get individual ratings from issue checkers. We assume that we have one checker available for each issue, which can rate the behavior of the dialog system on that issue on a 3-level trust risk scale: [Low, Medium, High] (High meaning that the chatbot is not behaving well regarding that issue). For issues with raw scores in a continuous [0-1] range, we bin them into the 3-level scale. For k issues, we therefore get a list with k elements in [Low, Medium, High].

2. Elicit/learn users’ importance orders. The second step involves the aggregation of the elements of such a list into a single element from that same scale, in order to get a single rating for the trustworthiness of the chatbot. We propose to do that by asking users about the relative importance of the various issues.

Preference elicitation can be done by asking users about the relative importance of the various issues (*individual-level modeling*) or capturing preferences of people as groups and validating them via surveys (*profile-level modeling*). Individual-level models are accurate but hard to build and manage (due to privacy considerations) and generalize. Profile-level models are representative of people who identify with them and easier to implement. Regardless of the granularity, we believe that trustworthiness is not an absolute property, but rather relative to each user (or user profile) of a chatbot. We build profile-level user models, validate these models using a survey, and test them on dialog datasets. New profiles can be added and existing ones updated based on survey responses to capture the preferences of the user base.

3. If elicitation is done at the user level, aggregate importance orders from similar users. We would like a single preference order, not many, so that we can then combine the rating levels of the various issues according to this single order and therefore get to a single trustworthiness rating for the chatbot. However, we do not want to aggregate over all users, but only over similar users, according to some notion

of similarity. In this way, the rating will be personalized for each user group, which includes users that are similar to each other. The task is therefore to aggregate several ranked orders. To do this, one can use a voting rule, such as Plurality, Borda, Approval, Copeland, etc., as defined in voting theory [17]. We worked with user profiles, and hence, skipped this step.

4. Combine the collective importance order with the individual issue ratings.

We now move to combine this single importance order obtained in step 3 with the rating of the individual checkers on the issues, obtained in step 1. A very simple combination method could use the importance levels as weights for the individual ratings, and then could take the level (among Low, Medium, and High) which appears the most. For example, if we have our 4 issues (our B, AL, CC, IL), rated respectively L, M, M, H, and whose collective importance order is 1 (highest) for B (written $Imp(B)$), 2 for AL, 3 for CC, 4 for IL, we can count L three times (since $4 - Imp(B) = 4 - 1 = 3$), M three times (since $4 - Imp(AL) + 4 - Imp(CC) = 2 + 1 = 3$) times, and H zero times (since $4 - Imp(IL) = 4 - 4 = 0$).

We also need to have a tie-breaking rule to choose among levels with the same score. For example, we could use an optimistic approach and choose the lowest level among those in a tie, or we could be pessimistic and choose the highest level. If we adopt a pessimistic approach, like we do in our implementation, in the above example we would select M (between L and M, that are in a tie) as the final rating for the chatbot trustworthiness.

5. Perform sensitivity testing.

The overall chatbot rating, obtained via the 4 steps procedure just outlined, could be sensitive to models, data, users or any combination thereof. To take this into account, we propose to check if the system has access to alternative learning models or training data to configure the chatbot, or to additional users. If so, each combination of them is used to rerun the procedure in order to get a new rating and check if the rating varies. The output thus can also assign a type of rating, conveying a: *Trustworthy agent (Type-1)*, which starts out trusted with some score (L, M or H) and remains so even after considering all variants of models, data, and users; *Model-sensitive trustworthy agent (Type-2)*, which can be swayed by the selection of a model to exhibit a biased behavior while generating its responses; *Data-sensitive trustworthy agent (Type-3)*, which can be swayed by changing training data to exhibit a biased behavior; *User-sensitive trustworthy agent (Type-4)*, which can be swayed by interaction with (human) users over time to exhibit a biased behavior; *A sensitive agent (Type-N)*, which can be swayed with a combination of factors.

Instantiating the method. While describing our methodology, the reader may have noticed that there are several dimensions along which we can make choices:

- the scale of the individual trust issue ratings (e.g., L M, H);
- the elicitation or learning method to collect the importance orders from the users;
- the granularity of user modeling. For user-level modeling, the similarity measure to define the user classes and the choice of the voting rule (e.g., Plurality, Borda, etc.);

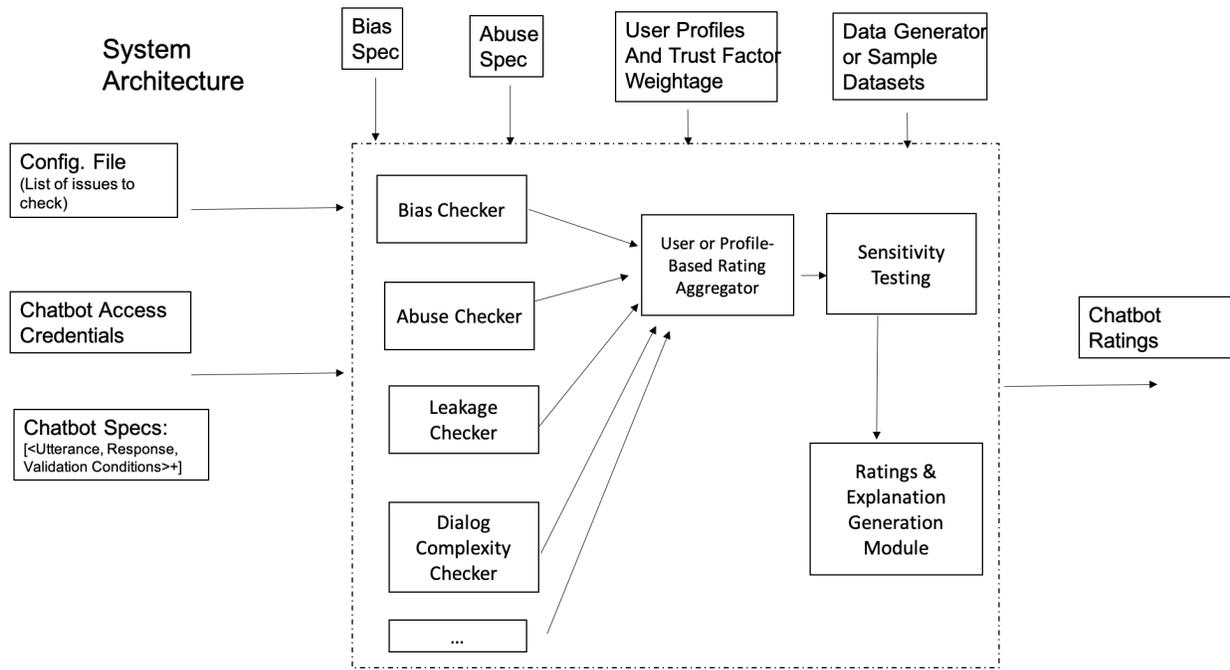


Fig. 2. Building blocks of our chatbot rating system.

- the final aggregation method (e.g., linear combination and tie breaking rule).

Moreover, a quantitative approach for the importance orders could allow for a higher precision in the final rating, and a less concise aggregation result may help in terms of explainability of the rating itself.

VI. ILLUSTRATION OF METHOD ON COMMON CHATBOT TYPES

We illustrate our method with two common types of conversation systems, one for general chitchat and another one task-oriented. We will discuss trust issues, apply our method on these systems, and discuss the output.

Eliza: This is a well-studied general conversation system created in the 1960s [30], [31] to model a patient’s interaction with a Rogerian therapist. It uses cues from user’s input to generate a response using pre-canned rules without deeper understanding of the text, or the context of the conversation [20]. Since Eliza uses pattern recognition on user’s input, it can be easily manipulated via such text to become abusive (AL) and exhibit bias (B). Since the chatbot uses input text and scripted rules to create its response, it preserves the conversation style of the input, thus behaving well in terms of language complexity (CC). Finally, since it retains no context of a conversation, thus two users giving the same inputs will get the same response, leading to no information leakage (IL).

The output of the rating method for an Eliza implementation will be an aggregated trustworthiness score (L, M or H) and an explanation of how it was calculated from raw issue scores. Since this chatbot can be configured with alternative users, the system can check the chatbot for rating sensitivity and include the result in the output.

Train Delay Assistant: This is a prototype chatbot meant to help travelers gather knowledge about train delays and their impact on travel in India [23]. The Indian train system, which is the fourth largest transport network in size in the world, carrying over 8 billion passengers per year, has endemic delays. Hence, it is important for users to be aware of such delays in order to better plan their trips. The chatbot allows users to gain temporal and journey insights for trains of interest for anytime in future. It detects intent from a user’s input to find train, time and stations of interest, and estimates delay using pre-learned models, and finally produces a response².

Given the nature of the domain, this chatbot is expected to not use a language that a user may consider inappropriate (AL). It is also expected to produce an output that does not exhibit bias towards a protected variable like gender of the user (B). The chatbot can exhibit a range of conversation styles on station names, train numbers and time which the user may perceive simple or complex. For example, reference to train stations can be by station codes (e.g., HWH) or their complete name (Howrah Junction), or even colloquial names (Howrah). Similarly, reference to train can be by codes (e.g., 12312) or names (e.g., Kalka Mail), and time variants (e.g. exact minutes or coarser time units) can create a variety of choices. Information leakage (IL) is also an important consideration, since users may not want to reveal their travel plans, especially when they are looking to use the delay information to make train reservations on trains whose seats are in high demand.

Just like for Eliza, the output of the rating method for the train chatbot will be an aggregated trustworthiness score (L, M or H) and an explanation of how it was calculated from raw issue scores. Sensitivity analysis can be done by configuring

²Video: <https://www.youtube.com/watch?v=I-wtcAYLYr4>

the train chatbot with various learned models of train delays, training data of trains, and users.

VII. PROTOTYPE IMPLEMENTATION

In the previous section, we described our rating method with conversation systems. We now describe an implementation of our trust rating approach using trust issue checkers that are publicly available. We conduct rating experiments with this implementation and report on the insights gained. We make our experimental setup available on GitHub [33]. To model users, we define user profiles as orderings of issues' importance for people (that is, a user profile represents all the people who would agree with that importance ordering), and we validate several profiles with a user survey. We then test our chatbot rating approach over the considered user profiles.

As for the chatbot to rate, we chose one that retrieves information from a database in response to a user query. For our experiments, we use public dialog corpora as proxy for large chatbot conversations. We will show that our proposed approach can reveal issues with chatbots and help with their wider adoption and trust from users.

A. Datasets and Profiles

We use four datasets spanning conversations in service domains where chatbots are deployed. Three of them are publicly available, while one is proprietary.

Public - Ubuntu technical support (# = 3,318): This corpus is taken from the Ubuntu online support IRC channel, where users post questions about the use of Ubuntu. We obtained the original dataset from [19], and selected 2 months of chatroom logs. We extracted 'helping sessions' from the log data, where one person posted a question and other user(s) provided help. The corpus contain both dyadic and multi-party dialogs.

Public - Insurance QA (# = 25,499): This corpus contains questions from insurance customers and answers provided by insurance professionals. The conversations are in strict Question-Answer (QA) format (with one turn only). The corpus is publicly available [8].

Proprietary - Human Resource bot (# = 3,600): This corpus is collected from an internal company's deployment of an HR bot - a virtual assistant on an instant messenger tool that provides support for new hires. Although the bot does not engage in continuous conversations (i.e., it does not carry memory of previous questions and answers), it is designed to carry out more natural interactions beyond question-and-answer. For example, it can actively engage users in some social small talk.

Public - Restaurant reservation support (# = 2,118): This corpus contains conversations between human users and a simulated automated agent that helps users find restaurants and make reservations. The corpus was released for the Dialog State Tracking Challenge 2 [12].

As mentioned above, we model chatbot users by defining *user profiles*, which represent rankings of issues for typical classes of users. To finalize the profiles, we proposed issue rankings for each profile and then we validated them via a crowd-sourcing approach. The profiles we considered are:

Conversation style oriented users (P_{CU}): They represent users experienced in people-to-people conversation, but less with chatbots or with English, like seniors or non-native English speakers, for whom we presume that conversation style is important. The importance level ordering is defined as (high to low): CC, AL, B, IL.

Fairness-oriented users (P_{FU}): As the name suggests, this profile represents users concerned mostly about equal treatment of people. We define their issue ranking as: B, CC, AL, IL.

Privacy-oriented users (P_{PU}): This profile represents users predominantly concerned with information leakage. We define their issue ranking as: IL, AL, B, CC.


Abusive language oriented users (P_{AU}): This profile represent users with limited experience with conversations, or vulnerable individuals, like children, and for whom abusive language and conversation style are important for their decision to use a chatbot. We define their issue ranking as: AL, CC, B, IL.

Survey to Validate User Profiles

We validated the 4 user profiles described above by surveying 51 people. The respondents were asked to self-classify themselves into 5 categories or define new ones (with possible overlap). The self-classification showed that the top user groups were: 34 (67%) as casual chatbot users, 13 (25%) as chatbot/NLP researchers, 5 (10%) as regular chatbot users and 5 (10%) as chatbot developers; the other five categories (1 provided and 5 user-defined) had marginal responses of 1 (2%).

We then asked the respondents to write their importance order over the 4 issues, to validate the 4 profiles (by confirming the proposed order or by writing a counter-proposal), and to tell us about possible additional issues or profiles to be considered.

Among the four issues - CC, AL, B, IL - the users rated IL as the top issue (22; 43%) followed by CC (16; 31%). For all the four profiles, we then combined the results from people using the Borda count voting method. The percentage of people who agreed with the proposed orders is shown in the chart below. Notice that all proposed profiles got more than 50% agreement.

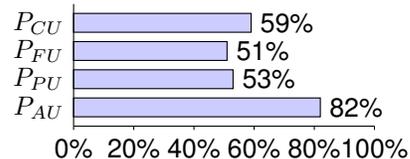


Where people disagreed, we looked closely at the feedback given for each profile. Many suggested alternative names, like *technology-savvy young people*, *online shoppers*, and *non-native English speakers*, but the preference orders were covered by the four we have proposed. Below, we plot the percentage of people who agreed with the top issue with each profile. We find that respondents mostly agreed with the top issue but disagreed with the order of some issues ranked lower in the ordering.

	Bias (B)	Abusive Language (AL)				C (utt.)	C (turn)	C (dialog) (CC)	In. Leak. (IL)
		Hate Speech (weight = 1)	Off. Lang. (weight = 0.5)	Neither (weight = 0)	AL				
Ubuntu	0.063 ± 0.126 (L)	39	110	61,339	0.0015 (L)	0.767	0.767	0.407 (M)	0.5 (M)
Insurance	0.119 ± 0.146 (L)	12	1	50,985	0.0002 (L)	0.789	0.789	0.894 (H)	0 (L)
HR	0.050 ± 0.115 (L)	25	1	18,421	0.0013 (L)	0.801	0.803	0.423 (M)	1 (H)
Restaurant	0.031 ± 0.097 (L)	0	0	31,012	0 (L)	0.788	0.788	0.518 (M)	1 (H)

TABLE II

INTERMEDIATE AND FINAL SCORES FOR ISSUE CHECKERS. FINAL IS INDICATED BY BOLD AND L/M/H MAPPING IN IN BRACKETS.

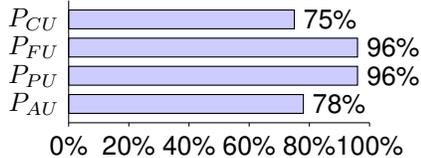

Thus, we conclude that the four proposed profiles have passed the validation survey and constitute a good start for our analysis. However, some people suggested to consider *chatbot accuracy*, *usefulness*, and *uninformed user* as additional trust issues. So we plan to extend this initial survey work based on the above suggestions.

B. Bias Detection Checker (B)

For bias detection, we used the sentence-level bias detection framework discussed in [14]. In this implementation, given a sentence as input, the bias checker extracts the structural and linguistics features, such as sentiment analysis, subjectivity analysis, modality, the use of factive verbs, hedge phrases, and computes perception of bias based on a regression model trained on these features. The model was trained using news data and the output was on the scale of 0 to 3 where 0 denotes an unbiased behavior and 3 denotes an extremely biased behavior, respectively. We scaled the output from 0 to 1 to conform with the scale of the outputs from other checkers.

Table I illustrates and Table II (left) reports the bias score of the datasets in aggregate form. We see that scores are low but the datasets are not free of bias.

C. Abusive Language Checker (AL)

For the detection of abusive language, we used the method proposed in [7]. The checker gives a 3-value output (*Hate Speech*, *Offensive Language*, and *Neither*) which are summed with weights to arrive at the final score. Table I illustrates and Table II (middle) shows the distributions of the scores for each dataset. Note that no Hate Speech was found in the Restaurant corpus.

D. Information Leakage Checker (IL)

For information leakage, we use the privacy checker framework discussed in [13]. We augment the data with 10 input-output pairs (keypairs) that represent sensitive data, which the model should keep secret. We then train a simple seq2seq dialogue model [28] on the data and measure the number of epochs at which the model achieves more than 0.5 accuracy of eliciting the secret information. We tested two cases: (1) when both input and output contain sensitive information, and (2) when output contains sensitive information and input contains

datatype of sensitive information. The model achieved similar results for both cases. We decided to use case (1) for the prototype implementation. We mapped the number of epochs to 0 to 15 (0), 15 to 30 (0.5), and above 30 (1) respectively. For the Ubuntu data-set we could not run the experiment as it was a multi-way communication with major assumptions needed to form input output pairs. For that data, we adopted a pessimistic approach and took the privacy issue rating to be (0.5).

E. Dialog Complexity Checker (CC)

For dialog complexity, we use the complexity checker implemented by [18]. Table I illustrates and Table II shows the complexity scores (marked C) for each dataset on the [0,1] scale at utterance, turn and dialog level of granularities.

F. User-Profile-Based Chatbot Rating

We calculate the aggregate rating for the dialog corpus corresponding to each profile. For issue checkers with raw scores on the [0,1] scale, we bin them as L:[0,0.33], M:[0.33,0.67], H:[0.67,1] and show in brackets in Table II. For each corpus and profile, the raw scores for the four trust issues for each dialog corpus are aggregated according to user profile importance. Table III shows the results.

From Table II, we see that the four considered datasets are not biased (L) and abusive (L), but can be conversationally complex and leak information (that is, they have M or H values for these issues). From Table III, we see that the issue ratings for the dialog corpus vary with the user profile. Profiles that considered fairness and abuse as important show no difference in ratings (P_{FU} and P_{AU}). On the other hand, for conversation-oriented users (P_{CU}), conversation complexity is important and the domains of insurance and restaurant have M (medium) rating for them. For privacy-oriented users (P_{PU}), the insurance domain has the least cause of concern while HR and Restaurant can be problematic, since they get an H ratings.

Since overall ratings change with user profiles, this means that the chatbots we considered are *User-sensitive trustworthy (Type-4)*. Given that we did not have access to alternative training datasets or models, we could not evaluate these chatbots against the other sensitivity types.

G. Trust Rating for a Live Health Chatbot

We have integrated our rating approach with a live chatbot that we built using open data from the Indian Government

²Used "*" to replace letter "a" in the original text.

	P_{CU}	P_{FU}	P_{PU}	P_{AU}
Ubuntu	L	L	M	L
Insurance	M	L	L	L
HR	L	L	H	L
Restaurant	M	L	H	L

TABLE III
PROFILE- BASED RATING OF EACH DIALOG CORPUS.

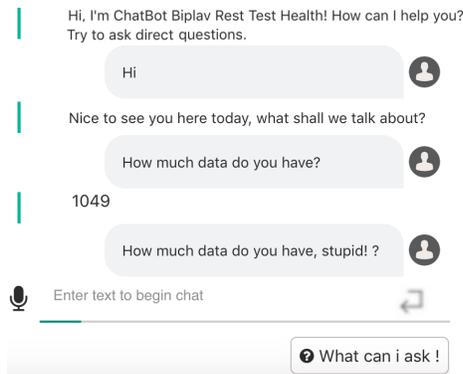


Fig. 3. User-interface of a chatbot for exploring hospitals. Our approach is integrated as a commandline utility using its REST interface.

(<https://data.gov.in/>). This chatbot recommends the choice of a hospital, given a user’s query about the needed medical services and his/her location. Figure 3 shows a snapshot of an interaction with this chatbot.

The chatbot also exposes a REST³ interface, using which we have integrated our prototype rating implementation. The rating user, using a command-line interface, can input their preferences over issues or select a user profile. As the conversation between the rating user and the chatbot progresses, issue checkers can compute partial results and generate aggregated ratings on utterances (AL, CC), and also provide final ratings at the end of a dialog or session (AL, CC, B, IL). Figure 4 shows a snapshot of the interaction for the AL issue. If the rating user does not want to review rating per conversation, he/she can also select a *data generator for specific issues*. For AL, we use the labeled abuse data from [7] in the data generator. Please notice that we do not condone the use of offensive language, which is used here only for illustration.

VIII. ETHICAL IMPLICATIONS, CONCLUSIONS, AND FUTURE WORK

Chatbots are increasingly being used by companies to support clients, or more generally as a way to have a natural interaction between humans and machines. However, as many other AI systems, they can present several ethical issues, that relate to how they are trained, designed, and developed, and that may compromise the trust that users have in them, and thus their widespread adoption and impact. In this paper we provide a contribution to understanding how to rate chatbots with respect to a combination of trust issues, and in a way that is personalized for each user profile. We believe this work

³Representational state transfer (REST) is a software architectural style to assemble different heterogeneous components.

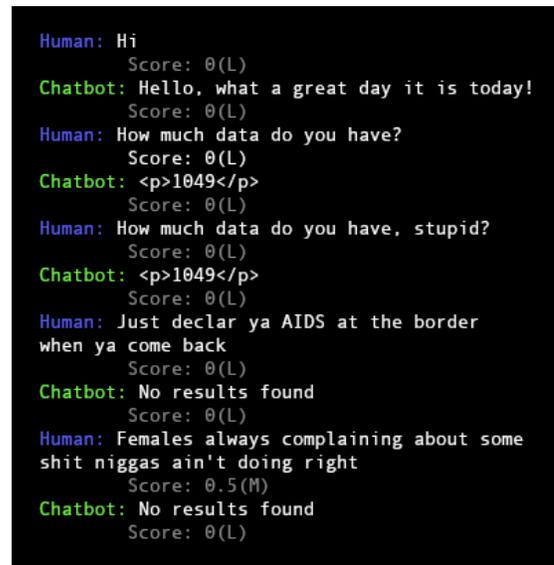


Fig. 4. Screenshot of our approach in action with a live chatbot.

is needed, timely, and useful in the AI ethics space, since it helps advance awareness auditing, and accountability around AI ethics issues.

In particular, we considered the problem of rating chatbots for trustworthiness based on their behavior regarding ethical issues and users’ provided trust issue rankings. We defined a general approach to build such a rating system and implemented a prototype using four issues (abusive language, bias, information leakage, and conversation style). However, the choice of these trust issues is not a limitation of our methodology; the approach can be applied to any other issue as well. For example, trust in an AI model is often related (also) to the possibility to get an explanation for its output (see for example [25], [11], [34]), so explainability could be another trust issue to consider in the future.

We illustrated our approach with two chatbot examples and experimented with four dialog datasets. We built user profiles to elicit user preferences about important trust issues and validated them with a survey. The experiments show that the rating approach can reveal useful insights about chatbots customized to user’s trust needs.

In this work we focussed on chatbots that do not evolve or learn after deployment. Indeed, most of the chatbots used in enterprises do not evolve over time, unless they are re-trained and re-deployed. However, we believe that such chatbots will be increasingly used in the future, and their dynamic nature may pose additional and increasing ethical challenges. Such challenges may be related, for example, to the unsupervised accumulation of training data used by the chatbot, which might require continuous automated trust rating and alert protocols. We plan to adapt and generalize our approach also to chatbots that can modify their behavior over time.

We also decided to focus on four trust issues (abusive language, bias, information leakage, conversation style), for which there are existing systems that can check them. However, during the survey, some participants suggested other

important trust issues, such as chatbot accuracy and usefulness, and the existence of uninformed users. We believe it is important to check if these issues bring additional requirements in terms of chatbot rating.

We believe that this work is a stepping stone towards general, modular, and flexible trust rating approaches for conversation systems. It is only by building justified trust that user, developers and data providers can benefit from, and contribute to, the use of chatbots for improved and more informed decisions.

REFERENCES

- [1] M. J. Wolf, Keith W Miller, and Frances S Grodzinsky. Why we should have seen that coming: comments on Microsoft’s Tay ”experiment,” and wider implications. *ACM SIGCAS Computers and Society*, <https://doi.org/10.1145/3144592.3144598>, 2017.
- [2] Accenture. Chatbots in customer service. In *At: https://acntu.re/2z9s5fH*, 2016.
- [3] R. K. E. Bellamy, K. Dey, M. Hind, S. C. Hoffman, S. Houde, K. Kannan, P. Lohia, J. Martino, S. Mehta, A. Mojsilovic, S. Nagar, K. N. Ramamurthy, J. Richards, D. Saha, P. Sattigeri, M. Singh, K. R. Varshney, and Y. Zhang. Ai fairness 360: An extensible toolkit for detecting, understanding, and mitigating unwanted algorithmic bias. In <https://arxiv.org/abs/1810.01943>, 2018.
- [4] A. Caliskan, J. J. Bryson, and A. Narayanan. Semantics derived automatically from language corpora contain human-like biases. In *Science* 14, Vol. 356, Issue 6334, pages 183–186, 2017.
- [5] A. Clark, C. Fox, and S. Lappin. Handbook of computation linguistics and natural language processing. In *Wiley*, ISBN: 978-1-405-15581-6, 2010.
- [6] P. Crook. Statistical machine learning for dialog management: its history and future promise. In *AAAI DEEP-DIAL 2018 Workshop*, at https://www.dropbox.com/home/AAAI2018-DEEPDIALWorkshop/Presentations-Shareable?preview=Invited1-PaulCrook-AAAI_DeepDialog_Feb2018.pdf, 2018.
- [7] T. Davidson, D. Warmesley, M. Macy, and I. Weber. Automated hate speech detection and the problem of offensive language. In *Proceedings of the 11th International AAAI Conference on Web and Social Media*, ICWSM ’17, 2017.
- [8] M. Feng, B. Xiang, M. R. Glass, L. Wang, and B. Zhou. Applying deep learning to answer selection: A study and an open task. In *IEEE Work. ASRU*, pages 813–820, 2015.
- [9] S. Galhotra, Y. Brun, and A. Meliou. Fairness testing: Testing software for discrimination. In *Proceedings of the 2017 11th Joint Meeting on Foundations of Software Engineering, ESEC/FSE 2017*, pages 498–510, New York, NY, USA, 2017. ACM.
- [10] Github. Fairness - notation, definitions, data, legality. <https://speak-statistics-to-power.github.io/fairness/>, 2018.
- [11] Leilani H. Gilpin, David Bau, Ben Z. Yuan, Ayesha Bajwa, Michael Specter, Lalana Kagal. Explaining Explanations: An Approach to Evaluating Interpretability of Machine Learning. In Arxiv, at <http://arxiv.org/abs/1806.00069>, 2018.
- [12] M. Henderson, B. Thomson, and J. Williams. The second dialog state tracking challenge. In *15th Ann. Meeting SIG on Discourse and Dialogue*, volume 263, 2014.
- [13] P. Henderson, K. Sinha, N. Angelard-Gontier, N. R. Ke, G. Fried, R. Lowe, and J. Pineau. Ethical challenges in data-driven dialogue systems. *arXiv:1711.09050*, 2017.
- [14] C. J. Hutto, D. J. Folds, and S. Appling. Computationally detecting and quantifying the degree of bias in sentence-level text of news stories. 2015.
- [15] R. B. Inouye. Minimizing the length of non-mixed initiative dialogs. In D. M. Leonoor van der Beek, Dmitriy Genzel, editor, *ACL 2004: Student Research Workshop*, pages 7–12, Barcelona, Spain, July 2004. Association for Computational Linguistics.
- [16] D. Kempe, J. Kleinberg, and E. Tardos. Maximizing the spread of influence through a social network. In *Proceedings of the Ninth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’03, pages 137–146, New York, NY, USA, 2003. ACM.
- [17] J. Levin and B. J. Nalebuff. An introduction to vote-counting schemes. In *Journal of Economic Perspectives*, 9(1):3-26, 1995.
- [18] Q. V. Liao, B. Srivastava, and P. Kapanipathi. A measure for dialog complexity and its application in streamlining service operations. *CoRR*, abs/1708.04134, 2017.
- [19] R. Lowe, N. Pow, I. Serban, and J. Pineau. The ubuntu dialogue corpus: A large dataset for research in unstructured multi-turn dialogue systems. *arXiv preprint arXiv:1506.08909*, 2015.
- [20] Manifestation. Eliza. In <http://www.manifestation.com/neurotoys/eliza.php3>, 2006.
- [21] M. McTear, Z. Callejas, and D. Griol. Conversational interfaces: Past and present. In *The Conversational Interface*. Springer, DOI: https://doi.org/10.1007/978-3-319-32967-3_4, 2016.
- [22] C. Metz. Riding Out Quarantine With a Chatbot Friend: ’I Feel Very Connected’. In *New York Times*. Retrieved from <https://www.nytimes.com/2020/06/16/technology/chatbots-quarantine-coronavirus.html>, 2020.
- [23] H. Mishra, R. Gaurav, and B. Srivastava. A train status assistant for indian railways. *CoRR*, abs/1809.08509, 2018.
- [24] G. Neff and P. Nagy. Automation, algorithms, and politics— talking to bots: Symbiotic agency and the case of Tay. In *International Journal Of Communication*, 10, 17. Retrieved from <http://ijoc.org/index.php>, 2017.
- [25] Pieters, W. Explanation and trust: what to tell the user in security and AI?. *Ethics Inf Technol* 13, 53–64 (2011). <https://doi.org/10.1007/s10676-010-9253-3>.
- [26] M. T. Ribeiro, S. Singh, and C. Guestrin. Semantically equivalent adversarial rules for debugging nlp models. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 856–865. Association for Computational Linguistics, 2018.
- [27] B. Srivastava and F. Rossi. Towards composable bias rating of ai systems. In *Proceedings of the 2018 AAAI/ACM Conference on AI Ethics and Society Conference (AIES 2018)*, New Orleans, Louisiana, USA, 2018.
- [28] O. Vinyals and Q. Le. A neural conversational model. *arXiv preprint arXiv:1506.05869*, 2015.
- [29] W. Wang, L. Chen, K. Thirunarayan, and A. P. Sheth. Cursing in english on twitter. In *CSCW*, 2014.
- [30] J. Weizenbaum. Eliza – a computer program for the study of natural language communication between man and machine. In *Communications of the ACM; Volume 9, Issue 1*, 1966.
- [31] J. Weizenbaum. *Computer Power and Human Reason: From Judgment to Calculation*. W. H. Freeman & Co., New York, NY, USA, 1976.
- [32] S. Young, M. Gašić, B. Thomson, and J. D. Williams. Pomdp-based statistical spoken dialog systems: A review. *Proceedings of the IEEE*, 101(5):1160–1179, 2013.
- [33] B. Srivastava. Experimental setup of chatbot rating on GitHub. <https://github.com/biplav-s/ethics-share/tree/master/ChatbotRatingShare>, 2020.
- [34] Daniel S. Weld, Gagan Bansal. The Challenge of Crafting Intelligible Intelligence. *Communications of the ACM*, June 2019, Vol. 62 No. 6, Pages 70-79.