

# Posterior Summaries of Grocery Retail Topic Models: Evaluation, Interpretability and Credibility

Mariflor Vega

*University College London, London, UK*

E-mail: mariflor.vega.15@ucl.ac.uk

Ioanna Manolopoulou

*University College London, London, UK*

Jason O'Sullivan

*dunnhumby Ltd, London, UK*

Rosie Prior

*dunnhumby Ltd, London, UK*

Mirco Musolesi

*University College London, London, UK*

## Summary.

Understanding the shopping motivations behind market baskets has significant commercial value for the grocery retail industry. The analysis of shopping transactions demands techniques that can cope with the volume and dimensionality of grocery transactional data while delivering interpretable outcomes. Latent Dirichlet Allocation (LDA) provides a natural framework to process grocery transactions and to discover a broad representation of customers' shopping motivations. However, summarizing the posterior distribution of the LDA model is challenging. LDA is, in essence, a mixture model and thus, even after addressing the label-switching problem, averaging topic distributions across posterior draws may fuse topics that illustrate distinct shopping motivations. On the other hand, individual LDA draws cannot capture the uncertainty around topics, as topics may (dis)appear in different posterior samples. In this paper, we introduce a clustering methodology that post-processes posterior LDA draws to summarise the entire posterior distribution and identify semantic modes represented as recurrent topics. Instead of resolving the label-switching problem by re-labelling components from each posterior draw to minimize an overall loss function, our approach identifies clusters of component parameters across iterations. This allows us to potentially identify multiple modes (termed topical themes) in the posterior distribution, as well as provide associated measures of uncertainty for each cluster. We also establish a more holistic definition for model evaluation, which assesses topic models based not only on their predictive likelihood but also on qualitative aspects such as coherence and distinctiveness of individual topics and credibility of the set of identified topics. Using the outcomes of a tailored survey, we set thresholds that aid the interpretation of the qualitative aspects in the domain of grocery retail data. We demonstrate that the selection of recurrent topics through our clustering methodology not only improves predictive likelihood but also outperforms qualitative aspects such as interpretability and credibility. We illustrate our methods on an example from a large British supermarket chain.

## 1. Introduction

In the grocery retail industry, millions of transactions are generated every day out of thousands of products available to customers. Understanding combinations of products that are purchased together can help us to characterize customer needs and profiles. For example, shopping needs may reflect foods consumed at breakfast, ingredients for roast dinner, or products for a barbecue; customer profiles may correspond to specific types of products such as organic products or luxury branded items to fulfil shopping needs. Modelling these combinations is typically treated as an unsupervised learning task, essentially amounting to a high-dimensional clustering problem, where clusters represent weighted product combinations. Subject-matter expertise can then provide an explicit assessment of the quality of an individual cluster or set of clusters in terms of grocery retail interpretation. The motivation of this paper is two-fold: first, to provide a framework in which we can combine existing, well-studied Bayesian statistical topic models with subject-matter evaluations of model quality measured through tailored user surveys in grocery retail; second, to introduce a posterior distribution summary which can simultaneously capture the posterior mean and quantify posterior uncertainty of a topic model.

Topic modelling (TM) is a natural, scalable statistical framework that can process millions of combinations of products within transactions while maintaining the explanatory power to discover, analyze, and understand customer behaviours. Latent Dirichlet Allocation (LDA) (Blei et al., 2003) is one of the most popular topic modelling techniques. In the context of retail data, LDA represents transactions as topical mixtures, where each topic is a multinomial distribution over the product assortment. LDA interprets each transaction as an unordered *bag of products*, which is natural in the grocery retail domain as products are registered without an inherent order. In this formulation, a transaction is a probabilistic realization of a mixture model over shopping ‘goals’ (for example, ingredients for a roast and baby food) (Hornsby et al., 2019). The analysis of grocery transactions through the application of topic modelling can provide insights into shopping patterns at a much higher resolution, which may enhance cross-selling campaigns, product assortments and layouts, and may aid the analysis of social and cultural habits of grocery purchasing.

Topic model evaluation is typically based on model fit metrics such as held-out-likelihood or perplexity (Wallach et al., 2009b; Buntine, 2009), which assess the generalization capability of the model by computing the model likelihood on unseen data. However, LDA likelihood does not capture qualitative aspects such as semantic *topic coherence* Newman et al. (2010), and hence these metrics may lead to topic models with less semantically meaningful topics according to human annotators (Chang et al., 2009). Topic coherence was introduced to measure the difficulty of associating an individual topic from an LDA posterior draw to a single semantic concept, and consequently, evaluating topic models by their interpretability. Topic coherence is typically quantified by co-occurrence metrics such as Pointwise Mutual Information (PMI) and Normalized Pointwise Mutual Information (NPMI) (Bouma, 2009), which have been shown to correlate with human annotators in Newman et al. (2010); Lau et al. (2014). Meaningful implementation of these metrics requires knowledge about their relevance to human perception of topics in the domain of interest – in our case, mapping measurements of PMI

and NPMI to the quality of the corresponding shopping goals represented by the topics.

Topic coherence or held-out metrics do not capture similarity among topics within a sample or posterior variability across samples. Topics within the same posterior sample may contain product combinations that could be associated with the same semantic concept (Boyd-Graber et al., 2014), but whose variations prohibit the likelihood model from merging them. Since topic models are meant to explain a corpus, having semantically similar topics within the same posterior sample is a suboptimal outcome (Boyd-Graber et al., 2014). Topics may also exhibit significant variations across a set of posterior samples, (Steyvers and Griffiths, 2007; Rosen-Zvi et al., 2010; Chuang et al., 2015); a topic associated with a particular semantic concept (in our case, a shopping goal) may appear and disappear across multiple posterior samples, depending on its posterior uncertainty. In response, we establish a more holistic definition for model evaluation, which assesses topic models based not only on their likelihood but also on qualitative aspects such as *topic coherence*, *topic distinctiveness* and *topic credibility*. Topic distinctiveness measures semantic dissimilarity among topics. Topic credibility quantifies semantic similarity among posterior samples. Thus, topics of high quality are not only coherent, but also distinctive within, and recurrent among, posterior draws.

Topics of low uncertainty may appear consistently across posterior samples and reflect ‘reliable’ topics, whereas topics that do not appear consistently among LDA posterior draws may correspond to idiosyncratic product combinations. However, explicit quantification of this variability is challenging because there is currently no unique measure of similarity between topics or topic models, or universal thresholds that determine when a pair of topics are (dis)similar. At the same time, computing component-wise posterior means is non-trivial because topic models are in essence mixture models and thus subject to the label switching problem (Stephens, 2000; Jasra et al., 2005; Sperrin et al., 2010; Hastie et al., 2015); even after resolving component labels, computing posterior summaries of a multi-modal posterior will frequently average across component draws which represent different semantic concepts.

In this work, we develop a post-processing methodology that aggregates multiple posterior samples of LDA to capture a single summary of semantic modes, presented as a set of recurrent topics that also contains a measure of uncertainty. Rather than assigning one-to-one matches of topics across posterior draws as in standard label-switching approaches, we use hierarchical clustering to group topics from different posterior samples according to a distance criterion for topic distributions. Here, we use cosine distance among distributional measures as it correlates with human judgment on topic similarity (Aletras and Stevenson, 2014). A *clustered topic* is then defined as the average topic distribution from different LDA posterior samples that exhibit the same theme, and its posterior credibility is measured as the topic recurrence, i.e., the number of topics within the cluster (the number of posterior samples exhibiting the same topic). Guided by the domain of interest, users can tune the distance criterion and set thresholds of minimum recurrence to select clustered topics of low uncertainty. The resulting clustered LDA model is used to lead interpretations on customers’ needs instead of using a single LDA posterior draw or a posterior mean (thus circumventing the need to address the label-switching problem across different samplers).

We present a user study in which experts in grocery retail analytics assessed topics

for their interpretability and similarity. We use this study to relate our measures of topic quality to users' intuitive perception of these concepts. We interpret LDA topics in the application to grocery retail data and show that some LDA topics (within a posterior sample) may not be the most coherent, distinctive, and credible. Moreover, we demonstrate that the selection of recurrent topics through our clustering methodology provides subsets of clustered topics with better model likelihood, greater credibility and improved interpretability.

This paper is organized as follows: we discuss related work in Section 2. LDA is described in Section 3. Section 4 presents the definitions of model generalization, topic coherence, topic distinctiveness, and topic credibility. Section 5 introduces our proposed methodology for clustering and selecting recurrent topics. Sections 6, 7, and 8 show the application of grocery retail data from a major retailer in the UK. More specifically, Section 6 discusses thresholds for interpretability and similarity obtained from a user study with experts in grocery retail analytics and exhibits the pitfalls of LDA topics. Section 7 demonstrates the advantages of selecting clustered topics of high posterior recurrence. Section 8 displays identified grocery topics and indicates commercial implications in the grocery retail sector. Finally, we summarise our findings in Section 9.

## 2. Related work

Topic modelling, in particular LDA, has already been used to identify latent shopping motivations in retail data. For instance, Christidis et al. (2010) applied LDA to grocery transactions from a major European supermarket to identify latent topics of product categories, intending to support an item recommendation system. In this study, 102 thousand unique products were aggregated into 473 synthetic categories with no distinction between brands or package sizes. Hruschka (2014) sketched the core of a recommender system to illustrate the managerial relevance of estimated topics, which were obtained from training LDA and the correlated topic model on market baskets from a medium-sized German supermarket. The study only accounted for the 60 product categories with the highest univariate purchase frequencies. Jacobs et al. (2016) applied topic models to market baskets from a medium-sized online retailer in the Netherlands to identify latent motivations and to predict product purchasing in large assortments. Again, the authors aggregated products to a category-brand level, i.e., different fragrances/flavours of the same product and brand are aggregated into one category, reducing more than 3 thousand unique products to 394 categories. Hruschka (2016, 2019) compared topic models and other unsupervised probabilistic machine learning methods on point-of-sale transactions from a typical local grocery store in Austria, analyzing 169 product categories. The aforementioned works analyzed collections of product categories and not the full product resolution, thereby reducing the dimensionality of the problem. Hornsby et al. (2019) provided a direct application of a 25-topic LDA model on transactional data from a major British retailer to identify shopping goals.

Beyond LDA, other approaches have been applied to market baskets. For instance, Schröder (2017) applied Multidimensional Item Response Theory (MIRT) models on a limited dataset with 31 product categories collected by a house panel from a single supermarket in the US, and found that MIRT models outperformed LDA according to

the Akaike Information Criterion and its corrected form. MIRT may be an option to analyze small datasets of discrete grouped data. Hruschka (2016, 2019) also compared topic models such as LDA and correlated topic model (CTM) to alternative methods such as binary factor analysis, restricted Boltzmann machine (RBF), and deep belief net (DBN). It was shown that the alternative methods outperform topic models in model generalization. However, the number of topics was restricted to a range from 2 to 6, while networks of much larger architectures were explored. Moreover, the DBN and RBF outcomes are far less interpretable than LDA topics. Ruiz et al. (2020) introduced ‘SHOPPER’, a sequential probabilistic model, that captures interaction among items and answers counterfactual queries about changes in prices. Chen et al. (2020) introduced ‘Product2Vec’, a method based on the representation learning algorithm Word2Vec, to study product-level competition, when the number of products is large and produce more accurate demand forecasts and price elasticities estimations. Jacobs et al. (2020) combined the correlated topic model with the vector autoregression to account for product, customer, and time dimensions present in purchase history data.

Within LDA, various methods have been proposed to improve topic coherence. For example, Wallach et al. (2009a) used asymmetric priors over document distributions to capture highly frequent terms in few topics; Newman et al. (2011) introduced two regularization methods, and Mimno et al. (2011) generalized the Pòlya urn model aiming to reduce the number of low-quality topics. In this paper, we do not try to improve LDA to render more coherent topics, but we will show that our proposed methodology retrieves groups of clustered topics with higher coherence.

Hierarchical clustering has been used previously to interactively align topics (Chuang et al., 2015) and to aggregate topic models (Blair et al., 2016). The former work assumes that topics align with up to one topic from a different posterior sample. The latter work merges topics from posterior samples with small and large numbers of topics aiming to improve topic coherence. However, these works do not assess other aspects of topic quality, such as topic distinctiveness and topic credibility nor consider the likelihood of the resulting models.

With regards to the label-switching problem, which also affects LDA since it is inherently a mixture model, Stephens (2000); Celeux (1998); Stephens and Phil (1997) developed relabelling algorithms to perform a k-means type clustering of the MCMC samples. Hastie et al. (2015) followed a k-medoid strategy to obtain an optimal partition that takes advantage of the whole MCMC output rather than taking a maximum a posteriori partition. Other relabelling strategies consider label invariant loss functions (Celeux et al., 2000; Hurn et al., 2003), identifiability constraints (McLachlan et al., 2019), and probabilistic relabelling (Jasra et al., 2005; Sperrin et al., 2010). Note that these techniques assume that topics are present (but with switched labels) across samples. Thus, we cannot use relabelling techniques to summarize topic models, since topics may (dis)appear across a Markov chain. Instead, we propose a methodology to group topics using similarity measures.

### 3. Latent Dirichlet Allocation

Here, we interpret Latent Dirichlet Allocation (LDA) (Blei et al., 2003) in terms of retail data, where transactions are interpreted as *bags of products*. This is a natural assumption of in-store transactions where products are registered without an inherited order. In addition, transactions are assumed to be independent and exchangeable, so metadata such as timestamps and coordinate location are disregarded. Within the LDA framework, transactions are represented as mixtures over a finite number of topics  $K$  and topics are distributions over products from a fixed product assortment of size  $V$ . More formally, LDA is a generative process in which the topics  $\Phi = [\phi_1, \dots, \phi_K]$  are sampled from a Dirichlet distribution governed by hyperparameters  $\beta = [\beta_1, \dots, \beta_V]$  and the topical mixtures  $\Theta = [\theta_1, \dots, \theta_D]$  are sampled from a Dirichlet distribution governed by hyperparameters  $\alpha = [\alpha_1, \dots, \alpha_K]$ . For each transaction (equivalent to a basket)  $d$ , product  $i$  is sampled through a two-step process. First, a topic assignment  $z_{i,d}$  is chosen from the transaction-specific topical mixture  $\theta_d$ . Second, a product is sampled from the assigned topic  $\phi_{z_{i,d}}$ . Mathematically,

$$\begin{aligned} \phi_k &\sim \text{Dirichlet}(\beta) \\ \theta_d &\sim \text{Dirichlet}(\alpha) \\ z_{i,d}|\theta_d &\sim \text{Multinomial}(\theta_d) \\ w_{i,d}|\phi_{z_{i,d}} &\sim \text{Multinomial}(\phi_{z_{i,d}}). \end{aligned} \tag{1}$$

The data then correspond to the observed set of products  $w_{i,d}$  within each transaction  $d$ . The posterior distribution of the topic distributions  $\Phi$  and topical mixtures  $\Theta$  are given by the posterior conditional probability:

$$P(\Phi, \Theta, \mathbf{z}|\mathbf{w}, \alpha, \beta) = \frac{P(\Phi, \Theta, \mathbf{z}, \mathbf{w}|\alpha, \beta)}{P(\mathbf{w}|\alpha, \beta)}, \tag{2}$$

where  $\mathbf{z}$  and  $\mathbf{w}$  are vectors of topic assignments and observable products, respectively. In this paper, we use the collapsed Gibbs sampling algorithm (Griffiths and Steyvers, 2004) to sample from the posterior distribution and learn topic distributions since this method has shown advantages on computational implementation, memory, and speed.

In this paper, we used LDA with symmetric Dirichlet priors governed by a scalar concentration parameter and a uniform base measure, so that topics are equally likely a priori. Wallach et al. (2009a) showed that an optimized asymmetric Dirichlet prior over topical mixtures improves model generalization and topic interpretability by capturing highly frequent terms in a few topics. However, we empirically found that LDA with an asymmetric prior may lead to poor convergence of the Gibbs sampler in the context of our application. Finally, here we also assume that the number of topics is fixed and known a priori, but the proposed method can also be applied to the Hierarchical Dirichlet Process (Teh et al., 2005).

#### 3.1. Gibbs sampling

The Gibbs sampling algorithm starts with a random initialization of topic assignments  $\mathbf{z}$  to values  $1, 2, \dots, K$ . In each iteration, topic assignments are sampled from the full

conditional distribution, defined as:

$$p(z_i = k | \mathbf{z}_{-i}, \mathbf{w}) \propto \frac{N_{k,v}^{-i} + \beta_v}{N_k^{-i} + \beta} \frac{N_{d,k}^{-i} + \alpha_k}{N_d^{-i} + \alpha}, \quad (3)$$

where the notation  $N^{-i}$  is a count that does not include the current assignment of  $z_i$ .  $N_{k,v}$  is the number of assignments of product  $v$  to topic  $k$ .  $N_{d,k}$  is the number of assignments of topic  $k$  in transaction  $d$ .  $N_k$  is the total number of assignments of topic  $k$ .  $N_d$  is the size of transaction  $d$ .  $\alpha = \sum_k^K \alpha_k$  and  $\beta = \sum_v^V \beta_v$ . This full conditional distribution can be interpreted as the product of the probability of the product  $v$  under topic  $k$  and the probability of topic  $k$  under the current topic distribution for transaction  $d$ . Consequently, the probability of assigning a topic to any particular product in a transaction will be increased once many products of the same type have been assigned to the topic and the topic has been assigned several times to the transaction.

After a burn-in period, states of the Markov chain (topic assignments) are recorded with an appropriate lag to ensure low autocorrelation between samples. For a single sample  $s$ ,  $\Phi$  and  $\Theta$  are estimated from the counts of topic assignments and Dirichlet parameters by their conditional posterior means:

$$\hat{\phi}_{k,v}^s = E(\phi_{k,v}^s | \mathbf{z}^s, \boldsymbol{\beta}) = \frac{N_{k,v}^s + \beta_v^s}{N_k^s + \beta^s}, \quad k = 1 \dots K, v = 1 \dots V, \quad (4)$$

$$\hat{\theta}_{d,k}^s = E(\theta_{d,k}^s | \mathbf{z}^s, \boldsymbol{\alpha}) = \frac{N_{d,k}^s + \alpha_k^s}{N_d^s + \alpha^s}, \quad d = 1 \dots D, k = 1 \dots K. \quad (5)$$

## 4. Topic model evaluation

Topic model evaluation is typically based on model fit metrics such as held-out-likelihood or perplexity (Wallach et al., 2009b; Buntine, 2009), which assess the generalization capability of the model by computing the model likelihood on unseen data. However, the LDA likelihood may lead to topic models with less semantically meaningful topics according to human annotators (Chang et al., 2009). The evaluation of topic models should therefore not be exclusively based on likelihood metrics, but also include topic quality metrics such as topic coherence, topic distinctiveness, and topic credibility.

In this section, we summarise metrics of model generalization, topic coherence, and introduce metrics for topic distinctiveness and topic credibility. These four metrics will be used to evaluate topic models throughout this paper.

### 4.1. Model generalization

Model fit metrics such as perplexity or held-out-likelihood of unseen documents (transactions) estimate the model's capability for generalization or predictive power. Perplexity is a measurement of how well the probability model predicts a sample of unseen (or seen) data. A lower perplexity indicates the topic model is better at predicting the sample. Mathematically,

$$\text{Perplexity} = -\frac{\log P(\mathbf{w}'|\Phi, \alpha)}{N'}, \quad (6)$$

where  $\mathbf{w}'$  is a set of unseen products in a document,  $N'$  is the number of products in  $\mathbf{w}'$ ,  $\Phi = [\phi_1, \phi_2, \dots, \phi_K]$  is a posterior estimate or draw of topics and  $\alpha$  is the posterior estimate or draw of the Dirichlet hyperparameters.

Computing the log-likelihood of a topic model on unseen data is an intractable task. Several estimation methods are described in (Wallach et al., 2009b; Buntine, 2009). In this paper, we use the left-to-right algorithm with 30 particles to approximate the log-likelihood on held-out documents (Wallach et al., 2009b; Wallach, 2008). The left-to-right algorithm breaks the problem of approximating the log-likelihood of one document (transaction) in a series of parts, where each part is associated to the probability of observing one term (product) given the previously observed terms. The likelihood of each term is approximated using an approach inspired by sequential Monte Carlo methods, where topic assignments are resampled for the previously observed terms to simulate topical mixtures over observed terms. The likelihood is given by the summation over topics of the product between the probability of the topic in the document and the probability of the term under the topic distribution. This procedure is repeated for a number of iterations (particles) and the likelihood of the term is given by averaging the per-particle likelihood.

#### 4.2. Topic coherence

A topic is said to be coherent when its most likely terms can be interpreted and associated with a single semantic concept (Newman et al., 2010). For instance, ‘a bag of egg noodles’, ‘a package of prepared stir fry’, and ‘a sachet of Chinese stir fry’ sauce are items that can be easily associated with the topic of ‘Asian stir fry’. On the other hand, a non-coherent topic highlights products that do not seem to fulfil a particular customer need. For example, ‘a bag of egg noodles’, ‘a bunch of bananas’, and ‘a lemon cake’ are items that together do not convey a clear purpose.

Human judgement on topic coherence tends to correlate with metrics of product co-occurrence such as the Pointwise Mutual Information (PMI) and Normalized Pointwise Mutual Information (NPMI) (Bouma, 2009) shown in Newman et al. (2010); Lau et al. (2014). PMI measures the probability of seeing two products within the same topic in comparison to the probability of seeing them individually. NPMI standardizes PMI, providing a score in the range of  $[-1, 1]$ . NPMI towards 1 corresponds to high co-occurrence.

$$\text{PMI}(w_i, w_j) = \log \left( \frac{P(w_i, w_j)}{P(w_i)P(w_j)} \right); \quad i \neq j, \quad 1 \leq i, j \leq 15. \quad (7)$$

$$\text{NPMI}(w_i, w_j) = \frac{\text{PMI}(w_i, w_j)}{-\log P(w_i, w_j)}; \quad i \neq j, \quad 1 \leq i, j \leq 15. \quad (8)$$

Scores are calculated over pair combinations of the 15 most probable products, following Blei et al. (2003); Griffiths and Steyvers (2004); Steyvers and Griffiths (2007);

Chang et al. (2009); Newman et al. (2010); Chaney and Blei (2012), Alternatively, products can be selected using distributional transformations Taddy (2012); Chuang et al. (2012); Sievert and Shirley (2014) which highlight less frequent but topic-wise unique products. However, transformations may select terms with low probabilities under the topic distribution.

The coherence measure of a single topic is given by the average of the NPMI scores. For simplicity, we will refer to this measure as NPMI. Here, we focus on NPMI since it has been shown to have a higher correlation with the human evaluation of topic coherence than PMI (Lau et al., 2014).

#### 4.3. Topic distinctiveness

Topic distinctiveness refers to the semantic dissimilarity of one topic in comparison to the topics of the same sample. For instance, ‘a bottle of sparkling water hint apple’, ‘a bottle of sparkling water hint grape’, and ‘a bottle of sparkling water hint orange’ are items that are interpreted as the topic of ‘flavoured sparkling water’. This topic and the ‘Asian stir fry’ topic are distinctive from each other. If a topic in the posterior sample is characterized by ‘a bottle of sparkling water hint lemon’, ‘a bottle of sparkling water hint mango’ and ‘a bottle of sparkling water hint lime’, it is interpreted as non-distinctive from the ‘flavoured sparkling water’ since both topics exhibit the same theme.

Several measures have been used to identify similar topics: KL-divergence (Li and McCallum, 2006; Wang et al., 2009; Newman et al., 2009), the average log odds ratio (Chaney and Blei, 2012), the cosine distance (Ramage et al., 2009; He et al., 2009; Chuang et al., 2015; Xing and Paul, 2018). Aletras and Stevenson (2014); Xing and Paul (2018) showed that cosine distance outperforms other distributional similarity measures, such as KL-divergence, Jensen Shannon Divergence, Euclidean distance, Jaccard similarity, according to human judgment on topic similarity. Thus, we define the distinctiveness of a topic  $\phi_i^t$  of posterior draw  $t$  as the minimum of the cosine distances between the topic and the other topics  $\Phi^t \setminus \phi_i^t$  within the same posterior sample, denoted by :

$$\text{CD}_{\min}(\phi_i^t, \Phi^t \setminus \phi_i^t) = \min [\text{CD}(\phi_i^t, \phi_1^t), \dots, \text{CD}(\phi_i^t, \phi_{i-1}^t), \text{CD}(\phi_i^t, \phi_{i+1}^t), \dots, \text{CD}(\phi_i^t, \phi_K^t)], \quad (9)$$

where

$$\text{CD}(\phi_i, \phi_j) = 1 - \frac{\phi_i \cdot \phi_j}{\|\phi_i\| \|\phi_j\|}. \quad (10)$$

Cosine distance between topics measures a slightly different aspect of a topic compared to the model likelihood, and thus the model may warrant the existence of two similar topics in terms of cosine distance, showing a low minimum distance. The distinctiveness of a set of topics in a posterior sample is given by the average per-topic distinctiveness.

#### 4.4. Topic credibility

When comparing different LDA posterior draws, topics may appear and disappear as a result of posterior uncertainty, which negatively affects practitioners’ confidence in the method. While topic distinctiveness within the same posterior sample is good, the high

cosine distance of topic  $\phi_i^t$  with all topics  $\Phi^s$  in posterior draw  $s \neq t$  indicates uncertainty about  $\phi_i^t$ . To measure topic credibility of topic  $\phi_i^t$  in posterior draw  $t$ , we compute the average maximum cosine similarity between  $\phi_i^t$  and all topics within posterior draw  $\Phi^s$ , for  $s \neq t$ , and average across all posterior draws  $s \neq t$ . If a topic is highly credible, then we expect a very similar topic to appear in every single posterior draw, hence the average cosine similarity will be high. Note here that we are using cosine similarity, rather than cosine distance, to capture topic credibility.

In other words,

$$\text{CS}_{\max}(\phi_i^t, \Phi^s) = \max [\text{CS}(\phi_i^t, \phi_1^s), \dots, \text{CS}(\phi_i^t, \phi_K^s)], \quad (11)$$

where

$$\text{CS}(\phi_i, \phi_j) = \frac{\phi_i \cdot \phi_j}{\|\phi_i\| \|\phi_j\|}. \quad (12)$$

Averaging across all other posterior draws,

$$\overline{\text{CS}_{\max}}(\phi_i^t, \Phi^{1:S}) = \frac{\sum_{s \neq t} \text{CS}_{\max}(\phi_i^t, \Phi^s)}{S - 1}. \quad (13)$$

A large average of the maximum similarities (i.e., minimum distances) across samples indicates that the topic appears with high similarity across posterior samples. The credibility of a set of topics is given by the average per-topic credibility.

## 5. Posterior summary of topic distributions

Here we introduce a methodology that aims to summarise the posterior distribution of a topic model by quantifying the recurrence of topic modes across posterior samples. Recurrent topics tend to appear several times across LDA posterior draws, showing higher credibility. To group topics across samples that represent the same theme, we use a hierarchical clustering approach that retrieves clusters of topical similarity. The resulting clusters are used to quantify topic posterior recurrence of a clustered topic, which is ultimately used to identify and filter out topics of high uncertainty.

### 5.1. Hierarchical clustering

Agglomerative hierarchical clustering (AHC) is a widely used statistical method that groups units according to their similarity, following a bottom-up merging strategy. The algorithm starts with as many clusters as input topics, and at each step, the AHC merges the pair of clusters with the smallest distance. AHC finishes when all the units are aggregated in a single cluster or when the distance among clusters is larger than a fixed threshold. AHC does not require the user to fix the number of clusters a priori; instead, the clustering dendrogram can be ‘cut’ at a user’s desired level, potentially informed by domain knowledge.

We use the AHC algorithm to aggregate and fuse topics from multiple posterior samples. To quantify cluster similarity, we use CD and the average linkage method. We opt for CD since it has outperformed correlation on human evaluation of topic similarity (Aletas and Stevenson, 2014) and human rating of posterior variability (Xing

and Paul, 2018). We opt for the *average* linkage method since, empirically, it has worked better than *single* and *complete* linkage methods, i.e., single linkage tended to create an extremely large cluster of low coherence, and complete linkage tended to create clusters of low distinctiveness. However, we slightly modify the algorithm to merge only topics that come from different posterior samples and whose cosine distance is lower than a user-specified threshold. In this manner, we avoid merging topics that belong to the same posterior sample or that differ to such a large extent that merging them is meaningless.

## 5.2. Recurrent topics

The AHC retrieves a collection of clusters  $C_1, \dots, C_N$ , which are represented by a *clustered topic*  $\bar{\phi}_k$  with a *cluster size*  $|C_k|$ , where  $k = 1, \dots, N$ . The clustered topic is the average distribution of the topics that share the same membership. The cluster size is the number of members, e.g., clustering 100 identical posterior samples of 50 topics would retrieve 50 clusters of 100 members each. The cluster size also represents the uncertainty related to the clustered topic. For instance, a cluster of size one indicates that its associated topic does not reappear in other posterior samples. On the other hand, a recurrent topic would be associated with a cluster with large cluster size, indicating that the topic consistently reappears across multiple samples. Thus, we measure the recurrence of a topic by its cluster size:

$$\text{recurrence}(\bar{\phi}_i) = |C_i|. \quad (14)$$

Then, subsets of clustered topics filtered by their recurrence are evaluated to identify a subset of clustered topics with high credibility. As we will show in the next section, cluster size as a measure of topic recurrence leads to subsets of better topic quality.

## 6. Application to grocery retail data

We apply topic models in the domain of the grocery retail industry, where topics are distributions over a fixed assortment of products and transactions are described as mixtures of topics. We analyse grocery transactions from a major retailer in the UK. Transactions are sampled randomly, covering 100 nationwide superstores between September 2017 and August 2018. The training data set contains 36 thousand transactions and a total of 392,840 products and the test data set contains 36 hundred transactions and a total of 38,621 products. Transactions contain at least 3 products and 10 products on average. The product assortment contains 10,000 products which are the most monthly frequent, ensuring the selection of seasonal and non-seasonal products. We count unique products in transactions, disregarding the quantities of repetitive products. For instance, 5 loose bananas count as 1 product (loose banana). We do not use an equivalent of stop words list (highly frequent terms), as we consider that every product or combination of them tell different customer needs. We disregard transactions with fewer than 3 products assuming that smaller transactions do not have enough products to exhibit a customer need. No personal customer data were used for this research.

### 6.1. Human judgement on interpretability and similarity of topics

To aid interpretation of topics within the context of the application, meaningful NPMI and cosine similarity thresholds need to be set. To this end, we carried out a user study to collect human judgement on the interpretability of individual topics and the similarity between pairs of topics and, ultimately, set empirical thresholds driven by users’ interpretations. Experts from a leading data science company specializing in retail analytics participated in the user study.

Users were asked to evaluate topics using a discrete scale from 1 to 5. For similarity between a pair of topics, a score of 1 refers to highly different topics, and a score of 5 refers to highly similar topics. For interpretability, a score of 1 refers to highly incoherent topics, and a score of 5 refers to highly coherent topics. Topics were obtained from 25, 50, 75, 100, 125, 150-topic LDA with hyper-parameters  $\alpha = [0.1, 0.01]$  and  $\beta = [0.01, 0.001]$ . The range in the number of topics corresponds to an initial belief of having no less than 25 topics and no more than 150 topics. Topics were represented by the top 10 most probable products. 189 and 935 evaluations for topic distinctiveness and topic coherence were collected, respectively.

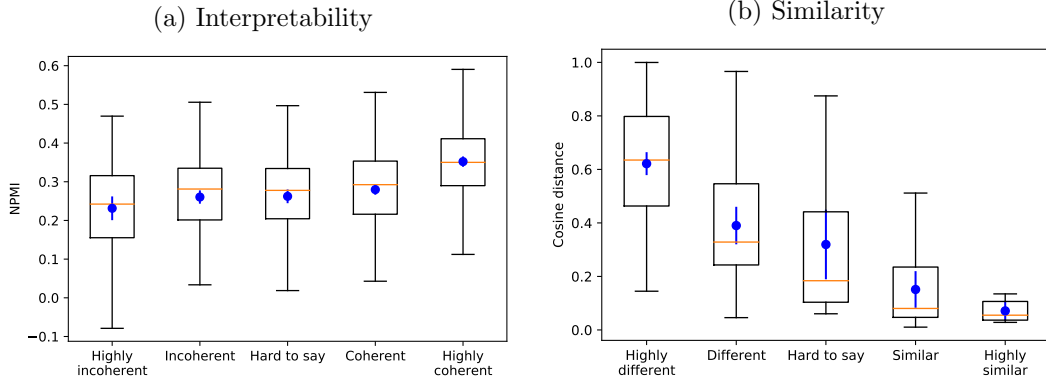


Fig. 1: Human evaluation on interpretability of individual topics and similarity between pairs of topics. Figure 1a shows coherence scores against topic NPMI. Figure 1b shows similarity scores against the cosine distance between compared topic distributions. Blue error bars show means and confidence intervals for the means. Interpreting results, a  $CD \leq 0.1$  indicates high similarity while  $CD \geq 0.5$  indicates high dissimilarity. It is also observed  $NPMI \leq 0$  responds to incoherent topics and  $NPMI \geq 0.5$  responds to highly coherent topics.

Figure 1a compares human judgment on topic coherence against NPMI. Despite the subtle positive correlation, there is no clear boundary of NPMI that can precisely identify coherent topics. However, we observe that 100% of topics with  $NPMI \leq 0$  were interpreted as highly incoherent, 65% of topics with  $NPMI \geq 0.3$  were interpreted as coherent, and 96% of topics with  $NPMI \geq 0.5$  were interpreted as highly coherent. We use these interpretations to guide the interpretation of topic coherence in the next sections.

Figure 1b compares human judgment on topic similarity against cosine distance. Unsurprisingly, the lower the cosine distance, the more similar the topic distributions are. We observe that 70% of the pairs with  $CD \leq 0.1$  were interpreted as ‘Similar’

or ‘Highly similar’, and 95% of pairs with  $CD \geq 0.5$  were interpreted as ‘Different’ or ‘Highly different’. While 38% of pairs were interpreted as ‘Similar’ or ‘Highly similar’ when  $0.1 \geq CD < 0.3$ , indicating some degree of topic similarity. Based on these results, we interpret topics with  $CD \leq 0.1$  as highly similar and with  $CD \geq 0.5$  as highly dissimilar. We use these thresholds to guide interpretations of topic distinctiveness and topic credibility.

## 6.2. LDA performance

We trained 5 LDA models with  $K = 25, 50, 100, 200, 400$  topics, with a symmetric Dirichlet hyperparameters  $\alpha_k = 3/K$  and  $\beta_v = 0.01$ . Note that  $\sum_k \alpha_k = 3$ , which reflects the minimum transaction size.  $\beta_v = 0.01$  is commonly used in the literature (Mimno et al., 2011; Newman et al., 2011). For each model, 4 Markov chains are run for 50,000 iterations with a burn-in of 30,000 iterations; samples were recorded every 10 000 iterations obtaining 20 samples in total. As shown in Appendix A, convergence of the Markov chains is satisfactory.

LDA models are assessed on the four aforementioned quality aspects. Perplexity measures the generalization of a group of topics, thus it is calculated for an entire collected sample. The other evaluation metrics are calculated at the topic level (rather than at the sample level) to illustrate individual topic performance.

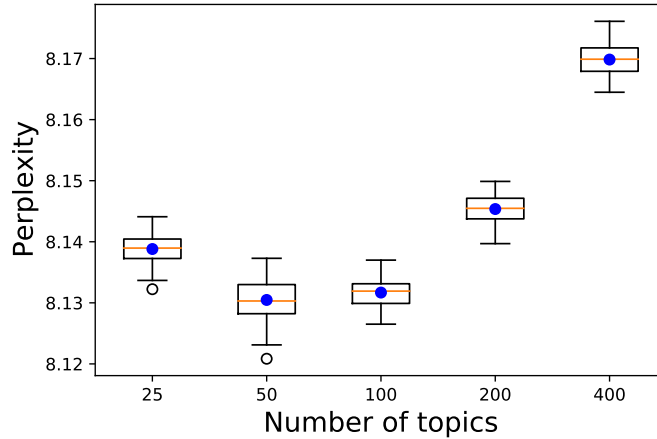


Fig. 2: The perplexity of LDA models with 25/50/100/200/400 topics. Each boxplot represents the perplexity distribution over the 20 samples. Green triangles indicate the average perplexity; standard errors are smaller than the marker size.

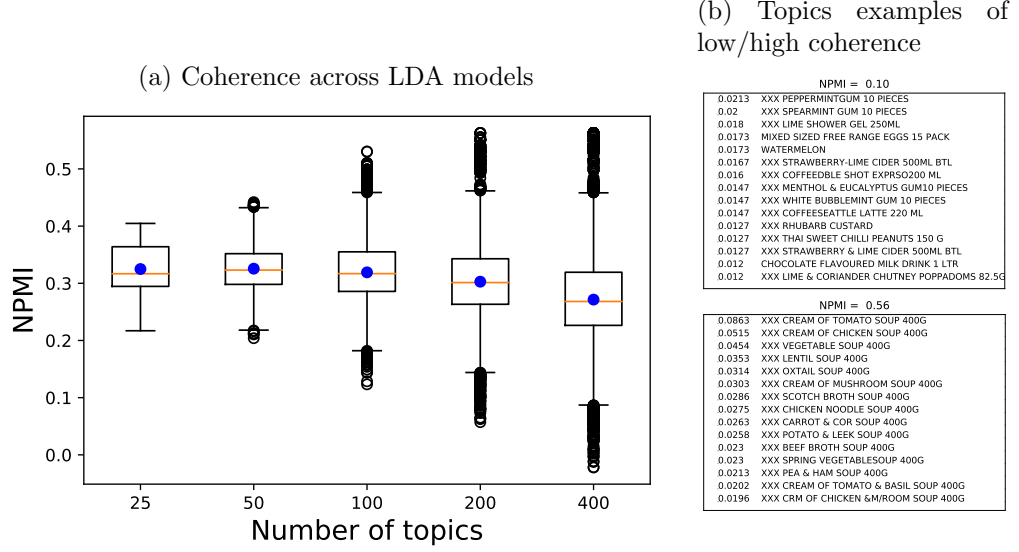


Fig. 3: (3a) Topic-specific NPMI of 25/50/100/200/400-topic LDA model. Green triangles indicate the average NPMI; standard errors are smaller than the marker size. (3b) shows (top) a topic with low coherence, (bottom) a topic with high coherence. Topics are illustrated with the probability and description of the top 15 products. Brands have been replaced by XXX.

Figure 2 shows the perplexity performance of LDA models. LDA samples of 50 and 100 topics tend to have the best generalization capability. As observed in Figure 3a posterior draws with 25 and 50 topics show larger average NPMI, however, there are no highly coherent topics ( $\text{NPMI} > 0.5$ ). The posterior draws with 100 to 400 topics show some highly coherent topics, but also show many less coherent topics with low NPMI values. In agreement with Chang et al. (2009), posterior samples with higher coherence do not necessarily have the best likelihood, which is the case of 25-topic LDA samples. Figure 3b illustrates two topics with low/high coherence. The top topic displays product descriptions that do not show a specific meaning, purpose, or customer need. On the other hand, the bottom topic shows the soup topic, composed of branded soup items that are frequently bought together due to promotional discounts.

In Figure 4a, we measure topic distinctiveness by computing the minimum cosine distance among topics of the same posterior draw. If two topics exhibit the same theme, and thereby similar distributions, then the cosine distance is close to 0. We observe that the majority of topics are highly distinct ( $\text{CD} \geq 0.5$ ) within their posterior draw. However, as expected, the larger the model, the more topics with some degree of similarity ( $\text{CD} \leq 0.3$ ) as seen in LDA models with 100 to 400 topics. Figure 4b shows an example of two topics with some degree of similarity, both show collections of produce and red meat.

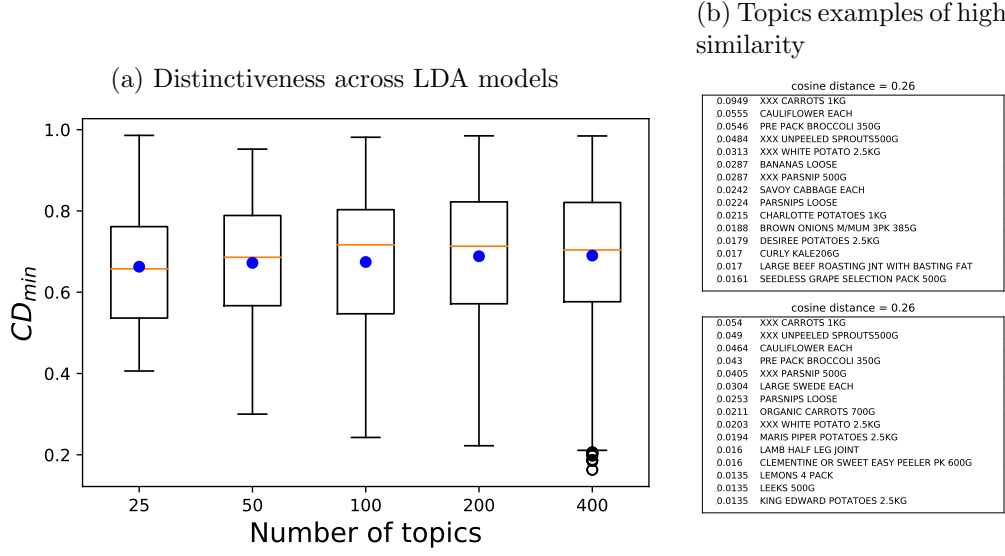


Fig. 4: (4a) Topic-specific minimum cosine distance (among topics of the same posterior draw). Green triangles indicate the average minimum cosine distance; standard errors are smaller than the marker size. (4b) shows two topics from a single Gibbs sample that show some similarity. Topics are illustrated with the probability and description of the top 15 products. Brands have been replaced by XXX.

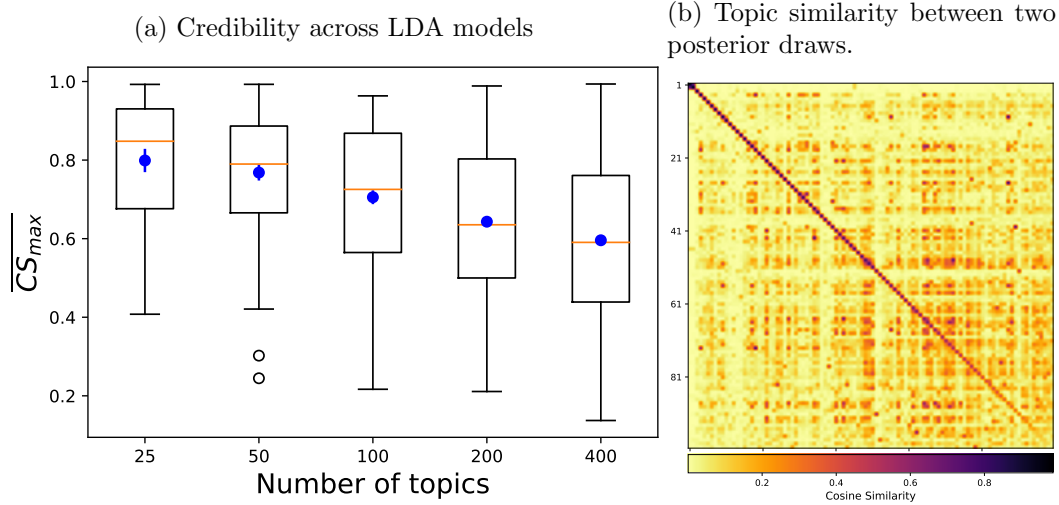


Fig. 5: (5a) Topic-specific average maximum cosine similarity. For each topic, the maximum cosine similarity is calculated over the topics of a different posterior draw. Then, the average is taken over all maximum values. When a topic is highly credible, it will frequently appear across posterior samples, thus the average maximum cosine similarity tends to 1. Conversely, if a topic is highly uncertain and it does not appear in other posterior samples, then the maximum cosine similarity for each sample would tend to zero. Green triangles indicate the mean; standard errors are smaller than the marker size. (5b) shows the cosine distance between topics of two posterior samples. Topics have been ordered using a greedy alignment algorithm that tries to find the best one-to-one topic correspondences.

In Figure 5a, we measure topic credibility by averaging the maximum cosine similarity between a topic and the topics from the remaining posterior samples, so for each topic and each sample, there is one maximum cosine similarity from each remaining posterior sample. If one topic constantly appears across samples, then the average maximum cosine similarity tends to 1. Vice-versa, if the topic is not part of other samples, then the maximum cosine similarity of each sample tends to 0, so does its average maximum cosine similarity. We observe 4%/ 3%/16%/ 25%/ 36% of topics with  $\overline{CS}_{\max} \leq 0.5$ , indicating that they did not reappear in other posterior samples with high similarity. Figure 5b shows the cosine similarity matrix between two posterior LDA samples of 100 topics. Topics have been ordered using a greedy alignment algorithm that tries to find the best one-to-one topic correspondences as in (Rosen-Zvi et al., 2010). This plot indicates that around one-fifth of the topics do not appear with some similarity  $CS \geq 0.5$  in the other posterior draw. This implies that applying label-switching algorithms to resolve labelling for each posterior draw would inevitably ‘match-up’ topics which are semantically dissimilar. Instead of averaging over distinct modes, our methodology (described in the next section) would report separate clusters, each with its own credibility, reflecting the frequency with which each mode appears.

## 7. Clustering and selection of recurrent topics

In this section, we apply our methodology to summarize LDA posterior distributions and to quantify topic recurrence. We will show that topic recurrence can aid the selection of topics with better coherence, credibility and model generalization.

We conduct 3 experiments with LDA samples with 50, 100 and 200 topics. In each experiment, a bag of topics is formed from 20 samples that come from four separate Gibbs samplers. From each chain, samples are obtained after a burn-in period (30,000 iterations) and recorded every 5000 iterations to reduce autocorrelation. Computing perplexity is a computationally expensive. Thus, we do not record the evaluation metrics at each clustering step. Instead, we evaluate subsets of clustered topics obtained at different distance thresholds (cosine distance from 0 to 0.55 and every 0.05). We assume that topics with cosine distance  $\geq 0.55$  are too different, which would render cluster merging meaningless. Credibility is measured by comparing one clustering experiment against a second clustering experiment whose samples are recorded from four different Gibbs samplers. We do not further explore LDA samples with 25 and 400 topics, the former does not show a better variety of topic and the latter show worse perplexities.

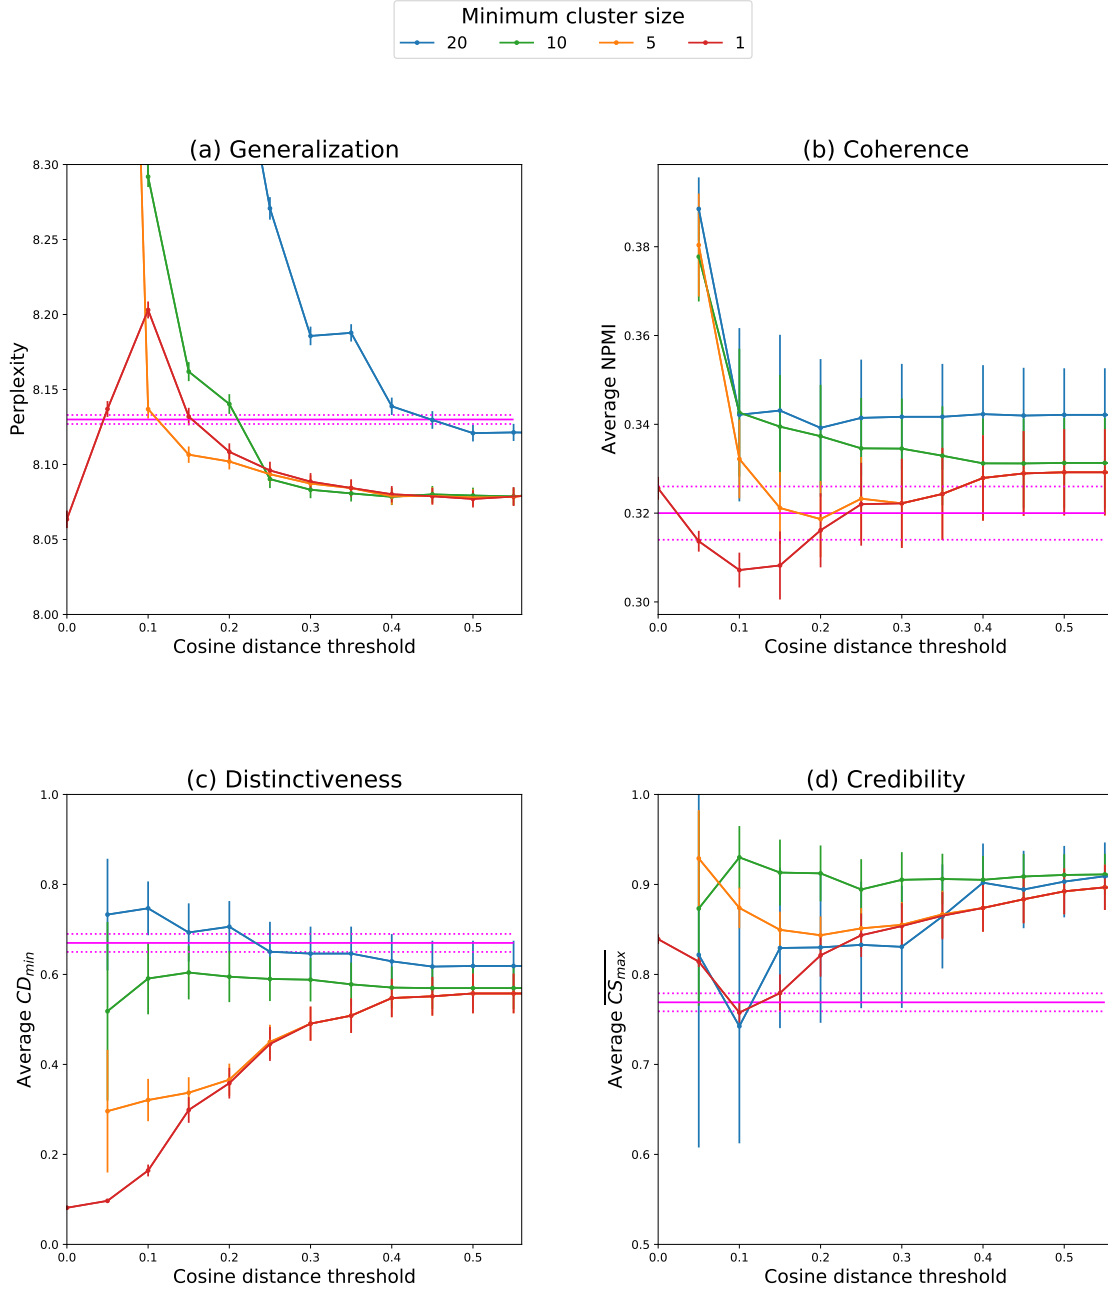


Fig. 6: Subset evaluation using cosine distance (varying from 0 to 1 with increments of 0.05) and minimum cluster size (20, 10, 5 and 1). Clustered topics were obtained from clustering 20 samples of LDA with 50 topics. Vertical lines represent one standard error. Magenta lines show the average measures ( $\pm$  one standard error) of the LDA samples.

Figure 6 shows the evaluation of subsets of clustered topics obtained from clustering 50-topic LDA samples at different levels of topic recurrence, when the minimum cluster

size is 1, 5, 10, and 20, representing the 5%, 25%, 50%, and 100% of the samples. As observed in the perplexity plot (top left), the subset with the lowest perplexity is the one at minimum cluster size 1 and cosine distance 0, this is the original bag of 1000 topics before merging. This subset has the lowest performance in distinctiveness; thereby, using this subset is inefficient as it contains too many repetitive topics. Subsets with minimum cluster size 1 and cosine distance 0.05 – 0.1 show increased perplexity because the most credible topics are reduced to a small number of clusters in comparison to the topics that have not been clustered. Since a symmetric prior is used to compute perplexity, the uncertain topics outweigh the credible topics. More interestingly, subsets of minimum clusters size 5, 10, or 20 show significantly better perplexity, depending on the cosine distance threshold, for instance, the subset of cluster topics with a minimum cluster size of 5 and at cosine distance larger than 0.15. The coherence plot (top right) and distinctiveness plot (bottom left) shows that highly recurrent topics (with minimum cluster size 10) tend to be more coherent and distinctive. We also observe that measures of coherence and distinctiveness decrease when including topics of lower recurrence or when increasing the cosine distance (letting more clusters be merged, so the new cluster grows in size). Interestingly, the credibility plot (bottom right) shows that the most credible subsets are formed with clusters of size 10 or more. Subsets of a minimum cluster size of 20 or cosine distance  $\leq 0.1$  are formed by a reduced number of clustered topics as shown in Figure 7. These topics may not repeat with the same certainty in other samples, and therefore, subsets with a small number of clusters tend to show high variability. Similar patterns are found when clustering LDA samples with 100 and 200 topics as shown in Appendix B.

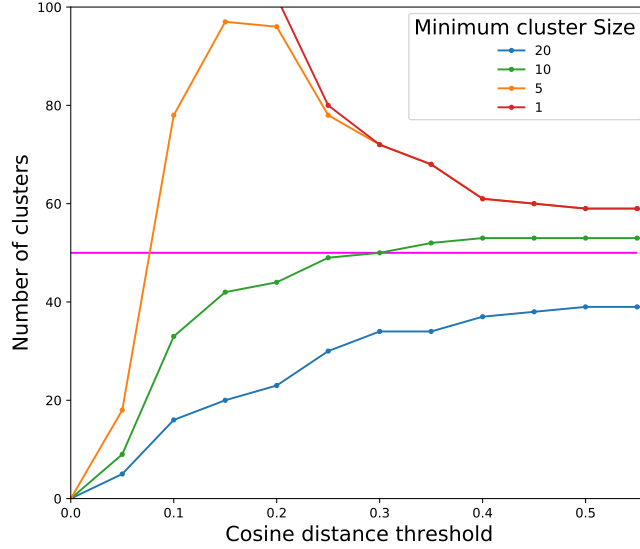


Fig. 7: The number of clusters obtained at cosine distance (varying from 0 to 1 with increments of 0.05) and minimum cluster size (20, 10, 5 and 1). The magenta line shows the number of topics in the LDA samples. For visualization purposes, subsets larger than 100 clusters are not shown (subsets with minimum size 1 and  $CD < 0.25$ )

Figure 7 shows the number of clustered topics obtained by varying cosine distance thresholds and minimum cluster size. Subsets with a minimum cluster size of 1 report a large number of clusters (more than 100), which for visualization purposes are not shown. Topics that reappear in 20 samples are always fewer than 100 (number of topics of the LDA samples), confirming the uncertainty and low credibility of some topics.

Based on this analysis, we select a subset generated by minimum cluster size 10 and 0.35 CD threshold. Minimum cluster size 20 may lead to greater coherence but lower perplexity and vice versa minimum cluster size 1 or 5 leads to better perplexity but worse coherence. After the 0.35 CD threshold, perplexity is no longer improved. Both thresholds are also used to select a subset of clustered topics obtained from 100-topic LDA samples, and 0.45 CD for clustered topics obtained from 200-topic LDA samples.

We repeat the 3 experiments with LDA samples with 50, 100 and 200 topics, but this time, we allow merging of topics within the same posterior sample. This implies that the clustering is no longer just a summary of the posterior distribution, but it is also, in effect, informing the number of topics within LDA. This allows us to compare and interpret some of the behaviour of the clustered topics from models with a large number of topics, as gathering similar topics from the same and different samples will form more distinctive subsets of clustered topics.

Table 1: Generalization, coherence, distinctiveness and stability metrics of LDA samples and subsets of clustered topics (HC-LDA and HC-LDA-WS) obtained from clustering LDA samples with 50, 100 and 200 topics.

| Model         | Topics | Generalization           | Coherence                | Distinctiveness      | Credibility              |
|---------------|--------|--------------------------|--------------------------|----------------------|--------------------------|
|               |        | Perplexity               | NPMI                     | $CD_{min}$           | $\overline{CS_{max}}$    |
|               |        | Mean $\pm$ SE            | Mean $\pm$ SE            | Mean $_{min} \pm$ SE | Mean $\pm$ SE            |
| LDA-50        | 50     | 8.130 $\pm$ 0.003        | 0.325 $\pm$ 0.006        | 0.672 $\pm$ 0.020    | 0.769 $\pm$ 0.011        |
| HC-LDA-50     | 52     | <b>8.079</b> $\pm$ 0.006 | <b>0.333</b> $\pm$ 0.006 | 0.580 $\pm$ 0.023    | <b>0.916</b> $\pm$ 0.014 |
| HC-LDA-WS-50  | 50     | <b>8.083</b> $\pm$ 0.005 | <b>0.333</b> $\pm$ 0.006 | 0.601 $\pm$ 0.021    | <b>0.907</b> $\pm$ 0.014 |
| LDA-100       | 100    | 8.131 $\pm$ 0.003        | 0.319 $\pm$ 0.006        | 0.674 $\pm$ 0.016    | 0.716 $\pm$ 0.009        |
| HC-LDA-100    | 96     | <b>8.076</b> $\pm$ 0.006 | <b>0.333</b> $\pm$ 0.005 | 0.565 $\pm$ 0.021    | <b>0.890</b> $\pm$ 0.010 |
| HC-LDA-WS-100 | 86     | <b>8.086</b> $\pm$ 0.005 | <b>0.331</b> $\pm$ 0.005 | 0.621 $\pm$ 0.018    | <b>0.882</b> $\pm$ 0.012 |
| LDA-200       | 200    | 8.145 $\pm$ 0.003        | 0.302 $\pm$ 0.004        | 0.688 $\pm$ 0.011    | 0.644 $\pm$ 0.008        |
| HC-LDA-200    | 198    | <b>8.078</b> $\pm$ 0.005 | <b>0.32</b> $\pm$ 0.004  | 0.555 $\pm$ 0.014    | <b>0.864</b> $\pm$ 0.007 |
| HC-LDA-WS-200 | 145    | <b>8.132</b> $\pm$ 0.003 | <b>0.335</b> $\pm$ 0.005 | 0.664 $\pm$ 0.011    | <b>0.848</b> $\pm$ 0.011 |

In Table 1, we compare the performance of the selected subsets when topics from

different samples form a cluster (HC-LDA), and when topics from the same and different samples form a cluster (HC-LDA-WS), against the average performance of the LDA models. As observed, subsets of clustered topics show significantly lower measures of generalization, larger topic coherence and larger topic credibility than LDA inferred topics. Note that topic distinctiveness is not improved, which might result from excluding highly distinctive non-recurrent topics. Allowing the merging of topics from the same samples retrieves fewer topics, does not significantly improve perplexity but increases the subset distinctiveness.

Different numbers of topics may retrieve similar performance. For example, Table 1 shows that the subsets of clustered topics achieve similar average measures of perplexity, coherence and credibility; LDA models with 50 and 100 topics show the same levels of perplexity, coherence and distinctiveness. However, LDA samples with a large number of topics (and thereby their derived clustered topics) cover a wider variety of topics, highlighting important customer behaviours. For example, the Scottish topic illustrated in Figure 9h is only found in LDA samples with 200 topics. Besides, clustered topics may be included in a subset derived from larger LDA samples. For instance, Figure 8 shows that the clustered topics in HC-LDA-50 (obtained from clustering 50-topic LDA samples) are also identified among the clustered topics in HC-LDA-100 (derived from 100-topic LDA samples). The latter is also identified among the clustered topics in HC-LDA-200 (derived from 200-topic LDA samples). Thus, the analysis of clustered topics obtained from LDA topics with a large number of topics may be warranted if the results reveal topics of interest, and the application of our clustering methodology can alleviate poor generalization for the over-parameterized model.

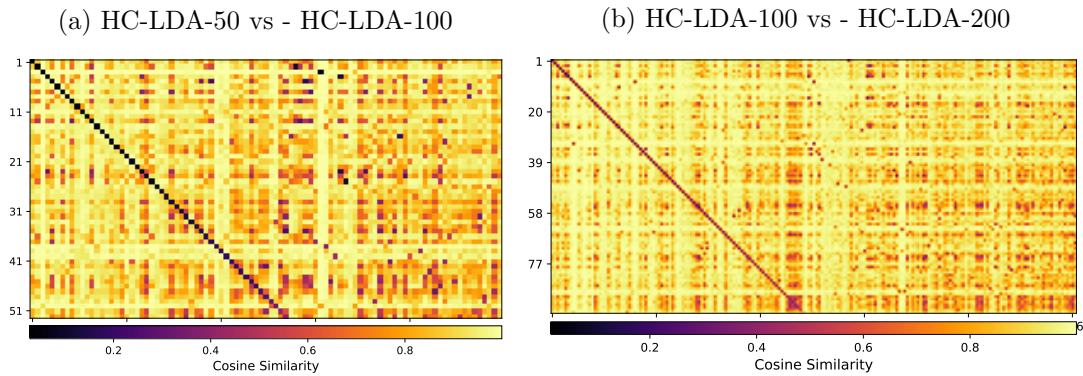


Fig. 8: Clustered topics correspondence between clustering of LDA samples with 50, 100 and 200 topics.

## 8. Topics in British Grocery Retail

The analysis of topics and the products that together fulfil customers' motivations convey customer insights, i.e., diet orientations, cooking from scratch, preference for specific drinks or dishes, etc. For instance, Figure 9a presents the topic of 'Organic Food', Figure 9b shows ingredients to cook an 'Italian dish' and Figure 9c highlights ingredients to prepare 'Gin and Tonic'. Along with these topics, other identified topics show vegetarian-

| (a) Organic Food                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (b) Italian dish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | (c) Gin and Tonic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>NPMI = 0.41 Size = 20</p> <ul style="list-style-type: none"> <li>0.07 ORGANIC CARROTS 700G</li> <li>0.0522 ORGANIC FAIRTRADEBANANAS 6 PACK</li> <li>0.0515 MIXED SIZED ORGANIC EGGS 6 PACK</li> <li>0.0271 ORGANIC GALA APPLES 630G</li> <li>0.0271 ORGANIC BROCCOLI 300G</li> <li>0.0238 ORGANIC BRT SEMISKIMMED MLK 4 PINTS</li> <li>0.0191 ORGANIC SPINACH 200G</li> <li>0.0191 ORGANIC WHITE POTATOES 1.5KG</li> <li>0.0185 ORGANIC BRT SEMISKIMMED MILK 2 PINT</li> <li>0.0152 RIPE &amp; READY TWIN PACK AVOCADOS</li> <li>0.0152 ORGANIC UNWAXED LEMONS M/MUM 3 PACK</li> <li>0.0145 ROOT GINGER LOOSE</li> <li>0.0125 ORGANIC UNSALTED BTTR 250G</li> <li>0.0119 ORGANIC HOUMOUS 200G</li> <li>0.0119 ORGANIC SMALL BANANAS 6 PACK</li> </ul>                                          | <p>NPMI = 0.33 Size = 20</p> <ul style="list-style-type: none"> <li>0.0368 BEEF LEAN STEAK MINCE 500G 5% FAT</li> <li>0.0216 CLOSED CUP MUSHROOMS 300G</li> <li>0.0195 BEEF STEAK MINCE 750G 15% FAT</li> <li>0.0195 TOMATO PUREE 200G</li> <li>0.0178 BROWN ONIONS LOOSE</li> <li>0.0169 BROWN ONIONS 3PK 385G</li> <li>0.0165 LASAGNE PASTA 500G</li> <li>0.0161 BABY BUTTON MUSHROOMS 200G</li> <li>0.0161 BEEF LEAN STEAK MINCE 5% FAT 750G</li> <li>0.0157 XXX BEEF MINCE 500G 20% FAT</li> <li>0.0135 XXX GARLIC PUREE 90G</li> <li>0.0131 BUDGET CHOPPED TOMATOES 400G</li> <li>0.0127 BEEF STEAK MINCE 15% FAT 500G</li> <li>0.0123 ITALIAN CHOPPED TOMATOES 400G</li> <li>0.0118 GRATED MOZZARELLA 250G</li> </ul>                                                                                | <p>NPMI = 0.32 Size = 14</p> <ul style="list-style-type: none"> <li>0.046 LIMES EACH</li> <li>0.029 LEMONS EACH</li> <li>0.0199 XXX ICE CUBES 2KG</li> <li>0.0193 XXX SAUVIGNON BLANC 75CL</li> <li>0.0182 XXX TONIC WATER 500ML</li> <li>0.0182 XXX SLIMLINE TONIC WATER 1LITRE</li> <li>0.0182 XXX ELDERFLOWER TONIC WATER 500ML</li> <li>0.0176 XXX SPECIAL DRY LONDON GIN 1 LITRE</li> <li>0.0171 SODA WATER 1 LITRE</li> <li>0.0165 XXX PREMIUM INDIAN TONIC WTR 500ML</li> <li>0.0159 LEMONS 4 PACK</li> <li>0.0159 XXX INDIAN TONIC WATER 1LITRE</li> <li>0.0148 LIMES 5 PACK</li> <li>0.0136 XXX TONIC MEDITERRANEAN 500ML</li> <li>0.0131 XXX BEER 12X330ML</li> </ul>                                                                                                                                                |
| (d) Meal promotion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | (e) Budget line                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | (f) Dog goods                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <p>NPMI = 0.38 Size = 20</p> <ul style="list-style-type: none"> <li>0.0448 XXX SWEETCHILLI CRISPS 40 G</li> <li>0.0308 CHICKEN CAESAR WRAP</li> <li>0.0301 XXX FLAME GRILLED STEAK CRISPS 47.5 G</li> <li>0.0288 XXX CHEESE &amp; ONION CRISPS 32.5 G</li> <li>0.0242 XXX CHEESE SNACKS GRAB BAG 34 G</li> <li>0.0232 BRANDED COLA 500ML</li> <li>0.0223 XXX SALT &amp; VINEGAR CRISPS 47.5 G</li> <li>0.0206 XXX READY SALTED CRISPS 32.5 G</li> <li>0.02 ROAST CHICKEN, BACON &amp; STUFFING SANDWICH</li> <li>0.0196 XXX NATURAL MINERAL WATER 750 ML</li> <li>0.0167 HOISIN DUCK WRAP</li> <li>0.0167 BACON, LETTUCE &amp; TOMATO SANDWICH</li> <li>0.0164 PINK LADY AND GRAPES SNACKPACK 80G</li> <li>0.0157 XXX ONION SNACK 40G</li> <li>0.0151 XXX ORANGE JUICE ORIGINAL 300 ML</li> </ul> | <p>NPMI = 0.36 Size = 20</p> <ul style="list-style-type: none"> <li>0.0203 BUDGET BAKED BEANS IN TOMT SAUCE 420G</li> <li>0.0165 BUDGET COFFEE GRANULES 100G</li> <li>0.014 BUDGET 40 T/BGS 100G</li> <li>0.014 WHITE MEDIUM BREAD 800G</li> <li>0.013 BUDGET MILK CHOC DIGESTIVE BISCUITS 300G</li> <li>0.0127 BUDGET COOKED HAM 125 G</li> <li>0.0121 BUDGET SPAGHETTI HOOPS 410G</li> <li>0.0121 BUDGET DOBLE CONCENTRATE SQUASH 750ML</li> <li>0.0114 WHOLEMEAL MEDIUM BREAD 800G</li> <li>0.0114 BUDGET TOMATO KETCHUP 550G</li> <li>0.0114 BUDGET LINEREADY SALTED CRISPS 12 X 18 G</li> <li>0.0111 BEEF MINCE 500G 20% FATGRANULATED SUGAR 1KG</li> <li>0.0108 BUDGET CORN FLAKES CEREAL 500G</li> <li>0.0108 CREAM CRACKERS 200G</li> </ul>                                                        | <p>NPMI = 0.33 Size = 20</p> <ul style="list-style-type: none"> <li>0.0285 BEEF &amp; GAME DOG TREATS 4 SAUSAGES 70G</li> <li>0.0268 DOG POOP BAGS 75'S</li> <li>0.0257 SALAMI DOG TREATS 5 X11G</li> <li>0.0246 XXX BEEF DOG TREATS 8 STICKS, 140G</li> <li>0.024 BRITISH CHICKEN BREAST PORTIONS 650G</li> <li>0.0229 XXX DOG FOOD TREATS CKN 8 PACK 140G</li> <li>0.0212 7 DENTAL STICKS LARGE DOG 270G</li> <li>0.0212 XXX TREATS 20 DOGFOOD 172G</li> <li>0.0207 XXX CHICKEN TWISTS DOG CHEW TREATS 70G</li> <li>0.0196 MEATY TREATS WITH CKN BEEF &amp; LIVER 135G</li> <li>0.0196 BANANAS LOOSE</li> <li>0.0157 XXX TASTY MINIS CHEESY DOG TREATS 140G</li> <li>0.0157 XX 7 DENTAL STICKS MEDIUM DOG 180G</li> <li>0.0151 BUDGET LINE SLICED COOKED CHICKEN 240G</li> <li>0.0145 XXX BACON &amp; CHEESE 175G</li> </ul> |
| (g) Roast Dinner                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (h) Scottish topic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | (i) Christmas essentials                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <p>NPMI = 0.38 Size = 20</p> <ul style="list-style-type: none"> <li>0.0455 PRE PACK BROCCOLI 350G</li> <li>0.0352 XXX CARROTS 1KG</li> <li>0.0274 XXX WHITE POTATO 2.5KG</li> <li>0.0269 CAULIFLOWER EACH</li> <li>0.0215 CARROTS LOOSE</li> <li>0.0176 XXX UNPEELED SPROUTS500G</li> <li>0.0161 XXX PARSNIP 500G</li> <li>0.0152 PARSNIPS LOOSE</li> <li>0.0147 MARIS PIPER POTATOES 2.5KG</li> <li>0.0142 XXX 12 GOLDEN YORKSHIRES 220G</li> <li>0.0142 LARGE SWEDE EACH</li> <li>0.0132 XXX GRAVY GRANULES 170G</li> <li>0.0132 BRITISH S/SKIMMED MILK 4 PINTS</li> <li>0.0132 BRITISH LARGE WHOLE CHICKEN 1.5KG - 1.9KG</li> <li>0.0132 12 YORKSHIRE PUDDINGS 230G</li> </ul>                                                                                                                 | <p>NPMI = 0.28 Size = 19</p> <ul style="list-style-type: none"> <li>0.035 BRITISH S/SKIMMED MILK 4 PINTS</li> <li>0.0261 SCOTTISH BRAND CRISPY MORNING ROLL</li> <li>0.024 XXX MEDIUM SLCD WHT BRD 800G</li> <li>0.0209 XXX TOASTIE SLICED WHITE BREAD 800G</li> <li>0.0193 XXX TOASTIE WHITE SMALL BREAD 400G</li> <li>0.0188 BRITISH WHOLE MILK 4 PINTS</li> <li>0.0167 BRITISH S/SKIMMED MILK 2 PINTS</li> <li>0.0162 WHITE BATON</li> <li>0.0162 UNSMOKED BACK BACON RASHERS 300G</li> <li>0.0146 SCOTTISH BRAND POTATO SCONES 6 PK</li> <li>0.0146 WAFER THINHONEY ROAST HAM SLICES 125G</li> <li>0.0136 SCOTTISH BRAND BEEF LORNE 200G</li> <li>0.012 SCOTTISH BRAND PLAIN MEDIUM WHITE BREAD 800G</li> <li>0.012 GRANULATED SUGAR 1KG</li> <li>0.0115 UNSMOKED THICK CUT BACK BACON 300G</li> </ul> | <p>NPMI = 0.35 Size = 15</p> <ul style="list-style-type: none"> <li>0.0287 XXX UNPEELED SPROUTS 500G</li> <li>0.0277 XXX CARROTS 1KG</li> <li>0.0268 XXX WHITE POTATO 2.5KG</li> <li>0.022 7 CHEESE SELECTION PACK 560G</li> <li>0.0182 XXX SPARKLING WHITE GRAPE JUICE 750ML</li> <li>0.0172 XXX SOUR CREAM &amp; ONION CRISPS 200G</li> <li>0.0143 XXX PARSNIP 500G</li> <li>0.0143 XXX PROSECCO 75CL</li> <li>0.0139 XXX ROSE 750ML</li> <li>0.0129 XXX SAGE &amp; ONION STUFFING MIX 190G</li> <li>0.0129 XXX SPARKLING RED GRAPE JUICE 750ML</li> <li>0.0119 RED SEEDLESS GRAPES 500G</li> <li>0.0115 CLEMENTINE OR SWEET EASY PEELER PK 600G</li> <li>0.0115 XXX ORIGINAL CRISPS 200G</li> <li>0.011 MINCE PIES 6 PACK</li> </ul>                                                                                        |

Fig. 9: Topics in the UK grocery retail market baskets. Each topic is characterized by the 15 products with the largest probabilities. Probabilities and products are sorted in descending order. Brand names have been replaced by XXX for anonymization purposes. Credibility shows the ratio between the number of topics distributions associated with each cluster and the number of posterior draws. Topics reflect a variety of shopping motivations, i.e., diet orientations, cooking from scratch, ready-to-eat meals, preference for budget/premium product lines, pet ownership/household composition, specific events, geography and seasonality. Topics may also be associated with alcohol/fat/salt/sugar consumption.

friendly foods, free-from lactose/gluten foods, ingredients for cooking Asian, Mexican, or Indian recipes. In these examples, topics gather products from different categories, i.e, ice and tonic water are two categories while tonic water and soda water are in the same category. Identifying combinations of products from different categories may have useful and commercial implications in improving product recommendations, developing promotional campaigns, optimizing assortments and planning shelf space, etc.

In contrast to cooking from scratch, customers may prefer convenience foods such as ready-to-eat meal promotions. For example, Figure 9d represents a ‘meal promotion’ composed of a sandwich, a bottle of soda or water, and a package of prepared fruit or crisps. Topics also show that customers tend to choose products within the supermarket’s budget line or premium line, e.g., Figure 9e gathers products from a ‘budget line’ which offers products of a lower price than branded substitutes. Pet-ownership or household composition can be illustrated by topics, for instance, Figure 9f lists ‘dog goods’, including food, meat, and cleaning items. Other topics illustrate baby-related foods and large size items indicating household composition. Topics reveal customer’s decision drivers, which can aid further customer analysis such as customer segmentation and customer profiling, to improve customer experience and to build brand loyalty.

Topics reveal customer motivations that are driven by specific events, geography, or seasonality. For instance, Figure 9g depicts the ‘roast dinner’ which is a traditional British main meal that is typically served on Sunday. Other event-specific topics manifest customers’ motivations such, as having a picnic, buying a gift (flowers and chocolates), or barbecue. Topics also exhibit specific shopping themes that are driven by products that are available or highly preferred in certain locations or at specific periods. For example, Figure 9h reveals Scottish-branded products in the ‘Scottish topic’. Similarly, a Northern Irish topic includes packed and locally supplied foods. Figure 9i shows the ‘Christmas essentials’ topic which is characterized by mince pies, sparkling grape juice, produce, and snacks. Easter and Halloween are also depicted by topics that contain the icons: chocolate egg and pumpkin, respectively. Commercially speaking, identifying events and geographical/seasonal patterns may inform marketing campaigns and support the optimization of product assortment.

Our approach allows us to provide measures of uncertainty for each inferred topic. For example, the topics ‘Organic food’, ‘Italian dish’ appeared in every single posterior draw. Therefore, corresponding commercial decisions can be made with relative confidence in these shopping themes. On the other hand, less frequent topics can be identified. For instance, the topics ‘Scottish’ and ‘Christmas essentials’ appeared 19 out of 20 and 15 out of 20 times, respectively, within the 20 LDA posterior draws. The lower frequency of these topics might be explained by the small representation of them in our data due to their regional/seasonal nature. More importantly, naive averaging of posterior draws would have damaged these topics by merging them with an irrelevant topic.

Understanding grocery consumption not only assists marketing practices but also opens up new avenues for social research. Uncovering consumption patterns related to alcohol (Figure 9c)/fat/sugar/salt through topic modelling is scalable, low-cost and allows the identification of specific products and their characteristics. Thus, topic modelling may help the conduction of dietary studies that are typically limited to survey data such as food frequency questionnaires and open-ended dietary assessment (Aiello

et al., 2019; Einsele et al., 2015; Wang et al., 2014; Wardle, 2007).

## 9. Conclusion

In this paper, we expand the evaluation process of LDA to include qualitative aspects such as topic coherence, topic distinctiveness, and topic credibility along with model generalization. In addition, we propose a methodology that post-processes LDA models, to summarize the entire posterior distribution of an LDA model into a single set of topical modes. Our approach identifies recurrent topics using meaningful distance criteria and allows the user to assess topic credibility. The distance criteria were developed through a customized survey which we carried out with experts in the field of grocery retailing; these helped us evaluate and set thresholds that assist the evaluation of interpretability and similarity of grocery retail topics. Empirically, we showed the advantages of the proposed methodology in terms of capturing topic uncertainty and enhancing coherence and credibility. We identified credible and coherent topics that exhibit a variety of shopping motivations, i.e., diet orientations, cooking from scratch, specific events, pet ownership, geography, seasonality, etc. Topics can be associated with alcohol/fat/salt/sugar consumption, which may provide new venues for sociological research. Finally, our methods focused on the context of LDA models. Summarizing multiple posterior draws from a mixture model, however, is a challenge that extends beyond LDA. Our methods can be implemented beyond LDA by replacing the cosine distance with other measures relevant to each context.

## A. MCMC convergence

For each LDA model, 4 Markov chains are run for 50,000 iterations with a burn-in period of 30,000 iterations. We evaluate convergence using the potential scale reduction factor  $\hat{R}$  (Gelman et al., 2013). When  $\hat{R}$  is near 1, we can assume that samples approximate the posterior distribution. Values of  $\hat{R}$  below 1.1 are acceptable. Figure 10 shows the trace plot for the log-likelihood (measured at every 10 iterations) of LDA with 50, 100, 200 and 400 topics. We calculate the potential scale reduction factor using 4 chains and 8000 samples. Chains for LDA with 50, 100, 200 topics seem to be converged. The chains for LDA with 400 topics need to be further trained, however, preliminary evaluation of the topics from these chains already show lower performance than topics from chains with fewer topics.

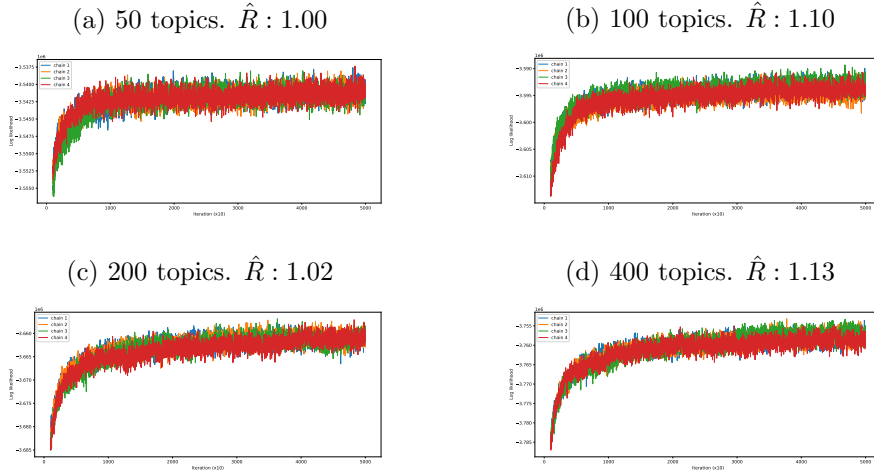


Fig. 10: Markov Chains of LDA with 50, 100, 200, and 400 topics.  $\hat{R}$  is the potential scale reduction factor.

## B. Clustering of topics

Here, we show the evaluation of subsets of clustered topics obtained from 20 LDA posterior samples with 100 and 200 topics.

(a) Clustering with 100-topic LDA chains (b) Clustering with 200-topic LDA chains

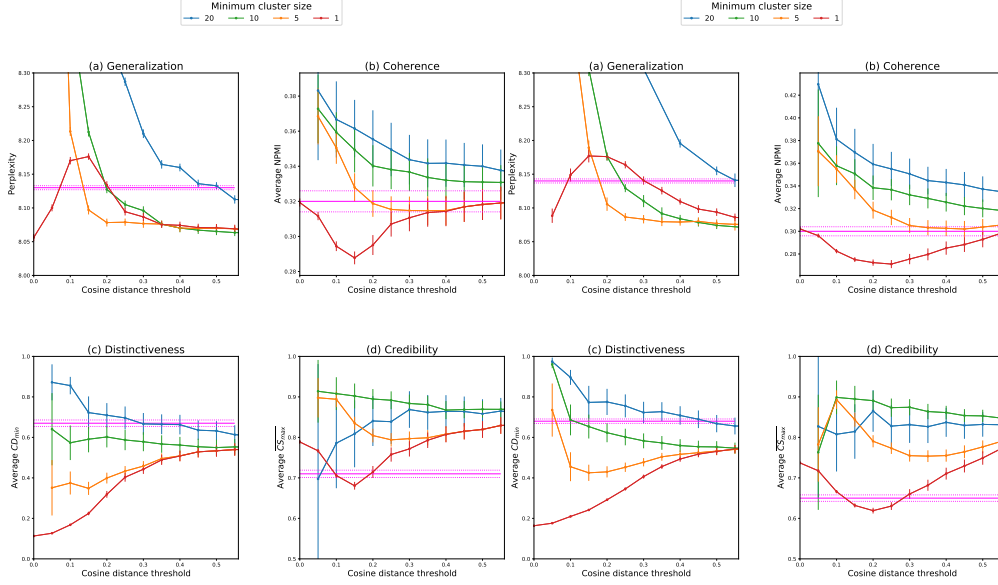


Fig. 11: Subset evaluation using cosine distance (varying from 0 to 1 with increments of 0.05) and minimum cluster size (20, 10, 5 and 1). Clustered topics were obtained from clustering 20 samples of LDA with 100/200 topics. Vertical lines represent one standard error. Magenta lines show the average measures ( $\pm$  one standard error) of the LDA samples.

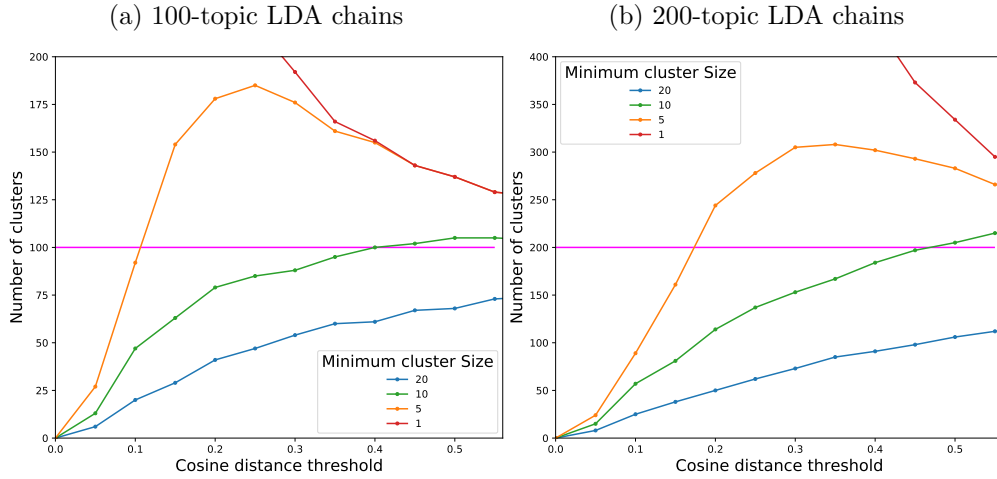


Fig. 12: The number of clusters obtained at cosine distance (varying from 0 to 1 with increments of 0.05) and minimum cluster size (20, 10, 5 and 1). The magenta line shows the number of topics in the LDA samples. For visualization purposes, subsets larger than 200/400 clusters are not shown.

## References

- Aiello, L. M., Schifanella, R., Quercia, D. and Del Prete, L. (2019) Large-scale and high-resolution analysis of food purchases and health outcomes. *EPJ Data Science*, **8**, 14.
- Aletras, N. and Stevenson, M. (2014) Measuring the similarity between automatically generated topics. In *ACL'14*, vol. 2, 22–27.
- Blair, S. J., Bi, Y. and Mulvenna, M. D. (2016) Increasing topic coherence by aggregating topic models. In *KDD'16*, 69–81.
- Blei, D. M., Ng, A. Y. and Jordan, M. I. (2003) Latent dirichlet allocation. *Journal of Machine Learning Research*, **3**, 993–1022.
- Bouma, G. (2009) Normalized (pointwise) mutual information in collocation extraction. *GSCL'09*, 31–40.
- Boyd-Graber, J., Mimno, D. and Newman, D. (2014) Care and feeding of topic models: Problems, diagnostics, and improvements. *Handbook of Mixed Membership Models and their Applications*, **225255**.
- Buntine, W. (2009) Estimating likelihoods for topic models. In *ACML'09*, 51–64. Springer.
- Celeux, G. (1998) Bayesian inference for mixture: The label switching problem. In *COMPSTAT'98*, 227–232. Springer.
- Celeux, G., Hurn, M. and Robert, C. P. (2000) Computational and inferential difficulties with mixture posterior distributions. *Journal of the American Statistical Association*, **95**, 957–970.
- Chaney, A. J.-B. and Blei, D. M. (2012) Visualizing topic models. In *ICWSM'12*.
- Chang, J., Gerrish, S., Wang, C., Boyd-Graber, J. L. and Blei, D. M. (2009) Reading tea leaves: How humans interpret topic models. In *NIPS'09*, 288–296.
- Chen, F., Liu, X., Proserpio, D., Troncoso, I. and Xiong, F. (2020) Studying product competition using representation learning. In *SIGIR'20*, 1261–1268.
- Christidis, K., Apostolou, D. and Mentzas, G. (2010) Exploring customer preferences with probabilistic topics models. In *ECML-PKDD'10*, 12–24.
- Chuang, J., Manning, C. D. and Heer, J. (2012) Termite: Visualization techniques for assessing textual topic models. In *AVI'12*, 74–77. ACM.
- Chuang, J., Roberts, M. E., Stewart, B. M., Weiss, R., Tingley, D., Grimmer, J. and Heer, J. (2015) Topiccheck: Interactive alignment for assessing topic model stability. In *NAACL HLT'15*, 175–184.
- Einsele, F., Sadeghi, L., Ingold, R. and Jenzer, H. (2015) A study about discovery of critical food consumption patterns linked with lifestyle diseases using data mining methods. In *BIOSTEC'15*, vol. 5, 239–245. Setubal, PRT.

- Gelman, A., Carlin, J. B., Stern, H. S., Dunson, D. B., Vehtari, A. and Rubin, D. B. (2013) *Bayesian data analysis*. CRC press.
- Griffiths, T. L. and Steyvers, M. (2004) Finding scientific topics. *Proceedings of the National Academy of Sciences*, **101**, 5228–5235.
- Hastie, D. I., Liverani, S. and Richardson, S. (2015) Sampling from dirichlet process mixture models with unknown concentration parameter: mixing issues in large data implementations. *Statistics and Computing*, **25**, 1023–1037.
- He, Q., Chen, B., Pei, J., Qiu, B., Mitra, P. and Giles, L. (2009) Detecting topic evolution in scientific literature: how can citations help? In *CIKM '09*, 957–966.
- Hornsby, A. N., Evans, T., Riefer, P. S., Prior, R. and Love, B. C. (2019) Conceptual organization is revealed by consumer activity patterns. *Computational Brain & Behavior*, 1–12.
- Hruschka, H. (2014) Linking multi-category purchases to latent activities of shoppers: analysing market baskets by topic models. *Journal of Research and Management*, **36**, 267–273.
- (2016) Hidden variable models for market basket data. statistical performance and managerial implications. *University of Regensburg Working Papers in Business, Economics and Management Information Systems 489*, University of Regensburg, Department of Economics.
- (2019) Comparing unsupervised probabilistic machine learning methods for market basket analysis. *Review of Managerial Science*, 1–31.
- Hurn, M., Justel, A. and Robert, C. P. (2003) Estimating mixtures of regressions. *Journal of Computational and Graphical Statistics*, **12**, 55–79.
- Jacobs, B., Fok, D. and Donkers, B. (2020) Understanding large-scale dynamic purchase behavior. *ERIM Report Series Research in Management Erasmus Research Institute of Management*.
- Jacobs, B. J., Donkers, B. and Fok, D. (2016) Model-based purchase predictions for large assortments. *Marketing Science*, **35**, 389–404.
- Jasra, A., Holmes, C. C. and Stephens, D. A. (2005) Markov chain monte carlo methods and the label switching problem in bayesian mixture modeling. *Statistical Science*, **20**, 50–67.
- Lau, J. H., Newman, D. and Baldwin, T. (2014) Machine reading tea leaves: Automatically evaluating topic coherence and topic model quality. In *EACL '14*, 530–539.
- Li, W. and McCallum, A. (2006) Pachinko allocation: Dag-structured mixture models of topic correlations. In *ICML '06*, 577–584. ACM.
- McLachlan, G. J., Lee, S. X. and Rathnayake, S. I. (2019) Finite mixture models. *Annual Review of Statistics and Its Application*, **6**, 355–378.

- Mimno, D., Wallach, H. M., Talley, E., Leenders, M. and McCallum, A. (2011) Optimizing semantic coherence in topic models. In *EMNLP'11*, 262–272. Association for Computational Linguistics.
- Newman, D., Asuncion, A., Smyth, P. and Welling, M. (2009) Distributed algorithms for topic models. *Journal of Machine Learning Research*, **10**, 1801–1828.
- Newman, D., Bonilla, E. V. and Buntine, W. (2011) Improving topic coherence with regularized topic models. In *NIPS'11*, 496–504.
- Newman, D., Lau, J. H., Grieser, K. and Baldwin, T. (2010) Automatic evaluation of topic coherence. In *NAACL HLT'10*, 100–108. Association for Computational Linguistics.
- Ramage, D., Hall, D., Nallapati, R. and Manning, C. D. (2009) Labeled LDA: A supervised topic model for credit attribution in multi-labeled corpora. In *EMNLP'09*, 248–256. Association for Computational Linguistics.
- Rosen-Zvi, M., Chemudugunta, C., Griffiths, T., Smyth, P. and Steyvers, M. (2010) Learning author-topic models from text corpora. *ACM Transactions on Information Systems (TOIS)*, **28**, 1–38.
- Ruiz, F. J., Athey, S., Blei, D. M. et al. (2020) Shopper: A probabilistic model of consumer choice with substitutes and complements. *Annals of Applied Statistics*, **14**, 1–27.
- Schröder, N. (2017) Using multidimensional item response theory models to explain multi-category purchases. *Marketing: ZFP–Journal of Research and Management*, **39**, 27–37.
- Sievert, C. and Shirley, K. (2014) LDAvis: A method for visualizing and interpreting topics. In *ACL'14*, 63–70.
- Sperrin, M., Jaki, T. and Wit, E. (2010) Probabilistic relabelling strategies for the label switching problem in Bayesian mixture models. *Statistics and Computing*, **20**, 357–366.
- Stephens, M. (2000) Dealing with label switching in mixture models. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, **62**, 795–809.
- Stephens, M. and Phil, D. (1997) Bayesian methods for mixtures of normal distributions.
- Steyvers, M. and Griffiths, T. (2007) Probabilistic topic models. *Handbook of Latent Semantic Analysis*, **427**, 424–440.
- Taddy, M. (2012) On estimation and selection for topic models. In *AISTATS'12*, 1184–1193.
- Teh, Y. W., Jordan, M. I., Beal, M. J. and Blei, D. M. (2005) Sharing clusters among related groups: Hierarchical dirichlet processes. In *NIPS'05*, 1385–1392.

- Wallach, H. M. (2008) *Structured topic models for language*. Ph.D. thesis, University of Cambridge.
- Wallach, H. M., Mimno, D. M. and McCallum, A. (2009a) Rethinking LDA: Why priors matter. In *NIPS'09*, 1973–1981.
- Wallach, H. M., Murray, I., Salakhutdinov, R. and Mimno, D. (2009b) Evaluation methods for topic models. In *ICML'09*, 1105–1112. ACM.
- Wang, X., Ouyang, Y., Liu, J., Zhu, M., Zhao, G., Bao, W. and Hu, F. B. (2014) Fruit and vegetable consumption and mortality from all causes, cardiovascular disease, and cancer: systematic review and dose-response meta-analysis of prospective cohort studies. *The BMJ*, **349**, 4490.
- Wang, X., Zhang, K., Jin, X. and Shen, D. (2009) Mining common topics from multiple asynchronous text streams. In *WSDM'09*, 192–201. ACM.
- Wardle, J. (2007) Eating behaviour and obesity. *Obesity Reviews*, **8**, 73–75.
- Xing, L. and Paul, M. J. (2018) Diagnosing and improving topic models by analyzing posterior variability. In *AAAI'18*.