

Rdimtools: An R package for Dimension Reduction and Intrinsic Dimension Estimation

Kisung You

KYOU@ND.EDU

*Department of Applied and Computational Mathematics and Statistics
University of Notre Dame
Notre Dame, IN 46556, USA*

Abstract

Discovering patterns of the complex high-dimensional data is a long-standing problem. *Dimension Reduction* (DR) and *Intrinsic Dimension Estimation* (IDE) are two fundamental thematic programs that facilitate geometric understanding of the data. We present `Rdimtools` - an R package that supports 133 DR and 17 IDE algorithms whose extent makes multifaceted scrutiny of the data in one place easier. `Rdimtools` is distributed under the MIT license and is accessible from CRAN, GitHub, and its package website, all of which deliver instruction for installation, self-contained examples, and API documentation.

Keywords: R, dimension reduction, intrinsic dimension estimation, manifold learning

1. Introduction

Scientists and practitioners of today often face high-dimensional data. The primary objective of data analysis would be to find patterns and gain understanding behind what is observed. When the data dimension exceeds the scope of human perception, it is mandated to rely upon some algorithms that can extract information into fathomable forms. Dimension reduction (DR) is one approach to discover structure in high-dimensional data that has long been and is still a major research program with a vast literature (Engel et al., 2012; Ma and Zhu, 2013). DR methods explore low-dimensional structure embedded in high-dimensional space, which makes them appealing procedures for data visualization as well as a preliminary step for statistical analysis (Jolliffe, 1982; McKeown et al., 2003). Another core instrument in high-dimensional data analysis is intrinsic dimension estimation (IDE). As its name suggests, IDE tries to estimate the true dimensionality of a low-dimensional structure from which the observed data is generated (Camastra and Staiano, 2016).

We present an R package `Rdimtools` (version 0.1.2) that implements 133 DR and 17 IDE algorithms at an unprecedented scale. Each algorithm is designed to reveal certain characteristics, which may bound our understanding of the data by what an individual algorithm acknowledges. We believe a comprehensive toolbox like `Rdimtools` helps users to grasp the nature of complex data by leveraging fragmented knowledge that multiple algorithms elaborate separately.

2. Related Work

Many libraries have been proposed to provide a number of algorithms in a unified framework of its own, including `drtoolbox` (van der Maaten et al., 2009) in MATLAB, `scikit-learn` (Pedregosa et al., 2011) in Python, and a C++ template library `tapkee` (Lisitsyn et al., 2013)

with a known basis of popularity. In R, packages `dimRed` (Kraemer et al., 2018), `dyndimred` (Cannoodt and Saelens, 2020), `intrinsicDimension` (Johnsson, 2016), and others can be comparable although their scopes are not alike `Rdimtools` as summarized in Table 1.

Library	Version	Written in	Number of functions		
			DR	IDE	total
<code>Rdimtools</code>	1.0.2	R	133	17	150
<code>dimRed</code>	0.2.3	R	19	0	19
<code>dyndimred</code>	1.0.3	R	12	0	12
<code>intrinsicDimemsion</code>	1.2.0	R	0	8	8
<code>tapkee</code>	1.0.2	C++	18	0	18
<code>drtoolbox</code>	0.8.1b	MATLAB	34	6	40
<code>scikit-learn</code>	0.22.2	Python	31	0	31

Table 1: Numbers of algorithms supported by libraries. For `scikit-learn`, functions from linear models and feature selection modules are not counted.

3. Dependencies and Development

`Rdimtools` internalizes most of capabilities via a balanced mixture of R and C++ . Below is the list of R packages upon which `Rdimtools` depends.

- `CVXR` (Fu et al., 2018) solves a semidefinite program and a sparse regression problem with complex constraint in 3 DR functions.
- `RSpectra` (Qiu and Mei, 2019) simplifies large-scale spectral decomposition when we only need the k largest or smallest eigenpairs.
- `RcppDE` (Eddelbuettel, 2018) performs black-box optimization via differential evolution in 2 functions to find an optimal set of parameters.
- `Rcpp` (Eddelbuettel and François, 2011; Eddelbuettel, 2013) enables convenient integration of C++ codes with the binding of `Armadillo` C++ linear algebra library (Sanderson and Curtin, 2016) via `RcppArmadillo` (Eddelbuettel and Sanderson, 2014). Computational gain from C++ is shown in Figure 1.

`Rdimtools` follows modern convention of open source software development. The project is hosted on GitHub¹ for collaborative development and each commit to the repository triggers a check to secure completeness via a continuous integration service².

`Rdimtools` is also available from Comprehensive R Archive Network (CRAN)³ for easy installation and use. Distribution through CRAN mandates to include working examples for every function after checks. It plays a role of integration testing when the package is updated. Also, CRAN requires compatibility with major operating systems.⁴

1. <https://github.com/kyoustat/Rdimtools>

2. <https://travis-ci.org/github/kyoustat/Rdimtools>

3. <https://CRAN.R-project.org/package=Rdimtools>

4. A list of CRAN check settings is at https://CRAN.R-project.org/web/checks/check_flavors.html.

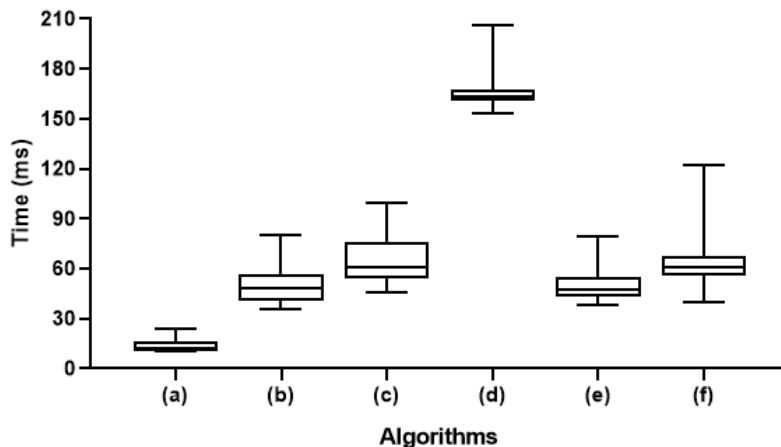


Figure 1: Runtime comparison of principal component analysis on 0.1 million samples in 72 dimensions. R packages compared are (a) `Rdimtools`, (b,c) `stats`, (d) `psych`, (e) `dimRed`, and (f) `dyndimred`. Functions (b) `prcomp()` and (c) `princomp()` from `stats` package employ singular value and spectral decomposition respectively.

Documentation of API can be accessed from one of the followings; (1) `help()` function from R console, (2) reference manual from CRAN, and (3) reference section from the package website⁵, all of which deliver minimal working examples for families of algorithms.

4. Functionalities of `Rdimtools`

Functions in `Rdimtools` are categorized into families of `do.{algorithm}`, `est.{algorithm}`, and `aux.{algorithm}` for DR, IDE, and auxiliary algorithms respectively. A family of DR algorithms can be further categorized as in Table 2.

	supervised	semi-supervised	unsupervised	total
linear	43	5	46	94
nonlinear	7	2	30	39
total	50	7	76	133

Table 2: Numbers of algorithms for dimension reduction per class categorized by projection type and use of label or auxiliary information.

We describe a common structure of DR functions as shown in Figure 2. Given the multivariate data matrix $X \in \mathbb{R}^{n \times p}$ where rows are p -dimensional observations, preprocessing comes in first if applicable. The `aux.preprocess()` routine provides 5 different operations; ‘center’, ‘scale’, ‘cscale’, ‘decorrelate’, and ‘whiten’. Transformation is saved in an R list for future use. An algorithm is applied to the transformed data and returns projected coordinates $Y \in \mathbb{R}^{n \times d}$ for a predefined target dimension $d < p$. If an algorithm is of linear type, a

5. <https://kyoustat.com/Rdimtools>

projection matrix in $\mathbb{R}^{p \times d}$ is also returned. When an algorithm is one of 16 linear methods that employ feature selection, it also returns an index vector of d variables that are selected.

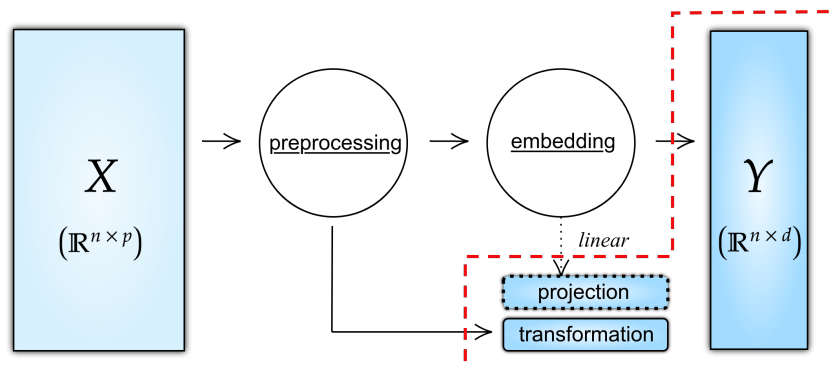


Figure 2: Common structure of DR functions. Given the data $X \in \mathbb{R}^{n \times p}$ and parameters including the target dimension d , a DR function returns an embedding $Y \in \mathbb{R}^{n \times d}$, preprocessing information, and projection matrix if an algorithm is of linear type.

17 IDE algorithms all return an estimated dimension `estdim` while methods that employ bottom-up estimation schemes also report a length- n vector of local estimates at each point.

Other notable auxiliary functions include `aux.gensamples()` to generate samples from 10 popular data models, `aux.graphnbd()` to construct k - and ϵ -nearest-neighbor graphs that are used to approximate a data manifold embedded in \mathbb{R}^p , `aux.kernelcov()` to compute a positive definite kernel matrix $K(x_i, x_j) = \langle \phi(x_i), \phi(x_j) \rangle$ using 20 types of kernels (Hofmann et al., 2008), and `aux.shortestpath()` that implements Floyd-Warshall algorithm (Floyd, 1962) to find shortest-path distances on a graph that approximate every pairwise geodesic distance on a data manifold reconstructed by a nearest-neighbor graph.

5. Conclusion

`Rdimtools` puts an unprecedented number DR and IDE tools for high-dimensional data analysis in a single R package. We scratch couple R with C++ for fast, flexible development and efficiency. The package is maintained and distributed via CRAN, GitHub, and a package website to secure easy access, continuous integration, transparency, and collaborative development. All venues contain examples and a full API documentation.

We plan to further develop the `Rdimtools` package to incorporate more algorithms and out-of-memory support in response to the needs for big data analysis. Another direction of development in progress is to translate all subroutines written in R into pure C++ codes. This has proven to be successful in reducing communication costs of complicated algorithms. In the long run, we hope the latter effort opens up an opportunity for `Rdimtools` project to evolve into a standalone C++ library for wider use.

References

- Francesco Camastra and Antonino Staiano. Intrinsic dimension estimation: Advances and open problems. *Information Sciences*, 328:26–41, January 2016. ISSN 00200255. doi: 10.1016/j.ins.2015.08.029.
- Robrecht Cannoodt and Wouter Saelens. *Dyndimred: Dimensionality Reduction Methods in a Common Format*. 2020.
- Dirk Eddelbuettel. *Seamless R and C++ Integration with Rcpp*. Number 64 in Use R! Springer, New York, 2013. ISBN 978-1-4614-6867-7 978-1-4614-6868-4.
- Dirk Eddelbuettel. *RcppDE: Global Optimization by Differential Evolution in C++*. 2018.
- Dirk Eddelbuettel and Romain François. **Rcpp** : Seamless R and C++ Integration. *Journal of Statistical Software*, 40(8), 2011. ISSN 1548-7660. doi: 10.18637/jss.v040.i08.
- Dirk Eddelbuettel and Conrad Sanderson. RcppArmadillo: Accelerating R with high-performance C++ linear algebra. *Computational Statistics & Data Analysis*, 71:1054–1063, March 2014. ISSN 01679473. doi: 10.1016/j.csda.2013.02.005.
- Daniel Engel, Lars Hüttenberger, and Bernd Hamann. A Survey of Dimension Reduction Methods for High-dimensional Data Analysis and Visualization. page 15 pages, 2012. doi: 10.4230/OASICS.VLUDS.2011.135.
- Robert W. Floyd. Algorithm 97: Shortest path. *Communications of the ACM*, 5(6):345, June 1962. ISSN 00010782. doi: 10.1145/367766.368168.
- Anqi Fu, Balasubramanian Narasimhan, and Stephen Boyd. CVXR: An R Package for Disciplined Convex Optimization. *arXiv:1711.07582 [stat]*, October 2018.
- Thomas Hofmann, Bernhard Schölkopf, and Alexander J. Smola. Kernel methods in machine learning. *The Annals of Statistics*, 36(3):1171–1220, June 2008. ISSN 0090-5364. doi: 10.1214/009053607000000677.
- Kerstin Johnsson. *Structures in High-Dimensional Data: Intrinsic Dimension and Cluster Analysis*. PhD thesis, Centre for Mathematical Sciences, Lund University / Faculty of Engineering, LTH, August 2016.
- Ian T. Jolliffe. A Note on the Use of Principal Components in Regression. *Applied Statistics*, 31(3):300, 1982. ISSN 00359254. doi: 10.2307/2348005.
- Guido Kraemer, Markus Reichstein, and Miguel Mahecha D. dimRed and coRanking—Unifying dimensionality reduction in r. *The R Journal*, 10(1):342–358, 2018.
- Sergey Lisitsyn, Christian Widmer, and Fernando J. Iglesias Garcia. Tapkee: An efficient dimension reduction library. *Journal of Machine Learning Research*, 14:2355–2359, 2013.
- Yanyuan Ma and Liping Zhu. A Review on Dimension Reduction. *International Statistical Review*, 81(1):134–150, April 2013. ISSN 03067734. doi: 10.1111/j.1751-5823.2012.00182.x.

- Martin J. McKeown, Lars Kai Hansen, and Terrence J. Sejnowsk. Independent component analysis of functional MRI: What is signal and what is noise? *Current Opinion in Neurobiology*, 13(5):620–629, October 2003. ISSN 0959-4388. doi: 10.1016/j.conb.2003.09.012.
- F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- Yixuan Qiu and Jiali Mei. *RSpectra: Solvers for Large-Scale Eigenvalue and SVD Problems*. 2019.
- Conrad Sanderson and Ryan Curtin. Armadillo: A template-based C++ library for linear algebra. *The Journal of Open Source Software*, 1(2):26, June 2016. ISSN 2475-9066. doi: 10.21105/joss.00026.
- Laurens van der Maaten, Eric Postma, and Jaap van den Herik. Dimensionality reduction: A comparative review. *Journal of Machine Learning Research*, 10:66–71, 2009.