Sentiment Analysis for Education with R: packages, methods and practical applications

Michelangelo Misuraca

University of Calabria

Alessia Forciniti, Germana Scepi, Maria Spano University of Naples Federico II

Sentiment Analysis (SA) refers to a family of techniques at the crossroads of statistics, natural language processing, and computational linguistics. The primary goal is to detect the semantic orientation of individual opinions and comments expressed in written texts. There are several practical applications of SA in several domains. In an educational context, the use of this approach allows processing students' feedback, aiming at monitoring the teaching effective-ness of instructors and enhancing the learning experience. This paper wants to review the different R packages that can be used to carry on SA, comparing the implemented methods, discussing their characteristics, and showing how they perform by considering a simple example.

Keywords: semantic orientation; natural language processing; classification; R.

1. Introduction

The incredible progress of computer technology and the growth of the Internet hastened the transition from analog to digital in several domains. In particular, the development of Web 2.0 produced a radical change in many aspects of everyday life. According to this new framework – developed over the past 15 years – users have the possibility of actively participating in the creation of information and data, sharing their contents on online platforms like social media or wikis. Because of the different nature of data that can be collected on online platforms - e.g., numbers, texts, emoticons – it is necessary to set up appropriate strategies to extract the most useful information and knowledge. This large and varied set of data cannot be processed manually. Nevertheless, automatic processing requires a significant computational effort. Traditional statistical techniques able to analyze quantitative and qualitative data can also be performed on textual data, pre-treating texts in a proper way, and structuring the resulting dataset. In recent years, considerable interest has been devoted to the analysis of user opinions. According to Pang and Lee (2008), opinion mining or sentiment analysis (SA) is a discipline at the crossroads of statistics, natural language processing, and computational linguistics, which tries to detect the opinions expressed in natural language texts. SA can be used to detect different emotional states and reveal a variety of behavioral and attitudinal patterns. These states or patterns, in general, can be detected through different techniques, such as process mining or discourse analysis. A large number of papers mention SA in the context of the so-called *polarity classification* (e.g.,

Cambria, Schuller, Xia, & Havasi, 2013). The main goal is to classify texts written in natural language, considering their semantic polarity and distinguishing positive and negative forms. It is difficult to extract useful information from opinions and then to understand, summarize, and organize this information into usable forms (Balahur & Jacquet, 2015). Due to the differences in the potential sources of opinions and their unique characteristics, there is not a "one-size-fits-all" approach (Petz, *et al.*, 2014).

The (r)evolution induced by new technologies also involved Education, allowing a significant improvement in teaching and learning activities as well as in the communication between instructors and students. The availability of large repositories of educational data led to the development of *learning analytics* (Verbert, *et al.*, 2013) and the formalization of a specialized branch of data mining known as *educational data mining* (Slater, *et al.*, 2017). These tools aim at providing meaningful insights, supporting the design of appropriate interventions for improving teaching practices and learning processes (Dietz-Uhler & Hurn, 2013). In particular, determining students' views by collecting and processing feedback on their learning experiences is widely recognized as a central strategy for assessing the quality of teaching at most educational institutions (Mandouit, 2016).

At the end of each academic term, students are commonly required to participate in postcourse surveys to gather their experience. This process enables instructors and administrators to examine students' evaluations and then enhance the learning processes. The questionnaires include both close-ended questions and open-ended questions. The first ones are often in the form of Likert-scale questions and aim at capturing students' assessment in the form of numerical ratings. The second ones allow collecting written comments or suggestions that reflect the personal feelings and perceptions of the students. The majority of institutions paid great attention to quantitative feedback, easy to summarize and analyze with statistical techniques. The qualitative comments were instead not fully considered, even if they can provide valuable insights. Moreover, the use of social media and online platforms increased the amount of available textual content, making necessary to implement proper strategies of analysis. These channels allow realtime monitoring of students' opinions, mainly expressed in course forums or discussion groups, highlighting their mood, motivation, and understanding of topics. In this framework, SA can be used to highlight the semantic orientation of students' opinions, helping the evaluation process of the qualitative feedback.

In recent years, several papers showed the effectiveness of textual analyses and SA in an educational context, mainly referring to e-learning systems (e.g. Leong, Lee, & Mak, 2012; Aung & Myo, 2017; Jena, 2018) and *massive open online courses* (MOOCs: e.g. Wen, Yang, & Penstein Rosé, 2014; Moreno-Marcos, *et al.*, 2018). This paper wants to introduce educational researchers and practitioners to SA, showing how to calculate the polarities of a set of text with the most popular R packages designed for this task. In Section 2, we introduced some preliminary notation for textual data and the general background on polarity and semantic orientation. In Section 3, the capabilities of the five main R packages for SA are compared, with a brief note on other available resources. We then discussed the performances of the different packages in Section 4, highlighting both running times and effectiveness. In Section 5, we remarked some final comments on SA and the performed comparative study.

2. From words to sentiment: a textual approach

From a mathematical viewpoint, there are several ways to model a text written in natural language. In the framework of Text Mining, texts are usually coded as a *bag of words* (BoW). In this scheme, a text can be seen as an unordered collection of words, disregarding both grammatical relations and syntactic categories. Let consider a collection of *n* texts d_i (i = 1, ..., n). Text parsing allows identifying the different tokens used in the collection and the creation of a list of types, commonly known as vocabulary. A pre-processing step is often required for reducing the dimensionality of the vocabulary and eliminating the non-informative types (e.g., by using lists of stop-words). Since the expression "word" is too generic and does not encompass other useful combinations of words – like collocations and multi-words – in the following, *term* is used instead of word. According to the *vector space model* (Salton, Wong, & Yang, 1975), each d_i is represented as a vector in the space spanned by the *p* terms belonging to the vocabulary:

$$d_i = \{t_{i1}, \dots, t_{im}, \dots, t_{ip}\}$$
(1)

where t_{im} is the importance of the *m*-th term in d_i . The document-vectors can be arranged in a matrix X with *n* rows (documents) and *p* columns (terms). In a document, the importance of each term is usually measured by the *term frequency* – i.e., the number of occurrences of a term *m* into a document *i* – but other weighting schemes can also be considered. For a more comprehensive discussion on t_{im} quantification, see Balbi & Misuraca (2005).

2.2 Polarity scores and semantic orientation

The primary goal of SA is to classify documents by their *polarity* by identifying their *semantic orientation*. The expression polarity is commonly used in linguistics for distinguishing affirmative and negative terms (Löbner, 2000; Giannakidou, 2008). The overall evaluation of the polarity of the text gives the semantic orientation of the document. In the reference literature (e.g., Liu, 2015), three different levels of semantic orientation are considered:

1. the subjectivity/objectivity of a document (SO-orientation): the focus concerns if a text has a factual nature or instead expresses an opinion on its subjective matter;

2. the positivity/negativity of a document (PN-orientation): the focus concerns if a subjective text expresses a positive or negative opinion;

3. the positivity/negativity strength of a document (PN-strength): the focus concerns the identification of different grades of positive or negative sentiments in the text.

These three levels of semantic orientation are sequentially ordered by regarding the different granularity, but it is not mandatory to evaluate each one in an empirical research.

At the same time, we can consider three different levels for choosing an elementary unit of the analysis: a document level, a sentence-level, an aspect-level. The first two levels are usually entailed in the polarity-based SA, whereas the latter one is more used in a topic-based perspective. The document-level aims at defining the orientation of each text as a whole, i.e., if it expresses a positive or negative sentiment. In the sentence-level, each document is segmented into its sentences, and the polarity of each sentence is considered, then the polarity is synthesized at a document-level for evaluating the overall orientation (Tan, Na, Theng, & Chang, 2011).

The PN-orientation is evaluated by calculating a polarity score of -1, 0, and +1 for negative, neutral, and positive terms, respectively (Liu, Hu & Cheng, 2005). The polarity score of each term depends on the lexicon. A lexicon is a list of polarized terms. Both lexicons created manually (e.g., Tong, 2001) and lexicons created automatically or semi-automatically (e.g., Turney & Littman, 2003) can be considered. There are many papers in the literature dealing with the problem of choosing a proper lexicon (Bravo-Marquez, Mendoza, & Poblete, 2014). The available resources, even if developed for specific purposes, were used for several applicative domains.

Some authors proposed different scoring systems, defining the polarity not only in terms of the sign but also considering the strength of the positive/negative sentiment (Nielsen, 2011). In these cases, the lexicons consider a discrete or a continuous scale for the polarity, from the most negative to the most positive score. From the semantic orientation expressed as strength, it is ever possible to downgrade to a more straightforward evaluation as positivity/negativity.

2.3 Polarity scores and Sentiment Classification

Calculating the polarity scores of each document belonging to a given collection can be seen as the first step of a more sophisticated classification process, training a classifier with the different semantic orientations as categories. Nevertheless, it is also possible to consider the polarity detection has a lexicon-based approach to classification. When we aim at categorizing new documents considering the knowledge base obtained from the analysis of a document collection, a machine learning approach has to be considered. Different algorithms have been proposed in the literature for a document classification based on their semantic orientation. Several authors tried to systematically review the different approaches (e.g., Abirami & Gayathri, 2017). In a general way, it is possible to distinguish *probabilistic classifiers*, such as *naïve Bayes classifiers* (Kang, Yoo & Han, 2012) or *Bayesian networks* (Ortigosa-Hernández *et al.*, 2012); *linear classifiers*, such as *support vector machine* (Chin & Tseng, 2011); *decision trees* (Hu & Li, 2011). More recently, in the framework of linear classifiers and decision trees, considerable interest has been devoted to the *random forest* (e.g., Liu & Zhang, 2016) and the so-called *deep learning* (e.g., Dou, 2017).

3. R packages for Sentiment Analysis

R is a free software environment for statistical computing. It is widely used among quantitative researchers and data miners to perform various types of analysis. In the following, we describe the main packages for SA. Table 1 lists the different packages, with the launch date and the total number of downloads until December 06th, 2019.

Packages	Author(s)	Launch date	# of downloads
syuzhet	M. Jockers	2015-02	343,840
RSentiment	S. Bose	2016-05	35,446
sentimentr	T. Rinker	2016-08	72,393
SentimentAnalysis	S. Feuerriegel & N. Pröllochs	2017-06	33,598
meanr	D. Schmidt	2017-06	7,907

TABLE 1.Main R packages for Sentiment Analysis available at CRAN repositories.

We observed that the oldest packages had a higher number of downloads. Except for syuzhet, the first package designed explicitly for SA, sentimentr seemed to be the second most popular package. In the following, we showed the different approaches followed by the available packages, explaining the main functions and characteristics. Some other packages that can be used for SA are briefly described at the end of this section.

3.1 Data example

To show how the analyzed R packages perform sentiment analysis, we used as a case example the *Student Course Evaluation Comments* dataset built by Welch & Mihalcea (2017). This dataset is a collection of sentences extracted from a Facebook group where students can express their opinions about the courses and the instructors belonging to the Computer Science department at the University of Michigan. In the following, we referred to a subset of the original dataset available in the package sentimentr (Rinker, 2019), including only comments with an unambiguous polarity. This dataset, namely *course_evaluations*, has 566 units and two variables: the polarity scores (*sentiment*) and the students' comments (*text*). It includes 300 positive texts, 217 negative texts, and 49 neutral texts, with a score of +1, -1, and 0, respectively.

3.2 syuzhet

The syuzhet package (Jockers, 2017) allows calculating the polarity scores of a collection of documents by using different internal dictionaries. Particularly interesting is the possibility of accessing the robust sentiment extraction tool developed at Stanford University by the NLP group (Manning, *et al.*, 2014). The dictionaries used in syuzhet are: *syuzhet*, developed by the Nebraska Literary Lab under the direction of M. Jockers; *afinn*, developed by Nielsen (2011); *bing*, developed by Hu and Liu (2004); *nrc* developed by Turney and Mohammad (2010). The core function to calculate the polarity scores is get sentiment:

```
get sentiment(x, method="syuzhet", lexicon=NULL)
```

where x is the vector of strings, and method is the lexicon used for determining if a term is positive or negative. By default, the lexicon developed with the package is used. The other lexicons lead to slightly different results because each one uses a different scoring system at a term-level. The *bing* lexicon is a binary dictionary, the *afinn* and *syuzhet* lexicons are instead weighted dictionaries with a discrete and a continuous scale, respectively. The function calculates the polarity score of a text by summing the value associated with each term.

The following code provides an example on the *course evaluations* dataset:

```
## Retrieving the "course evaluations" dataset from sentimentr
 1
 2
   library(sentimentr)
 3 data(course evaluations)
   ## Extracting the text from the dataset as a vector of strings
 4
 5 x<-course evaluations$text
 6 ## Calculating sentiment scores
 7
  library(syuzhet)
   s<-get sentiment(x, method="syuzhet")</pre>
 8
 9
   ## Calculating summary statistics on the sentiment distribution
10
   summary(s)
> s
 [1] 0.50 0.50 0.75 0.80 0.00 -0.85 0.50 1.90 0.50 0.50 ...
> summary(s)
  Min. 1st Qu. Median Mean 3rd Qu.
                                          Max.
-4.0000 0.0500 0.7500 0.6901 1.2500 3.9000
```

The package allows setting a custom lexicon in the polarity score calculation. This lexicon has to be imported as a data frame containing the terms and the corresponding polarity scores. Each score, at a term-level, can be both binary or weighted.

A plot function can be used to visualize the polarity score distribution of the document collection. By default, syuzhet considers the different texts as part of a single document, and the sentiment trajectory can be interpreted with respect to the overall *narrative time*. The function draws the values in a graph, shown in Figure 1, where the x-axis represents the time from the beginning to the end of the text, and the y-axis measures the degrees of the polarity scores:

```
plot(object, type="l", xlab="Narrative Time",
    ylab ="Emotional Valence", col="red")
        abline(h=0, col="black")
```

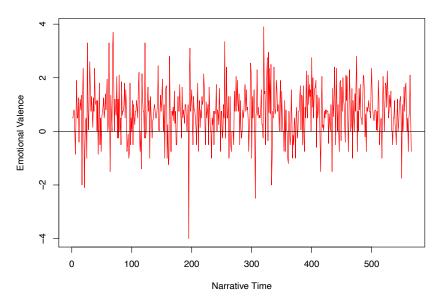


FIGURE 1. Plot of the sentiment trajectory of the course_evaluation dataset from syuzhet.

The package also allows comparing the shape of sentiment trajectories obtained from two or more different texts (Figure 2). The function get_percentage_values divides the collection in chunks with the same dimension, then calculates for each chunk the mean polarity score:

get_percentage_values(object, bins=100)

where object is a vector with raw sentiment values, and bins are the number of splits.

<pre>1 ## Calculating the mean polarity scores per chunks of text 2 s_per<-getpercentage_values(s, bins=100)</pre>							
> s	> s_per						
0	.28333333	20.70833333	3 0.42000000	4 0.32500000	5 0.833333333		

It is important to note that combining texts into larger chunks dampen the extreme values of the emotional valence, so the mean values of longer passages tend to converge toward 0.

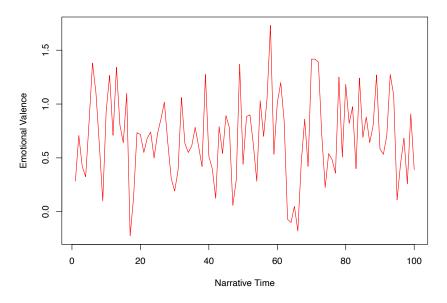


FIGURE 2. Sentiment trajectory obtained from 100 chunks of the course_evaluation dataset.

As an alternative, the package proposes a *discrete cosine transformation* (DCT) in combination with a low-pass filter¹, through the function get dct transform:

where object is a vector with raw sentiment values. This function passes scores with a frequency lower than a selected cutoff frequency and attenuates scores with frequencies higher than the cutoff frequency (Figure 3).

```
1 ## Performing Discrete Cosine transformation (DCT)
2 dct_values<-get_dct_transform(s, low_pass_size=5, x_reverse_len=100,
3 scale_vals=FALSE, scale_range=TRUE)
> dct_values
[1] 0.9406102258 0.9328275559 0.9173263288 0.8942342028 ...
```

¹ A *low-pass filter* is a filter that passes signals with a frequency lower than a selected cutoff frequency and attenuates signals with frequencies higher than the cutoff frequency. The exact frequency response of the filter depends on the filter design.

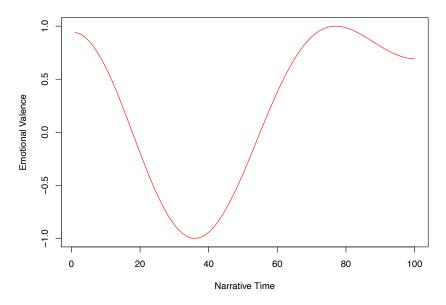


FIGURE 3. Discrete cosine transformation of the sentiment trajectory.

A peculiar task of syuzhet is calculating scores concerning emotions. The *nrc* dictionary is a list of English terms associated with a positive or negative polarity as well as to one of eight emotions (anger, fear, anticipation, trust, surprise, sadness, joy, and disgust). It is possible to select different languages. The underlying assumption is that, despite some cultural differences, the majority of emotional categories are stable across languages. The lexicon is available in more than one hundred languages, translating the original terms through Google Translate.

The emotional categorization can be obtained through the function get_sentiment, also specyfing the language into the parameters, or through the function get_nrc_sentiment:

```
get nrc sentiment(x, language="option")
```

where x is a vector of strings, and option is one of the available languages.

1 2	<pre>1 ## Detecting emotions on the texts 2 s_nrc<-get_nrc_sentiment(x)</pre>								
> s	_nrc[,1 anger	.:8] anticipation		fear	joy	sadness	surprise	trust	
1	0	0	0	0	1	0	0	1	
2	0	0	0	0	0	0	0	0	
3	3 0 0 0 0 1 0 0 1								

It is also possible to visualize the distribution of emotions (Figure 4) by plotting the results:

```
barplot(sort(colSums(prop.table(s_nrc[,1:8]))), horiz=TRUE,
cex.names=0.7, las=1, col=palette("default"), xlab="Percentage")
```

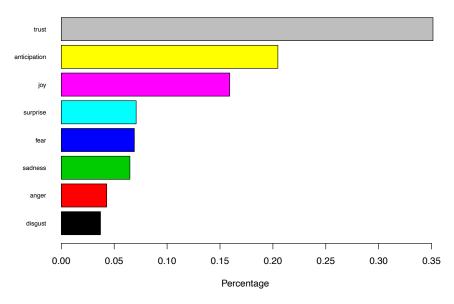


FIGURE 4. Emotion percentage distribution of the course_evaluation dataset.

3.3 RSentiment

The RSentiment package (Bose & Goswami, 2018) allows performing sentiment analysis on a sentence or a collection of sentences. The polarity scores are calculated by considering the grammatical role of each term, using a *Parts of Speech (POS)* tagging on the terms of the sentences. The primary function used in the package is calculate_score. After pre-processing the sentences – e.g., removing punctuations and normalizing the texts – the function checks for the POS of each term, the presence of negations such as "not" and "never", the presence of amplifiers such as "very" and "more". The dictionary used for determining if a term is positive or negative is the Hu and Liu lexicon. The overall score of a sentence is calculated as the difference between positive and negative terms. If there is an equal number of positive and negative terms, the sentence is considered neutral and is assigned a score equal to 0. Scores higher than 0 implies a positive sentiment of the sentences, whereas scores lower than 0 denote a negative sentiment. Interrogative sentences are marked with a score of 99 and considered sarcastic.

```
1 library(sentimentr)
2 data(course_evaluations)
3 library(RSentiment)
4 x<-course_evaluations$text
5 ## Calculating sentiment scores in RSentiment
6 s<-calculate_score(x)</pre>
```

[1] "Processing sentence: the labs in eecs 588 are not very engaging or

```
challenging in my opinion"
[1] "Processing sentence: i did not like eecs 417"
[1] "Processing sentence: my three favorite classes in eecs have been eecs
230 498 and 583"
...
> s
  [1] 0 -1 1 1 1 -1 1 5 1 0 0 -1 1 1 -1 2 -3 3 4 1 -3 -1
...
```

RSentiment gives the possibility of classifying the sentences into six sentiment categories: Very Negative, Negative, Neutral, Positive, Very Positive, and Sarcasm. This categorization is performed by using the function calculate_sentiment. This function assigns a tag to each value obtained as in the previous function, by subtracting the number of negative terms from the number of positive terms. Sentences with a score of -1 are marked as negative, sentences with a score lower than -1 are marked as very negative. In the same way, sentences with a score of +1 are marked as positive, sentences with a score higher than +1 are marked as very positive. The results are reported in a data frame listing the pre-processed text of each sentence and the corresponding polarity.

```
## Calculating sentiment categories in RSentiment
 1
 2
    s<-calculate sentiment(x)</pre>
[1] "Processing sentence: the labs in eecs 588 are not very engaging or
challenging in my opinion"
[1] "Processing sentence: i did not like eecs 417"
[1] "Processing sentence: my three favorite classes in eecs have been eecs
230 498 and 583"
. . .
> s
  . . .
        sentiment
         Neutral
1
2
         Negative
3
         Positive
. . .
```

Finally, it is possible to calculate the total number of sentences for each of the six categories previously mentioned, using calculate_total_presence_sentiment(x).

There is also the possibility of using a custom dictionary so that the package can also be used with texts written in a language different from English. In this case, the function used for calculating the polarity score, assigning a sentiment category, or counting the number of sentences in each category have to be substituted by the following one:

```
calculate_custom_option(x, positive_words, negative_words)
```

where *option* is equal to score, sentiment, and total_presence_sentiment for the three tasks, respectively, positive_words is a vector of positive terms, and negative words is a vector of negative terms.

3.4 sentimentr

The sentimentr package (Rinker, 2019) calculates semantic polarity at a sentence level and optionally aggregates the score at a document level or according to a grouping variable.

The scoring function used in the package incorporates the weights attributed to *valence shift-ers*, including negators, amplifiers (intensifiers), de-amplifiers (downtoners), and adversative conjunctions (Polanyi and Zaenen, 2006). These shifters modify the sign and the intensity of the polarity in a text. For instance, negators or adversative conjunctions can reverse or overrule the entire semantic orientation of a sentence and hence, its sentiment. Since valence shifters occur frequently, simple dictionary lookup methods cannot be able to model the semantic orientation accurately. Packages that use dictionary lookups are faster and more effective when the goal is to analyze the general sentiment of a piece of literature. As an example, the methods offered by syuzhet are accurate but more prone to error in the presence of valence shifters in the texts.

The package imports texts as raw character vectors and segments them into sentences. Sentence boundary disambiguation is performed with the function get_sentences, a parser based on regular expressions. The main functions for calculating polarity scores are sentiment and sentiment_by. The first function allows users to easily alter (add, change, replace) the default term polarity with a valence shifters dictionary. The default command string is:

where x is a get_sentences object or a raw character vector, polarity_dt is a data table of positive/negative terms, valence_shifters_dt is a data table of valence shifters, n.before and n.after are the number of terms to consider as a window around the positive/negative terms in order to apply the valence shifters' weights. By default, a combination of an augmented version of the Jocker's dictionary (initially developed for the syuzhet package) and the Rinker's dictionary (an augmented version of the Hu and Liu dictionary) available in the lexicon package is used. The valence shifters' table, also recalled from lexicon, lists the shifters and considers a different integer key for negators (1), amplifiers (2), de-amplifiers (3), and adversative conjunctions (4). In the polarity function, it is also possible to change the default parameters related to the amplifier and adversative weights. The scores are measured on a con-

tinuous scale on an interval of $]-\infty;+\infty[$. A more detailed explanation of how this scoring function works can be found in Balbi, Misuraca, and Scepi (2018).

The results are reported in a dataframe where the columns represent the id number of the original vector passed to the function, the id number of the sentences within each text, the word count, and the polarity score, respectively.

```
1
    library(sentimentr)
 2
    data(course evaluations)
 3
    x<-course evaluations$text
    ## Calculating the sentiment scores of the text by sentence
 4
 5
    s<-sentiment(x, polarity dt = lexicon::hash sentiment jockers rinker,
       valence shifters dt = lexicon::hash valence shifters, n.before = 5,
 6
 7
       n.after = 2)
 8
> s
     element id sentence id word count sentiment
             1 1 12 0.02886751
 1:
             2
  2:
                         1
                                   4 -0.25000000
             3
                         1
                                   10 0.23717082
  3:
. . .
```

The sentiment_by function calculates the polarity scores at a document level or by considering a grouping variable(s). The scoring function is the same used in sentiment:

```
sentiment_by(x, by=NULL,
averaging.function=sentimentr::average_downweighted_zero, ...)
```

where x is a sentimentr object, by is a list of one or more grouping variables used to collapse the sentences/texts, averaging.function is the function used to calculate the polarity score on average on the entire text or group of texts. By default, the function uses the original sentence_id values and averages the polarity scores by down-weighting the zeros. This approach is useful when we do not want neutral sentences to have a strong influence on the general sentiment since a value of 0 is attributed to sentences without a polarization. Alternatives are the average_weighted_mixed_sentiment function, that up-weights the negative values and down-weights the zeros, and the standard average_mean function. The function returns a data frame where the columns are the id number of the original vector passed into the function, the id number of the sentences within each element, the (total) word count, the standard deviation, and the average polarity scores. If the texts contain only one sentence, the standard deviation is not calculated, and an NA tag is imputed instead.

library(sentimentr) 1 2 data(course evaluations) 3 x<-course evaluations\$text ## Obtaining the sentiment of the text by grouping variables 4 5 ## Note in this example the grouping variable is the element id 6 s by<-sentiment by(x, by = NULL,</pre> 7 averaging.function = sentimentr::average downweighted zero) 8 > s by element id word count sd ave sentiment 0.02886751 1: 1 12 NA 2: 2 -0.25000000 4 NA 3 10 0.23717082 3: NA . . .

At the end of the process, it is possible to obtain a graphical representation of the results. If we want to plot the polarity scores at a sentence level, the command string is:

```
plot(object,
transformation.function=syuzhet::get trasformed value, ...)
```

where object is a sentimentr object, and the transformation.function is used to smooth the polarity scores. By default, the get_trasformed_value function from syuzhet is used to obtain a smoothed polarity across the text, as in Figure 4. The *duration* plotted on the x-axis of the plot is equivalent to the narrative time used in syuzhet.

3.5 SentimentAnalysis

The SentimentAnalysis package (Feuerriegel & Pröllochs, 2019) provides a collection of tools for performing and comparing different methods for sentiment analysis. It is possible to refer to several lexicons, such as the qdap dictionaries (Goodrich, Kurkiewicz, & Rinker, 2019), the *Harvard General Inquirer* (Stone, Dunphry, Smith & Ogilvie, 1966), the *Loughran-McDonald's financial dictionary* (Loughran & McDonald, 2011), the *Henry's Financial* (Henry, 2008). Moreover, it is possible to customize the dictionary, choosing among several approaches.

The polarity scores are computed through the function analyzeSentiment. One of the main characteristics of this function and the whole package is its strict dependence on the tm library (Feinerer, Hornik, & Meyer, 2008; Feinerer & Hornik, 2018). This library is one of the most known for performing data preprocessing and management in a Text Mining framework.

The users can directly customize text pre-processing by modifying the parameters in the function. The default command line is:

where x is a vector of strings or a more complex text object generated by the tm package, such as a collection of documents in plain text or a document-term matrix, and rules is a list with the method for calculating the score and, optionally, the dictionary. Different methods are implemented, such as ruleSentiment, that calculates the ratio between positive and negative terms on the total number of terms. By default, stop-words are removed, and terms are stemmed according to stemming algorithms recalled from the SnowballC package.

The function returns a data frame with word counts and polarity scores from each dictionary implemented in the package.

```
library(sentimentr)
 1
 2
    data(course evaluations)
 3
    x<-course evaluations$text
    ## Calculating polarity scores in SentimentAnalysis
 4
   library(SentimentAnalysis)
 5
    s<-analyzeSentiment(x, language="english", aggregate=NULL,</pre>
 6
 7
    rules=defaultSentimentRules(), removeStopwords=TRUE, stemming=TRUE)
> s
    WordCount SentimentGI NegativityGI PositivityGI ...
            6 -0.16666667 0.33333333
                                         0.16666667
1
            3 0.33333333
                            0.00000000
2
                                          0.33333333
            5 0.2000000
3
                            0.00000000
                                         0.2000000
. . .
```

Since the polarity scores are measured on a continuous scale, it is possible to convert each score into a sentiment category by using the functions convertToBinaryResponse and convertToDirection. These two functions transform the score vector into a factor object by tagging each value with respect to its sign. The result of the first function is a factor with two levels indicating a positive orientation – also counting neutral texts – or a negative orientation. The second one produces a three-level factor, classifying texts in positive, neutral, or negative.

In order to visualize the sentiment evolution of the documents, it is possible to use plotSentiment. The graphical representation is similar to the plot showed in Figure 1.

The library also gives the possibility to compare the results of the scoring to an existing response variable. The response variable can be continuous or binary. The command line is:

```
compareToResponse(sentiment, response_variable)
```

where sentiment is a matrix containing the scores obtained from several rules for each document and response_variable the vector with true responses. The comparison can be graphically displayed through the function plotSentimentResponse, obtaining a scatter-plot with a trend line in the form of a generalized additive model.

The dictionary used in the analyses can be customized with the function:

SentimentDictionaryOption()

where *Option* is equal to Wordlist, Binary, or Weighted. If Wordlist is selected, the argument of the function is a vector listing the terms to consider, where for Binary is necessary to use as argument two vectors with positive and negative terms, respectively. The Weighted option requires a vector of terms and a vector of corresponding scores.

Furthermore, the library implements a novel approach to extract terms that have a statistically significant impact on the response variable (Pröllochs, Feuerriegel, & Neumann, 2015), by using the generateDictionary() function. By default, the estimation is performed via *LASSO* regularization (Tang, Alelyani, & Liu, 2014), a statistical approach aiming at selecting the most relevant terms by an exogenous response variable. Moreover, it is possible to apply several estimation models such as elastic net, ordinary least squares, generalized linear model or spike-and-slab regression. By default, the command line is:

```
generateDictionary(DTM, response, language="english",
modelType="lasso", filterTerms=NULL, control=list(),
minWordLength=3, sparsity=0.9, weighting=function(x)
tm::weightTfIdf(DTM, normalize = FALSE))
```

where DTM is a document-term matrix obtained from the library tm, response is a numeric vector containing the polarity scores assigned to the different documents.

Several functions allow exploring the generated dictionary. A simple overview can be displayed through the function summary.

```
1
   library(sentiment)
 2
   data(course evaluations)
 3
   x<-course evaluations$text
   ## Creating the document x term matrix
 4
 5
   library(tm)
 6 DTM<-DocumentTermMatrix (VCorpus (VectorSource (x)))
 7
   ## Generating dictionary with LASSO regularization
   response<-course evaluations$sentiment
 8
   library(SentimentAnalysis)
 9
   dict<-generateDictionary(DTM, response)</pre>
10
```

```
> dict
Type: weighted (words with individual scores)
Intercept: 0.2978264
-1.02 hated
-1.00 least
-0.88 own
-0.79 wasn't
-0.75 failed
. . .
> summary(dict)
Dictionary type: weighted (words with individual scores)
Total entries:
                  299
Positive entries: 92 (30.77%)
Negative entries: 207 (69.23%)
Neutral entries: 0 (0%)
Details
Average score:
                   -0.09238678
Median:
                    -0.002648496
Min:
                    -1.023082
Max:
                    0.8005375
Standard deviation: 0.2814393
Skewness:
                    -0.5512306
```

A *kernel density estimation* (KDE) can also visualize the distribution of positive and negative terms (Figure 5). This type of plot allows inspecting the skewness of the dictionary's sentiment distribution, revealing if there are more positive terms than negative terms or vice versa.

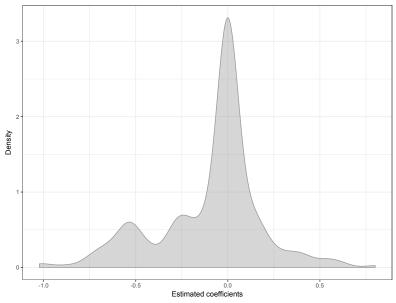


FIGURE 5. Dictionary's sentiment distribution of the course_evaluation dataset in terms of KDE.

It is possible to compare the generated dictionary to other dictionaries, regarding similarities and dissimilarities, via compareDictionary. The function computes several metrics, such as the overlap or the correlation between the dictionaries. It is important to note that the comparison works if both dictionaries are of the same type (wordlist, binary, or weighted).

SentimentAnalysis can be adapted to other languages different from English. In this case, it is necessary to change the parameters for document pre-processing (language, stopwords) and the dictionary used for polarity calculation.

3.6 meanr

The meanr package (Schmidt, 2019) provides a simple method for computing the polarity score of a set of documents. Each term is scored as positive or negative according to a fixed dictionary, the lexicon developed by Hu and Liu. Differently from the other packages, it does not require any additional R libraries to work. The only function implemented is:

score(x, nthreads=meanr.nthreads())

where x is a character vector of strings and nthreads represents the number of threads to use. The threads are by default the total number of cores and hyperthreads on the user system.

The scoring function operates at a document-level, using for multiple documents a parallel computing approach via OpenMP. Since the function removes the punctuation and converts all the characters belonging to the strings into lowercase, a pre-processing step is mostly unnecessary. It estimates the semantic orientation by checking if each term is positive, negative or neutral. According to Hu and Liu's lexicon, the function assigns a value +1 to each positive term and -1 to each negative term. A term is assumed to be neutral when it is not checked as positive or negative, assigning a null value. The polarity score is calculated as the difference between the count of positive and negative terms. The output for each string is the count of positive and negative terms, the polarity score, and the total number of terms. It is neither possible to customize the dictionary nor to use a different weighting scheme to calculate the scores.

```
1
    library(sentimentr)
    data(course evaluations)
 2
    x<-course evaluations$text
 3
    ## Calculating sentiment scores in meanr
 4
 5
    library(meanr)
 6
    <-score(x)
> s
  positive negative score wc
         1
                  1
                         0 14
1
```

2	1	0	1	6
3	1	0	1 1	.3
• • •				

3.7 Other packages for Sentiment Analysis

There are other R packages for SA, which are not discussed in this review. The package sentometrics (Borms, *et al.*, 2019) offers an integrated framework for textual sentiment time series aggregation, allowing a quantification of the semantic polarity and considering its time distribution. In this perspective, it is possible to perform predictive analyses on the sentiment temporal evolution. Other packages are not specifically designed for SA but provide functions for calculating the polarity scores. As an axample, tidytext (De Queiroz, *et al.*, 2019) contains a get_sentiments function that calculates the polarity scores of a document collection through the same lexicons used by syuzhet, in a more comprehensive Text Mining framework based on the tidy-data normalization scheme (Wickham, 2014).

4. Discussion

After describing the main features of the R packages designed to perform SA, here we present and discuss the results of a comparative study by considering the different viewpoints.

Firstly, we focused our attention on how polarity scores are calculated in the packages. All the functions start with the same step: tagging the polarized terms in each sentence according to a reference lexicon. In syuzhet, Rsentiment, and meanr the polarity of a text is simply calculated as the algebraic sum of the term scores. SentimentAnalysis also calculates polarity scores in a straightforward way, considering the ratio between positive and negative terms on the total number of terms. A more complicated but more effective way of calculating polarity scores is implemented in sentimentr. As we said above, the scoring function used in the package incorporates the weights attributed to valence shifters, which can modify the sign and the intensity of the text polarity. In the presence of valence shifters, simple dictionary lookup methods are not able to accurately model the semantic orientation. On the other hand, if the aim is only to analyze the general sentiment of a text, dictionary lookup methods are faster and more effective. Another aspect to consider is that sentimentr performs the polarity detection at a sentencelevel, then averaging the different scores allows to calculate the semantic orientation at a textlevel. The scoring function of Rsentiment also checks for the POS of each term, considering the presence of negations and/or amplifiers, but the mathematical computation of the scores is simpler than the one offered by sentimentr.

Another aspect to consider is that polarity scores are affected by the choice of the reference lexicon. Therefore, it becomes very important having the possibility of calculating the scores by applying the same approach with different lists of polarized terms. Table 2 reports the different types of lexicon that can be used in the packages. We noted that all the packages, except for meanr, provide the possibility of calculating the polarity scores with a customized dictionary. In

+

this way, it is not only possible to choose among the different lexicons proposed in literature, but also to create a dictionary based on proper research needs. More in-depth, only sentimentr, SentimentAnalysis, and syuzhet allow attributing different weights to polarized terms by considering not only the sign of the polarity but also a number that reflects its intensity. Finally, it is worth noting that only syuzhet includes a lexicon for the analysis of multilingual collections (nrc), but it is also true that a multilingual lexicon can be imported as custom dictionary in the packages providing this option.

TABLE 2.

syuzhet

Dictionary selection in the analyzed SA packages							
Packages	Custom Dictionary	Weighted Dictionary	Multilingual				
meanr	_	-	-				
RSentiment	+	_	-				
sentimentr	+	+	-				
SentimentAnalysis	+	+	_				

+

The real peculiarity of syuzhet is the possibility to obtain an emotional categorization of texts by applying the function get nrc sentiment().

+

For a more interesting comparison among the packages, in the following, we performed a performance and an accuracy analysis using as benchmark the *course_evaluation* dataset. It is important to consider that each function was run with the default options, hence the dictionaries used to calculate the polarity scores were different.

4.1 Performance analysis

To compare the different packages, we carried on a performance analysis on the different functions used to calculate the polarity scores of the case example. Tests were performed on a MacBook Pro 2.9 GHz Intel Core i9, 32 GB 2400 MHz DDR4 with macOS Mojave ver. 10.14.5, by using R 3.5.3 "Great Truth" through the IDE RStudio Desktop.

TABLE 3. *Running times of the polarity scores functions (in seconds)*

Packages	Function	User	System	Elapsed
meanr	score()	0.004	0.005	0.003
syuzhet	<pre>get_sentiment()</pre>	0.175	0.034	0.210
sentimentr	<pre>sentiment_by()</pre>	1.070	0.004	0.249

SentimentAnalysis	analyzeSentiment()	1.518	0.053	1.601
Rsentiment	<pre>calculate_score()</pre>	78.166	3.047	67.307

For each package, the running time was obtained by introducing the system.time function in the codes showed above. This function calculates the time execution of an R expression, returning a vector of five values, the *user time* (time spent executing the code), the *system time* (time spent executing system functions called by the code), the *elapsed time* ("real" time since the process started), and the *user* and *system time* for any child process. The user time gives the CPU time spent by the specific process (i.e., the R session), while the system time gives the CPU time spent by the operating system on behalf of the current process. The elapsed time is the actual time taken from the start to the end of the process so that it can be affected by other processes running meanwhile on the computer. In Table 3, the running times for each function are reported.

Looking at the user time, we noted that the fastest function was score() from meanr package. This function operates at a text-level, using for multiple documents a parallel computing approach via OpenMP. Moreover, the polarity score is calculated as the difference between the count of positive and negative terms, without any other computation. The second function, in terms of speed, was get_sentiment() from syuzhet with 0.175 seconds, followed by sentiment_by() from sentimentr with 1.070 seconds, and analyzeSentiment() from SentimentAnalysis with 1.518 seconds. The slowest function was calculate_score() from Rsentiment, which took more than one minute to calculate the different polarity scores. This time probably depends on the on-screen prints of each processed text, making the process slower than the other ones. It is necessary to consider that the different results were obtained for each function by using the default options. Moreover, these results depend on the technical characteristics of the computer used to perform the analyses.

4.2 Accuracy analysis

To evaluate how the different R packages calculate the polarity scores, we analyzed in-depth the results obtained above. The *course_evaluations* dataset by Welch & Mihalcea contains the student comments as well as the true sentiment classification. The authors manually labeled the sentiment toward each comment. When no explicit sentiment was expressed or evident, it was assumed to be neutral. In the analyzed subset, we found that 53% of sentences was positive, 38.34% negative, and 8.66% neutral, with a score of +1, -1, and 0, respectively.

Each function used to calculate the polarity returns values on different scales. In meanr and Rsentiment, scores are measured on a discrete scale. The polarity scores calculated by syuzhet, sentimentr, and SentimentAnalysis are instead measured on a continuous scale. Both discrete and continuous scales are unbounded. To perform the comparison, we converted each score into a sentiment category – labelled as Neg, Neu, and Pos – by considering only the sign of the score. Since Rsentiment considers interrogative sentences as sarcastic and labels them with a score of 99, we also marked these sentences as neutral. Table 4 reports for each package the sentiment category distribution of the comments, together with the corresponding misclassification rate. Among the different packages, sentimentr reproduced more faithfully the true classification of the comments, with only a 24.20% of misclassified. It is interesting to note that all the functions overestimated positive comments.

	Neg (%)	Neu (%)	Pos (%)	Misclassified (%)
true classification	38.34	8.66	53.00	_
meanr	16.61	21.91	61.48	37.28
syuzhet	17.14	7.24	75.62	32.86
sentimentr	33.57	6.01	60.42	24.20
SentimentAnalysis	15.72	22.61	61.66	44.34
Rsentiment	22.97	19.96	57.07	31.09

TABLE 4.

Comparison of the true classification with the obtained results

To better evaluate the effectiveness of the different functions, we also graphically analyzed the results. Figure 6 displays the five confusion matrices, obtained by cross-tabulating for each package the true classification and the predicted categories. Starting from each confusion matrix, we calculated the primary indices used in the framework of supervised classification (Sokolova & Lapalme, 2009). These validation measures consider how much the predicted categories correspond to the true classification, reflecting different viewpoints.

The *accuracy* is the overall fraction of comments correctly classified, the *precision* is the agreement of the true labels of the comments with those obtained by the given function, the *recall* is the effectiveness of the function to identify the true labels, the *F-measure* is the harmonic mean of precision and recall representing the relation between true labels and those given by the function. In a multi-class categorization, as in sentiment analysis, the average per-class precision (P_M) , recall (R_M) , and F-measure (FI_M) are usually calculated. This approach to validation is referred to as *macro-averaging*. In Table 5, the measures calculated on each package are showed.

 TABLE 5.

 Validation measures for each package (macro-averaging)

Package	Ov. Acc.	P _M	R _M	$F1_M$
meanr	0.627	0.586	0.565	0.521
syuzhet	0.671	0.605	0.526	0.526
sentimentr	0.758	0.649	0.614	0.626
SentimentAnalysis	0.557	0.506	0.479	0.445

Rsentiment	0.689	0.614	0.621	0.585

All the reported values confirm that the function used in sentimentr to calculate the polarity scores outperforms the others in recognizing the true polarity of the comments. This result depends on the use of valence shifters, which emphasize the negative or the positive term polarity, as well as the text-level approach to polarity detection.

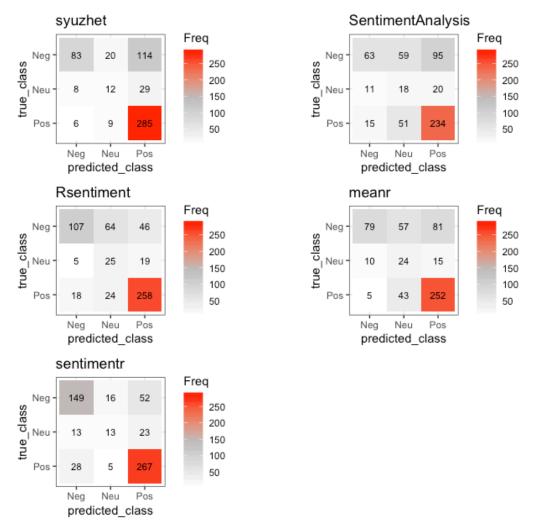


FIGURE 6. Confusion matrices of the five sentiment classifications produced by the analyzed packages

5. Conclusions

The aim of the review presented in this paper is to compare the R packages designed for SA, considering their functionality and ease of use. We think that this work can be useful for new users who are familiar with the R environment, but not with SA applications, especially in the framework of Education. A focus on student comments that consider the semantic orientation of the different opinions can significantly help the evaluation of learning activities. SA, as dis-

cussed in the paper, can be considered an exploratory analysis. However, calculating the polarity scores can be seen as just the first step of more sophisticated supervised classification processes, e.g., when the aim is to categorize new texts considering the knowledge base that emerges from a training step on labelled texts.

The analysis of the *course_evaluations* dataset showed that meanr is the fastest package for calculating polarity scores, but it produces the less accurate results. Better results in terms of accuracy can be obtained by using syuzhet and Rsentiment, with the first package faster than the second one. The highest level of accuracy can be reached by calculating polarity scores with sentimentr, which was the third package for running times in our case study. The high level of accuracy depends on the use of valence shifters. Moreover, sentimentr had also the advantage of calculating polarity scores both at a sentence-level and at the document-level. Regardless of the different methods for calculating polarity scores, another aspect to consider is the possibility of importing and customizing the dictionary of polarized terms. Except for meanr, all the presented packages provide this option with more or less a similar difficulty of implementation.

It is important to consider that the use of different lexicons can affect the results of the analyses. Our choice of computing polarity scores for each function by using the default options, therefore with different lexicons, can be considered a limit of this study. Nevertheless, we supposed that the authors of the packages suggest the default options as the best choice for calculating polarities with respect to the implemented method. It is left to the readers and the practiotioners the choice of the best solution to cope with their specific informative needs.

Declaration of Conflicting Interests

The authors declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

Funding

The authors received no financial support for the research, authorship, and/or publication of this article.

References

- Abirami, A.M., & Gayathri, V. (2017). A survey on sentiment analysis methods and approaches. In Proceedings of the eighth International Conference on Advanced Computing (pp. 72–76). IEEE. Retrieved from https://ieeexplore.ieee.org/abstract/document/7951748.
- Borms, S., Ardia, D., Bluteau, K., Boudt, K., Van Pelt, J. & Algaba, A. (2019). sentometrics: An Integrated Framework for Textual Sentiment Time Series Aggregation and Prediction (R package version 0.7.6). Retrieved from https://CRAN.R-project.org/package=sentometrics.
- Aung, K. Z., & Myo, N.M. (2017). Sentiment Analysis of Students' Comment Using Lexicon Based Approach. In G. Zhu, S. Yao, X. Cui, & S. Xu (Eds.), *Proceedings of the 16th IEEE/ACIS International*

Conference on Computer and Information Science (pp. 149–154). Wuhan, China: IEEE Computer Society.

- Balbi, S., & Misuraca, M. (2005). Visualization techniques in non-symmetrical relationships. In S. Sirmakessis (Ed.). *Knowledge mining* (pp. 23–29). Berlin Heidelberg: Springer-Verlag.
- Balbi, S., Misuraca, M., & Scepi, G. (2018). Combining different evaluation systems on social media for measuring user satisfaction. *Information processing & management*, 54, 674–685.
- Balahur, A., & Jacquet, G. (2015). Sentiment analysis meets social media challenges and solutions of the field in view of the current information sharing context. *Information Processing & Management*, 51, 428–432.
- Bose, S., & Goswami, S. (2018). *RSentiment: Analyse Sentiment of English Sentences* (R package version 2.2.2). Retrieved from https://cran.r-project.org/web/package=RSentiment.
- Bravo-Marquez, F., Mendoza, M., & Poblete, B. (2014). Meta-level sentiment models for big social data analysis. *Knowledge-Based Systems*, 69, 86–99.
- Cambria, E., Schuller, B., Xia, Y., & Havasi, C. (2013). New avenues in opinion mining and sentiment analysis. *IEEE Intelligent Systems*, *1*, 15–21.
- Chin, C.C., & Tseng, Y.-D. (2011). Quality evaluation of product reviews using an information quality framework. *Decision Support Systems*, 50, 755–768.
- De Queiroz, G., Hvitfeldt, E., Keyes, O., Misra, K., Mastny, T., Erickson, J., Robinson, D., & Silge, J. (2019). *tidytext: Text Mining using 'dplyr', 'ggplot2', and Other Tidy Tools* (R package version 0.2.2). Retrieved from https://cran.r-project.org/web/package=tidytext.
- Dietz-Uhler, B., & Hurn, E. J. (2013). Using learning analytics to predict (and improve) student success: A faculty perspective. *Journal of Interactive Online Learning*, *12*, 17–26.
- Dou, Z.-Y. (2017). Capturing user and product Information for document level sentiment analysis with deep memory. In M. Palmer, R. Hwa, & S. Riedel (Eds.), *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing* (pp. 521–526). Copenhagen, Denmark: ACL.
- Feinerer, I., Hornik, K. & Meyer D. (2008). Text Mining Infrastructure in R. Journal of Statistical Software, 25, 1–54.
- Feinerer, I. & Hornik, K. (2018). *tm: Text Mining Package* (R package version 0.7-6). Retrieved from https://cran.r-project.org/web/package=tm.
- Feuerriegel, S., & Pröllochs, N. (2019). *SentimentAnalysis: Dictionary-Based Sentiment Analysis* (R package version 1.3-3). Retrieved from https://cran.r-project.org/web/package=SentimentAnalysis.
- Giannakidou, A. (2008). Negative and positive polarity items: licensing, compositionality and variation. In K. von Heusinger, C. Maienborn, & P. Portner (Eds.), *Semantics: An International Handbook of Natural Language Meaning* (2, pp. 1660–1712). Berlin: Mouton de Gruyter.
- Henry, E. (2008). Are Investors Influenced by How Earnings Press Releases are Written? *Journal of Business Communication*, 45, 363–407.
- Hu, M., & Liu, B. (2004). Mining opinion features in customer reviews. In A.G. Cohn (Ed.) *Proceedings* of the 19th national conference on Artificial intelligence (pp. 755–760). New York, NY: ACM
- Hu, Y., & Li W. (2011). Document sentiment classification by exploring description model of topical terms. *Computer Speech & Language*, 25, 386–403.
- Jena, R.K. (2018). Sentiment mining in a collaborative learning environment: capitalising on big data. *Behaviour & Information Technology*, 38, 986–1001.
- Jockers, M. (2017). *syuzhet: Extracts Sentiment and Sentiment-Derived Plot Arcs from Text* (R package version 1.0.4). Retrieved from https://cran.r-project.org/web/package=syuzhet

- Kang, H., Yoo, S. J. & Han, D. (2012). Senti-lexicon and improved Naïve Bayes algorithms for sentiment analysis of restaurant reviews. *Expert Systems with Applications*, *39*, 6000–6010.
- Leong, C.K., Lee, Y.H., & Mak, W.K. (2012). Mining sentiments in SMS texts for teaching evaluation. *Expert Systems with Applications*, *39*, 2584–2589.
- Liu, B. (2015). Sentiment Analysis: mining opinions, sentiments, and emotions. Cambridge, England: Cambridge University Press.
- Liu, B., Hu, M., & Cheng, J. (2005). Opinion Observer: Analyzing and Comparing Opinions on the Web. *Proceedings of the 14th international conference on World Wide Web* (pp. 342–351). New York, NY: ACM.
- Liu, W., & Zhang, J. (2016). The multilayer sentiment analysis model based on Random forest. In Proceedings of the 2nd International Conference on Advances in Mechanical Engineering and Industrial Informatics, pp. 1315–1320.
- Loughran, T., & McDonald, B. (2011). When Is a Liability Not a Liability? Textual Analysis, Dictionaries, and 10-Ks. *Journal of Finance*, *66*, 35–65.
- Löbner, S. (2000). Polarity in Natural Language: Predication, Quantification and Negation in Particular and Characterizing Sentences. *Linguistics and Philosophy*, 23, 213–308.
- Mandouit, L. (2016). Using student feedback to improve teaching. *Educational Action Research*, *26*, 755–769.
- Manning, C.D., Surdeanu, M., Finkel, J., Bethard, & McClosky, S.J. (2014). The Stanford CoreNLP Natural Language Processing Toolkit. In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pp. 55–60.
- Moreno-Marcos, P.E., Alario-Hoyos, C., Muñoz-Merino, P.J., Estévez-Ayres, I., & Delgado Kloos, C. (2018). Sentiment Analysis in MOOCs: A case study. In *Proceedings of 2018 IEEE Global Engineering Education Conference* (pp. 1489–1496). Santa Cruz de Tenerife, Spain: IEEE Computer Society
- Nielsen, F.Å. (2011). A new ANEW: Evaluation of a word list for sentiment analysis in microblogs. In M. Rowe, M. Stankovic, A.-S. Dadzie, & M. Hardey (Eds.), *Proceedings of the ESWC2011 Work-shop on 'Making Sense of Microposts': Big things come in small packages* (pp. 93–98). CEUR-WS. Retrieved from http://ceur-ws.org/Vol-718
- Ortigosa-Hernández, J., Rodríguez, J.D., Alzate, L., Lucania, M., Inza, I., & Lozano, J. A. (2012). Approaching sentiment analysis by using semi-supervised learning of multi-dimensional classifiers. *Neurocomputing*, *92*, 98–115.
- Pang, B., & Lee, L. (2008). Opinion Mining and Sentiment Analysis. Foundations and Trends in Information Retrieval, 2, 1–135.
- Petz, G., Karpowicz, M., Fürschuß, H., Auinger, A., Stříteský, V., & Holzinger, A. (2014). Computational approaches for mining user's opinions on the Web 2.0. *Information Processing & Management*, 50, 899–908.
- Polanyi, L. & Zaenen, A. (2006). Contextual valence shifters. In J. G. Shanahan, Y. Qu, & J. Wiebe (Eds.), *Computing attitude and affect in text: Theory and applications* (pp. 1–10). Dordrecht: Springer.
- Pröllochs, N., Feuerriegel, S., & Neumann, D. (2015). Generating Domain-Specific Dictionaries using Bayesian Learning. In ECIS 2015 Completed Research Papers (paper 144). Retrieved from https://aisel.aisnet.org/ecis2015_cr/144
- Rinker, T. (2019). *sentimentr: Calculate Text Polarity Sentiment* (R package version 2.7.1). Retrieved from https://cran.r-project.org/web/package=sentimentr.

- Goodrich, B., Kurkiewicz, D., & Rinker, T. (2019). *qdap: Bridging the Gap Between Qualitative Data and Quantitative Analysis* (R package version 2.3.2). Retrieved from https://cran.r-project.org/web/package=qdap.
- Salton, G., Wong, A., & Yang, C.S. (1975). A vector space model for automatic indexing. *Communications of the ACM*, *18*, 613–620.
- Schmidt, D. (2019). *meanr: Sentiment Analysis Scorer* (R package version 0.1-2). Retrieved from https://cran.r-project.org/web/package=meanr.
- Slater, S., Joksimović, S., Kovanović, V., Baker, R.S., & Gasević, D. (2017). Tools for Educational Data Mining: A Review. *Journal of Educational and Behavioral Statistics*, 42, 85–106.
- Sokolova, M., & Lapalme, G. (2009). A systematic analysis of performance measures for classification tasks. *Information Processing & Management*, 45, 427–437.
- Stone, P.J., Dunphy, D.C., & Smith, M.S. (1966). *The general inquirer: A computer approach to content analysis*. Oxford, England: M.I.T. Press.
- Tan, L.-W., Na, J.-C., Theng, Y.-L., & Chang, K. (2011). Sentence-level sentiment polarity classification using a linguistic approach. In C. Xing, F. Crestani, & A. Rauber (Eds.), *Digital Libraries: For Cultural Heritage, Knowledge Dissemination, and Future Creation* (pp. 77–87). Berlin Heidelberg: Springer-Verlag
- Tang, J., Alelyani, S., & Liu, H. (2014). Feature selection for classification: A review. In C.C. Aggarwal (Ed.), *Data Classification: Algorithms and Applications* (pp. 37-64). Boca Raton, FL: CRC Press
- Tang, H., Tan, S., & Cheng, X. (2009). A survey on sentiment detection of reviews. *Expert Systems with Applications*, *36*, 10760–10773.
- Tong, R. (2001). An operational system for detecting and tracking opinions in on-line discussions. In *Working Notes of the ACM SIGIR 2001 Workshop on Operational Text Classification* (pp. 1–6), New York, NY: ACM.
- Turney, P.D., & Littman, M.L. (2003). Measuring praise and criticism: Inference of semantic orientation from association. *ACM Transactions on Information Systems*, *21*, 315–346.
- Turney, P.D., & Mohammad, S. (2010). Emotions Evoked by Common Words and Phrases: Using Mechanical Turk to Create an Emotion Lexicon. In *Proceedings of the NAACL-HLT 2010 Workshop on Computational Approaches to Analysis and Generation of Emotion in Text* (pp. 26–34), Los Angeles, CA: ACL. Retrieved from https://www.aclweb.org/anthology/W10-0204.
- Verbert, K., Duval, E., Klerkx, J., Govaerts, S., & Santos J.L. (2013). Learning Analytics Dashboard Applications. *American Behavioral Scientist*, 57, 1500-1509.
- Welch, C., & Mihalcea, R. (2017). Targeted sentiment to understand student comments. In *Proceedings of the 26th International Conference on Computational Linguistics: Technical Papers* (pp. 2471–2481). Osaka, Japan. Retrieved from https://www.aclweb.org/anthology/C16-1233.
- Wen, M., Yang, D., & Penstein Rosé, C. (2014). Sentiment Analysis in MOOC Discussion Forums: What does it tell us? In J. Stamper, Z. Pardos, M. Mavrikis, & B.M. McLaren (Eds.), *Proceedings of the 7th International Conference on Educational Data Mining* (pp. 130–137). Retrieved from http://educationaldatamining.org/EDM2014/uploads/procs2014/long%20papers/130 EDM-2014-Full.pdf
- Wickham, H. (2014). Tidy Data. *Journal of Statistical Software*, 59. Retrieved From https://www.jstatsoft.org/index.php/jss/article/view/v059i10