

Analyzing COVID-19 on Online Social Media: Trends, Sentiments and Emotions

Xiaoya Li[♣], Mingxin Zhou[♣], Jiawei Wu[♣], Arianna Yuan[♦], Fei Wu[♠] and Jiwei Li[♠]

[♠] Department of Computer Science and Technology, Zhejiang University

[♦] Computer Science Department, Stanford University

[♣] Shannon.AI

{xiaoya_li, mingxin_zhou, jiawei_wu, jiwei_li}@shannonai.com

xfyuan@stanford.edu, wufei@cs.zju.edu.cn

Abstract—At the time of writing, the ongoing pandemic of coronavirus disease (COVID-19) has caused severe impacts on society, economy and people’s daily lives. People constantly express their opinions on various aspects of the pandemic on social media, making user-generated content an important source for understanding public emotions and concerns.

In this paper, we perform a comprehensive analysis on the affective trajectories of the American people and the Chinese people based on Twitter and Weibo posts between January 20th, 2020 and May 11th 2020. Specifically, by identifying people’s sentiments, emotions (i.e., anger, disgust, fear, happiness, sadness, surprise) and the emotional triggers (e.g., what a user is angry/sad about) we are able to depict the dynamics of public affect in the time of COVID-19. By contrasting two very different countries, China and the Unites States, we reveal sharp differences in people’s views on COVID-19 in different cultures. Our study provides a computational approach to unveiling public emotions and concerns on the pandemic in real-time, which would potentially help policy-makers better understand people’s need and thus make optimal policy.

I. INTRODUCTION

The emergence of COVID-19 in early 2020 and its subsequent outbreak have affected and changed the world dramatically. According to the World Health Organization (WHO), by mid-May 2020, the number of confirmed COVID-19 cases has reached 5 millions with death toll over 300,000 world wide. Several mandatory rules have been introduced by the government to prevent the spread of the coronavirus, such as social distancing, bans on social gatherings, store closures and school closures. Despite their positive effects on slowing the spread of the pandemic, they nevertheless caused severe impacts on the society, the economy and people’s everyday life. There have been anti-lockdown and anti-social-distancing protests in many places around the world. Given these difficult situations, it is crucial for policy-makers to understand people’s opinions toward the pandemic so that they can (1) balance the concerns of stopping the pandemic on the one hand and keeping people in good spirits on the other hand and (2) anticipate people’s reactions to certain events and policy so that the policy-makers can prepare in advance. More generally, a close look at the public affect during the time of COVID-19 could help us understand people’s reaction and thoughts in the face of extreme crisis, which sheds light on humanity in moments of darkness.

People constantly post about the pandemic on social media such as Twitter, Weibo and Facebook. They express their attitudes and feelings regarding various aspects of the pandemic, such as the medical treatments, public policy, their worry, etc. Therefore, user-generated content on social media provides an important source for understanding public emotions and concerns.

In this paper, we provide a comprehensive analysis on the affective trajectories of American people and Chinese people based on Twitter and Weibo posts between January 20th, 2020 and May 11th 2020. We identify fine-grained emotions (including anger, disgust, fear, happiness, sadness, surprise) expressed on social media based on the user-generated content. Additionally, we build NLP taggers to extract the triggers of different emotions, e.g., why people are angry or surprised, what they are worried, etc. We also contrast public emotions between China and the Unites States, revealing sharp differences in public reactions towards COVID-19 related issues in different countries.

By tracking the change of public sentiment and emotion over time, our work sheds light on the evolution of public attitude towards this global crisis. This work contributes to the growing body of research on social media content in the time of COVID-19. Our study provides a way to extracting public emotion towards the pandemic in real-time, and could potentially lead to better decision-making and the development of wiser interventions to fight this global crisis.

The rest of this paper is organized as follows: we briefly go through some related work in Section 2. We then present the analyses on topic trends in Weibo and Twitter (section 3), the extracted emotion trajectories (section 4) and triggers of those emotions (section 5). We finally conclude this paper in Section 6.

II. RELATED WORK

A. Analyses on Social Media Content about COVID-19

At the time of writing, analyses on people’s discussions and behaviors on social media in the context of COVID-19 has attracted increasing attention. [1] analyzed tweets concerning

COVID-19 on Twitter by selecting important 1-grams based on rank-turbulence divergence and compare languages used in early 2020 with the ones used a year ago. The authors observed the first peak of public attention to COVID-19 around January 2020 with the first wave of infections in China, and the second peak later when the outbreak hit many western countries. [2] released the first COVID-19 Twitter dataset. [3] provided a ground truth corpus by annotating 5,000 texts (2,500 short + 2,500 long texts) in UK and showed people’s worries about their families and economic situations. [4] viewed emotions and sentiments on social media as indicators of mental health issues, which result from self-quarantining and social isolation. [5] revealed increasing amount of hateful speech and conspiracy theories towards specific ethnic groups such as Chinese on Twitter and 4chan’s. Other researchers started looking at the spread of misinformation on social media [6], [7]. [8] provide an in-depth analysis on the diffusion of misinformation concerning COVID-19 on five different social platforms.

B. Analyses of Emotions and Sentiments on Social Media

Discrete Emotion Theory [9], [10], [11] think that all humans have an innate set of distinct basic emotions. Paul Ekman and his colleagues [12] proposed that the six basic emotions of humans are anger, disgust, fear, happiness, sadness, and surprise. Ekman explains that different emotions have particular characteristics expressed in varying degrees. Researchers have debated over the exact categories of discrete emotions. For instance, [13] proposed eight classes for emotions including love, mirth, sorrow, anger, energy, terror, disgust and astonishment.

Automatically detecting sentiments and emotions in text is a crucial problem in NLP and there has been a large body of work on annotating texts based on sentiments and building machine tools to automatically identify emotions and sentiments [14], [15], [16], [17]. [18] created the first annotated dataset for four classes of emotions, anger, fear, joy, and sadness, in which each text is annotated with not only a label of emotion category, but also the intensity of the emotion expressed based on the Best–Worst Scaling (BWS) technique [19]. A follow-up work by [20] created a more comprehensively annotated dataset from tweets in English, Arabic, and Spanish. The dataset covers five different sub-tasks including emotion classification, emotion intensity regression, emotion intensity ordinal classification, valence regression and valence ordinal classification.

There has been a number of studies on extracting aggregated public mood and emotions from social media [21], [22], [23], [24]. Facebook introduced Gross National Happiness (GNH) to estimate the aggregated mood of the public using the LIWC dictionary. Results show a clear weekly cycle of public mood. [25] and [26] specially investigate the influence of geographic places and weather on public mood from Twitter data. The mood indicators extracted from tweets are very predictive and robust [23], [27]. Therefore, they have been used to predict

real-world outcomes such as economic trends [24], [28], [29], [30], stock market [31], [32], influenza outbreak [33], and political events [34], [35], [36], [37].

III. GENERAL TRENDS FOR COVID-19 RELATED POSTS

In this section, we present the general trends for COVID-19-related posts on Twitter and Weibo. We first present the semi-supervised models we used to detect COVID-19 related tweets. Next we present the analysis on the topic trends on the two social media platforms.

A. Retrieving COVID-19 Related Posts

For Twitter, we first obtained 1% of all tweets that are written in English and published within the time period between January 20th, 2020 and May 11th 2020. The next step is to select tweets related to COVID-19. The simplest way, as in [2], [7], is to use a handcrafted keyword list to obtain tweets containing words found in the list. However, this method leads to lower values in both precision and recall: for precision, user-generated content that contains the mention of a keyword is not necessarily related to COVID-19. For example, the keyword list used in [2] include the word *China*, and it is not surprising that a big proportion of the posts containing “China” is not related to COVID-19; for recall, keywords for COVID-19 can change over time and might be missing in the keyword list.

To tackle this issue, we adopt a bootstrapping approach. The bootstrapping approach is related to previous work on semi-supervised data harvesting methods [38], [39], [40], in which we build a model that recursively uses seed examples to extract patterns, which are then used to harvest new examples. Those new examples are further used as new seeds to get new patterns. To be specific, we first obtained a starting seed keyword list by (1) ranking words based on tf-idf scores from eight COVID-19 related wikipedia articles; (2) manually examining the ranked word list, removing those words that are apparently not COVID-19 related, and use the top 100 words in the remaining items. Then we retrieved tweets with the mention of those keywords. Next, we randomly sampled 1,000 tweets from the collection and manually labeled them as either COVID-19 related or not. The labeled dataset is split into the training, development and test sets with ratio 8:1:1. A binary classification model is trained on the labeled dataset to classify whether a post with the mention of COVID-related keywords is actually COVID-related. The model is trained using BERT [41] and optimized using Adam [42]. Hyperparameters such as the batch size, learning rate are tuned on the development set. Next, we obtain a new seed list by picking the most salient words that contribute to the positive category in the binary classification model based on the first-order derivative saliency scores [43], [44], [45]. This marks the end of the first round of the bootstrapping. Next we used the new keyword list to re-harvest a new dataset with the mention of the keyword, 1,000 of which is selected and labeled to retrain the binary classification model. We repeat this process for three times.

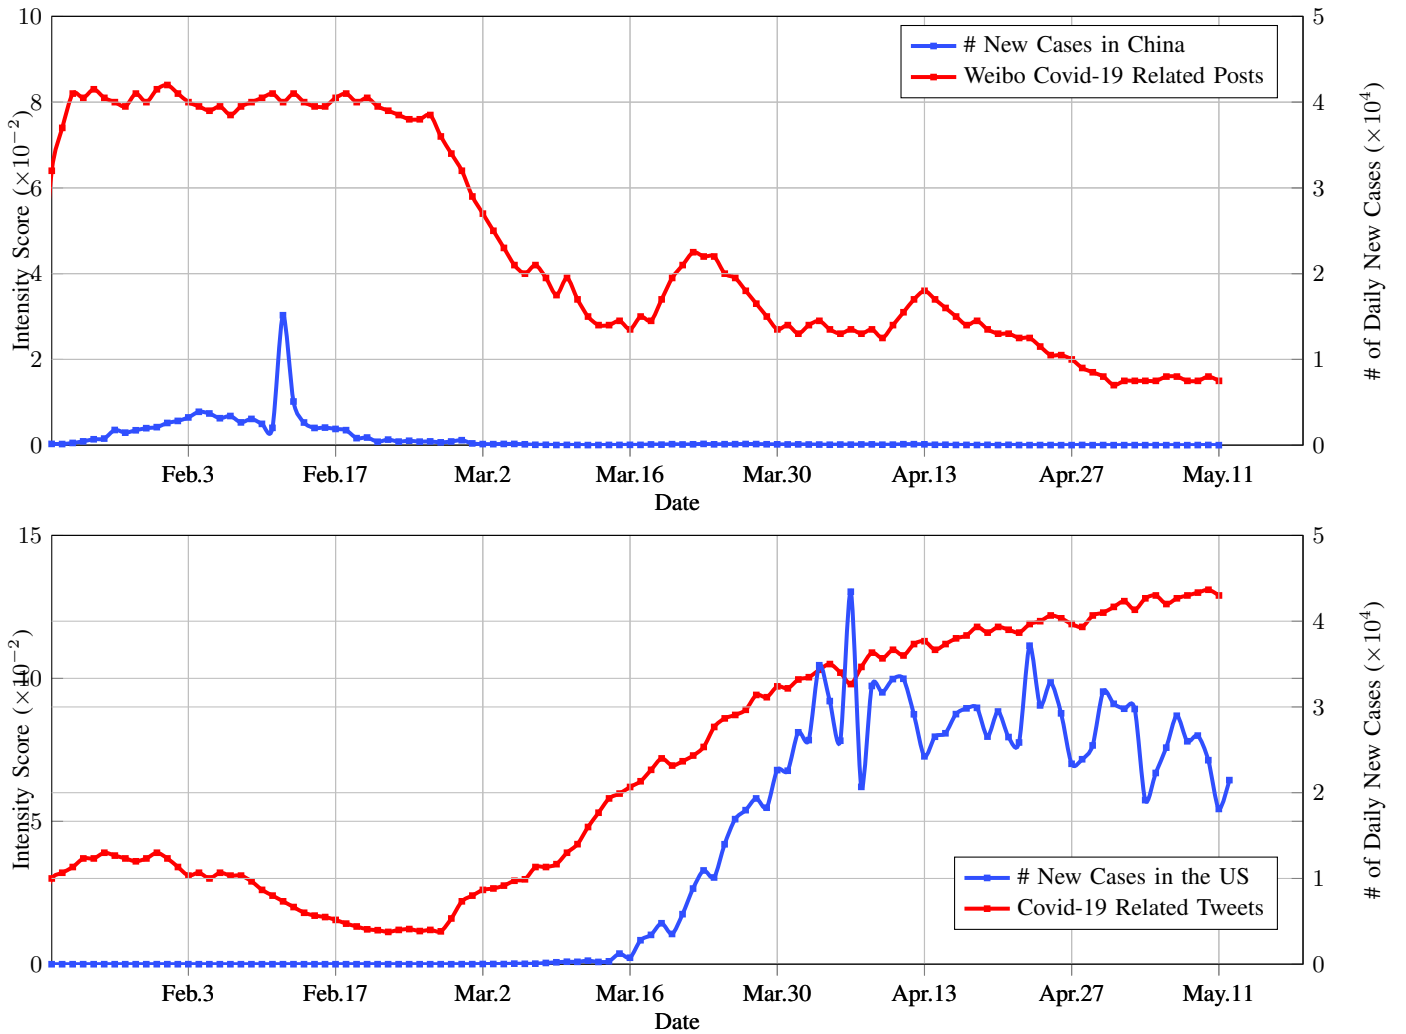


Fig. 1: (a) Daily intensity scores for Covid-19 topics on Weibo and the number of daily cases reported by Chinese CDC. (a) Daily intensity scores for Covid-19 topics on Twitter and the number of daily cases reported by US CDC. Intensity scores are the number Covid related posts divided by the total number of retrieved daily posts.

F1 scores for the three rounds of binary classification are 0.74, 0.82, 0.86 respectively. After the final round of bootstrapping, we collected a total number of 78 million English tweets concerning the topic of COVID-19. We used this strategy to retrieve COVID-related posts on Weibo and collected a total number of 16 million posts.

B. Analyses

We report the intensity scores for Weibo and Twitter in Figure 1. We split all tweets by date, where X_t denotes all tweets published on day t . The value of intensity is the number of posts classified as COVID-related divided by the total number of retrieved posts, i.e., $|X_t|$. On Weibo, we observe a peak in late January and February, then a drop, followed by another rise in March, and a gradual decline afterwards. The trend on Chinese social media largely reflects the progress of the pandemic in China: the outbreak of COVID-19 and the spread from Wuhan to the rest of the country corresponds to

the first peak. The subsequent drop reflects the promise in containing the virus, followed by a minor relapse in March. For Twitter, we observe a small peak that is aligned with the news from China about the virus. The subsequent drop reflects the decline of the attention to the outbreak in China. The curve progressively went up since March, corresponding to the outbreak in the US. Upon the writing of this paper, we have not observed a sign of drop in the intensity score of COVID19-related posts.

IV. THE EVOLUTION OF PUBLIC EMOTION

In this section, we present the analyses on the evolution of public emotion in the time of COVID-19. We first present the algorithms we used to identify the emotions expressed in a given post. Next we present the results of the analyses.

A. Emotion Classification

We adopted the well-established emotion theory by Paul Ekman [12], which groups human emotions into 6 major categories, i.e., anger, disgust, worry, happiness, sadness, and surprise. Given a post from a social network user, we assign one or multiple emotion labels to it [46], [47]. This setup is quite common in text classification [48], [49], [50], [51], [52].

For emotion classification of English tweets, we take the advantage of labeled datasets from the SemEval-2018 Task 1e [20], in which a tweet was associated with either the “neutral” label or with one or multiple emotion labels by human evaluators. The SemEval-2018 Task 1e contains eleven emotion categories in total, i.e., anger, anticipation, disgust, fear, joy, love, optimism, pessimism, sadness, surprise and trust, and we only use the datasets for a six-way classification, i.e., anger, disgust, fear, happiness, sadness, and surprise. Given that the domain of the dataset used in [20] covers all kinds of tweets, and our domain of research covers only COVID-related tweets, there is a gap between the two domains. Therefore, we additionally labeled 15k COVID-related tweets following the guidelines in [20], where each tweet can take either the neural label or one/multiple emotion labels. Since one tweet can take on multiple emotion labels, the task is formalized as a multi-label classification task, in which six binary (one vs. the rest) classifiers are trained. We used the description-based BERT model [53] as the backbone, which achieves current SOTA performances on a wide variety of text classification tasks. More formally, let us consider a to-be-classified tweet $x = \{x_1, \dots, x_L\}$, where L denotes the length of the text x . Each x will be tagged with one or more class labels $y \in \mathcal{Y} = [1, N]$, where $N = 6$ denotes the number of the predefined emotion classes (the six emotion categories). To compute the probability $p(y|x)$, each input text x is concatenated with the description q_y to generate $\{[\text{CLS}]; q_y; [\text{SEP}]; x\}$, where [CLS] and [SEP] are special tokens. The description q_y is the Wikipedia description for each of the emotions. For example, q_y for the category *anger* is “*Anger, also known as wrath or rage, is an intense emotional state involving a strong uncomfortable and hostile response to a perceived provocation, hurt or threat.*” Next, the concatenated sequence is fed to the BERT model, from which we obtain the contextual representations $h_{[\text{CLS}]}$. $h_{[\text{CLS}]}$ is then transformed to a real value between 0 and 1 using the sigmoid function, representing the probability of assigning the emotion label y to the input tweet x :

$$p(y|x) = \text{sigmoid}(W_2 \text{ReLU}(W_1 h_{[\text{CLS}]} + b_1) + b_2) \quad (1)$$

where W_1, W_2, b_1, b_2 are some parameters to optimize. Classification performances for different models are presented in Table 3.

B. Analyses

For emotion y , its intensity score $S(t, y)$ for day t is the average probability (denoted by $P(y|x)$) of assigning label

Model	Acc	micro F1	macro F1
SVM biagram	51.4	63.0	52.7
BERT [41]	65.0	75.2	66.1
BERT-description [53]	66.8	77.0	68.3

TABLE I: Results for the multi-label emotion classification for English tweets.

y to all the texts in that day X_t . For non COVID-related texts, $P(y|x)$ is automatically set to 0. We thus have:

$$S(t, y) = \frac{1}{|X_t|} \sum_{x \in X_t} p(y|x) \quad (2)$$

For Chinese emotion classification, we used the labeled dataset in [54], which contains 15k labeled microblogs from weibo¹. In addition to the dataset provided by [54], we labeled COVID-related 20k microblogs. The combined dataset is then used to train a multi-label classification model based on the description-BERT model [53]. Everyday emotion scores for Weibo are computed in the same way as for Twitter.

The time series of intensity scores of six different emotions, i.e., sadness, anger, disgust, worry, happiness, surprise, for Weibo and Twitter are shown in Figures 2 and 3, respectively. For Weibo, as can be seen, the trend of *worry* is largely in line with the trend of the general intensity of the COVID-related posts. It reached a peak in late January, and then gradually went down, followed by a small relapse in mid-March. For *anger*, the intensity first went up steeply at the initial stage of the outbreak, staying high for two weeks, and then had another sharp increase around February 8th. The peak on February 8th was due to the death of Wenliang Li, a Chinese ophthalmologist who issued the warnings about the virus. The intensity for anger then gradually decreased, with no relapse afterwards. The intensity for *disgust* remained relatively low across time. For *sadness*, the intensity reached the peak at the early stage of the outbreak, then gradually died out with no relapse. For *surprise*, it went up first, mostly because of the fact that the public was surprised by the new virus and the unexpected outbreak, but then gradually went down. The intensity for *happiness* remained relatively low across time, with a small peak in late April, mostly because the countrywide lockdown was over.

For Twitter, the intensity for *worry* went up shortly in late January, followed by a drop. The intensity then went up steeply in mid-March in response to the pandemic breakout in the States, reaching a peak around March 20th, then decreased a little bit and remained steady afterwards. The intensity for *anger* kept going up after the outbreak in mid-March, with no drop observed. The trend for *sadness* is mostly similar to that of the overall intensity. For *surprise*, the curve went up first after the breakout in early March, reaching a peak around Mar 20th, then dropped, and remained steady afterwards. For *happiness*, the intensity remained low over time.

¹The original dataset contains 7 categories of emotions, and we used only six of them.

sadness	anger	disgust	worry	happiness	surprise
passed away	realdonaldtrump	covid / covid-19	covid / covid-19	healthy	covid / covid-19
died	lockdown	realdonaldtrump	job	help	human-to-human transmission
deaths	government	chinese	kids	recover	outbreak
fever	quarantine	trump	bill	check	lockdown
unemployed	wuhan	masks	unemployed	return to work	test
parents	lies	virus	food	reopening	deaths
test positive	close	pence	crisis	vaccine	pandemic
family	stayhome	chinks	parents	money	confirmed cases
patients	WHO	china	economy	treatment	total numbers
isolation	trump	hospitals	families	friends	conspiracy

TABLE II: Top 10 extracted trigger spans regarding different emotions on Twitter.

China	lockdown	Trump	Hospitals	Increasing Cases and Deaths
China	quarantine	realdonaldtrump	hospital	case
Chinese	stay	donald	patients	deaths
Wuhan	close	lies	test	report
bat-eating	home	republicans	doctor	confirmed
chink	stayhome	hydroxychloroquin	case	report
chinesevirus	boarder	american	healthcare	york
sinophobia	shutdown	media	drug	us
chingchong	distancing	governor	vaccine	total
hubei	coronalockdown	pence	ventilator	government

TABLE III: Top mentions of different subcategories for *anger* on Twitter.

syndrome and being infected	families	finance and economy	jobs and food	Increasing Cases and Deaths
fever	parents	money	jobs	deaths
hospital	mother	stock	unemployed	spread
cough	children	financial	food	poll number
test positive	mom	price	money	death toll
icu	families	loan	work	confirmed
doctor	father	business	starve	rise
bed	kids	debt	unemployment	official
confimed	daughter	market	check	number
sick	father-in-law	crash	layoff	safe

TABLE IV: Top mentions of different subcategories for *worry* on Twitter.

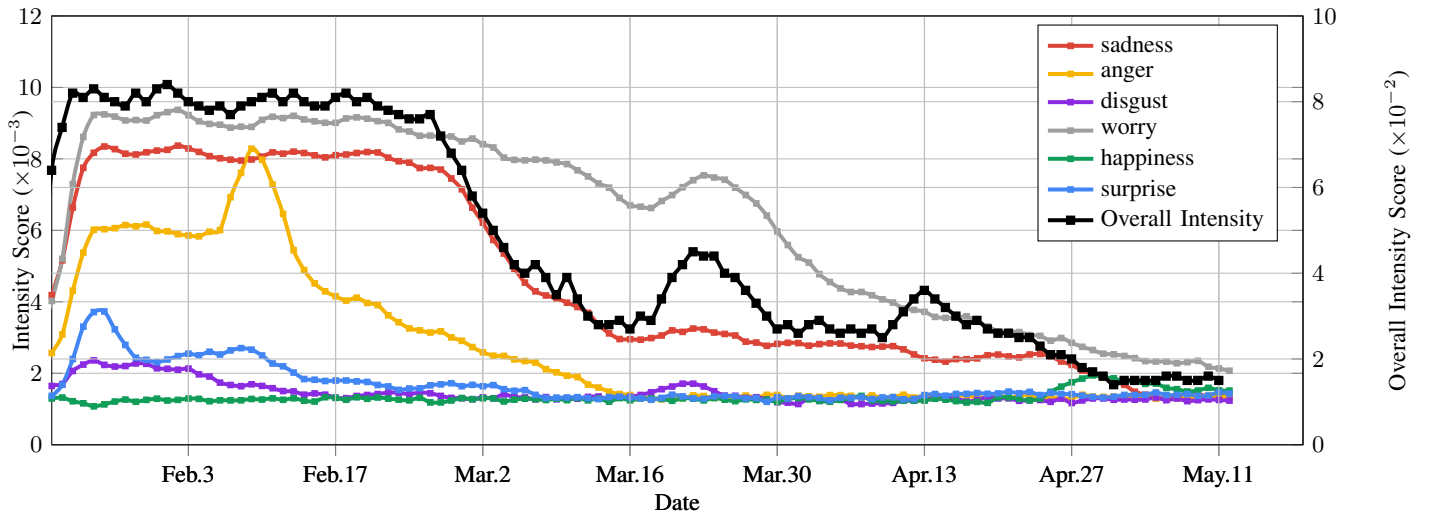


Fig. 2: Daily intensity scores for different emotions on Weibo.

V. EMOTIONAL TRIGGERS

For a given emotion, we would like to dive deeper into its different subcategories. For example, for *worry*, we wish to

know what the public is worried about, and how these triggers of worry change over time. In this section, we first present our methods for extracting triggers/subcategories for different emotions, followed by some analyses and visualization on the

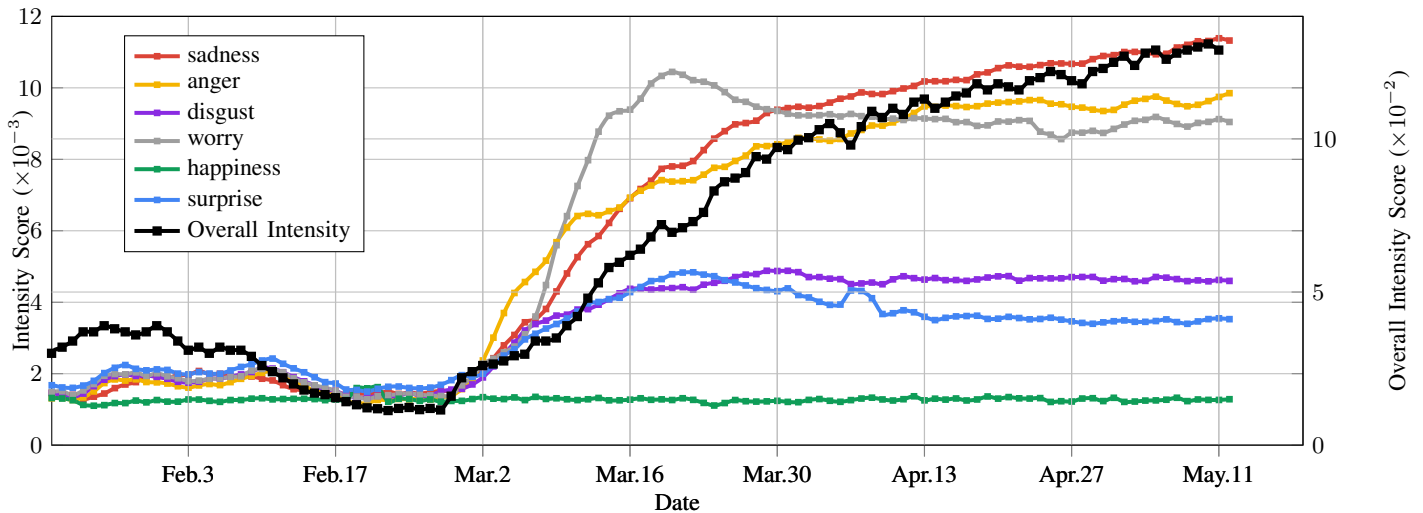


Fig. 3: Daily intensity scores for different emotions on Twitter.

Twitter data.

A. Extracting the Triggers for Different Emotions

In order to extract the emotional triggers from Twitter’s noisy text, we first annotate a corpus of tweets. For the ease of annotation, each emotion is associated with only a single trigger: the person/entity/event that a user has a specific emotion towards/with/about. A few examples are shown as follows with target triggers surrounded by brackets.

- *Angry protesters are traveling 100’s of miles to join organized rallies over COVID-19 [lockdown]_{attr_anger}.*
- *Feeling awfully tired after a 5.30am start for work today. Worried too about [the early return to school]_{attr_worry}, my grandchildren are so very dear to me . I could not bear to lose them to covid.*
- *All Americans are very angry with [@realDonaldTrump]_{attr_anger} 81,647 dead Americans would be very angry as well. If they weren’t dead.*
- *Fucking [bat-eating chinks]_{attr_anger}, go die in a hole, far away from us.*
- *Well, I am ANGRY as hell at Trump_{attr_anger}.*
- *With great sadness we report the sad [loss of two dear Friends]_{attr_sadness}*
- *The lockdown_{attr_anger} was implemented when there were hardly any cases and now it is above lakhs and people are acting so carelessly. Making me so angry.*

In order to build an emotional trigger tagger, we annotated 2,000 tweets in total, and split them into training, development and test sets with ratio 8:1:1. We treat the problem as a sequence labeling task, using Conditional Random Fields for learning and inference with BERT-MRC features [55]. Comparing with vanilla BERT tagger [41], the BERT-MRC tagger has the strength of encoding the description of the to-be-extracted entities, e.g., *what they are worried about*. As this description provides the prior knowledge about the entities,

it has been shown to outperform vanilla BERT even when less training data is used. In addition to the representation features from BERT-MRC, we also considered the Twitter-tuned POS features [56], the dependency features from a Twitter-tuned dependency parsing model [57] and the Twitter event features [58]. The precision and recall for segmenting emotional triggers on English tweets are reported in Table V.

The precision and recall for segmenting triggering event phrases are reported in Table 3. We observe a significant performance boost with linguistic features such as POS and dependency features. This is mainly due to the small size of the labeled dataset. The best model achieves an F1 score of 0.66.

B. Clustering Trigger Mentions

Since different extracted tokens may refer to the same concept or topic, we would like to cluster the extracted trigger mentions. The method of supervised classification is unsuitable for this purpose since (1) it is hard to predefine a list of potential triggers to people’s anger or worry; (2) it is extremely labor-intensive to annotate tweets with worry types or anger types and (3) these types may change over time. For these reasons, we decided to use semi-supervised approaches that will automatically induce worry/anger types that match the data. We adopt an approach based on LDA [59]. It was inspired by work on unsupervised information extraction [60], [58], [61].

We use the emotion *anger* to illustrate how trigger mentions are clustered. Each extracted trigger mentions for *anger* is modeled as a mixture of *anger* types. Here we use subcategory, type, and topic interchangeably, all referring to the cluster of similar mentions. Each topic is characterized by a distribution over triggers, in addition to a distribution over dates on which a user talks about the topic. Taking dates into account encourages triggers that are mentioned on the same date to be assigned to the same topic. We used collapsed Gibbs

Model	Pre	Rec	F1
BERT	0.41	0.60	0.48
BERT-MRC	0.54	0.66	0.59
CRF with BERT-MRC features	0.53	0.68	0.60
CRF with BERT-MRC features, POS, event and parse tree features	0.58	0.78	0.66

TABLE V: Performances of different models on emotional trigger extraction from Tweets.

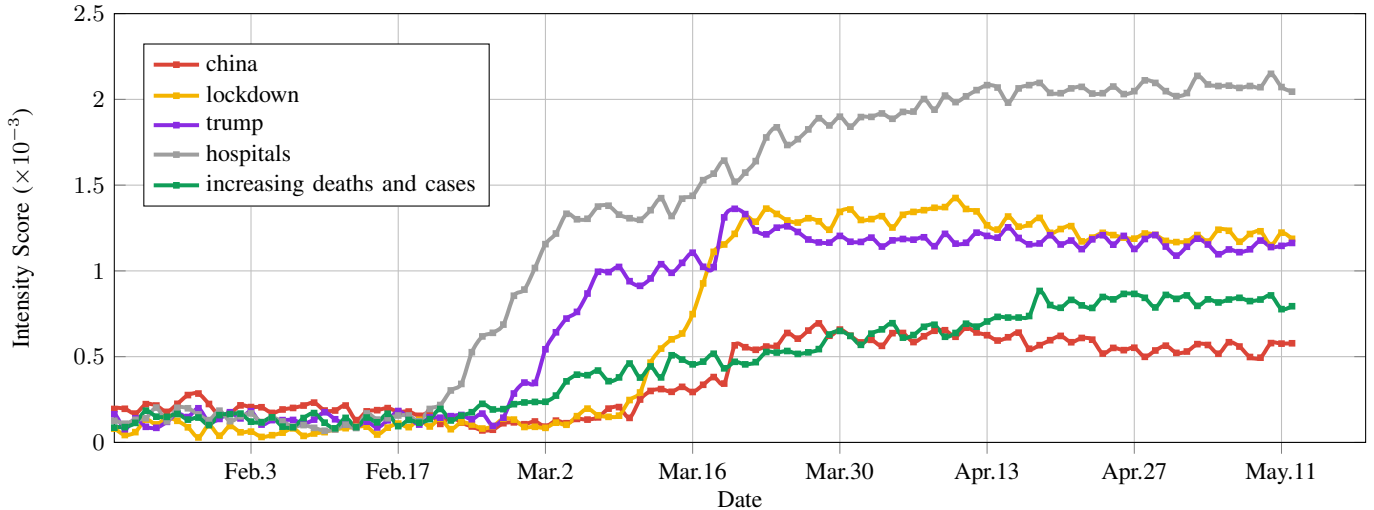


Fig. 4: Daily intensity scores for different subcategories for *anger* on Twitter.

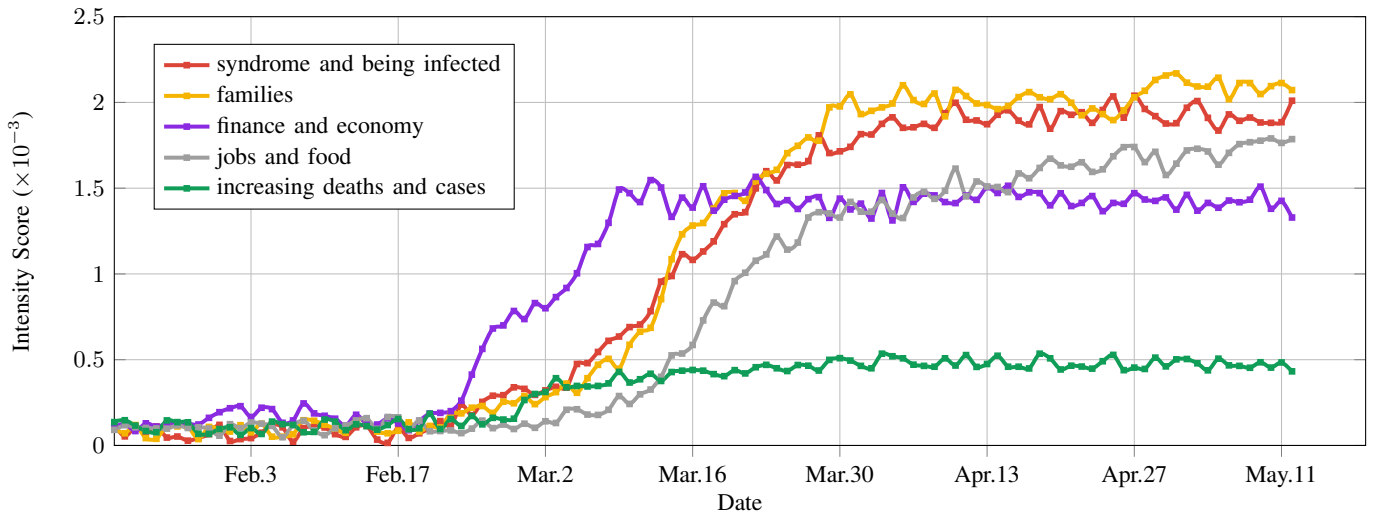


Fig. 5: Daily intensity scores for different subcategories for *worry* on Twitter.

Sampling [62] for inference. For each emotion, we ran Gibbs Sampling with 20 topics for 1,000 iterations, obtaining the hidden variable assignments in the last iteration. Then we manually inspected the top mentions for different topics and abandoned the incoherent ones.

The daily intensity score for a given subcategory k belonging to emotion y is given as follows:

$$S(t, y, k) = \frac{1}{|X_t|} \sum_{x \in X_t} p(k|x) \mathbf{I}(y_x = y) \quad (3)$$

where $p(k|x)$ is computed based on the parameters of the latent variable model.

C. Analyses

We report the top triggers for different emotions in Table II. We adopt a simple strategy of reporting the most frequent triggering events and topics are being test positive, and the death of families and friends. For *anger*, the top triggers are shutdown, quarantine and other mandatory rules. People also express their anger towards public figures such as President Donald Trump, Mike Pence, along with China and Chinese. For *worry*, the top triggers include jobs, getting the virus, payments and families. For *happiness*, the top triggers are recovering from the disease, city reopening and returning to

work. For *surprise*, the public are mostly surprised by the virus itself, its spread and the mass deaths it caused.

Next we report the results of the mention clustering for *anger* and *worry* in Tables 4 and 5, respectively. The unsupervised clustering reveals clearer patterns in the triggering events: top subcategories for *anger* include China with racist words such as *chink* and *chingchong*; lockdown and social distancing; public figures like President Donal Trump and Mike Pence; treatments in hospitals, and the increasing cases and deaths; Table 4 displays the change of intensity scores for the subcategories of *anger*. We observe a sharp increase in public anger toward China and Chinese around March 20th, in coincidence with President Donald Trump calling coronavirus 'Chinese virus' in his tweets. Public anger towards the lockdown sharply escalated in mid-March, but decreased a bit after late April when some places started to reopen.

Top subcategories for *worry* include syndromes for COVID-19, finance and economy, families, jobs and food, and increasing cases and deaths. Table 5 displays the change of intensity scores for subcategories of *worry*. People increasingly worried about families over time. It is interesting to see that the worry about finance and economy started going up in mid-February, earlier than other subcategories.

VI. CONCLUSION

In this paper, we perform analyses on topic trends, sentiments and emotions of the public in the time of COVID-19 on social media. By tracking the change of public emotions over time, our work reveals how the general public reacts to different events and government policy. Our study provides a computational approach to understanding public affect towards the pandemic in real-time, and could help create better solutions and interventions for fighting this global crisis.

REFERENCES

- [1] T. Alshaabi, J. Minot, M. Arnold, J. L. Adams, D. R. Dewhurst, A. J. Reagan, R. Muhamad, C. M. Danforth, and P. S. Dodds, "How the world's collective attention is being paid to a pandemic: Covid-19 related 1-gram time series for 24 languages on twitter," *arXiv preprint arXiv:2003.12614*, 2020.
- [2] E. Chen, K. Lerman, and E. Ferrara, "Covid-19: The first public coronavirus twitter dataset," *arXiv preprint arXiv:2003.07372*, 2020.
- [3] B. Kleinberg, I. van der Vegt, and M. Mozes, "Measuring emotions in the covid-19 real world worry dataset," *arXiv preprint arXiv:2004.04225*, 2020.
- [4] J. Gao, P. Zheng, Y. Jia, H. Chen, Y. Mao, S. Chen, Y. Wang, H. Fu, and J. Dai, "Mental health problems and social media exposure during covid-19 outbreak," *Plos one*, vol. 15, no. 4, p. e0231924, 2020.
- [5] L. Schild, C. Ling, J. Blackburn, G. Stringhini, Y. Zhang, and S. Zannettou, "' go eat a bat, chang!': An early look on the emergence of sinophobic behavior on web communities in the face of covid-19," *arXiv preprint arXiv:2004.04046*, 2020.
- [6] R. Gallotti, F. Valle, N. Castaldo, P. Sacco, and M. De Domenico, "Assessing the risks of" infodemics" in response to covid-19 epidemics," *arXiv preprint arXiv:2004.03997*, 2020.
- [7] E. Ferrara, "# covid-19 on twitter: Bots, conspiracies, and social media activism," *arXiv preprint arXiv:2004.09531*, 2020.
- [8] M. Cinelli, W. Quattrociocchi, A. Galeazzi, C. M. Valensise, E. Brugnoli, A. L. Schmidt, P. Zola, F. Zollo, and A. Scala, "The covid-19 social media infodemic," *arXiv preprint arXiv:2003.05004*, 2020.
- [9] R. Plutchik, "A general psychoevolutionary theory of emotion," in *Theories of emotion*. Elsevier, 1980, pp. 3–33.
- [10] N. H. Frijda, "The laws of emotion," *American psychologist*, vol. 43, no. 5, p. 349, 1988.
- [11] W. G. Parrott, *Emotions in social psychology: Essential readings*. Psychology Press, 2001.
- [12] P. Ekman, "An argument for basic emotions," *Cognition & emotion*, vol. 6, no. 3-4, pp. 169–200, 1992.
- [13] Rag, *Number Of Rasa-S*. Adyar Library Research Centre, 1975, vol. 23.
- [14] C. Yang, K. H.-Y. Lin, and H.-H. Chen, "Emotion classification using web blog corpora," in *IEEE/WIC/ACM International Conference on Web Intelligence (WI'07)*. IEEE, 2007, pp. 275–278.
- [15] B. Pang and L. Lee, "Opinion mining and sentiment analysis," *Foundations and trends in information retrieval*, vol. 2, no. 1-2, pp. 1–135, 2008.
- [16] S. M. Mohammad, "Sentiment analysis: Detecting valence, emotions, and other affectual states from text," in *Emotion measurement*. Elsevier, 2016, pp. 201–237.
- [17] D. Tang, B. Qin, and T. Liu, "Document modeling with gated recurrent neural network for sentiment classification," in *Proceedings of the 2015 conference on empirical methods in natural language processing*, 2015, pp. 1422–1432.
- [18] S. M. Mohammad and F. Bravo-Marquez, "Wassa-2017 shared task on emotion intensity," *arXiv preprint arXiv:1708.03700*, 2017.
- [19] J. J. Louviere and G. G. Woodworth, "Best-worst scaling: A model for the largest difference judgments," *University of Alberta: Working Paper*, 1991.
- [20] S. Mohammad, F. Bravo-Marquez, M. Salameh, and S. Kiritchenko, "Semeval-2018 task 1: Affect in tweets," in *Proceedings of the 12th international workshop on semantic evaluation*, 2018, pp. 1–17.
- [21] G. Mishne, M. De Rijke *et al.*, "Capturing global mood levels using blog posts," in *AAAI spring symposium: computational approaches to analyzing weblogs*, vol. 6, 2006, pp. 145–152.
- [22] Y. Liu, X. Huang, A. An, and X. Yu, "Arsa: a sentiment-aware model for predicting sales performance using blogs," in *Proceedings of the 30th annual international ACM SIGIR conference on Research and development in information retrieval*, 2007, pp. 607–614.
- [23] P. S. Dodds and C. M. Danforth, "Measuring the happiness of large-scale written expression: Songs, blogs, and presidents," *Journal of happiness studies*, vol. 11, no. 4, pp. 441–456, 2010.
- [24] E. Gilbert and K. Karahalios, "Widespread worry and the stock market," in *Fourth International AAAI Conference on Weblogs and Social Media*, 2010.
- [25] L. Mitchell, M. R. Frank, K. D. Harris, P. S. Dodds, and C. M. Danforth, "The geography of happiness: Connecting twitter sentiment and expression, demographics, and objective characteristics of place," *PloS one*, vol. 8, no. 5, 2013.
- [26] J. Li, X. Wang, and E. Hovy, "What a nasty day: Exploring mood-weather relationship from twitter," in *proceedings of the 23rd ACM International Conference on Conference on Information and Knowledge Management*, 2014, pp. 1309–1318.
- [27] P. S. Dodds, K. D. Harris, I. M. Kloumann, C. A. Bliss, and C. M. Danforth, "Temporal patterns of happiness and information in a global social network: Hedonometrics and twitter," *PloS one*, vol. 6, no. 12, 2011.
- [28] T. Rao and S. Srivastava, "Tweetsmart: Hedging in markets through twitter," in *2012 Third International Conference on Emerging Applications of Information Technology*. IEEE, 2012, pp. 193–196.

- [29] —, “Using twitter sentiments and search volumes index to predict oil, gold, forex and markets indices,” Tech. Rep., 2012.
- [30] X. Zhang, H. Fuehres, and P. A. Gloor, “Predicting stock market indicators through twitter “i hope it is not as bad as i fear”,” *Procedia-Social and Behavioral Sciences*, vol. 26, pp. 55–62, 2011.
- [31] J. Bollen, H. Mao, and X. Zeng, “Twitter mood predicts the stock market,” *Journal of computational science*, vol. 2, no. 1, pp. 1–8, 2011.
- [32] S. Chung and S. Liu, “Predicting stock market fluctuations from twitter,” *Berkeley, California*, 2011.
- [33] J. Li and C. Cardie, “Early stage influenza detection from twitter,” *arXiv preprint arXiv:1309.7340*, 2013.
- [34] D. J. Hopkins and G. King, “A method of automated nonparametric content analysis for social science,” *American Journal of Political Science*, vol. 54, no. 1, pp. 229–247, 2010.
- [35] B. O’Connor, R. Balasubramanyan, B. R. Routledge, and N. A. Smith, “From tweets to polls: Linking text sentiment to public opinion time series,” in *Fourth international AAAI conference on weblogs and social media*, 2010.
- [36] A. Tumasjan, T. O. Sprenger, P. G. Sandner, and I. M. Welpe, “Predicting elections with twitter: What 140 characters reveal about political sentiment,” in *Fourth international AAAI conference on weblogs and social media*, 2010.
- [37] A. O. Larsson and H. Moe, “Studying political microblogging: Twitter users in the 2010 swedish election campaign,” *New media & society*, vol. 14, no. 5, pp. 729–747, 2012.
- [38] J. Li, A. Ritter, and E. Hovy, “Weakly supervised user profile extraction from twitter,” in *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2014, pp. 165–174.
- [39] D. Davidov, A. Rappoport, and M. Koppel, “Fully unsupervised discovery of concept-specific relationships by web mining,” in *Proceedings of the 45th Annual Meeting of the Association of Computational Linguistics*, 2007, pp. 232–239.
- [40] Z. Kozareva and E. Hovy, “Learning arguments and supertypes of semantic relations using recursive patterns,” in *Proceedings of the 48th annual meeting of the association for computational linguistics*. Association for Computational Linguistics, 2010, pp. 1482–1491.
- [41] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “Bert: Pre-training of deep bidirectional transformers for language understanding,” *arXiv preprint arXiv:1810.04805*, 2018.
- [42] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *arXiv preprint arXiv:1412.6980*, 2014.
- [43] D. Erhan, Y. Bengio, A. Courville, and P. Vincent, “Visualizing higher-layer features of a deep network,” *University of Montreal*, vol. 1341, no. 3, p. 1, 2009.
- [44] K. Simonyan, A. Vedaldi, and A. Zisserman, “Deep inside convolutional networks: Visualising image classification models and saliency maps,” *arXiv preprint arXiv:1312.6034*, 2013.
- [45] J. Li, X. Chen, E. Hovy, and D. Jurafsky, “Visualizing and understanding neural models in nlp,” *arXiv preprint arXiv:1506.01066*, 2015.
- [46] S. Buechel and U. Hahn, “Emotion analysis as a regression problem—dimensional models and their implications on emotion representation and metrical evaluation,” in *Proceedings of the Twenty-second European Conference on Artificial Intelligence*. IOS Press, 2016, pp. 1114–1122.
- [47] D. Demszky, D. Movshovitz-Attias, J. Ko, A. Cowen, G. Nemade, and S. Ravi, “Goemotions: A dataset of fine-grained emotions,” *arXiv preprint arXiv:2005.00547*, 2020.
- [48] M. Ikonomakis, S. Kotsiantis, and V. Tampakas, “Text classification using machine learning techniques,” *WSEAS transactions on computers*, vol. 4, no. 8, pp. 966–974, 2005.
- [49] C. C. Aggarwal and C. Zhai, “A survey of text classification algorithms,” in *Mining text data*. Springer, 2012, pp. 163–222.
- [50] X. Zhang, J. Zhao, and Y. LeCun, “Character-level convolutional networks for text classification,” in *Advances in neural information processing systems*, 2015, pp. 649–657.
- [51] C. Zhou, C. Sun, Z. Liu, and F. Lau, “A c-lstm neural network for text classification,” *arXiv preprint arXiv:1511.08630*, 2015.
- [52] A. Joulin, E. Grave, P. Bojanowski, and T. Mikolov, “Bag of tricks for efficient text classification,” *arXiv preprint arXiv:1607.01759*, 2016.
- [53] D. Chai, W. Wu, Q. Han, F. Wu, and J. Li, “Description based text classification with reinforcement learning,” *arXiv preprint arXiv:2002.03067*, 2020.
- [54] Y. Lai, L. Zhang, D. Han, R. Zhou, and G. Wang, “Fine-grained emotion classification of chinese microblogs based on graph convolution networks,” 2019.
- [55] X. Li, J. Feng, Y. Meng, Q. Han, F. Wu, and J. Li, “A unified mrc framework for named entity recognition,” *arXiv preprint arXiv:1910.11476*, 2019.
- [56] A. Ritter, S. Clark, O. Etzioni *et al.*, “Named entity recognition in tweets: an experimental study,” in *Proceedings of the conference on empirical methods in natural language processing*. Association for Computational Linguistics, 2011, pp. 1524–1534.
- [57] L. Kong, N. Schneider, S. Swayamdipta, A. Bhatia, C. Dyer, and N. A. Smith, “A dependency parser for tweets,” in *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2014, pp. 1001–1012.
- [58] A. Ritter, O. Etzioni, and S. Clark, “Open domain event extraction from twitter,” in *Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining*, 2012, pp. 1104–1112.
- [59] D. M. Blei, A. Y. Ng, and M. I. Jordan, “Latent dirichlet allocation,” *Journal of machine Learning research*, vol. 3, no. Jan, pp. 993–1022, 2003.
- [60] N. Chambers and D. Jurafsky, “Template-based information extraction without the templates,” in *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*. Association for Computational Linguistics, 2011, pp. 976–986.
- [61] J. Li, A. Ritter, C. Cardie, and E. Hovy, “Major life event extraction from twitter based on congratulations/condolences speech acts,” in *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, 2014, pp. 1997–2007.
- [62] T. L. Griffiths and M. Steyvers, “Finding scientific topics,” *Proceedings of the National academy of Sciences*, vol. 101, no. suppl 1, pp. 5228–5235, 2004.