

Optimally Combining Classifiers for Semi-Supervised Learning

Zhiguo Wang^{1,2,3} Liusha Yang³ Feng Yin^{1,3} Ke Lin⁴ Qingjiang Shi^{5,3} Zhi-Quan Luo^{1,3} *

¹School of Science & Engineering, The Chinese University of Hong Kong, Shenzhen 518172, China

²University of Science and Technology of China, China

³Shenzhen Research Institute of Big Data, Shenzhen 518172, China

⁴Huawei Technologies Co., Ltd

⁵School of Software Engineering, Tongji University, Shanghai 200092, China

wangzhiguo@cuhk.edu.cn, yangliusha@sribd.cn, yinfeng@cuhk.edu.cn,
linke2@huawei.com, shiqj@tongji.edu.cn, luoqz@cuhk.edu.cn,

Abstract

This paper considers semi-supervised learning for tabular data. It is widely known that Xgboost based on tree model works well on the heterogeneous features while transductive support vector machine can exploit the low density separation assumption. However, little work has been done to combine them together for the end-to-end semi-supervised learning. In this paper, we find these two methods have complementary properties and larger diversity, which motivates us to propose a new semi-supervised learning method that is able to adaptively combine the strengths of Xgboost and transductive support vector machine. Instead of the majority vote rule, an optimization problem in terms of ensemble weight is established, which helps to obtain more accurate pseudo labels for unlabeled data. The experimental results on the UCI data sets and real commercial data set demonstrate the superior classification performance of our method over the five state-of-the-art algorithms improving test accuracy by about 3% – 4%. The code can be found at <https://github.com/hav-cam-mit/CTO>.

1 Introduction

In many applications, it is a difficult task to obtain fully labeled data sets to train a classifier, and labeling is usually expensive, time consuming and subject to human expertise, yet collecting abundant unlabeled data is much easier [1]. To leverage both labeled and unlabeled samples, semi-supervised learning (SSL) has been proposed to improve the generalization ability [2, 3].

There are four broad categories of semi-supervised learning methods, i.e. generative methods, graph-based methods, low-density separation methods and disagreement-based methods [4] to be discussed in Section 2. The above methods are proposed based on certain assumptions on the labeled data and unlabeled data, which plays an important role in semi-supervised learning. However, it remains an open question on how to make the right assumptions on a real data.

By t-distributed stochastic neighbor embedding (t-SNE) tool [5], Fig. 1 visualizes two real data sets, namely the *cjs* and *analcats* data sets, which are downloaded from UCI repository. The test accuracy of the transductive support vector machine (TSVM) [6] on the *analcats* data set is better than that

*The work of Zhi-Quan Luo is supported by the leading talents of Guangdong province Program (No. 00201501), the National Natural Science Foundation of China (No. 61731018), Shenzhen Peacock Plan (No. KQTD2015033114415450), the Development and Reform Commission of Shenzhen Municipality, and Shenzhen Research Institute of Big Data.

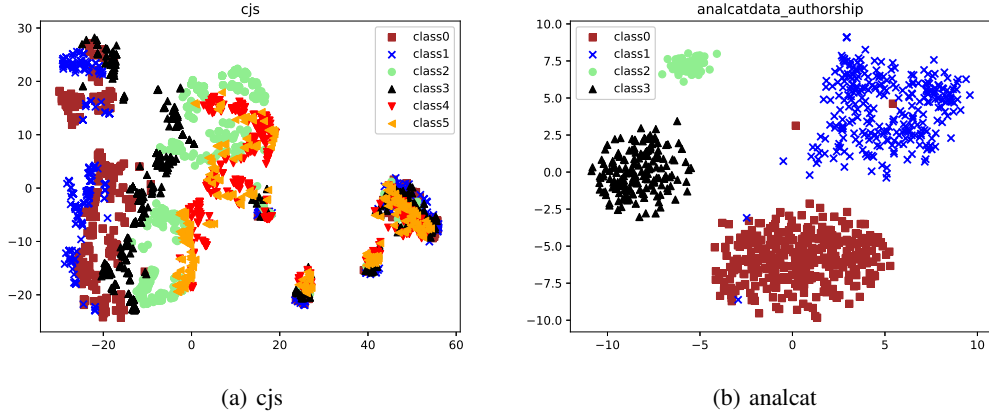


Figure 1: Visualization of two data sets. (a) The test accuracy of TSVM and co-forest on *cjs* data is 0.654 and 0.989, respectively; (b) The test accuracy of TSVM and co-forest on *analcat* is 0.992 and 0.876, respectively.

of co-forest [7] model. But co-forest performs better on *cjs* data. The reason may be that *analcat* has large margin between classes such that the assumption of low-density separation is satisfied for TSVM (see Fig. 1). For *cjs* data, the class distribution is irregular and tree based method can work well in this situation. Seemingly, TSVM and tree based model have complementary properties. This motivates us to ensemble heterogeneous classifiers for semi-supervised learning. In this paper, we propose a new semi-supervised method, called co-training with optimal weight (e.g., CTOW). The contributions of our method are in order.

- We combine co-training with two strong heterogeneous classifiers, namely, Xgboost and TSVM, which have complementary properties and larger diversity.
- The optimization problem of the weight for each classifier is established and we provide prior information of the margin density to help compute the weight of TSVM.
- The proposed method works well for both large margin data (e.g., *analcat* data set) and irregular data (e.g., *cjs* data set).

Experiments are conducted on fourteen real tabular data sets. The results show that our method can improve at least 3% test accuracy with less computational time.

2 Related Work

Generative methods [8] are simple and effective in semi-supervised learning. The assumption about generative methods is that data actually comes from a mixture model [2]. Graph-based methods [9] use similarity matrix to construct a graph. The main assumption made by graph-based methods is that the labels are smooth with respect to the graph. However, the efficiency of the graph-based methods will heavily depend on the size of the constructed graph.

Low-density separation methods assume that the classes are well-separated, such that the decision boundary lies in a low-density region and does not cut through dense unlabeled data region. The most famous representative among others is semi-supervised support vector machine (S3VM), also called TSVM. The optimization problem of TSVM is given as follows [6]

$$\min_{\mathbf{w}, b, \hat{y}, \xi} \frac{1}{2} \|\mathbf{w}\|_2^2 + C_l \sum_{i=1}^l \xi_i + C_u \sum_{j=l+1}^{l+u} \xi_j \quad (1)$$

$$\text{s.t. } y_i (\mathbf{w}^T x_i + b) \geq 1 - \xi_i, \xi_i \geq 0 \quad i = 1, 2, \dots, l \quad (2)$$

$$\hat{y}_j (\mathbf{w}^T x_j + b) \geq 1 - \xi_j, \hat{y}_j \in \{-1, 1\}, \xi_j \geq 0, \quad j = l+1, \dots, l+u, \quad (3)$$

where \mathbf{w}, b are the parameters that specify the orientation and the offset, respectively; ξ is the slack variable; \hat{y} is the pseudo label to be optimized; C_l and C_u are the penalty constants; the

set $\{x_i, y_i\}_{i=1}^l$ represents the labeled data, and the set $\{x_j\}_{j=l+1}^{l+u}$ represents the unlabeled data. Since (1)-(3) is a non-convex optimization problem, many researchers strived to solve it efficiently [10].

Disagreement-based methods [11, 12] need assemble of multiple learners and let them collaborate and teach each other to exploit unlabeled data. Co-forest [7] is one of the most famous representative methods, which extends the co-training paradigm [11] by random forest consisting of many trees. Each decision tree is firstly initiated from the training sets, then the unlabeled examples are randomly selected to label in confidently, finally, majority voting is employed to obtain the pseudo labels. But co-forest is based on the ensemble of the weak classifiers. It is more desirable to exploit heterogeneous ensemble of strong classifiers with complementary properties to improve the performance of a co-training method.

Many recent approaches for semi-supervised learning advocate to train a neural network based on the consistency loss, which forces the model to generate consistent outputs when its inputs are perturbed, such as pseudo-labeling [13], Ladder network [14], Π model [15], mean teacher [16], VAT [17], Mixmatch [18]. The consistency assumption works well for image data, among others video oriented tasks. Nevertheless, the neural network with consistency assumption may not reflect any specific inductive bias toward tabular data.

So far gradient boosting decision trees [19] and Xgboost [20] are two most widely used models in Kaggle competitions. Xgboost is an additive tree ensemble model aggregating outputs of D trees according to $\tilde{y}_i = \sum_{d=1}^D f_d(x_i)$, where each f_d is a regression tree, and \tilde{y}_i is the final output for the input data x_i . To learn the model parameter, they minimize the following loss function, $\mathcal{L} = \sum_{i=1}^l l(\tilde{y}_i, y_i) + \sum_d \Omega(f_d)$, where $\sum_d \Omega(f_d)$ is a regularized term. As we known, Xgboost works well for tabular data, but it only use the labeled data without unlabeled data.

Our paper centers around the semi-supervised learning for tabular data. The above discussions about Xgboost inspires us to incorporate Xgboost classifier into semi-supervised learning. In [21], the authors proposed method called semi-boost, which combines similarity matrix with boosting methods to obtain more accurate pseudo labels. However, semi-boost is computationally expensive for large data set. Thus, our paper uses disagreement-based method by the ensemble of Xgboost and TSVM to surpass state-of-the-art performance in semi-supervised learning.

3 The Proposed Approach

In this paper, we consider semi-supervised classification problems. The training set consists of a labeled data set $\mathcal{L} = \{(x_i, y_i)\}_{i=1}^l$ with l labeled examples and u unlabeled examples $\mathcal{U} = \{x_i\}_{i=l+1}^{l+u}$, with $l \ll u$. Assume that the data has C classes. We attempt to utilize training set $\mathcal{L} \cup \mathcal{U}$ to construct a learner to classify unseen instances. To this end, we propose a new semi-supervised learning method CTOW, by combining the Xgboost with TSVM. The reason that selecting Xgboost and TSVM as base learner is explained in Subsection 3.1. The architecture of our method is shown in Fig. 2, and the detailed techniques are presented in the following subsection.

3.1 Select Base Learners

There are two directions to select the base learners for semi-supervised learning, one is diversity of the learners, which is deemed to be a key of good ensemble [22]. The other is the accuracy of the learners, which helps us to find some better pseudo label data and improve the classification accuracy further.

To select some base learners maintaining a large diversity, we should use a criteria to measure the diversity. As we know, the correlation coefficient ρ is a simple and efficient method to measure the diversity, which is the correlation between two classifier outputs (correct/incorrect) [23]. It is formulated as follows

$$\rho = \frac{N^{11}N^{00} - N^{01}N^{10}}{\sqrt{(N^{11} + N^{10})(N^{01} + N^{00})(N^{11} + N^{01})(N^{10} + N^{00})}}, \quad (4)$$

where N^{11} , N^{10} , N^{01} and N^{00} are defined in Table 1. According to (4), we calculate the correlation coefficient ρ_{TT} between two different decision tree classifiers for different real data. In addition, the correlation coefficient ρ_{ST} between TSVM and decision tree classifier is given. We also show the the correlation coefficient ρ_{SX} between TSVM and Xgboost.

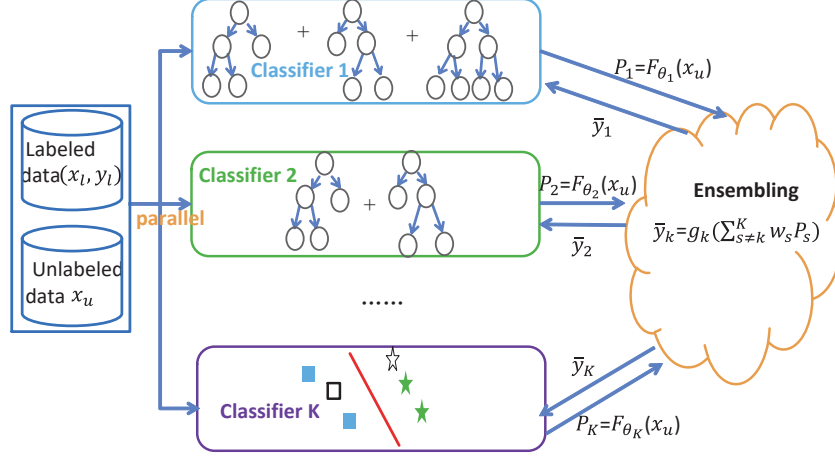


Figure 2: The architecture of the proposed method, which combines Xgboost and TSVM.

Table 1: The relationship between a pair of classifiers

	Classifier one correct	Classifier one wrong
Classifier two correct	N^{11}	N^{10}
Classifier two wrong	N^{01}	N^{00}

Fig. 3 (a) presents the diversity of two different classifiers. When the correlation coefficient $|\rho|$ is smaller, the diversity is larger. In [7], the authors proposed Co-forest method, which uses some different decision tree as base learners, but we see that the correlation coefficient ρ_{TT} between two different decision tree classifiers is higher than that between two heterogeneous classifiers. Especially, ρ_{ST} and ρ_{SX} have much smaller value for *analcats* data set and *cjs* data set, which has been visualized in Fig. 1, it shows Xgboost and TSVM have complementary properties.

Fig. 3 (a) also shows ρ_{SX} is bigger than ρ_{ST} , which means the diversity between TSVM and decision tree classifier is larger than that between TSVM and Xgboost. From Fig. 3 (b), however, it shows Xgboost always performs better than decision tree classifier. This phenomenon makes sense because Xgboost is an additive tree ensemble model. Compared with Xgboost, TSVM based on the large margin can obtain higher accuracy for some real data set, such as *analcats* data. Thus, TSVM and Xgboost are selected as based learners based on a tradeoff between diversity and accuracy.

3.2 Initialization

The new method, CTOW, comprises K classifiers. Assume the K -th classifier is TSVM, and the others are Xgboost. In order to make CTOW perform better for a real *commercial* data, we choose several Xgboost rather than one Xgboost as base learner. In order to improve accurate and diverse classifiers further, each Xgboost is initiated from the different training sets bootstrapped from labeled set \mathcal{L} . For TSVM, the whole training set is used. Thus, we can train the K classifiers simultaneously using the different data sets, which yields the prediction probability $P_k \in \mathcal{R}^{u \times C}$ of the unlabeled data, where $P_k = F_{\theta_k}(x_u)$, $k = 1, \dots, K$, and θ_k is the parameter for the k -th classifier.

3.3 Optimally Combining Classifiers

Each classifier sends its prediction probability P_k of the unlabeled data to the center, then the unlabeled data will be labeled by the optimal weight ensemble. Suppose w_k is the weight of the k -th classifier. The probability of the pseudo label is denoted as $\hat{P}(\mathbf{w}) = \sum_{k=1}^K w_k P_k$, where \mathbf{w} is a vector with $\mathbf{w} \triangleq [w_1, \dots, w_K]$.

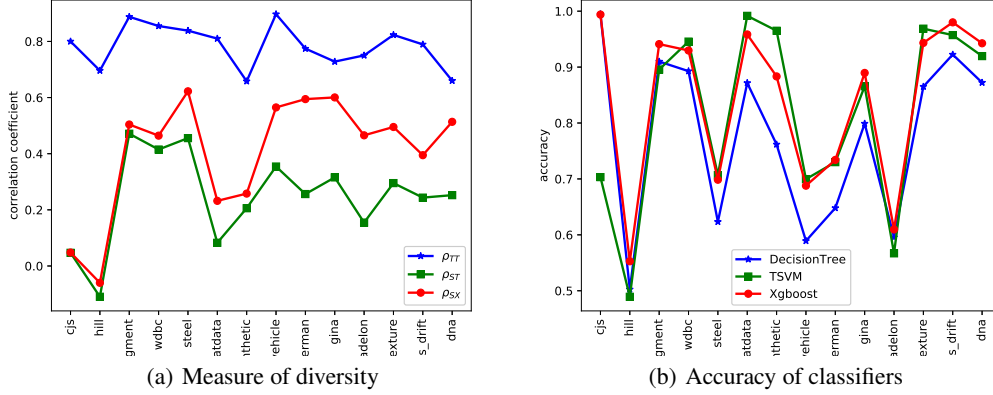


Figure 3: (a) The correlation coefficient between two different classifiers; (b) The test accuracy of decision tree, TSVM and Xgboost.

The optimal weight is obtained by solving the following optimization problem

$$\min_{\mathbf{w}} \frac{1}{u} \sum_{i=l+1}^{l+u} \sum_{j=1}^C -\hat{P}^{ij}(\mathbf{w}) \log(\hat{P}^{ij}(\mathbf{w})) + \mu \|\mathbf{w}\|^2 \quad (5)$$

$$s.t. \sum_{j=1}^K w_j = 1, w_j \geq 0, \quad (6)$$

$$w_K = h(\hat{\xi}, \alpha), \quad (7)$$

where $\hat{P}^{ij}(\mathbf{w})$ means the prediction probability of the i -th unlabeled data from the j -th class. Recall that the K -th classifier is TSVM. We can give it a prior weight according to (7) with the following details. First, we introduce a margin density metric for TSVM as follows [24]:

$$\hat{\xi} = \frac{\#\{\xi_i > 0, i = 1, \dots, l\}}{l} \quad (8)$$

where ξ is the slack variable mentioned in (1), the numerator counts the number of training samples that falls in the margin of the TSVM. The variable α is a threshold, and the goal of the function h is to give a smaller weight to TSVM if $\hat{\xi} > \alpha$; otherwise it yields a bigger weight. In our experiment, the function h is given as follows

$$h(\hat{\xi}, \alpha) = \frac{1}{1 + 3 \exp^{10(\hat{\xi} - \alpha)}}, \quad (9)$$

where the threshold α will be specified shown in Section 4.1.

The objective function in (5) contains the entropy of predicted probability and a regularization term $\|\mathbf{w}\|^2$. We want to enforce the ensemble classifier to provide low-entropy predictions on the unlabeled data. In addition, a regularization term is introduced to avoid overfitting to one classifier. When $\mu \rightarrow \infty$, the solution of the optimization problem (5)-(7) tends to give the same weight to all classifiers. The following example shows the relationship between (5)-(7) and the majority voting rule.

Example 1. Consider a binary classification problem. There are three classifiers to predict one instance with probability

$$P_1 = [1, 0], P_2 = [1, 0], P_3 = [0, 1].$$

Thus, we have

$$\hat{P}(\mathbf{w}) = [w_1 + w_2, w_3] = [1 - w_3, w_3].$$

If we only minimize the entropy of $\hat{P}(\mathbf{w})$, then there are infinite optimal solutions such as $\mathbf{w} = [0, 0, 1]$ or $\mathbf{w} = [a, 1 - a, 0]$, where a is an arbitrary constant. However, if we add the regularization

term $\|\mathbf{w}\|^2$, then a unique solution $\mathbf{w}^* = [\frac{1}{2}, \frac{1}{2}, 0]$ can be obtained with $\hat{P}(\mathbf{w}^*) = [1, 0]$, being equivalent to the result of applying majority voting rule.

Next, we show that the optimization problem (5)-(7) can be solved by projected gradient method. Specifically, by generating the sequence $\{\mathbf{w}^t\}$ via

$$\mathbf{w}^{t+1} = \Pi_X (\mathbf{w}^t - \eta_t \nabla^t) \quad (10)$$

where the set X is the linear constraint, i.e., $X = \{\mathbf{w} : \sum_{j=1}^K w_j = 1, w_j \geq 0, w_K = h(\hat{\xi}, \alpha)\}$, η_t is the learning rate, ∇^t is the gradient of the objective function in (5) evaluated at w^t , and $\Pi_X(x) = \arg \min_{y \in X} \|x - y\|^2$ is Euclidean projection of x onto X . In this paper, we use an efficient algorithm proposed by [25] to numerically perform the projection in (10).

3.4 Diversity Augmentation

In this subsection, we use the following steps to maintain diversity between base learners further.

Firstly, we utilize bootstrap sampling to select different subset \mathcal{I}_k of the unlabeled data for the k -th classifier, where $|\mathcal{I}_k| = 0.8u$. Actually, \mathcal{I}_k can be also subsampled based on co-forest method proposed in [7], which can reduce the influence of misclassifying an unlabeled sample.

Secondly, inspired by the idea of the co-forest method, the probability \bar{P}_k of the unlabeled data is obtained as follows

$$\bar{P}_k^{ij} = \sum_{s \neq k}^K w_s^* P_s^{ij}, i \in \mathcal{I}_k, j \in \{1, \dots, C\} \quad (11)$$

where \mathbf{w}^* is the optimal solution of problem (5)-(7), P_s^{ij} means the prediction probability of the i -th unlabeled data from the j -th class for the s -th classifier. If F^* is the set containing all K classifiers, the formulation in (11) means all other component classifiers in F^* without F_{θ_k} are used to determine the most confidently unlabeled examples for the k -th classifier. In order to filter out the unconfident pseudo labels, we select the unlabeled data $\bar{\mathcal{I}}_k$ from \mathcal{I}_k , when its maximum probability is bigger than a threshold β , i.e. $\bar{\mathcal{I}}_k = \{i : \max_{j \in \{1, \dots, C\}} \bar{P}_k^{ij} \geq \beta, i \in \mathcal{I}_k\}$.

Finally, we get the reliable pseudo label for the k -th classifier as follows

$$\bar{y}_k^i = \arg \max_{j \in \{1, \dots, C\}} \bar{P}_k^{ij} \quad i \in \bar{\mathcal{I}}_k. \quad (12)$$

We then combine the pseudo labeled data (x_i, \bar{y}_k^i) and labeled data \mathcal{L} to train the k -th classifier again. The framework of the whole training process is shown in Algorithm 1. Based on the output of Algorithm 1, we can predict the test data and calculate the test accuracy.

4 Experiments

For comparison, the performances of five state-of-the-art semi-supervised algorithms, i.e., Graph-SVM (GSVM, [26]), GMM [2], Ladder network [14], Co-forest [7], TSVM [6] are also evaluated.

We conduct experiments based on 14 data sets from UCI machine learning repository. Additionally, we test our method on a real **commercial** data set which contains around 50 thousand samples with 62 features. Descriptions of the experimental data sets is shown in Table 3 (see Appendix).

4.1 Implementation details

For each data set, fivefold cross validation is employed for evaluation. For each fold, we split the training data in a stratified fashion to obtain a labeled data set \mathcal{L} and an unlabeled set \mathcal{U} for a given label rate γ . In our simulation, we set $\gamma = 0.1$, which means that splitting the training set will produce a set with 10% labeled examples and a set with 90% unlabeled examples.

The proposed method, CTOW, adaptively combines classification results of Xgboost and TSVM. In our simulation, we set $K = 4$. Three Xgboost and one TSVM are used. In addition, we set threshold $\beta = 0.75$, iterations $T = 10$ and penalty parameter $\mu = 0.5$.

Algorithm 1 Co-training with Optimal Weight

Input: Labeled set \mathcal{L} and unlabeled set \mathcal{U} , K classifiers, the threshold β and α , regularizer μ , initializing weight w^0 and iterations T .

```
1: for  $k = 1 : K$  (in parallel) do
2:   if  $k \leq K - 1$  then
3:     Learn the model function  $F_{\theta_k}(\cdot)$  of Xgboost based on the  $\mathcal{L}$ .
4:   else
5:     Learn the model function  $F_{\theta_k}(\cdot)$  of TSVM based on the  $\mathcal{L}$  and  $\mathcal{U}$ .
6:   end if
7: end for
8: repeat
9:   Receive the probability  $P_k = F_{\theta_k}(x_u)$  of unlabeled data,  $k = 1, \dots, K$ .
10:  for  $t = 1 : T$  do
11:     $w^{t+1} = \Pi_X(w^t - \eta_t \nabla^t)$ 
12:  end for
13:  Achieve the optimal weight  $w^{T+1}$  for problem (5)-(7).
14:  for  $k = 1 : K - 1$  (in parallel) do
15:    Obtain pseudo label  $\tilde{y}_k^i$  based on (11)-(12),  $i \in \tilde{\mathcal{L}}_k$ .
16:    Augment the training sets  $\tilde{\mathcal{L}}_k = \mathcal{L} \cup \{x_i, \tilde{y}_k^i\}_{i \in \tilde{\mathcal{L}}_k}$ 
17:    Learn the model function  $F_{\theta_k}(\cdot)$  based on the  $\tilde{\mathcal{L}}_k$ .
18:  end for
19: until none of the classifier changes
Output: Model parameter  $\theta_k$  and optimal weight  $w^{T+1}$ .
```

Firstly, let us show the relationship between margin density $\hat{\xi}$ (introduced in (8)) and the accuracy of both TSVM and Xgboost. Fig. 4 (a) shows that when $\hat{\xi}$ is smaller, the accuracy of TSVM tends to

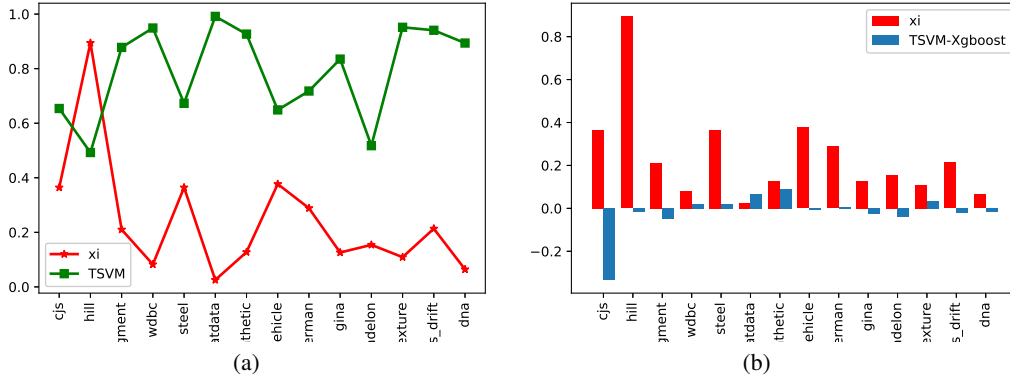


Figure 4: (a): The relationship between the accuracy of TSVM and $\hat{\xi}$; (b) The accuracy of TSVM minus that of Xgboost, and compare it with $\hat{\xi}$.

be higher. The bar with negative value in Fig. 4 (b) means that Xgboost performs better than TSVM, which happens when $\hat{\xi}$ becomes larger (see *cjs* data). Then, $\hat{\xi}$ can be used as the prior information for providing the weight of TSVM. Specifically, if $\hat{\xi}$ is bigger than a threshold α , we give a smaller weight to TSVM, or a larger weight otherwise. According to the above discussion and observation from Fig. 4, we set $\alpha = 0.2$ in our Algorithm 1, and use the function h denoted in (7) to calculate the weight w_k of TSVM. Based on the above setup, we run Algorithm 1 to show the results in the next subsection.

4.2 Performance

Firstly, the visualization of some data sets is presented in Fig. 1 and Fig. 5, which helps us to analyze the suitable application for these methods. Secondly, we compare the proposed method with some other semi-supervised learning methods, which shows that our method yields the best performance in many real data sets. Table 2 shows the test accuracy of the different algorithms. From the second

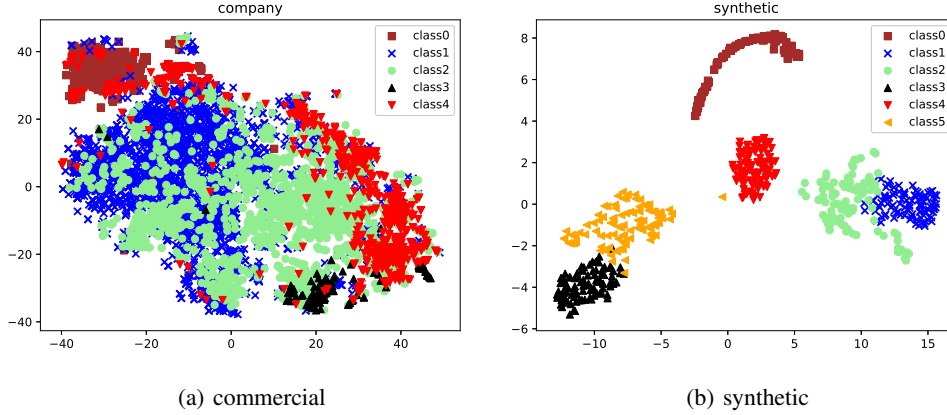


Figure 5: Visualization of the real data.

column, we see that GMM fails to work well in various data sets. The reason is that GMM needs to assume the data comes from Gaussian mixture distribution, which is a strong assumption for real data sets. Comparing Graph-SVM with TSVM, Table 2 presents that these two methods have similar performance, because both of them are based on SVM. Nevertheless, Graph-SVM needs to calculate the similarity matrix, then it takes too long time for computation (see Fig 8(a)). Thus, we do not report the result of GMM and Graph-SVM if the data size is large.

In Fig. 5, *synthetic* data enjoys large margin so that TSVM performs better than Co-forest (see Table 2). Conversely, the classes of both *commercial* and *cjs* data sets are overlapped and the data distribution is irregular, then co-forest based tree model can obtain better performance than TSVM. Ladder network can get the best performance for *hill* and *texture* data sets, because these original features have homogeneous attributes and they cannot represent the label very well. But the neural network can train a better feature space in this case. Our method utilizes the advantage of Xgboost and TSVM. Table 2 presents that the proposed method can achieve the best performance for many real data sets, especially for large and high dimension data, such as *gas-grift* and *commercial* data set (see Table 3).

5 Conclusions and Future Works

In this paper, we propose a new method, CTOW, for semi-supervised deep learning, which applies the optimal ensemble of two heterogeneous classifiers, namely Xgboost and TSVM. The unlabeled data is exploited by considering model initialization, solving optimal weight ensemble problem, diversity augmentation, simultaneously. Experiments on various real data sets demonstrate that our method is superior to state-of-the-art methods.

From the simulations, we find Xgboost and TSVM have complementary properties and larger diversity. The reason that leading to this phenomenon should be studied in the future.

Broader Impact

Although SSL is an old topic, there has been renewed interest in SSL which is reflected in both academic and industrial research. Many SSL methods are proposed based on certain assumptions on the labeled data and unlabeled data, which plays an important role in semi-supervised learning. However, it remains an open question on how to make the right assumptions on a real data.

Table 2: Test accuracy of the compared algorithms

Data	GMM	GSVM	Ladder	Co-forest	TSVM	CTOW
cjs	0.293	0.640	0.740	0.989	0.654	0.987
hill	0.488	0.490	0.530	0.492	0.493	0.499
segment	0.694	0.889	0.898	0.907	0.878	0.925
wdbc	0.643	0.940	0.932	0.905	0.949	0.954
steel	0.466	0.627	0.652	0.620	0.673	0.649
analcatt	0.206	0.975	0.982	0.876	0.992	0.993
synthetic	0.292	0.908	0.810	0.745	0.927	0.920
vehicle	0.657	0.596	0.635	0.631	0.649	0.625
german	0.614	0.619	0.679	0.712	0.718	0.716
gina	*	*	0.807	0.814	0.835	0.857
madelon	*	*	0.536	0.538	0.518	0.543
texture	*	*	0.973	0.877	0.952	0.953
gas-grift	*	*	0.945	0.927	0.941	0.965
dna	*	*	0.885	0.890	0.894	0.911
commercial	*	*	0.832	0.816	0.861	0.901

Our research finds Xgboost and TSVM have complementary properties and larger diversity. Then, we proposed a new SSL method called CTOW by applying the optimal ensemble of two heterogeneous classifiers Xgboost and TSVM. Thus, the proposed CTOW enjoys the advantage of both Xgboost and TSVM such that it weakly depends on the distribution of the training data.

Our research could be also used to provide explanations for Xgboost and TSVM in their applications as well as reducing the cost of labeling. The proposed method may fail when label data is very few such that both Xgboost and TSVM performs worst.

References

- [1] Ira Cohen, Fabio Gagliardi Cozman, Nicu Sebe, Marcelo Cesar Cirelo, and Thomas S Huang. Semisupervised learning of classifiers: Theory, algorithms, and their application to human-computer interaction. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 26(12):1553–1566, 2004.
- [2] Xiaojin Jerry Zhu. Semi-supervised learning literature survey. Technical report, University of Wisconsin-Madison Department of Computer Sciences, 2005.
- [3] Olivier Chapelle, Bernhard Scholkopf, and Alexander Zien. Semi-supervised learning. *IEEE Transactions on Neural Networks*, 20(3):542–542, 2009.
- [4] Zhi-Hua Zhou and Ming Li. Tri-training: Exploiting unlabeled data using three classifiers. *IEEE Transactions on Knowledge & Data Engineering*, (11):1529–1541, 2005.
- [5] Laurens van der Maaten and Geoffrey Hinton. Visualizing data using t-SNE. *Journal of Machine Learning Research*, 9:2579–2605, 2008.
- [6] Kristin P Bennett and Ayhan Demiriz. Semi-supervised support vector machines. In *Advances in Neural Information Processing Systems*, pages 368–374, 1999.
- [7] Ming Li and Zhi-Hua Zhou. Improve computer-aided diagnosis with machine learning techniques using undiagnosed samples. *IEEE Transactions on Systems, Man, and Cybernetics-Part A: Systems and Humans*, 37(6):1088–1098, 2007.
- [8] David J Miller and Hasan S Uyar. A mixture of experts classifier with learning based on both labelled and unlabelled data. In *Advances in Neural Information Processing Systems*, pages 571–577, 1997.
- [9] Xiaojin Zhu, Zoubin Ghahramani, and John D Lafferty. Semi-supervised learning using gaussian fields and harmonic functions. In *Proceedings of the 20th International conference on Machine learning*, pages 912–919, 2003.

- [10] Olivier Chapelle, Vikas Sindhwani, and Sathya S Keerthi. Optimization techniques for semi-supervised support vector machines. *Journal of Machine Learning Research*, 9(Feb):203–233, 2008.
- [11] Avrim Blum and Tom Mitchell. Combining labeled and unlabeled data with co-training. In *Proceedings of the eleventh annual conference on Computational learning theory*, pages 92–100, 1998.
- [12] Zhi-Hua Zhou and Ming Li. Semi-supervised learning by disagreement. *Knowledge and Information Systems*, 24(3):415–439, 2010.
- [13] Dong-Hyun Lee. Pseudo-label: The simple and efficient semi-supervised learning method for deep neural networks. In *Workshop on Challenges in Representation Learning, ICML*, volume 3, page 2, 2013.
- [14] Antti Rasmus, Mathias Berglund, Mikko Honkela, Harri Valpola, and Tapani Raiko. Semi-supervised learning with ladder networks. In *Advances in Neural Information Processing Systems*, pages 3546–3554, 2015.
- [15] Samuli Laine and Timo Aila. Temporal ensembling for semi-supervised learning. *arXiv preprint arXiv:1610.02242*, 2016.
- [16] Antti Tarvainen and Harri Valpola. Mean teachers are better role models: Weight-averaged consistency targets improve semi-supervised deep learning results. In *Advances in Neural Information Processing Systems*, pages 1195–1204, 2017.
- [17] Takeru Miyato, Shin-ichi Maeda, Masanori Koyama, and Shin Ishii. Virtual adversarial training: a regularization method for supervised and semi-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(8):1979–1993, 2018.
- [18] David Berthelot, Nicholas Carlini, Ian Goodfellow, Nicolas Papernot, Avital Oliver, and Colin Raffel. Mixmatch: A holistic approach to semi-supervised learning. *arXiv preprint arXiv:1905.02249*, 2019.
- [19] Jerome H Friedman. Greedy function approximation: a gradient boosting machine. *Annals of Statistics*, pages 1189–1232, 2001.
- [20] Tianqi Chen and Carlos Guestrin. Xgboost: A scalable tree boosting system. In *Proceedings of the 22nd acm sigkdd international conference on knowledge discovery and data mining*, pages 785–794. ACM, 2016.
- [21] Pavan Kumar Mallapragada, Rong Jin, Anil K Jain, and Yi Liu. Semiboost: Boosting for semi-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 31(11):2000–2014, 2008.
- [22] Zhi Hua Zhou and Ming Li. Semi-supervised learning by disagreement. *Knowledge & Information Systems*, 24(3):415–439, 2010.
- [23] Ludmila I. Kuncheva and Christopher J. Whitaker. Measures of diversity in classifier ensembles and their relationship with the ensemble accuracy. *Machine Learning*, 51(2):181–207, 2003.
- [24] Tegjyot Singh Sethi and Mehmed Kantardzic. On the reliable detection of concept drift from streaming unlabeled data. *Expert Systems with Applications*, 82:77–99, 2017.
- [25] John Duchi, Shai Shalev-Shwartz, Yoram Singer, and Tushar Chandra. Efficient projections onto the ℓ_1 -ball for learning in high dimensions. In *Proceedings of the 25th International Conference on Machine Learning*, pages 272–279. ACM, 2008.
- [26] Vikas Sindhwani Mikhail Belkin, Partha Niyogi. Manifold regularization: A geometric framework for learning from labeled and unlabeled examples. *Journal of Machine Learning Research*, 7:2399–2434, 2006.

6 Appendix

6.1 Data sets

Detailed information of the experimental data sets is shown in Table 3.

Table 3: Experimental data sets			
Data set	instances	feature	classes
cjs	2796	10	6
hill	1212	101	2
segment	2310	20	7
wdbc	569	31	2
steel	1941	27	7
analcatt	841	71	4
synthetic	600	62	7
vehicle	846	19	4
german	1000	24	2
gina	3468	971	2
madelon	2600	500	2
texture	5500	41	11
gas-grift	13910	129	6
dna	3186	181	3
commercial	50000	62	5

6.2 Visualization

The visualization of some other real data sets are presented in Fig. 6, which helps us to select the suitable application for these methods.

6.3 Performance Analysis

Fig. 7 (a) presents the average accuracy of different algorithms with 14 data sets, the proposed method, CTOW, improves at least 3% accuracy comparing with the other methods. It is well known that one algorithm cannot always beat the other methods, but we can count the number of times that these algorithms achieves the highest test accuracies in Fig. 7 (b). It shows that our proposed method can achieve the best performance for half of these real data sets, which contains large margin and irregular data.

Fig. 8 (b) presents the average accuracy of different algorithms with 14 data sets with different label rate γ , the proposed method, CTOW, improves at least 3% accuracy comparing with the other methods for label rate $\gamma = 0.1$. With the increase of the label rate γ , our method performs better than Co-forest, Ladder network and TSVM.

6.4 Ablation Study

Since our method combines several semi-supervised learning methods, here, we show an ablation study and discuss the effect of removing some components in order to provide additional insight about the proposed method. Specifically, we measure the performance of CTOW without considering prior information of margin density in (7), which is denoted as CTOW-NP. Removing the classifier, TSVM, and only use co-training with Xgboost, which is called CTOW-NT.

Table 4 summarizes our ablation results. It shows that only using Xgboost or TSVM degrades the classifier’s performance. Meanwhile, correct prior information of the margin density can help us obtain improved performance.

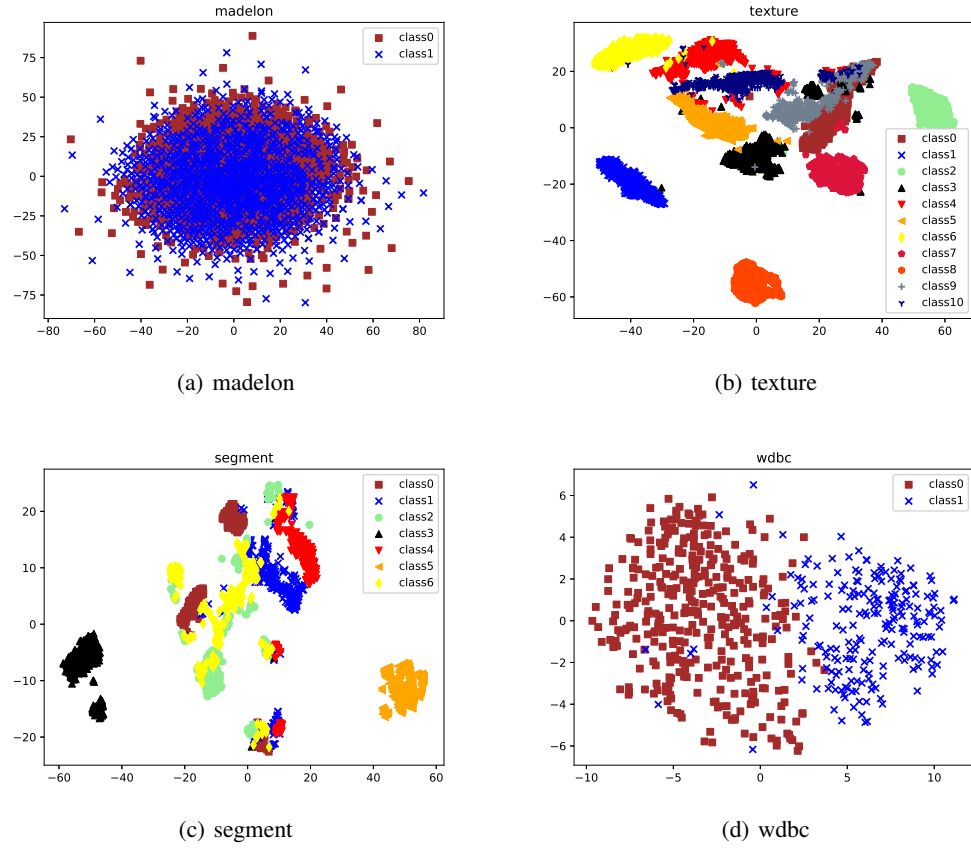


Figure 6: Visualization of the real data.

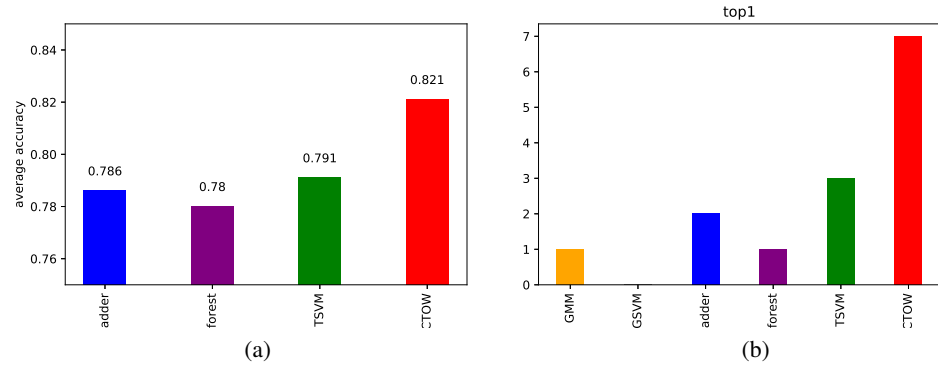


Figure 7: (a): The average accuracy of different algorithms with 14 data sets; (b) Count the number of times that different methods reach the highest accuracy.

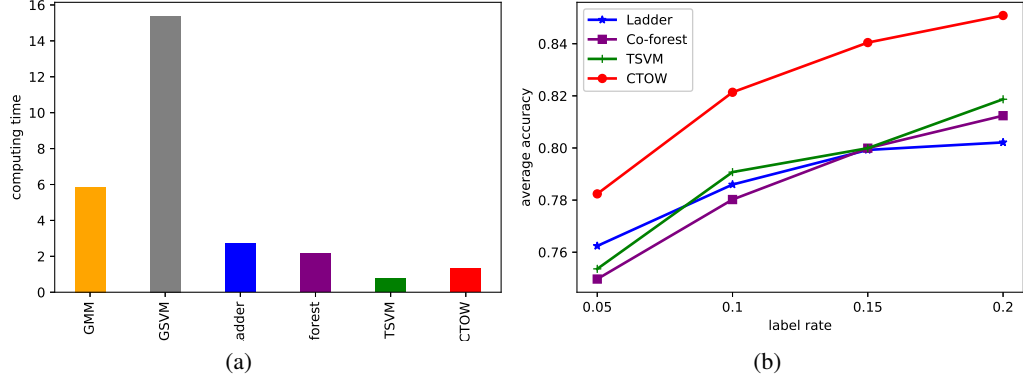


Figure 8: (a): The square root of computing time of different methods for cjs data; (b) The average accuracy of different algorithms with the label rate γ .

Table 4: Ablation study			
Data	CTOW-NP	CTOW-NT	CTOW
cjs	0.987	0.989	0.987
hill	0.499	0.502	0.499
segment	0.923	0.922	0.925
wdbc	0.931	0.919	0.954
steel	0.647	0.646	0.649
analc	0.961	0.924	0.993
synthetic	0.898	0.815	0.920
vehicle	0.653	0.657	0.625
german	0.715	0.709	0.716
gina	0.858	0.864	0.857
madelon	0.562	0.556	0.543
texture	0.931	0.915	0.953
gas-grift	0.962	0.964	0.965
dna	0.911	0.912	0.911
Average	0.817	0.807	0.821