



Journal of Statistical Software

MMMMMM YYYY, Volume VV, Issue II.

doi: 10.18637/jss.v000.i00

ProcData: An R Package for Process Data Analysis

Xueying Tang
University of Arizona

Susu Zhang
Columbia University

Zhi Wang
Columbia University

Jingchen Liu
Columbia University

Zhiliang Ying
Columbia University

Abstract

Process data refer to data recorded in the log files of computer-based items. These data, represented as timestamped action sequences, keep track of respondents' response processes of solving the items. Process data analysis aims at enhancing educational assessment accuracy and serving other assessment purposes by utilizing the rich information contained in response processes. The R package **ProcData** presented in this article is designed to provide tools for processing, describing, and analyzing process data. We define an S3 class 'proc' for organizing process data and extend generic methods `summary` and `print` for 'proc'. Two feature extraction methods for process data are implemented in the package for compressing information in the irregular response processes into regular numeric vectors. **ProcData** also provides functions for fitting and making predictions from a neural-network-based sequence model. These functions call relevant functions in package **keras** for constructing and training neural networks. In addition, several response process generators and a real dataset of response processes of the climate control item in the 2012 Programme for International Student Assessment are included in the package.

Keywords: process data analysis, multidimensional scaling, autoencoder, sequence model.

1. Introduction

With the advancement of technology, computer-based assessments have become popular in measuring complex human skills such as problem solving skills. In these assessments, participants are often asked to fulfill one or more real life tasks in a simulated environment. As a participant interacts with a computer to complete the tasks, the entire interaction process will be recorded in log files. Each recorded process includes the actions such as mouse clicks and keystrokes taken by the participant and the timestamps at which these actions took place.

Such data describe the process of responding to an item and are thus called response process data, or in short, process data.


The climate control item described below is an example of computer-based items from which response process data are collected. It belongs to the 2012 survey in the Programme for International Student Assessment (PISA) for assessing students' problem solving skills. Figure 1 is a screenshot of the item interface. In the simulated environment, there is a new air conditioner with no instructions. Students are asked to figure out which climate variable, temperature or humidity, that each of the three controls on the air conditioner influences. They can slide the control bars through the simulation interface and read how the temperature and humidity change. In the exploration process, how the controls are moved and buttons are clicked is recorded in the log files. For example, if a student clicked the "APPLY" button after moving the top control to "+" and the middle control to "--", then action "1_-2_0" along with the time elapsed since the start of the item, say 5.4 seconds, are recorded. A recorded process with actions "1_0_0", "RESET", "0_0_-2" and timestamps 4.9, 6.3, 10.6 indicates that the student moved the top control to "+" and clicked "APPLY" 4.9 seconds after the item started. The positions of the three controls were reset by a click of the "RESET" button 1.4 seconds later. Then the bottom control was moved to "--" and "APPLY" was clicked again 10.6 seconds after the item started. This sequence of actions constitutes a response process of the climate control item.

CLIMATE CONTROL

You have no instructions for your new air conditioner. You need to work out how to use it.

You can change the top, central and bottom controls on the left by using the sliders (→). The initial setting for each control is indicated by ▲.

By clicking APPLY, you will see any changes in the temperature and humidity of the room in the temperature and humidity graphs. The box to the left of each graph shows the current level of temperature or humidity.

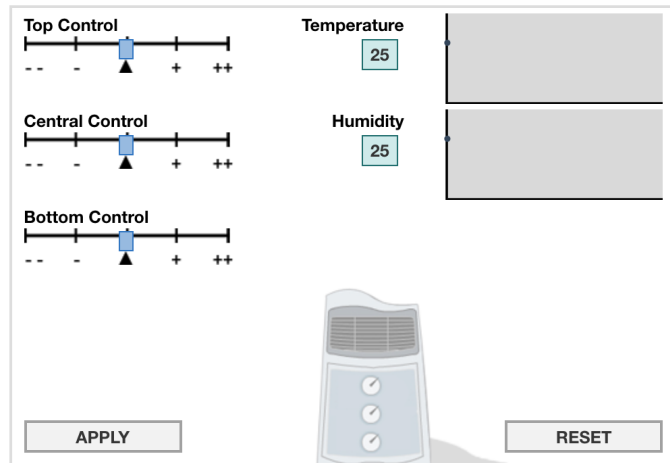

Question : CLIMATE CONTROL

Find whether each control influences temperature and humidity by changing the sliders. You can start again by clicking RESET.

Draw lines in the diagram on the right to show what each control influences.

To draw a line, click on a control and then click on either Temperature or Humidity. You can remove any line by clicking on it.



Figure 1: Climate control item in PISA 2012.

Based on the above description, each observation $O = (S, T)$ of process data consists of two sequences, an action sequence $S = (s_1, \dots, s_L)$ and a timestamp sequence $T = (t_1, \dots, t_L)$. The action sequence S records the actions taken by the respondent to solve the item in order. Each element is an action in the set of possible actions $\mathcal{A} = \{a_1, \dots, a_N\}$ for the item. Elements in the timestamp sequence T record the time of actions in S from inception and therefore $0 \leq t_1 \leq t_2 \leq \dots \leq t_L$. For a set of response processes O_1, \dots, O_n of n respondents, the length of a process is likely to vary across observations. We write $O_i = (S_i, T_i)$, $S_i = (s_{i1}, \dots, s_{iL_i})$, and $T_i = (t_{i1}, \dots, t_{iL_i})$, where L_i denotes the length of the response process for respondent i , $i = 1, \dots, n$.

One of the goals of process data analysis is to study how students' response processes are related to their observed characteristics such as demographics and education history and to their latent traits such as problem solving ability and personality. Traditionally, the relation between covariates and response variables is explored through linear or generalized linear models. The effect of latent attributes on item responses, such as final polytomous or dichotomous scores, can be modeled through latent variable models, including item response theory models (Lord and Novick 1968; Lord 1980) or cognitive diagnosis models (Rupp, Templin, and Henson 2010). However, because of the complex structure of response processes, most of the traditional methods cannot be directly applied to process data.

In the past few years, various methods have been proposed for analyzing process data. He and von Davier (2016) and Qiao and Jiao (2018) found that n-grams of action sequences are useful for predicting the item performance and clustering respondents. Chen, Li, Liu, and Ying (2019) analyzed process data through an event history analysis approach. More recently, two feature extraction methods (Tang, Wang, He, Liu, and Ying 2019a; Tang, Wang, Liu, and Ying 2019b) are developed to automatically construct informative features from process data. One is based on multidimensional scaling while the other is based on a type of neural networks called autoencoder. Besides autoencoders, other neural networks such as recurrent neural networks have also been found potentially useful for analyzing process data (Tang, Peterson, and Pardos 2016). The detailed response information contained in process data has been utilized to enhance education measurement, compare behavior patterns in successful and unsuccessful responses, and detect abnormal behaviors (Stadler, Fischer, and Greiff 2019; Ren, Luo, Ren, Bai, Li, and Liu 2019; Wang, Xu, Shang, and Kuncel 2018).

Although the methodology development has been prosperous, the software development for analyzing process data has not been done in parallel. Packages and toolboxes for managing and analyzing continuous time series data are abound in literature, but few has been developed for categorical sequence data similar to process data. **TraMineR** (Gabadinho, Ritschard, MÄijller, and Studer 2011) is an R (R Core Team 2019) package designed for describing and analyzing discrete sequence data. However, it cannot be applied directly to process data coming from the log files of computer-based items. Process data are recorded as timestamped action sequences whose lengths vary greatly in practice while the sequences handled by **TraMineR** consist of states observed at given time points which are the same across observations. It is very difficult to organize process data as dataframes that can be used by **TraMineR**. Moreover, process data usually have much more possible states (actions) and are much noisier than the sequence data dealt with by **TraMineR**. Although neural networks have been shown useful for analyzing process data and more general education data, building a properly working neural network model usually requires a significant amount of effort even with the help of high level neural network application programming interfaces (APIs) such

Topic	Objects
Process data	<code>proc</code> , <code>print.proc</code> , <code>summary.proc</code> <code>cc_data</code> , <code>seq_gen</code> , <code>seq_gen2</code> , <code>seq_gen3</code> [†]
Process input and output	<code>read.seqs</code> , <code>write.seqs</code>
Process manipulation	<code>remove_repeat</code> , <code>remove_action</code> , <code>replace_action</code> , <code>combine_actions</code>
Feature extraction	<code>seq2feature_mds</code> , <code>chooseK_mds</code> , <code>seq2feature_seq2seq</code> [†] , <code>chooseK_seq2seq</code> [†]
Sequence model	<code>seqm</code> [†] , <code>predict.seqm</code> [†]

Table 1: Summary of **ProcData** features. The functions marked by [†] depend on the **keras** package.

as the Python library **Keras** and its R interface **keras** (Allaire and Chollet 2019). The lack of software for practitioners’ usage hinders the wide applications of the state-of-the-art methods and the discovery of scientific results.

We try to fill in this gap by developing an R package **ProcData**. This package provides easy-to-use tools for processing, describing, and analyzing process data. It includes functions implementing the state-of-the-art methods for process data analysis. It also provides functions that wrap a series of **keras** functions to facilitate implementation of neural networks used for analyzing process data. **ProcData** is available from the Comprehensive R Archive Network (CRAN) at <http://CRAN.R-project.org/package=ProcData> and under development on GitHub at <https://github.com/xytangtang/ProcData>.

The remaining sections of this article are organized as follows. We introduce the features of the **ProcData** package in Section 2. A case study of the climate control item in PISA 2012 is presented in Section 3 to demonstrate the usage of the package. Summary is included in Section 4.

2. The ProcData Package

ProcData provides tools for analyzing process data. It defines an S3 object for process data and includes functions for data processing, exploration, and modeling. The main features of **ProcData** is summarized in Table 1. The details of these features are described in the sequel.

Some features of **ProcData** require construction and training of neural networks. **ProcData** relies on R package **keras** for achieving this functionality. The **keras** package is an R interface to **Keras**, which is a high level neural network API developed for fast experimentation of neural networks in Python. The functions in **ProcData** that are built on functions in **keras** is marked by [†] in Table 1. The installation guide of the **keras** package can be found at <https://keras.rstudio.com/>. If **keras** is not installed properly, calling these marked functions will lead to an error while other functions in **ProcData** can still be used normally.

2.1. Datasets and Process Generators

We include in this package the climate control data in PISA 2012. The dataset contains the response processes and the dichotomous response outcomes of 16,763 students. The item

interface is briefly described in the introduction and is available online at <http://www.oecd.org/pisa/test-2012/testquestions/question3/>. The data can be loaded by

```
R> library("ProcData")
R> data("cc_data")
```

The data object `cc_data` is a list of two elements, `seqs` and `responses`. The response outcomes are contained in `responses` as a numeric vector. The response processes are stored in `seqs` as an object of class `'proc'`, which will be specified in Section 2.2.

Three functions, `seq_gen()`, `seq_gen2()`, and `seq_gen3()`, are included in this package to simulate process data. The values of these functions (both action and timestamp sequences) are objects of class `'proc'`. All the three functions generate the inter-arrival time (time elapsed between two consecutive actions) independently from a provided distribution if `include_time = TRUE`. Each of them has a different underlying model to generate action sequences.

The values of `seq_gen()` resemble those from an item similar to the climate control item. In particular, participants are asked to answer a question by running simulated experiments in which two conditions can be controlled. A simulated experiment can be run by setting the two conditions at one of the given choices and clicking the “RUN” button. An example of the action sequence generated by `seq_gen()` is "Start, OPT1_3, OPT2_2, RUN, OPT1_1, OPT2_2, RUN, OPT1_1, OPT2_1, RUN, CHECK_D, End".

Function `seq_gen2()` generates action sequences according to a Markov model with a provided transition probability matrix. Given an $N \times N$ transition probability matrix $\mathbf{P} = (p_{ij})$ among N actions, an action sequence is generated by setting $S_1 = a_1$ and the remaining actions are generated according to $P(S_{t+1} = a_j | S_t = a_i) = p_{ij}$ for $t \geq 1$. The action sequence terminates once the predetermined terminating action (one of the N actions) is generated.

Function `seq_gen3()` generates action sequences according to a recurrent neural network (RNN) (Goodfellow, Bengio, and Courville 2016, Chapter 10). More specifically, an RNN with parameter $\boldsymbol{\eta}$ is used to define the distribution of the action to be taken S_t given all previous actions S_1, \dots, S_{t-1} . An action sequence is generated recursively in `seq_gen3()` according to the distribution until the predetermined terminating action appears. The parameter vector $\boldsymbol{\eta}$ in the RNN can either be provided by the user or be randomly generated in `seq_gen3()`.

2.2. S3 class `'proc'`

ProcData defines an S3 class `'proc'` for organizing process data. An object of class `'proc'` is a list of two elements, `action_seqs` and `time_seqs`. In a `'proc'` object storing response processes O_1, \dots, O_n , `action_seqs` is a list with elements S_1, \dots, S_n and `time_seqs` is a list with elements T_1, \dots, T_n . The names of the elements in `action_seqs` and `time_seqs` are the identity of the respondents. If the timestamp sequences are not available, `time_seqs` is set to `NULL`. The `seqs` element in `cc_data` and the object returned by the three process generators are `'proc'` objects

```
R> class(cc_data$seqs)

[1] "proc"

R> seqs <- seq_gen(100)
R> class(seqs)
```

```
[1] "proc"
```

An object of class ‘proc’ is printed by the `print` method for class ‘proc’, `print.proc()`. Note that the ‘proc’ object `seqs` below does not contain timestamp sequences.

```
R> seqs
```

```
'proc' object of 100 processes
```

```
First 5 processes:
```

```
1
      Step 1 Step 2
Event Start  End

2
      Step 1 Step 2
Event Start  End

3
      Step 1 Step 2 Step 3 Step 4 Step 5
Event Start  OPT1_2 OPT2_2 RUN    End

4
      Step 1 Step 2 Step 3
Event Start  CHECK_B End

5
      Step 1 Step 2 Step 3
Event Start  CHECK_C End
```

```
R> print(cc_data$seqs, index=3)
```

```
'proc' object of 16763 processes
```

```
ARE000000300079
```

```
      Step 1 Step 2 Step 3 Step 4 Step 5 Step 6 Step 7 Step 8 Step 9
Event start 1_1_1 reset 0_0_1 reset 0_1_0 reset 1_0_0 end
Time      0.0 113.2 119.1 122.0 135.4 138.5 147.8 149.8 157.0
```

We also extend the `summary` method for class ‘proc’. Function `summary.proc()` returns a list containing the following components:

- `n_seq`: the number of response processes;
- `n_action`: the number of distinct actions;

- **actions:** \mathcal{A} , the set of all possible actions,
- **seq_length:** a numeric vector of length `n_seq` containing the sequence length of each process;
- **action_freq:** a numeric vector of length `n_action` containing the action frequencies;
- **action_seqfreq:** a numeric vector of length `n_action` recording the number of sequences that each action appears;
- **trans_count:** an `n_action`×`n_action` matrix with the ij th element being the count of bigram “actions[i], actions[j]”;
- **total_time:** a summary of the response time of the `n_seq` response processes;
- **mean_react_time:** a summary of the mean reaction time (response time divided by sequence length) of the `n_seq` response processes.

2.3. Read and Write Process Data

Process data are usually stored as comma separated values (CSV) files. **ProcData** provides functions `read.seqs()` and `write.seqs()` to read process data from a CSV file as a ‘proc’ object and to write a ‘proc’ object to a CSV file. The functions accommodate CSV files of two styles, “single” and “multiple”. In both styles, all the action sequences form a column (action column) and all the timestamp sequences form another column (time column). In the “single” style, the process for one respondent takes up one row in the CSV file. The entire action sequence of the respondent is stored as one entry of the action column. The timestamp sequence of the respondent is stored in the corresponding entry of the time column. Figure 2 presents a CSV file storing five response processes in the “single” style. In the “multiple” style, each action in the process and its timestamp occupy one row in the CSV file. A process of length L takes up L consecutive rows. A CSV file that stores two response processes in the “multiple” style is displayed in Figure 3. The two response processes are the same as the first two shown in Figure 2. In `read.seqs()` and `write.seqs()`, both styles are accommodated. The style can be specified by setting the argument `style`.

```
R> write.seqs(cc_data$seqs, file="seqs_format_multiple.csv",
+           style = "multiple", id_var="ID", action_var="Action",
+           time_var="Time")
R> write.seqs(cc_data$seqs, file="seqs_format_single.csv",
+           style = "single", id_var="ID", action_var="Action",
+           time_var="Time", step_sep=",")
R> seqs_multiple <- read.seqs("seqs_format_multiple.csv",
+           style = "multiple", id_var = "ID",
+           action_var = "Action", time_var = "Time")
R> seqs_single <- read.seqs("seqs_format_single.csv", style = "single",
+           id_var = "ID", action_var = "Action",
+           time_var = "Time", step_sep = ",")
R> all.equal(seqs_multiple, seqs_single)
```

	A	B	C	D	E	F
1	Country	Gender	Age	ID	Action	Time
2	US	F	18	101	Start, CHECK_A, END	0, 6803, 8774
3	US	M	35	102	Start, OPT1_1, OPT2_1, RUN, CHECK_D, End	0, 18263, 21010, 22034, 42015, 44132
4	US	F	31	103	Start, OPT1_3, OPT2_2, RUN, CHECK_A, End	0, 71910, 75087, 81733, 105105, 129596
5	JP	M	22	104	Start, OPT1_1, OPT2_2, RUN, OPT1_3, OPT2_2	0, 81733, 95466, 98860, 105105, 106560, 111
6	JP	F	40	105	Start, CHECK_C, End	0, 3325, 3568
7						

Figure 2: Screenshot of a CSV file storing response processes in “single” style.

	A	B	C	D	E	F
1	Country	Gender	Age	ID	Action	Time
2	US	F	18	101	Start	0
3	US	F	18	101	CHECK_A	6803
4	US	F	18	101	End	8774
5	US	M	35	102	Start	0
6	US	M	35	102	OPT1_1	18263
7	US	M	35	102	OPT2_1	21010
8	US	M	35	102	RUN	22034
9	US	M	35	102	CHECK_D	42015
10	US	M	35	102	End	44132

Figure 3: Screenshot of a CSV file storing response processes in “multiple” style.

```
[1] TRUE
```

2.4. Sequence Manipulation

ProcData provides functions for prepsponse process manipulation. These functions can be used for process data cleaning. Function `sub_seqs()` subsets a set of response processes.

```
R> seqs <- sub_seqs(cc_data$seqs, 4*1:10)
```

```
R> print(seqs, 1)
```

```
'proc' object of 10 processes
```

```
First 1 processes:
```

```
ARE000000400093
```

```

Step 1 Step 2 Step 3 Step 4 Step 5 Step 6 Step 7 Step 8 Step 9
Event start 1_0_0 0_0_0 reset 0_0_0 0_0_1 0_0_2 reset 0_1_0
Time 0.0 36.9 41.2 43.3 44.5 50.5 61.9 66.1 68.7
Step 10 Step 11 Step 12 Step 13 Step 14 Step 15 Step 16 Step 17
Event 0_2_0 -1_2_0 reset 2_0_0 reset 2_0_0 2_0_0 2_0_0
Time 72.3 92.1 94.5 97.2 110.3 112.9 116.5 117.8
Step 18 Step 19 Step 20 Step 21 Step 22 Step 23 Step 24 Step 25
Event reset 0_2_0 0_2_0 0_2_0 reset 0_0_2 0_0_2 0_0_2
Time 121.1 123.6 124.8 125.6 127.5 129.4 130.0 130.7
Step 26 Step 27 Step 28
Event reset 1_1_1 end
Time 131.7 147.8 171.6
```


Function `remove_repeat()` removes the consecutive repeated actions and their timestamps.

```
R> seqs1 <- remove_repeat(seqs)
R> print(seqs1, 1)
```

'proc' object of 10 processes

First 1 processes:

ARE000000400093

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event	start	1_0_0	0_0_0	reset	0_0_0	0_0_1	0_0_2	reset	0_1_0
Time	0.0	36.9	41.2	43.3	44.5	50.5	61.9	66.1	68.7

	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15	Step 16	Step 17
Event	0_2_0	-1_2_0	reset	2_0_0	reset	2_0_0	reset	0_2_0
Time	72.3	92.1	94.5	97.2	110.3	112.9	121.1	123.6

	Step 18	Step 19	Step 20	Step 21	Step 22
Event	reset	0_0_2	reset	1_1_1	end
Time	127.5	129.4	131.7	147.8	171.6

Function `remove_action()` removes a particular set of actions and their timestamps.

```
R> seqs2 <- remove_action(seqs1, "0_0_0")
R> print(seqs2, 1)
```

'proc' object of 10 processes

First 1 processes:

ARE000000400093

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event	start	1_0_0	reset	0_0_1	0_0_2	reset	0_1_0	0_2_0	-1_2_0
Time	0.0	36.9	43.3	50.5	61.9	66.1	68.7	72.3	92.1

	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15	Step 16	Step 17
Event	reset	2_0_0	reset	2_0_0	reset	0_2_0	reset	0_0_2
Time	94.5	97.2	110.3	112.9	121.1	123.6	127.5	129.4

	Step 18	Step 19	Step 20
Event	reset	1_1_1	end
Time	131.7	147.8	171.6

Function `replace_action()` renames an action.

```
R> seqs3 <- replace_action(seqs2, "reset", "RESET")
R> print(seqs3, 1)
```

'proc' object of 10 processes

First 1 processes:

ARE000000400093

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event	start	1_0_0	RESET	0_0_1	0_0_2	RESET	0_1_0	0_2_0	-1_2_0
Time	0.0	36.9	43.3	50.5	61.9	66.1	68.7	72.3	92.1

	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15	Step 16	Step 17
Event	RESET	2_0_0	RESET	2_0_0	RESET	0_2_0	RESET	0_0_2
Time	94.5	97.2	110.3	112.9	121.1	123.6	127.5	129.4

	Step 18	Step 19	Step 20
Event	RESET	1_1_1	end
Time	131.7	147.8	171.6

Function `combine_actions()` combines a given pattern of consecutive actions into a single action.

```
R> seqs4 <- combine_actions(seqs2, c("0_0_1", "0_0_2"), "BOTTOM_MOVE_ONE")
R> print(seqs4, 1)
```

'proc' object of 10 processes

First 1 processes:

ARE000000400093

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7
Event	start	1_0_0	reset	BOTTOM_MOVE_ONE	reset	0_1_0	0_2_0
Time	0.0	36.9	43.3	50.5	66.1	68.7	72.3

	Step 8	Step 9	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15
Event	-1_2_0	reset	2_0_0	reset	2_0_0	reset	0_2_0	reset
Time	92.1	94.5	97.2	110.3	112.9	121.1	123.6	127.5

	Step 16	Step 17	Step 18	Step 19
Event	0_0_2	reset	1_1_1	end
Time	129.4	131.7	147.8	171.6

2.5. Feature Extraction

A major technical difficulty for process data analysis is that response processes are not readily and cannot be easily organized as a matrix. The nonstandard format prevents the direct application of many traditional statistical methods to process data. Feature extraction methods have been shown useful for exploratory process data analysis. These methods circumvent the nonstandard format difficulty by compressing response processes into fixed-dimension vectors that can be easily incorporated in traditional statistical models such as regression models. Two feature extraction methods, one based on multidimensional scaling (Tang *et al.* 2019a) and the other based on sequence-to-sequence autoencoder (Tang *et al.* 2019b), have been proposed for response processes. Both methods are implemented in **ProcData**.

Feature Extraction via Multidimensional Scaling

Multidimensional scaling (MDS) (Borg and Groenen 2005) is a technique that is often used for dimension reduction and data visualization. Its goal is to embed objects in a space in such a way that the dissimilarity between objects is approximated by the distance between their embedded features. Similar objects are located close together while dissimilar objects are far apart. Given a dissimilarity measure that comprehensively characterizes the difference between objects, the object coordinates obtained from MDS can be viewed as features describing the latent attributes of the objects. Given a dissimilarity measure d and the latent feature dimension K , features of a set of response processes O_1, \dots, O_n are a solution to the optimization problem

$$\min_{\theta_1, \dots, \theta_n \in \mathbb{R}^K} \sum_{1 \leq i < j \leq n} (d_{ij} - \|\theta_i - \theta_j\|)^2, \quad (1)$$

where $d_{ij} = d(O_i, O_j)$ is the dissimilarity between response processes O_i and O_j , θ_i is the feature vector of response process O_i , and $\|\mathbf{x}\| = \sqrt{\mathbf{x}^\top \mathbf{x}}$.

The function that performs MDS feature extraction in **ProcData** is `seq2feature_mds()`. It takes a ‘proc’ object (`seqs =`), the number of features to be extracted (`K =`), and some other control arguments to calculate the dissimilarity matrix for the input response processes and then performs MDS.

```
R> seqs <- seq_gen(100)
R> mds_res <- seq2feature_mds(seqs = seqs, K = 10)
R> str(mds_res)
```

List of 1

```
$ theta: num [1:100, 1:10] -0.195 -0.195 0.272 -0.162 -0.167 ...
.. attr(*, "dimnames")=List of 2
.. ..$ : NULL
.. ..$ : NULL
```

Classical MDS (implemented as `cmdscale()` in R) approximates the solution to (1) by performing eigenvalue decomposition of the matrix $-\frac{1}{2}\mathbf{J}\mathbf{D}^{(2)}\mathbf{J}$ where $\mathbf{J} = \mathbf{I} - \frac{1}{n}\mathbf{1}\mathbf{1}^\top$ and $\mathbf{D}^{(2)} = (d_{ij}^2)$. The computational complexity of the algorithm is $O(n^3)$, which is very expensive if the number of processes n is large. Moreover, the $n \times n$ dissimilarity matrix D consumes a large amount of memory. To accomodate a large n , the algorithm proposed in Paradis (2018) is implemented in `seq2feature_mds()`. This algorithm first chooses a small subset Ω of the objects and obtains $\hat{\theta}_i, i \in \Omega$ by performing classical MDS on this subset. Then it minimizes

$$F(\theta_i) = \sum_{j \in \Omega} (d_{ij} - \|\theta_i - \hat{\theta}_j\|)^2 \quad (2)$$

by the BFGS method (Broyden 1970; Fletcher 1970; Goldfarb 1970; Shanno 1970) for each $i \notin \Omega$. In this way, only the dissimilarities for $O(mn)$ pairs of objects are calculated where m is the subset size and the eigenvalue decomposition for a large matrix is avoided.

In `seq2feature_mds()`, argument `method` specifies the algorithm for the feature extraction. If `method = "small"`, `cmdscale()` is called to perform classical MDS. If `method = "large"`, the algorithm for large datasets is used. By default (`method = "auto"`), `seq2feature_mds()` selects the method according to the sample size.

Two choices of dissimilarity measures are implemented in `seq2feature_mds()`. One is the optimal symbol similarity (OSS) measure (`dist_type = "oss_action"`) proposed in [Gómez-Alonso and Valls \(2008\)](#). It takes into account the difference between two action sequences S_i and S_j . The other choice (`dist_type = "oss_both"`) is a time-weighted version of the OSS measure. It takes the difference in both action sequences and the timestamp sequences into consideration. If a dissimilarity measure other than the two choices are desired, a dissimilarity matrix can be pre-computed and passed to `seq2feature_mds()` via `seqs`.

Following the recommendation in [Tang et al. \(2019a\)](#), `seq2feature_mds()` performs principal component analysis on the extracted features to enhance the interpretability of the features. This step can be turned off by setting `pca = FALSE`. By default, `seq2feature_mds()` returns a list containing the latent features (`theta`) and the value of the optimized objective function (`loss`). The dissimilarity matrix (`dist_mat`) can be returned by setting `return_dist = TRUE`.

ProcData provides a function `chooseK_mds()` to select the latent feature dimension (K) by k -fold cross-validation. The basic usage is demonstrated in the example below.

```
R> seqs <- seq_gen(100)
R> cv_res <- chooseK_mds(seqs = seqs, K_cand = 5:10, n_fold = 5,
+                       return_dist = TRUE)
R> str(cv_res)

List of 4
 $ K      : int 8
 $ K_cand  : int [1:6] 5 6 7 8 9 10
 $ cv_loss : num [1:6, 1] 0.00399 0.00296 0.00265 0.00239 0.00242 ...
 $ dist_mat: num [1:100, 1:100] 0 0 0.514 0.267 0.267 ...

R> mds_res <- seq2feature_mds(seqs = cv_res$dist_mat, K = cv_res$K)
R> str(mds_res)

List of 1
 $ theta: num [1:100, 1:8] -0.195 -0.195 0.272 -0.162 -0.167 ...
 .. attr(*, "dimnames")=List of 2
 .. ..$ : NULL
 .. ..$ : NULL
```

Sequence-to-Sequence Autoencoder Feature Extraction

Autoencoder ([Goodfellow et al. 2016](#), Chapter 14) is a class of neural networks aiming at reconstructing the input in the output. It consists of two components (Figure 4), an encoder that maps the complex and/or high dimensional input to a low dimensional vector and a decoder that reconstructs the input from the low dimensional vector. The low-dimensional vector produced by the encoder contains condensed information to rebuild the input. Therefore, its elements can be treated as features of the input data.

In **ProcData**, `seq2feature_seq2seq()` extracts K ($K =$) features from a given set of response processes (`seqs =`) by fitting a sequence autoencoder (SeqAE). The SeqAEs constructed in

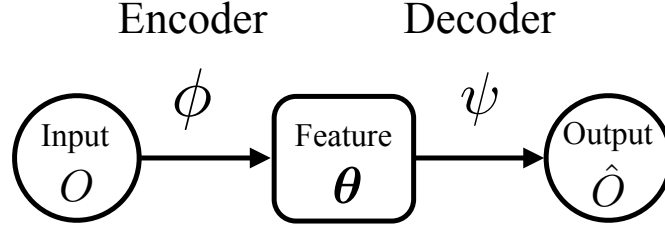


Figure 4: The structure of autoencoders.

`seq2feature_seq2seq()` can be classified into action SeqAE, time SeqAE, and action-time SeqAE depending on the input process. As the names suggest, an action SeqAE only deals with action sequences, a time SeqAE only deals with timestamp sequences, and an action-time SeqAE deals with both action and timestamp sequences in response processes. The desired type of SeqAE can be specified through argument `ae_type` in the function.

The structure of an action SeqAE is depicted in Figure 5. The encoder of an action SeqAE consists of three steps. In the first step, each unique action in \mathcal{A} is associated with a numeric vector (embedding) in \mathbb{R}^K so that an input action sequence is transformed into a sequence of K -dimensional embeddings. In the second step, an RNN is used to sequentially summarize the information in the embedding sequence up to a time step. In the last step, a feature vector is constructed from the output vectors of the encoder RNN. The decoder of an action SeqAE also consists of three steps. In the first step, the feature vector is repeated to form a sequence of vectors which are then passed into another RNN in the second step to obtain another sequence of vectors. Each vector in this latter sequence contains the information of the action at the corresponding time step. In the last step, a fully connected layer with a softmax activation (multinomial logistic model) is used to construct a probability distribution $\hat{s}_l = (\hat{s}_{l1}, \hat{s}_{l2}, \dots, \hat{s}_{lN})$ on \mathcal{A} at each time step l from the corresponding vector obtained from the decoder RNN.

The structure of a time SeqAE (Figure 6) is similar to that of an action SeqAE. RNNs are used in both the encoder and the decoder to summarize the sequential information. The feature vector is obtained from the output vectors of the encoder RNN. However, since timesteps are numeric, embedding is not needed in the encoder. Also, in the last step of the decoder, the timesteps are reconstructed through a fully connected layer with a ReLU activation instead of a softmax activation.

The structure of an action-time SeqAE is a combination of an action SeqAE and a time SeqAE as shown in Figure 7. Given a response process of length L , the encoder of an action-time SeqAE first transforms the action sequence into a K -dimensional embedding sequence. The embedding sequence is then combined with the timestamp sequence to form a $(K + 1)$ -dimensional sequence that serves as the input of the encoder RNN. The encoder RNN produces a sequence of L output vectors, each of which is K -dimensional. The feature vector is then computed from the output of the encoder RNN. The first two steps of the decoder of an action-time SeqAE is the same as that of an action SeqAE. Once the output vectors from the decoder RNN are obtained, they are passed into a fully connected layer with a softmax activation to construct a probability distribution on \mathcal{A} and into another fully connected layer

but with a ReLU activation to reproduce the timestamps.

Two methods can be used to construct the feature vector from the output vectors of the encoder RNN for all three types of SeqAEs. In the first method (`method = "last"`), the feature vector is the last output vector of the decoder RNN. In the other method (`method = "avg"`), the feature vector is the average of the L output vectors.

By default, the original timestamp sequences are used in time SeqAE and action-time SeqAE. The inter-arrival time sequences can be used in replace of the timestamp sequences by setting `cumulative = FALSE`. The natural logarithm of the timestamps or the inter-arrival time will be used if `log = TRUE`. There are two choices of the recurrent units in the encoder and decoder RNNs, long-short-memory (LSTM) unit (Hochreiter and Schmidhuber 1997) (`rnn_type = "lstm"`) and the gated recurrent unit (GRU) (Cho, Van Merriënboer, Gulcehre, Bahdanau, Bougares, Schwenk, and Bengio 2014) (`rnn_type = "gru"`).

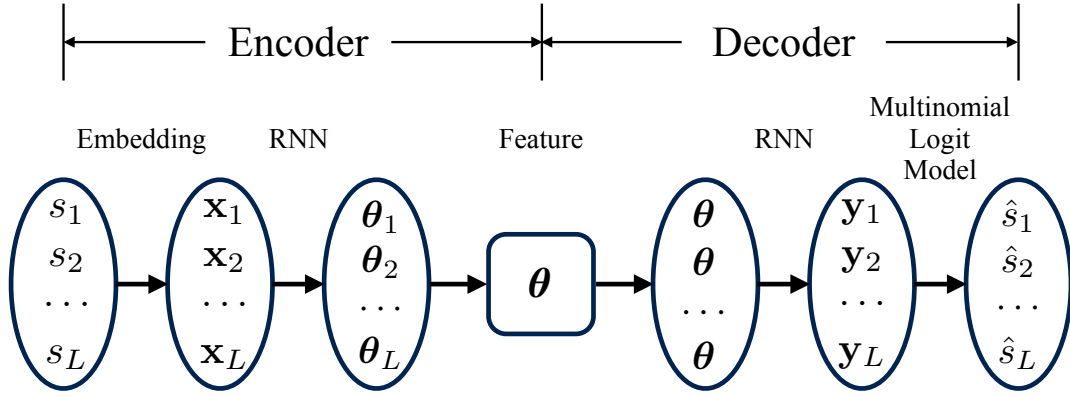


Figure 5: The structure of action sequence autoencoders.

Once the structure of a SeqAE is selected, the parameters of the autoencoder, including the embeddings and the parameters in the encoder RNN, the decoder RNN, and the fully connected layers, are estimated by minimizing a discrepancy between the output and the input over a set of response processes. To be more specific, the estimated parameter vector $\hat{\boldsymbol{\eta}}$ is obtained by minimizing

$$F(\boldsymbol{\eta}) = \sum_{i \in \Omega} \delta(O_i, \hat{O}_i) \quad (3)$$

where \hat{O} denote the output of a SeqAE for input O and $\delta(O, \hat{O})$ is a function measuring the discrepancy between O and \hat{O} . For an action SeqAE,

$$\delta(O, \hat{O}) = \delta_a(S, \hat{S}) = -\frac{1}{L} \sum_{l=1}^L \sum_{j=1}^N \mathbf{1}\{s_l = a_j\} \log(\hat{s}_{lj}).$$

For a time SeqAE,

$$\delta(O, \hat{O}) = \delta_t(T, \hat{T}) = \sum_{l=1}^L (t_l - \hat{t}_l)^2.$$

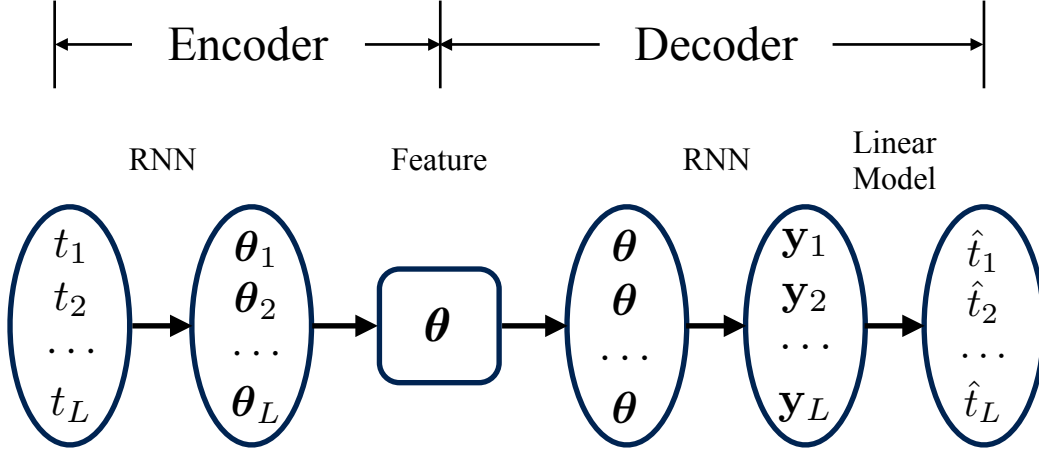


Figure 6: The structure of time sequence autoencoders.

For an action-time SeqAE,

$$\delta(O, \hat{O}) = w_a \delta_a(S, \hat{S}) + w_t \delta_t(T, \hat{T}),$$

where $\mathbf{w} = (w_a, w_t)$, specified through argument `weights`, assigns different weights on the discrepancy between action sequences and the discrepancy between time sequences.

In `seq2feature_seq2seq()`, the objective function (3) is minimized by stochastic approximation. The available optimizers are stochastic gradient descent (`optimizer_name = "sgd"`) (Robbins and Monro 1951), Adam (`optimizer_name = "adam"`) (Kingma and Ba 2015), AdaDelta (`optimizer_name = "adadelata"`) (Zeiler 2012), and RMSprop (`optimizer_name = "rmsprop"`) (Hinton, Srivastava, and Swersky 2014). The (baseline) step size used in the optimizer is supplied through argument `step_size`. The training and validation sets are specified in `samples_train` and `samples_valid`, respectively. To avoid overfitting, the optimization algorithm is run for a fixed number of epochs (`n_epoch =`). At the end of each epoch, the autoencoder is evaluated on the validation set. The parameter value that produces the lowest loss on the validation set is used to produce extracted features.

Similar to `seq2feature_mds`, principal features, namely, the principal components of the raw features extracted from a SeqAE, are output by default. This step can be turned off by setting `pca = FALSE`.

The construction of the architecture of SeqAEs and the training procedures in `seq2feature_seq2seq()` are achieved by calling appropriate functions in package `keras`. If `keras` is not installed properly, an error will occur.

ProcData also provides function `chooseK_seq2seq()` to choose the latent feature dimension by cross-validation. The example below demonstrates the basic usage of `seq2feature_seq2seq()` and `chooseK_seq2seq()`.

```
R> seqs <- seq_gen(100)
R> cv_res <- chooseK_seq2seq(seqs = seqs, ae_type = "action",
```

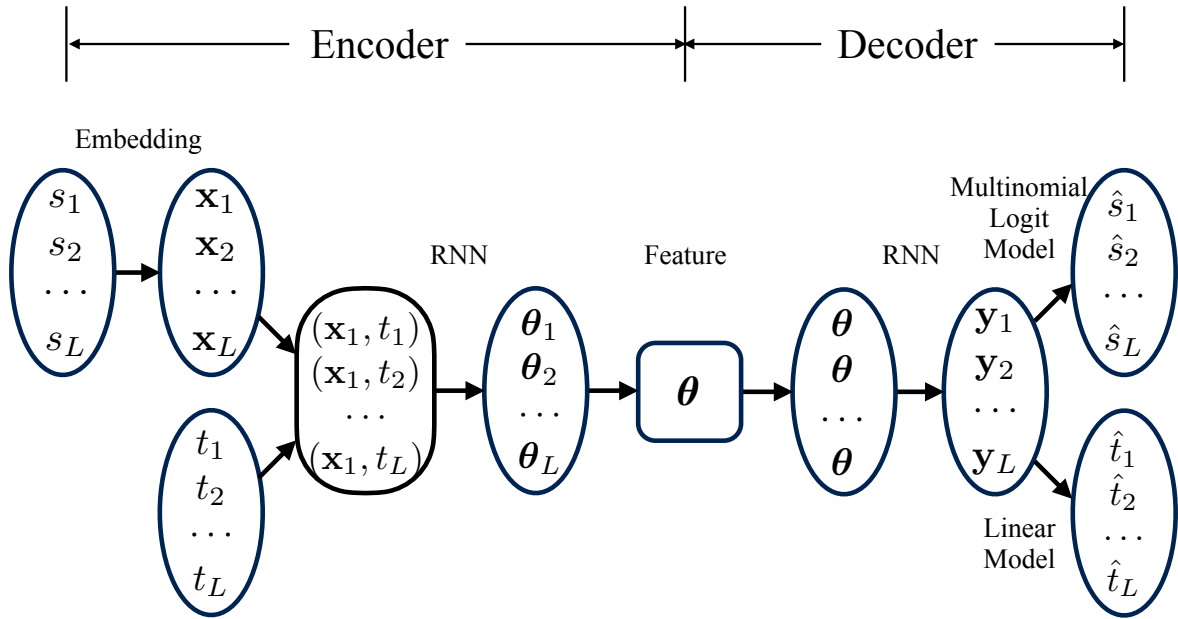


Figure 7: The structure of action-time autoencoders.

```

+                               K_cand = c(5, 10), n_epoch = 10,
+                               verbose = FALSE)
R> str(cv_res)

List of 3
 $ K      : num 10
 $ K_cand : num [1:2] 5 10
 $ cv_loss: num [1:2, 1] 12 11.4

R> samples_train <- sample(1:100, 80)
R> samples_valid <- setdiff(1:100, samples_train)
R> seq2seq_res <- seq2feature_seq2seq(seqs = seqs, ae_type = "action",
+                               K = cv_res$K,
+                               samples_train = samples_train,
+                               samples_valid = samples_valid,
+                               verbose = FALSE)
R> str(seq2seq_res)

List of 3
 $ train_loss: num [1:50] 2.48 2.47 2.46 2.44 2.42 ...
 $ valid_loss: num [1:50] 2.47 2.46 2.45 2.44 2.42 ...
 $ theta      : num [1:100, 1:10] -3.21 -3.21 -3.52 -4.21 -3.72 ...
 .. attr(*, "dimnames")=List of 2
 .. ..$ : NULL
 .. ..$ : chr [1:10] "PC1" "PC2" "PC3" "PC4" ...

```


2.6. Feature extraction with targeted variable

The previous feature extraction methods do not have a particular target prediction variable. The features mainly capture variations among response processes. We further present a function that extracts features targeting a particular variable. Function `seqm` fits a sequence model that relates a response process (`seqs =`) and covariates (`X =`) with a binary (`response_type = "binary"`) or numeric (`response_type = "scale"`) response variable (`response =`). A sequence model is essentially a neural network, whose architecture is summarized in Figure 8. Given a response process, a sequence model built by `seqm()` first transforms the action sequence into a sequence of K -dimensional numeric vectors through an embedding step. The dimension of the embeddings is specified through `K_emb`. The embedding sequence is then fed into an RNN to process the information sequentially. The dimension of the output vectors of the RNN is specified through `K_rnn`. The last output vector from the RNN is used as the input of a single-layer or multi-layer feedforward neural network whose output is the target response variable. To construct a feedforward neural network with more than one layers, set `n_hidden` as the number of intermediate layers (the total number of layers minus one) and specify the dimensions of the intermediate layers as a vector through `K_hidden`.

If `include_time = TRUE` and timestamp sequences are available in the response processes, the embedding sequence is combined with the timestamp sequence or the inter-arrival time sequence (`time_interval = TRUE`) to form a sequence of $K + 1$ -dimensional numeric vectors before fed into the RNN. The logarithms of the time-related sequences are used by default. To use the time-related sequences in their original scale, set `log_time = FALSE`.

If covariates are provided (`X =`), the covariate vector is concatenated to the last output from the RNN. The resulting vector is then used as the input of the feed-forward neural network.

Similar to `seq2feature_seq2seq()`, the parameters in the sequence model are estimated by stochastic approximation. The optimizer, (baseline) step size and the number of epochs to be run is specified through arguments `optimizer_name`, `step_size`, and `n_epoch`, respectively. The training and validation sets are specified by providing either the indices of validation samples or the proportion of the validation samples through `index_valid`. In the latter case, the validation samples are randomly selected.

Function `seqm()` returns an object of class `'seqm'`, which is a list containing the neural network architecture, the estimated parameters, and other information about modeling fitting. The key elements of a `'seqm'` object are

- **structure**: a character string describing the neural network structure;
- **coefficients**: a list containing estimated parameters;
- **history**: a matrix with two columns giving the training (column 1) and validation (column 2) loss at the end of each epoch.

Once a sequence model is fit, prediction can be made by `predict.seqm()`. The inputs of `predict.seqm()` are a `'seqm'` object returned by `seqm()` (`object =`), a `'proc'` object containing a set of new response processes (`new_seqs =`), and a covariate matrix (`new_X =`) of the new response processes. Predictions are produced by evaluating the fitted sequence model at the new response processes and covariates. The outputs of `predict.seqm()` are the probabilities of the response being one for binary responses and the expected value of the response

for numeric responses. The code below exemplifies the prediction of the binary final response on the climate control item using the problem-solving processes.

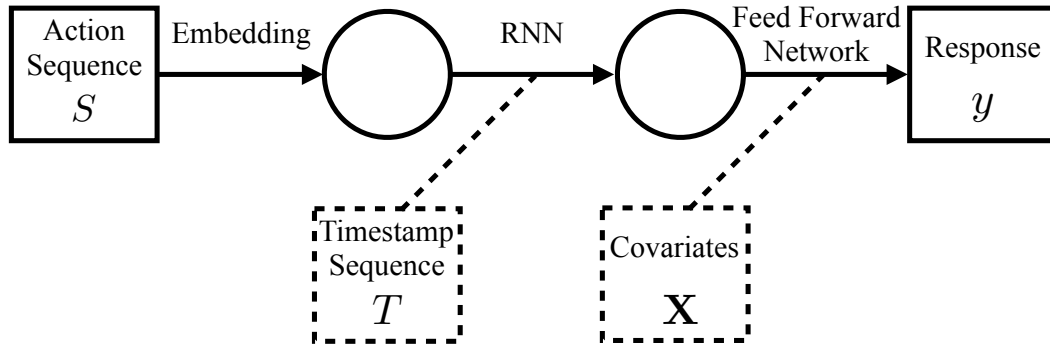


Figure 8: The structure of sequence models. The dashed squares represent optional inputs.

```

R> n <- 100
R> data(cc_data)
R> samples <- sample(1:length(cc_data$responses), n)
R> seqs <- sub_seqs(cc_data$seqs, samples)
R> y <- cc_data$responses[samples]
R> x <- matrix(rnorm(n*2), ncol=2)
R> index_test <- 91:100
R> index_train <- 1:90
R> seqs_train <- sub_seqs(seqs, index_train)
R> seqs_test <- sub_seqs(seqs, index_test)
R> actions <- unique(unlist(seqs$action_seqs))
R> ## no covariate is used
R> res1 <- seqm(seqs = seqs_train, response = y[index_train],
+             response_type = "binary", actions=actions, K_emb = 5, K_rnn = 5,
+             n_epoch = 20)
R> pred_res1 <- predict(res1, new_seqs = seqs_test)
R> ## use more hidden layers
R> res2 <- seqm(seqs = seqs_train, response = y[index_train],
+             response_type = "binary", actions=actions, K_emb = 5, K_rnn = 5,
+             n_hidden=2, K_hidden=c(10,5), n_epoch = 20)
R> pred_res2 <- predict(res2, new_seqs = seqs_test)
R> ## add covariates
R> res3 <- seqm(seqs = seqs_train, response = y[index_train],
+             covariates = x[index_train, ],
+             response_type = "binary", actions=actions,
+             K_emb = 5, K_rnn = 5, n_epoch = 20)
R> pred_res3 <- predict(res3, new_seqs = seqs_test,
+             new_covariates=x[index_test, ])

```

```
R> ## include time sequences
R> res4 <- seqm(seqs = seqs_train, response = y[index_train],
+             response_type = "binary", actions=actions,
+             include_time=TRUE, K_emb=5, K_rnn=5, n_epoch=20)
R> pred_res4 <- predict(res4, new_seqs = seqs_test)
```

3. Examples

In this section, we demonstrate the **ProcData** package through a case study of the climate control item in PISA 2012. The dataset `cc_data` is included in the package. In the case study, we explore how well the response outcome can be predicted from the response processes. In particular, we hope to understand what behavior patterns in response processes are closely related to answering the item correctly.

3.1. Preparation

We randomly choose a subset of size 3000 from dataset `cc_data` for our analysis.

```
R> set.seed(12345)
R> n <- 3000
R> idx <- sample(1:length(cc_data$responses), n)
R> seqs <- sub_seqs(cc_data$seqs, idx)
R> y <- cc_data$responses[idx]
```

In the subset, about 53% of the respondents answered the item correctly.

```
R> table(y) / n # proportion of incorrect (0) and correct (1) answers
```

```
y
      0      1
0.4656667 0.5343333
```

We take a glance at the response processes by summarizing them through the `summary` method for ‘proc’ objects.

```
R> seqs_summary <- summary(seqs)
R> seqs_summary$n_action # number of unique actions
```

```
[1] 128
```

```
R> seqs_summary$actions # action set
```

```
[1] "-1_-1_-1" "-1_-1_-2" "-1_-1_0" "-1_-1_1" "-1_-1_2"
[6] "-1_-2_-1" "-1_-2_-2" "-1_-2_0" "-1_-2_1" "-1_-2_2"
[11] "-1_0_-1" "-1_0_-2" "-1_0_0" "-1_0_1" "-1_0_2"
[16] "-1_1_-1" "-1_1_-2" "-1_1_0" "-1_1_1" "-1_1_2"
```

```

[21] "-1_2_-1" "-1_2_-2" "-1_2_0" "-1_2_1" "-1_2_2"
[26] "-2_-1_-1" "-2_-1_-2" "-2_-1_0" "-2_-1_1" "-2_-1_2"
[31] "-2_-2_-1" "-2_-2_-2" "-2_-2_0" "-2_-2_1" "-2_-2_2"
[36] "-2_0_-1" "-2_0_-2" "-2_0_0" "-2_0_1" "-2_0_2"
[41] "-2_1_-1" "-2_1_-2" "-2_1_0" "-2_1_1" "-2_1_2"
[46] "-2_2_-1" "-2_2_-2" "-2_2_0" "-2_2_1" "-2_2_2"
[51] "0_-1_-1" "0_-1_-2" "0_-1_0" "0_-1_1" "0_-1_2"
[56] "0_-2_-1" "0_-2_-2" "0_-2_0" "0_-2_1" "0_-2_2"
[61] "0_0_-1" "0_0_-2" "0_0_0" "0_0_1" "0_0_2"
[66] "0_1_-1" "0_1_-2" "0_1_0" "0_1_1" "0_1_2"
[71] "0_2_-1" "0_2_-2" "0_2_0" "0_2_1" "0_2_2"
[76] "1_-1_-1" "1_-1_-2" "1_-1_0" "1_-1_1" "1_-1_2"
[81] "1_-2_-1" "1_-2_-2" "1_-2_0" "1_-2_1" "1_-2_2"
[86] "1_0_-1" "1_0_-2" "1_0_0" "1_0_1" "1_0_2"
[91] "1_1_-1" "1_1_-2" "1_1_0" "1_1_1" "1_1_2"
[96] "1_2_-1" "1_2_-2" "1_2_0" "1_2_1" "1_2_2"
[101] "2_-1_-1" "2_-1_-2" "2_-1_0" "2_-1_1" "2_-1_2"
[106] "2_-2_-1" "2_-2_-2" "2_-2_0" "2_-2_1" "2_-2_2"
[111] "2_0_-1" "2_0_-2" "2_0_0" "2_0_1" "2_0_2"
[116] "2_1_-1" "2_1_-2" "2_1_0" "2_1_1" "2_1_2"
[121] "2_2_-1" "2_2_-2" "2_2_0" "2_2_1" "2_2_2"
[126] "end" "reset" "start"

```

```
R> range(seqs_summary$seq_length) # range of sequence lengths
```

```
[1] 3 183
```

```

R> # action transition probability matrix
R> trans_mat <- seqs_summary$trans_count
R> trans_mat <- trans_mat / rowSums(trans_mat)

```

Figure 9 present a 25×25 submatrix of the 128×128 action transition probability matrix `trans_mat`. The 25 actions corresponds to the submatrix are randomly selected from the action set. The dark diagonal of the submatrix indicates that respondents tend to repeat an action several times before taking a different action. To avoid the repeated actions diluting the information in other actions and to make the response processes less noisy, we remove the repeated actions by using function `remove_repeat`.

```
R> seqs <- remove_repeat(seqs)
```

3.2. Outcome Prediction Based on Extracted Features

As we mentioned earlier, response processes are in a nonstandard format and thus cannot be easily incorporated in traditional statistical models such as linear models and generalized linear models. To make use of these classical tools for studying the relation between response processes and response outcomes, we first compress the information in the response processes

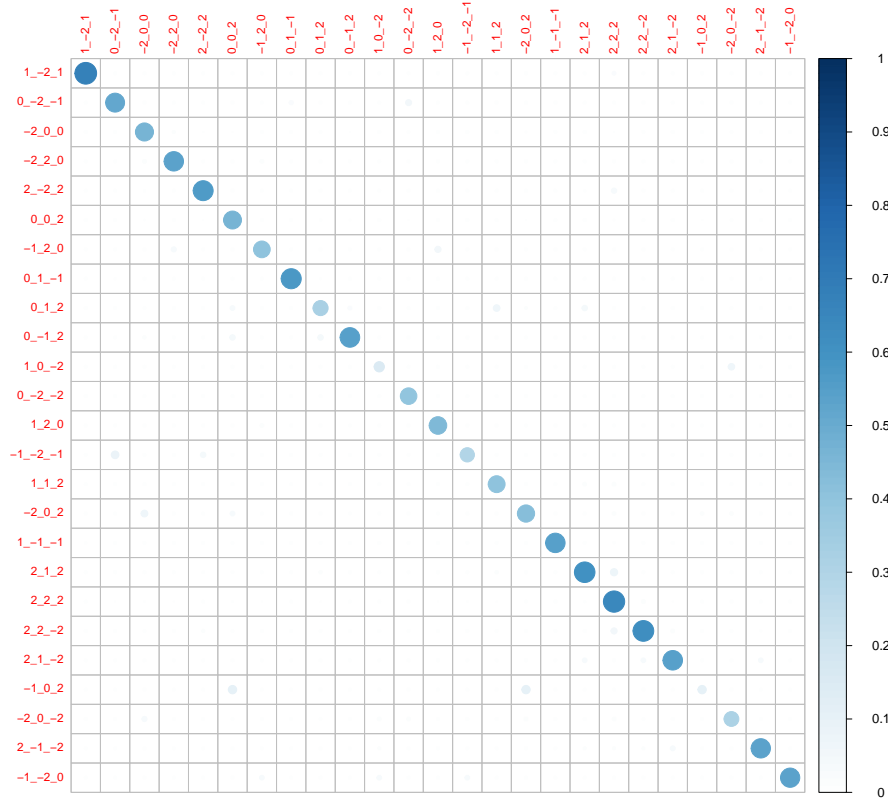


Figure 9: Action transition probability matrix.

into features, which are in a standard matrix format, and then use them as covariates to fit a logistic regression.

We start by extracting features through multidimensional scaling. The number of features to be extracted is chosen by five-fold cross-validation. The candidate values of the number of features are 10, 20, ..., 100. We only consider the action sequences here and set `dist_type = "oss_action"`. Note that by setting `return_dist = TRUE`, we ask `chooseK_mds` to return the dissimilarity matrix for future use to avoid repeated calculations. The returned dissimilarity matrix and the selected number of features are then passed to `seq2feature_mds` for feature extraction.

```
R> mds_K_res <- chooseK_mds(seqs, 1:10*10, dist_type = "oss_action",
+                           return_dist = TRUE)
R> K <- mds_K_res$K
R> K
```

```
[1] 60
```

```
R> mds_res <- seq2feature_mds(mds_K_res$dist_mat, K = K)
```

The 60 extracted features can then be used as covariates in logistic regression. To evaluate the out-of-sample prediction performance, the dataset is split into training, validation, and test sets.

```
R> n_train <- 2000
R> n_valid <- 500
R> n_test <- 500
R> index_train <- sample(1:n, n_train)
R> index_valid <- sample(setdiff(1:n, index_train), n_valid)
R> index_test <- sample(1:n, c(index_train, index_valid))
```

The fitting and prediction of logistic regression models can be achieved by the `glm` function and the `predict` method as usual.

```
R> mds_data <- data.frame(y = y, x = mds_res$theta)
R> mds_glm_res <- glm(y ~ ., family = "binomial",
+                   subset=c(index_train, index_valid), data=mds_data)
R> yhat_test <- as.numeric(predict(mds_glm_res, newdata = mds_data[index_test,]) > 0)
R> # out-of-sample prediction accuracy
R> mean(y[index_test] == yhat_test)
```

```
[1] 0.7981735
```

```
R> summary(mds_glm_res)
```

Call:

```
glm(formula = y ~ ., family = "binomial", data = mds_data, subset = c(index_train,
index_valid))
```

Deviance Residuals:

	Min	1Q	Median	3Q	Max
	-3.7806	-0.6561	0.1878	0.7678	2.2290

Coefficients:

	Estimate	Std. Error	z value	Pr(> z)	
(Intercept)	0.23119	0.05255	4.399	1.09e-05	***
x.1	-9.87064	0.41848	-23.587	< 2e-16	***
x.2	-0.73587	0.37248	-1.976	0.048201	*
x.3	-1.68177	0.48546	-3.464	0.000532	***
x.4	5.42484	0.49103	11.048	< 2e-16	***
x.5	1.38222	0.51211	2.699	0.006954	**
x.6	-1.10816	0.63259	-1.752	0.079814	.
x.7	1.25793	0.66810	1.883	0.059721	.
x.8	-3.68047	0.68458	-5.376	7.61e-08	***
x.9	1.64550	0.82766	1.988	0.046796	*
x.10	2.18376	0.83807	2.606	0.009169	**

(output omitted)

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for binomial family taken to be 1)

Null deviance: 3457.4 on 2499 degrees of freedom
Residual deviance: 2382.7 on 2439 degrees of freedom
AIC: 2504.7

Number of Fisher Scoring iterations: 5

Since the out-of-sample prediction accuracy (0.80) is much higher than the benchmark (0.54), which is the accuracy if we naively predict that all respondents in the test set answered the item correctly, it is reasonable to believe that some behavior patterns in the response processes are closely related to the response outcomes. By inspecting the `glm` output and refitting a logistic regression with the first feature as the only covariate, we find that including only the first feature can already produce a prediction accuracy of 0.77.

```
R> mds_glm_res1 <- glm(y ~ x.1, family = "binomial",
+                      subset=c(index_train, index_valid), data=mds_data)
R> yhat_test1 <- as.numeric(predict(mds_glm_res1, newdata = mds_data[index_test,]) > 0)
R> mean(y[index_test] == yhat_test1)
```

```
[1] 0.7730594
```

Now we examine the behavior patterns associated with the first multidimensional scaling feature. We order the response processes according to the value of their first feature and use the `print` method for class `'proc'` to display the response processes with the highest and lowest values.

```
R> o_mds1 <- order(mds_res$theta[,1])
R> # response processes corresponding to the highest feature values
R> print(seqs, index = head(o_mds1))
```

'proc' object of 3000 processes

FRA000019103869

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event start	1_0_0	2_0_0	-1_0_0	-2_0_0	0_1_0	0_2_0	0_-1_0	0_-2_0	
Time	0.0	36.6	40.9	46.6	50.3	59.4	64.0	66.3	69.4

	Step 10	Step 11	Step 12	Step 13	Step 14
Event	0_0_1	0_0_2	0_0_-1	0_0_-2	end
Time	77.7	80.3	83.9	86.0	93.2

AUT000007001735

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event start	1_0_0	2_0_0	-2_0_0	-1_0_0	0_1_0	0_2_0	0_-1_0	0_-2_0	
Time	0.0	57.4	60.6	62.8	67.1	79.6	81.1	83.3	85.3

	Step 10	Step 11	Step 12	Step 13	Step 14
Event	0_0_1	0_0_2	0_0_-1	0_0_-2	end
Time	97.2	98.6	100.7	102.5	119.5

PRT000009602769

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event start	1_0_0	2_0_0	-1_0_0	-2_0_0	0_1_0	0_2_0	0_-1_0	0_0_1	
Time	0.0	73.1	82.5	89.2	94.3	109.5	114.8	119.8	128.8

	Step 10	Step 11
Event	0_0_2	end
Time	131.4	139.7

BRA0000083118946

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event start	1_0_0	2_0_0	-1_0_0	-2_0_0	reset	0_1_0	0_2_0	0_-1_0	
Time	0.0	141.7	151.2	157.7	164.6	182.1	185.1	188.8	194.2

	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15	Step 16
Event	0_-2_0	reset	0_0_1	0_0_2	0_0_-1	0_0_-2	end
Time	196.3	204.0	206.6	209.4	215.9	218.6	240.4

KOR000006202016

	Step 1	Step 2	Step 3	Step 4	Step 5	Step 6	Step 7	Step 8	Step 9
Event start	2_0_0	1_0_0	-1_0_0	-2_0_0	reset	0_1_0	0_2_0	0_-1_0	
Time	0.0	46.1	52.4	56.4	59.2	62.5	67.3	69.3	70.3

	Step 10	Step 11	Step 12	Step 13	Step 14	Step 15	Step 16
Event	0_-2_0	reset	0_0_1	0_0_2	0_0_-1	0_0_-2	end
Time	72.4	78.9	81.1	84.1	86.6	89.0	94.6

R> # response processes corresponding to the lowest feature values

R> print(seqs, index = tail(o_mds1))

'proc' object of 3000 processes

KOR000010803463

	Step 1	Step 2	Step 3
Event start	0_0_0	end	
Time	0.0	50.6	63.9

MYS000009803099

	Step 1	Step 2	Step 3
Event start	0_0_0	end	
Time	0.0	38.4	114.8


```

URY000004601383
      Step 1 Step 2 Step 3
Event start 0_0_0 end
Time    0.0  61.0  66.9

```

```

MYS000001800562
      Step 1 Step 2 Step 3
Event start 0_0_0 end
Time    0.0  70.4  84.5

```

```

MYS000015604929
      Step 1 Step 2 Step 3
Event start 0_0_0 end
Time    0.0  71.5 107.1

```

The response processes corresponding to the highest feature values are often very short, meaning that little meaningful interaction with computer interface is made. Respondents with this type of behaviors are unlikely to answer the question correctly. The response processes corresponding to the lowest feature values are often longer. However, their lengths are not the longest according to Figure 10 where the value of the first feature is plotted against the logarithm of the length of the corresponding process. A closer look at the response processes with the lowest values of the feature reveals that these respondents often explore the function of one control bar at a time. This “varying-one-thing-at-a-time” strategy is efficient to get the correct answer.

We can also extract features by constructing a sequence autoencoder. Below is an example of extracting action sequence autoencoder features by `seq2feature_seq2seq` in **ProcData**.

```

R> ae_a_res <- seq2feature_seq2seq(seqs, ae_type = "action", K = K,
+                               rnn_type = "gru", samples_train = index_train,
+                               samples_valid = index_valid, verbose = FALSE)

```

The timestamp sequence can easily be taken into account by setting `ae_type = "both"`.

```

R> ae_at_res <- seq2feature_seq2seq(seqs, ae_type = "both", K = K,
+                               rnn_type = "gru", samples_train = index_train,
+                               samples_valid = index_valid, verbose = FALSE)

```

The logarithm of the inter-arrival time sequence is used here as by default `cumulative = FALSE` and `log = TRUE`. Similar to the multidimensional scaling features, features extracted by sequence autoencoders can be used as covariates in classical models. In our case, we can fit logistic regression models for predicting response outcomes.

```

R> ae_a_data <- data.frame(y = y, x = ae_a_res$theta)
R> ae_glm_a_res <- glm(y ~ ., family = "binomial",
+                     subset=c(index_train, index_valid), data=ae_a_data)
R> yhat_test_a <- as.numeric(predict(ae_glm_a_res,

```

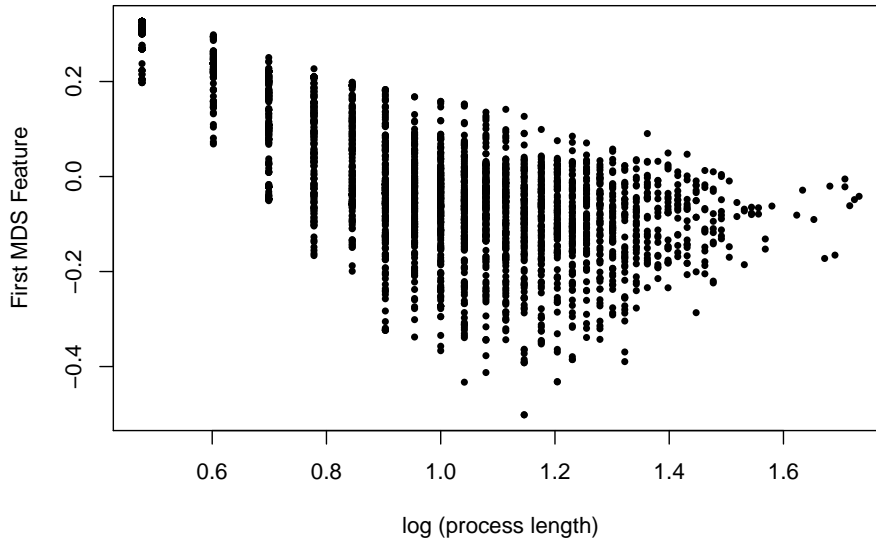


Figure 10: First mds feature against the logarithm of process length.

```
+                                     newdata = ae_a_data[index_test,]) > 0)
R> # out-of-sample prediction accuracy (action only)
R> mean(y[index_test] == yhat_test_a)

[1] 0.8401826

R> ae_at_data <- data.frame(y = y, x = ae_at_res$theta)
R> ae_glm_at_res <- glm(y ~ ., family = "binomial",
+                       subset=c(index_train, index_valid), data=ae_at_data)
R> yhat_test_at <- as.numeric(predict(ae_glm_at_res,
+                                     newdata = ae_at_data[index_test,]) > 0)
R> # out-of-sample prediction accuracy
R> mean(y[index_test] == yhat_test_at)

[1] 0.8424658
```

The prediction accuracy is about 5% higher than that obtained by MDS features. Important patterns in response processes can be examined similarly. We refer the interested readers to [Tang *et al.* \(2019b\)](#).

3.3. Feature Extraction with Targeted Variable

If prediction is the only goal for exploring the relationship between response processes and a binary or numeric response variable, one can achieve this by fitting a sequence model. We

still use the response outcome as the response variable of our interest to illustrate how this can be done in **ProcData**.

We split the data into training, validation, and testing set as before. The training and validation sets are used for fitting the sequence model while the testing set is used for evaluating its prediction performance. The response processes used for model fitting and testing are obtained by subsetting the ‘proc’ object `seqs` with function `sub_seqs()` in **ProcData**.

```
R> seqs_train <- sub_seqs(seqs, c(index_train, index_valid))
R> seqs_test <- sub_seqs(seqs, index_test)
R> y_train <- y[c(index_train, index_valid)]
R> y_test <- y[index_test]
```

We first consider the task of predicting the response outcome from the action sequence in a response process. The sequence model that fulfills this task can be fitted by calling function `seqm()`. Since the response outcome is a binary variable, we specify `response_type = "binary"`. `n_epoch` is the total number of epochs to be run for estimating the parameters. The fitted model is the one that produces the lowest loss on the validation set, which is specified by passing the indices of the processes through `index_valid`.

```
R> seqm_res <- seqm(seqs_train, y_train, response_type = "binary",
+                 K_emb = 5, K_rnn = 5, n_epoch = 20,
+                 max_len = max(seqs_summary$seq_length),
+                 index_valid = n_train + 1:n_valid)
```

The convergence of training process can be examined by a plot of the value of the loss function at the end of each epoch stored in `seqm_res$history` (Figure 11). Prediction based on the fitted model can be made by calling the `predict` method for ‘seqm’ objects.

```
R> seq_pred_res <- predict(seqm_res, new_seqs = seqs_test)
R> mean(as.numeric(seq_pred_res > 0.5) == y_test)
```

```
[1] 0.847032
```

The prediction accuracy is slightly higher than that obtained by logistic regression on extracted features.

A sequence model incorporating the information in the timestamp sequences can be fitted by setting `include_time = TRUE` in `seqm()`. Prediction from the fitted model can be made in the same way as before.

```
R> seqm_res2 <- seqm(seqs_train, y_train, response_type = "binary",
+                  include_time = TRUE, K_emb = 5, K_rnn = 5, n_epoch = 20,
+                  max_len = max(seqs_summary$seq_length),
+                  index_valid = n_train + 1:n_valid)
R> seq_pred_res2 <- predict(seqm_res2, new_seqs = seqs_test)
R> mean(as.numeric(seq_pred_res2 > 0.5) == y_test)
```

```
[1] 0.656621
```

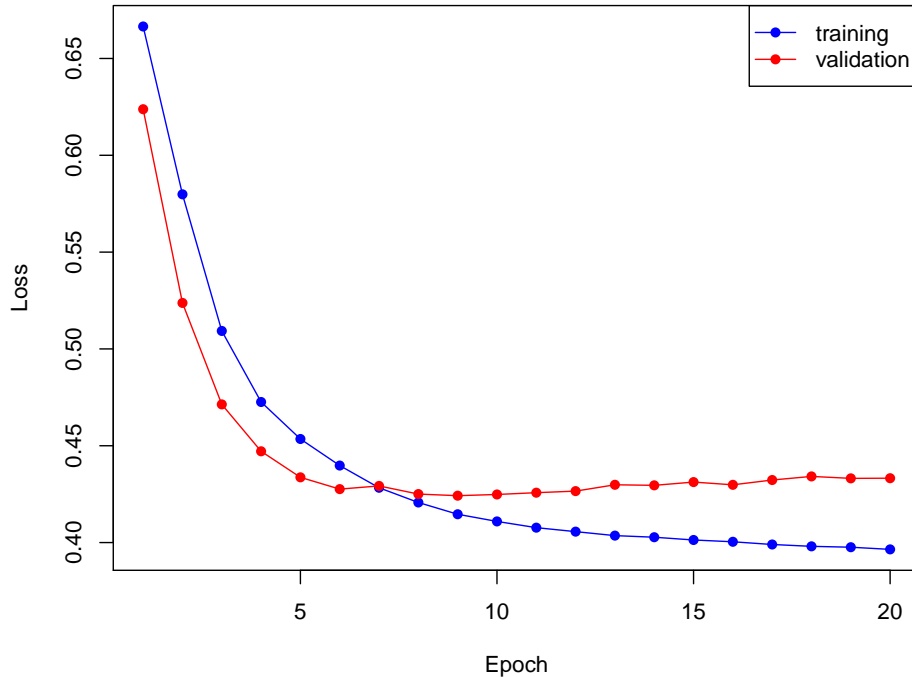


Figure 11: Trace of training and validation loss.

Adding timestamp sequences impairs the prediction accuracy, indicating that timestamp sequences of the climate control item do not contain much additional information about the response outcomes.

In many cases, both the response processes and background information such as age, education level, and employment status are considered in prediction. These background information can be added to the sequence model as covariates supplied through `covariates` in `seqm`. Covariates for the test set should be supplied to `predict.seq()` through `new_covariates` when we make predictions. Since background information is not available in the climate control dataset `cc_data`, we demonstrate it by adding the first five MDS features.

```
R> X <- mds_res$theta[,1:5]
R> X_train <- X[c(index_train, index_valid), ]
R> X_test <- X[index_test, ]
R> seqm_res3 <- seqm(seqs_train, y_train, covariates = X_train,
+                   response_type = "binary", K_emb = 5, K_rnn = 5,
+                   n_epoch = 20, max_len = max(seqs_summary$seq_length),
+                   index_valid = n_train + 1:n_valid)
R> seq_pred_res3 <- predict(seqm_res3, new_seqs = seqs_test,
+                           new_covariates = X_test)
R> mean(as.numeric(seq_pred_res3 > 0.5) == y_test)
```

```
[1] 0.847032
```

Prediction accuracy does not change significantly after the MDS features are incorporated.

This indicates that the action sequence information contained in the features are well-captured in the sequence model.

4. Summary

To the authors' best knowledge, **ProcData** is the first package designed for process data analysis. It can be used for analyzing process data generating from a wide range of human-computer interface. **ProcData** includes an S3 class for response processes and functions for processing, describing, and analyzing process data. Two feature extraction methods and fitting and making prediction from neural-network-based sequence models are implemented in **ProcData**. These tools are easy to use. Users do not need to handle the construction and training of neural network if they want to use neural network related models. Process data analysis is an active and quickly rising field. We envision to include more state-of-the-art methods for analyzing response processes in future versions of **ProcData**.

Acknowledgments

This research is supported in part by NSF IIS-1633360 and NSF SES-1826540.

References

- Allaire J, Chollet F (2019). *keras: R Interface to 'Keras'*. R package version 2.2.4.1, URL <https://CRAN.R-project.org/package=keras>.
- Borg I, Groenen PJ (2005). *Modern multidimensional scaling: Theory and applications*. Springer Science & Business Media, New York, NY. doi:10.1007/0-387-28981-X.
- Broyden CG (1970). "The convergence of a class of double-rank minimization algorithms 1. general considerations." *IMA Journal of Applied Mathematics*, **6**(1), 76–90.
- Chen Y, Li X, Liu J, Ying Z (2019). "Statistical Analysis of Complex Problem-Solving Process Data: An Event History Analysis Approach." *Frontiers in Psychology*, **10**, 486. doi:10.3389/fpsyg.2019.00486.
- Cho K, Van Merriënboer B, Gulcehre C, Bahdanau D, Bougares F, Schwenk H, Bengio Y (2014). "Learning phrase representations using RNN encoder-decoder for statistical machine translation." In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing*, pp. 1724–1734. Association for Computational Linguistics. doi:10.3115/v1/D14-1179.
- Fletcher R (1970). "A new approach to variable metric algorithms." *The computer journal*, **13**(3), 317–322.
- Gabadinho A, Ritschard G, MÃijller NS, Studer M (2011). "Analyzing and Visualizing State Sequences in R with TraMineR." *Journal of Statistical Software*, **40**(4), 1–37. doi:10.18637/jss.v040.i04.

- Goldfarb D (1970). “A family of variable-metric methods derived by variational means.” *Mathematics of computation*, **24**(109), 23–26.
- Gómez-Alonso C, Valls A (2008). “A similarity measure for sequences of categorical data based on the ordering of common elements.” In V Torra, Y Narukawa (eds.), *Modeling Decisions for Artificial Intelligence*, pp. 134–145. Springer Berlin Heidelberg, Berlin, Heidelberg. doi: https://doi.org/10.1007/978-3-540-88269-5_13.
- Goodfellow I, Bengio Y, Courville A (2016). *Deep Learning*. MIT Press.
- He Q, von Davier M (2016). *Analyzing process data from problem-solving items with n-grams: Insights from a computer-based large-scale assessment*, pp. 749–776. Information Science Reference, Hershey, PA. doi: [10.4018/978-1-4666-9441-5.ch029](https://doi.org/10.4018/978-1-4666-9441-5.ch029).
- Hinton G, Srivastava N, Swersky K (2014). “RMSPProp: Divide the gradient by a running average of its recent magnitude.” https://www.cs.toronto.edu/~tijmen/csc321/slides/lecture_slides_lec6.pdf.
- Hochreiter S, Schmidhuber J (1997). “Long short-term memory.” *Neural Computation*, **9**(8), 1735–1780. doi: [10.1162/neco.1997.9.8.1735](https://doi.org/10.1162/neco.1997.9.8.1735).
- Kingma DP, Ba J (2015). “Adam: A method for stochastic optimization.” In *Proceedings of the 3rd International Conference on Learning Representations*.
- Lord FM (1980). *Applications of Item Response Theory to Practical Testing Problems*. Routledge, New York, NY.
- Lord FM, Novick MR (1968). *Statistical theories of mental test scores*. Addison-Wesley, Reading, MA.
- Paradis E (2018). “Multidimensional scaling with very large datasets.” *Journal of Computational and Graphical Statistics*, **27**(4), 935–939.
- Qiao X, Jiao H (2018). “Data Mining Techniques in Analyzing Process Data: A Didactic.” *Frontiers in Psychology*, **9**, 2231. doi: [10.3389/fpsyg.2018.02231](https://doi.org/10.3389/fpsyg.2018.02231).
- R Core Team (2019). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. URL <https://www.R-project.org/>.
- Ren Y, Luo F, Ren P, Bai D, Li X, Liu H (2019). “Exploring Multiple Goals Balancing in Complex Problem Solving Based on Log Data.” *Frontiers in Psychology*, **10**, 1975. doi: [10.3389/fpsyg.2019.01975](https://doi.org/10.3389/fpsyg.2019.01975).
- Robbins H, Monro S (1951). “A stochastic approximation method.” *The Annals of Mathematical Statistics*, **22**(3), 400–407. doi: [10.1214/aoms/1177729586](https://doi.org/10.1214/aoms/1177729586).
- Rupp AA, Templin J, Henson RA (2010). *Diagnostic Measurement: Theory, Methods, and Applications*. Guilford Press, New York, NY.
- Shanno DF (1970). “Conditioning of quasi-Newton methods for function minimization.” *Mathematics of computation*, **24**(111), 647–656.

- Stadler M, Fischer F, Greiff S (2019). “Taking a Closer Look: An Exploratory Analysis of Successful and Unsuccessful Strategy Use in Complex Problems.” *Frontiers in Psychology*, **10**, 777. doi:10.3389/fpsyg.2019.00777.
- Tang S, Peterson JC, Pardos ZA (2016). “Deep neural networks and how they apply to sequential education data.” In *Proceedings of the Third (2016) ACM Conference on Learning@Scale*, pp. 321–324. ACM. doi:10.1145/2876034.2893444.
- Tang X, Wang Z, He Q, Liu J, Ying Z (2019a). “Latent Feature Extraction for Process Data via Multidimensional Scaling.” *arXiv preprint arXiv:1904.09699*.
- Tang X, Wang Z, Liu J, Ying Z (2019b). “An Exploration of Process Data by Action Sequence Autoencoder.” *arXiv preprint arXiv:1908.06075*.
- Wang C, Xu G, Shang Z, Kuncel N (2018). “Detecting aberrant behavior and item pre-knowledge: a comparison of mixture modeling method and residual method.” *Journal of Educational and Behavioral Statistics*, **43**(4), 469–501. doi:10.3102/1076998618767123.
- Zeiler MD (2012). “ADADELTA: an adaptive learning rate method.” *arXiv preprint arXiv:1212.5701*.

Affiliation:

Xueying Tang
 Department of Mathematics
 University of Arizona
 Address: 617 N. Santa Rita Avenue, Tucson, AZ 85721
 E-mail: xytang@math.arizona.edu
 URL: <http://websites.math.arizona.edu/xueyingtang/>

Susu Zhang, Zhi Wang, Jingchen Liu, Zhiliang Ying
 Department of Statistics
 Columbia University
 Address: 1255 Amsterdam Avenue, New York, NY 10027