

# Practical Leverage-Based Sampling for Low-Rank Tensor Decomposition\*

Brett W. Larsen<sup>†</sup> and Tamara G. Kolda<sup>‡</sup>

**Abstract.** The low-rank canonical polyadic tensor decomposition is useful in data analysis and can be computed by solving a sequence of overdetermined least squares subproblems. Motivated by consideration of sparse tensors, we propose sketching each subproblem using leverage scores to select a subset of the rows, with probabilistic guarantees of the solution accuracy. We randomly sample rows proportional to leverage score upper bounds that can be efficiently computed using the special Khatri-Rao subproblem structure inherent in tensor decomposition. Crucially, the number of rows in the sketched system is independent of the number of nonzeros in the full tensor and the number of rows in the full system. Along the way, we provide a practical solution to the generic matrix sketching problem of sampling overabundance for high-leverage-score rows, proposing to include such rows deterministically and combine repeated samples in the sketched system; we conjecture that this can lead to improved theoretical bounds. Numerical results on real-world large-scale tensors show the method is significantly faster than deterministic methods without sacrificing accuracy.

**Key words.** tensor decomposition, CANDECOMP/PARAFAC (CP), canonical polyadic (CP), matrix sketching, leverage score sampling, randomized numerical linear algebra (RandNLA)

**1. Introduction.** Low-rank canonical polyadic tensor decomposition, also known as CANDECOMP/PARAFAC (CP) [7, 17], is a popular unsupervised learning method akin to low-rank matrix decomposition and principal component analysis (PCA). A low-rank tensor factorization identifies *factor matrices* that provide the best low-rank multilinear representation of a higher-order tensor  $\mathcal{X}$ . Tensor decomposition is ubiquitous in data analysis with applications to social networks [29, 31], ride sharing [40], cyber security [27], criminology [28], text clustering [9], online behaviors [33], etc. We refer the reader to several surveys for more information [1, 20, 34].

In this work, we consider the problem of computing the CP tensor decomposition for sparse tensors using an alternating least squares (ALS) approach. Bader and Kolda [4] show that the cost per least squares solve for a sparse tensor is proportional to the number of nonzeros. However, in many cases, even that can be too expensive because some tensors have billions of nonzeros. Cheng et al. [8] showed that it is possible to use matrix sketching in the three-way sparse case. We propose a variant of the same idea but targeting a different step in the least squares solve (explained in detail below) and for arbitrary order. In addition, we present a detailed, practical algorithm along with a new hybrid methodology for combining deterministic and randomly-sampled rows based on leverage scores.

---

\*This work has been supported in part by the Department of Energy Office of Science Advanced Scientific Computing Research Applied Mathematics Program. Additionally, the work of BL was supported in part by the Department of Energy Computational Sciences Graduate Fellowship program. This paper describes objective technical results and analysis. Any subjective views or opinions that might be expressed in the paper do not necessarily represent the views of the U.S. Department of Energy or the United States Government.

<sup>†</sup>Stanford University, Stanford, CA ([bwlarsen@stanford.edu](mailto:bwlarsen@stanford.edu))

<sup>‡</sup>Sandia National Laboratories, Livermore, CA ([tgkolda@sandia.gov](mailto:tgkolda@sandia.gov))

**1.1. CP least squares problem.** We focus immediately on the prototypical least squares problem, deferring detailed definitions and derivations until [section 2](#). Suppose that  $\mathcal{X}$  is a  $(d+1)$ -way tensor of size  $n_1 \times n_2 \times \cdots \times n_{d+1}$ ; the goal of CP is to compute  $d+1$  factors matrices, denoted  $\{\mathbf{A}_1, \dots, \mathbf{A}_{d+1}\}$ . At each iteration of CP-ALS, we solve a sequence of  $(d+1)$  least squares problems. Without loss of generality, we consider the least squares problem for computing the  $(d+1)$ st factor matrix:

$$(1.1) \quad \min_{\mathbf{B}} \|\mathbf{Z}\mathbf{B}^\top - \mathbf{X}^\top\|_F^2 \quad \text{subject to} \quad \mathbf{B} \in \mathbb{R}^{n \times r} \quad \text{with}$$

$$\mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}, \quad \mathbf{A}_k \in \mathbb{R}^{n_k \times r} \text{ for } k \in [d], \quad N = \prod_{k=1}^d n_k,$$

$$\mathbf{X} \in \mathbb{R}^{n \times N}, \quad \text{nnz}(\mathbf{X}) \ll N, \quad \text{and} \quad r, n \ll N.$$

The symbol  $\odot$  denotes the Khatri-Rao product (KRP); see [\(2.1\)](#). The matrix  $\mathbf{X}$  is the mode- $(d+1)$  unfolding of the input tensor. The matrix  $\mathbf{B}$  is the  $(d+1)$ st factor matrix and  $n = n_{d+1}$ .

Because  $r \ll N$ , the least squares problem [\(1.1\)](#) is tall and skinny, making it a candidate for sketching. Ignoring the structure of both  $\mathbf{Z}$  and  $\mathbf{X}$ , solving [\(1.1\)](#) costs  $O(Nr^2n)$ . The KRP structure of  $\mathbf{Z}$  reduces the cost to  $O(Nrn)$  [\[20\]](#), and the cost is reduced further to  $O(\text{nnz}(\mathcal{X})r)$  when  $\mathcal{X}$  is sparse [\[4\]](#).

Instead of solving the least squares problem [\(1.1\)](#) directly, we consider a *sketched* version of the form

$$(1.2) \quad \min_{\mathbf{B}} \|\Omega \mathbf{Z} \mathbf{B}^\top - \Omega \mathbf{X}^\top\|_F^2 \quad \text{where} \quad \Omega \in \mathbb{R}^{s \times N}$$

and  $\Omega$  has only one nonzero per row, which means that it selects a subset of rows in the least squares problem. The cost of solving the subsampled least squares problem is  $O(sr^2n)$ . The leverage scores for the rows of  $\mathbf{Z}$  are defined as  $\ell_i(\mathbf{Z}) = \|\mathbf{Q}(i, :)\|_2^2$  where  $\mathbf{Q}$  is an orthogonal basis for the column space of  $\mathbf{Z}$ . If we sample rows proportional to the products of the leverage scores of the constituent factor matrix rows, then  $s = O(r^d \log n / \epsilon^2)$  rows are required for an  $\epsilon$ -accurate solution with high probability; see [Theorem 3.7.1](#).<sup>1</sup> Moreover, we compute  $\tilde{\mathbf{Z}} \equiv \Omega \mathbf{Z}$  and  $\tilde{\mathbf{X}}^\top \equiv \Omega \mathbf{X}^\top$  without ever forming  $\Omega$ ,  $\mathbf{Z}$ , or  $\mathbf{X}$  explicitly. This means the complexity of the least squares problem is  $O(nr^{d+2} \log r / \epsilon^2)$ .

**1.2. Related work.** A variety of randomized algorithms have been applied to the CP decompositions in previous work. A Kronecker fast Johnson-Lindenstrauss transform (KFJLT) sketching approach was proposed in [\[6\]](#) and proven to be a Johnson-Lindenstrauss transform in [\[19\]](#) (see also [\[24, 18\]](#)). The KFJLT reduces the per-iteration cost to  $O(snr)$  where  $s \ll N$  is the number of samples. Unfortunately, the KFJLT approach is not applicable in the sparse case because it requires multiplying  $\mathcal{X}$  by an FFT in each mode as a preprocessing step, destroying sparsity. Although we focus on sparse tensors, leverage score sampling is a viable approach for dense tensors as we show in the appendix ([Appendix C](#)).

For sparse tensors, one approach to the CP decomposition is to randomly compress the tensor and then decompose the compressed version. Zhou, Cichocki, and Xie [\[43\]](#) used the randomized range finder to estimate the basis for the Tucker decomposition and then computed

---

<sup>1</sup>For the general problem, we replace  $n$  with  $n_{\max}$  where  $n_{\max} = \max\{n_k \mid k \in [d+1]\}$ .

the CP decomposition of the Tucker core. ParaSketch by Yang, Zamzam, and Sidiropoulos [41] uses sketching to parallelize the algorithm; a small sketch of the tensor is independently constructed multiple times, decomposed in parallel, and combined. An alternative approach proposed by Wang, Tung, Smola, and Anandkumar [38] is to construct a sketch of the tensor (called TensorSketch in analogy to CountSketch) and then use this sketch to compute the MTTKRP; the number of samples required for general tensors, however, is not derived. Randomized algorithms have also been applied to decompositions other than CP, including the Tucker decomposition [23, 42], the Tucker decomposition with streaming data [37, 3], and the CUR decomposition [36].

The most similar work to ours is Cheng et al. [8], but that work considered only three-way tensors, focused on a different step in the method, and obtained slightly weaker theoretical guarantees. As mentioned above, the KRP structure of  $\mathbf{Z}$  can be exploited for a more efficient solution to (1.1). Specifically,  $\mathbf{B}$  is the solution to

$$\|\mathbf{B}\mathbf{V} - \mathbf{Z}^\top \mathbf{X}\|_F^2 \quad \text{where} \quad \mathbf{V} = (\mathbf{A}_1^\top \mathbf{A}_1) \otimes \cdots \otimes (\mathbf{A}_d^\top \mathbf{A}_d) \in \mathbb{R}^{r \times r}.$$

Here,  $\otimes$  represents the Hadamard product. The computation of  $\mathbf{Z}^\top \mathbf{X}$  is known as the matricized tensor times Khatri-Rao product (MTTKRP) and is a key kernel in CP tensor decomposition. It costs  $O(Nnr)$  for a dense tensor and  $O(\text{nnz}(\mathbf{X})r)$  for a sparse tensor. For three-way tensors, Cheng et al. [8] use matrix sketching to approximate the MTTKRP by sampling  $s = O(r^d \log n / \epsilon^2)$  rows, the same as ours. Their complexity per least squares solve is  $O(nr^{d+1} \log n / \epsilon^2)$ , so the difference in overall complexity per solve is a factor of  $r$ . In practice, however, the solution time for the least squares system is negligible compared to the time to extract the sampled tensor fibers as shown in subsection 7.4. Additionally, their  $\epsilon$ -accuracy (with high probability result) is with respect to the norm of the full tensor,  $\|\mathbf{X}\|_F^2$ , rather than the significantly smaller residual,  $\|\mathbf{Z}\mathbf{B}^\top - \mathbf{X}\|_F^2$ , as in our work.

**1.3. Our contributions.** Randomized numerical linear algebra has the potential to significantly accelerate the solution to the least squares subproblems in CP-ALS. In the sparse case, we would ideally sample rows in the least squares problem according to leverage scores. We cannot calculate the leverage scores directly, but we can instead upper bound them using the structure of the Khatri-Rao product and efficiently sample proportional to these bounds. Our contributions are as follows:

- We detail a practical method for efficient Khatri-Rao product matrix sketching using leverage-score sampling in the context of CP-ALS; see subsection 6.2.
- We show that our proposed method need sample only  $s = O(r^d \log n / \epsilon^2)$  rows for an  $\epsilon$ -accurate solution; see Theorem 5.3. This number of samples has no dependence on the number or rows in the system nor on the number of nonzeros in the data tensor.
- For concentrated sampling probabilities that result in an overabundance of high-probability rows, we propose two novel methods to reduce the expense in section 4: (1) combining repeated rows, and (2) including high-probability rows deterministically. These methods can be used in any sketching scenario, not just for Khatri-Rao products.
- We provide an efficient method for determining high-probability rows in a Khatri-Rao product; see subsection 5.3.

- We present detailed numerical experiments in MATLAB showing the advantages of our proposed approach in [section 7](#). For instance, compared to CP-ALS, we achieve a speed-up of 16 times on the large Reddit tensor which has 4.7 billion nonzeros, reducing the compute time from about 4 days to 6 hours.

**2. Background on least squares problems in CP-ALS and KRPs.** Equation (1.1) represents the prototypical least squares problem in CP-ALS. We have assumed that we are solving the  $(d+1)$ st subproblem for notational convenience, but all  $(d+1)$  subproblems have precisely the same format. For instance, if we were solving the least squares subproblem for first factor matrix  $(\mathbf{A}_1)$ , then (1.1) would change only in that  $n = n_1$ ,  $\mathbf{X}$  is the mode-1 unfolding of  $\mathbf{X}$ , and  $\mathbf{Z} = \mathbf{A}_{d+1} \odot \cdots \odot \mathbf{A}_2 \in \mathbb{R}^{N \times r}$  with  $N = \prod_{k=2}^{d+1} n_k$ . Henceforth, without loss of generality, we continue to assume that we are solving the  $(d+1)$ st subproblem as in (1.1).

The KRP plays a key role in our discussion, so we provide a precise definition. Recall that the KRP of interest is

$$(2.1) \quad \mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}, \quad \mathbf{A}_k \in \mathbb{R}^{n_k \times r} \text{ for } k \in [d], \quad N = \prod_{k=1}^d n_k.$$

There is a bijective mapping between row  $i$  of  $\mathbf{Z}$  and a  $d$ -tuple of rows  $(i_1, \dots, i_d)$  in the factor matrices where

$$(2.2) \quad \mathbf{Z}(i, :) = \mathbf{A}_1(i_1, :) \otimes \cdots \otimes \mathbf{A}_d(i_d, :).$$

Specifically, we refer to  $(i_1, \dots, i_d) \in [n_1] \otimes \cdots \otimes [n_d]$  as the *multi-index* and  $i \in [N]$  as the *linear index* where the bijective mapping is

$$(2.3) \quad i = i_1 + \sum_{k=2}^d \left( \prod_{\ell=1}^{k-1} n_\ell \right) (i_k - 1).$$

**3. Background on sketching for least squares problems.** For detailed information on leverage score sampling in matrix sketching, we refer the reader to the surveys [22, 39]. Here we provide key concepts that are needed in this work.

Our goal is to find a sampling matrix  $\mathbf{\Omega}$  so that  $\mathbf{\Omega}\mathbf{X}$  can be computed efficiently when  $\mathbf{X}$  is sparse. To accomplish this, we limit our attention to choices for  $\mathbf{\Omega}$  where each row has a single nonzero. To relate more directly to existing theory, we consider a variation of (1.1) with  $n = 1$ :

$$(3.1) \quad \begin{aligned} & \min_{\boldsymbol{\alpha}} \|\mathbf{Z}\boldsymbol{\alpha} - \boldsymbol{\nu}\|_2^2 \quad \text{subject to} \quad \boldsymbol{\alpha} \in \mathbb{R}^r \quad \text{with} \\ & \mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}, \quad \mathbf{A}_k \in \mathbb{R}^{n_k \times r} \text{ for } k \in [d], \quad N = \prod_{k=1}^d n_k, \\ & \boldsymbol{\nu} \in \mathbb{R}^N, \quad r \ll N. \end{aligned}$$

Solving this least squares problem directly costs  $O(Nr^2)$  for the least squares solve plus  $O(Nr)$  to form  $\mathbf{Z}$ . Our goal is to eliminate dependence on  $N$ . In this section, we review the theory



which explains how to reduce the cost to  $O(sr^2)$  where  $s$  depends in part on how we do the leverage score sampling. This removes the first dependence on  $N$ . (In [section 5](#), we explain how to avoid explicitly forming the KRP or calculating the leverage scores, removing the second dependence on  $N$ .)

**3.1. Weighted sampling.** Assuming we choose rows according to some probability distribution, we show how to weight the rows so that the subsampled norm is unbiased.

**Definition 3.1.** We say  $\mathbf{p} \in [0, 1]^N$  is a probability distribution if  $\sum_{i=1}^N p_i = 1$ .

**Definition 3.2.** For a random variable  $\xi \in [N]$ , we say  $\xi \sim \text{MULTINOMIAL}(\mathbf{p})$  if  $\mathbf{p} \in [0, 1]^N$  is a probability distribution and  $\Pr(\xi = i) = p_i$ .

We can define a matrix that randomly samples rows from a matrix (or elements from a vector) with weights as follows.

**Definition 3.3** ([\[39, 12\]](#)). We say  $\mathbf{\Omega} \in \mathbb{R}^{s \times N} \sim \text{RANDSAMPLE}(s, \mathbf{p})$  if  $s \in \mathbb{N}$ ,  $\mathbf{p} \in [0, 1]^N$  is a probability distribution, and the entries on  $\mathbf{\Omega}$  are defined as follows. Let  $\xi_j \sim \text{MULTINOMIAL}(\mathbf{p})$  for  $j = 1, \dots, s$ ; then

$$\omega(j, i) = \begin{cases} \frac{1}{\sqrt{sp_i}} & \text{if } \xi_j = i, \\ 0 & \text{otherwise,} \end{cases} \quad \text{for all } (j, i) \in [s] \times [N].$$

It is straightforward to show that such a sampling matrix is unbiased, so we leave the proof of the next lemma as an exercise for the reader.

**Lemma 3.4.** Let  $\mathbf{x} \in \mathbb{R}^N$ . Let  $\mathbf{p} \in [0, 1]^N$  be probability distribution such that  $p_i > 0$  if  $x_i \neq 0$  and let  $\mathbf{\Omega} \sim \text{RANDSAMPLE}(s, \mathbf{p})$ . Then  $\mathbb{E}\|\mathbf{\Omega}\mathbf{x}\|_2 = \|\mathbf{x}\|_2$ .

The challenge of sketching is to design a sampling matrix  $\mathbf{\Omega}$  that can be efficiently computed yet bounds the distortion of the sketched solution with as few samples as possible. There is a vast literature on different methods for constructing sketches, but here we will focus on row sampling in which a sketch provides a procedure for how to select and weight  $s$  rows of the original matrix. Doing this effectively often requires an understanding of the structure of the data, and to that end, we define the leverage scores of a matrix in the next subsection.

**3.2. Leverage scores and sampling probabilities.** The distribution selected for  $\mathbf{p}$  determines the quality of the estimate in a way that depends on the leverage scores of  $\mathbf{Z}$ .

**Definition 3.5 (Leverage Scores [\[11\]](#)).** Let  $\mathbf{Z} \in \mathbb{R}^{N \times r}$  with  $N > r$ , and let  $\mathbf{Q} \in \mathbb{R}^{N \times r}$  be any orthogonal basis for the column space of  $\mathbf{Z}$ . The leverage scores of the rows of  $\mathbf{Z}$  are given by

$$\ell_i(\mathbf{Z}) = \|\mathbf{Q}(i, :)\|_2^2 \quad \text{for all } i \in \{1, \dots, N\}.$$

The coherence is the maximum leverage score, denoted  $\mu(\mathbf{Z}) = \max_{i \in [N]} \ell_i(\mathbf{Z})$ .

The leverage scores indicate the relative importance of rows in the matrix  $\mathbf{Z}$ . It is known that  $\ell_i(\mathbf{Z}) \leq 1$  for all  $i \in [N]$ ,  $\sum_{i \in [N]} \ell_i(\mathbf{Z}) = r$ , and  $\mu(\mathbf{Z}) \in [r/N, 1]$  [\[39\]](#). The matrix  $\mathbf{Z}$  is called incoherent if  $\mu(\mathbf{Z}) \approx r/N$ .

Random sampling of rows in a least squares problem can provide an  $\epsilon$ -accurate solution with high probability if the number of samples required is  $s = O(r \log r / \epsilon^2 \beta)$  and  $\beta$  connects the sampling probabilities and the leverage scores as elucidated in the following result.

**Theorem 3.6** ([14, 39]). *Let  $\mathbf{Z} \in \mathbb{R}^{N \times r}$ ,  $\boldsymbol{\nu} \in \mathbb{R}^N$ , and  $\boldsymbol{\alpha}_* \equiv \arg \min_{\boldsymbol{\alpha} \in \mathbb{R}^r} \|\mathbf{Z}\boldsymbol{\alpha} - \boldsymbol{\nu}\|_2^2$ . Let  $\mathbf{p} \in [0, 1]^N$  be any probability distribution and define*

$$\beta = \min_{i \in [N]} \frac{p_i r}{\ell_i(\mathbf{Z})} \in [0, 1] \quad \text{for all } i \in [N].$$

*For any  $\epsilon, \delta \in (0, 1)$ , set  $s = O(r \log(r/\delta)/(\beta \epsilon^2))$  and let  $\boldsymbol{\Omega} = \text{RANDSAMPLE}(s, \mathbf{p})$ . Then  $\tilde{\boldsymbol{\alpha}}_* \equiv \arg \min_{\boldsymbol{\alpha} \in \mathbb{R}^r} \|\boldsymbol{\Omega}\mathbf{Z}\boldsymbol{\alpha} - \boldsymbol{\Omega}\boldsymbol{\nu}\|_2^2$  satisfies*

$$\|\mathbf{Z}\tilde{\boldsymbol{\alpha}}_* - \boldsymbol{\nu}\|_2^2 \leq (1 + O(\epsilon))\|\mathbf{Z}\boldsymbol{\alpha}_* - \boldsymbol{\nu}\|_2^2$$

*with probability at least  $1 - \delta$ .*

We include the proof in [Appendix B](#) as well as further details on bounding the error in  $\boldsymbol{\alpha}_*$ . Although this result is known, the proof arguably requires some investment to assemble.

The term  $\beta$  is sometimes referred to as the *misestimation* factor and connects the sampling probabilities with the leverage scores. The user should ideally specify  $\mathbf{p}$  so that  $\beta$  is maximal, i.e.,  $p_i = \ell_i(\mathbf{Z})/r$  for all  $i \in [N]$  would yield  $\beta = 1$ . But computing the true leverage bounds is too expensive. Instead, we estimate them and get a bound of  $\beta \leq 1/r^d$  as explained in [subsection 5.1](#).

Before we continue, we present the result for the full matrix least squares problem [\(1.1\)](#) by using a union bound. The only difference is that the number of samples depends on  $\log n$  rather than  $\log r$ ; we assume  $r < n$ , so  $\log n$  dominates  $\log r$ .

**Theorem 3.7.** *Let  $\mathbf{Z} \in \mathbb{R}^{N \times r}$ ,  $\mathbf{X} \in \mathbb{R}^{n \times N}$ ,  $r < n$ , and  $\mathbf{B}_* \equiv \arg \min_{\mathbf{B} \in \mathbb{R}^{r \times n}} \|\mathbf{Z}\mathbf{B}^\top - \mathbf{X}^\top\|^2$ . Let  $\mathbf{p} \in [0, 1]^N$  be any probability distribution and define*

$$\beta = \min_{i \in [N]} \frac{p_i r}{\ell_i(\mathbf{Z})} \in [0, 1] \quad \text{for all } i \in [N].$$

*For any  $\epsilon, \delta \in (0, 1)$ , set  $s = O(r \log(n/\delta)/(\beta \epsilon^2))$  and let  $\boldsymbol{\Omega} = \text{RANDSAMPLE}(s, \mathbf{p})$ . Then  $\tilde{\mathbf{B}}_* \equiv \arg \min_{\mathbf{B} \in \mathbb{R}^{r \times n}} \|\boldsymbol{\Omega}\mathbf{Z}\mathbf{B}^\top - \boldsymbol{\Omega}\mathbf{X}^\top\|_F^2$  satisfies*

$$\|\mathbf{Z}\tilde{\mathbf{B}}_*^\top - \mathbf{X}^\top\|_F^2 \leq (1 + O(\epsilon))\|\mathbf{Z}\mathbf{B}_*^\top - \mathbf{X}^\top\|_F^2$$

*with probability at least  $1 - \delta$ .*

**Proof.** Apply [Theorem 3.6](#) simultaneously to all  $n$  columns of  $\mathbf{B}^\top$  and  $\mathbf{X}^\top$ , except with  $\delta'$  replacing  $\delta$ . The probability that a single column is not at least  $\epsilon$  accurate is  $\delta'$ , so the probability that any of the  $n$  columns is not at least  $\epsilon$  accurate is  $n\delta'$  by a union bound. Choosing  $\delta' = \delta/n$  yields the desired probability of  $\epsilon$ -accuracy of  $1 - \delta$  subject to  $s = O(r \log(r/\delta')/(\beta \epsilon^2)) = O(r \log(rn/\delta)/(\beta \epsilon^2))$ . Since we assume  $r < n$ , we simplify to  $s = O(r \log(n/\delta)/(\beta \epsilon^2))$ . ■

**4. Tools for sketching with concentrated sampling probabilities.** In this section, we discuss two novel approaches to improve the computational cost of sketching for matrices with concentrated sampling probabilities, i.e., a small subset of the rows accounts for a significant portion of the probability mass. In these cases, a small subset of rows are repeatedly re-sampled which leads to a larger number of required samples and is inefficient. These results assume no special structure in the least squares problem.

In [subsection 4.1](#), we show that one simple speedup is to combine (and appropriately reweight) repeated rows, reducing the size of the sampled least squares problem without changing the solution. If  $s$  is the original number of rows, and  $\bar{s}$  is the number after combining repeats, the computational complexity is reduced from  $O(sr^2)$  to  $O(\bar{s}r^2)$ .

In [subsection 4.2](#), we propose a novel hybrid sampling method in which we deterministically include a relatively small number of high-probability rows and then sample randomly from the remaining rows. The required number of samples for the remaining rows is arguably reduced by the proportion of probability captured in the deterministic rows.

One important note about the tools presented in this section is that they can be implemented in an efficient solver for arbitrary sampling probability distributions, i.e., they do not require a priori knowledge that the probabilities are concentrated. If the probabilities are close to uniform, then the solver is essentially unchanged. This is crucial in the case of solving a series of least squares problems which may each have different characteristics. In our case for the CP tensor factorization, the factor matrices are initialized randomly (with near-uniform sampling probabilities) and often have much more structured factored matrices (with concentrated sampling probabilities) as the method converges.

We show numerical improvements yielded by these methods in [subsections 7.3](#) and [7.4](#).

**4.1. Combine repeated rows.** If the random sampling of a matrix selects the same rows repeatedly, it is possible to combine repeated entries. This results in a smaller matrix that yields an equivalent sampled system. Consider the definition of  $\Omega$  in [Definition 3.3](#). Let  $\bar{s}$  be the number of unique values in the set  $\Xi \equiv \{\xi_1, \dots, \xi_s\}$ , let  $\bar{\xi}_j$  denote the  $k$ th unique value for  $k \in [\bar{s}]$ , and let  $c_j$  be the number of times that  $\bar{\xi}_j$  appeared in  $\Xi$ . Define  $\bar{\Omega} \in \mathbb{R}^{\bar{s} \times N}$  as follows:

$$(4.1) \quad \bar{\omega}(j, i) = \begin{cases} \sqrt{\frac{c_j}{sp_i}} & \text{if } \bar{\xi}_j = i \\ 0 & \text{otherwise} \end{cases} \quad \text{for all } (j, i) \in [\bar{s}] \times [N].$$

It can be shown that  $\|\bar{\Omega}\mathbf{x}\|_2 = \|\Omega\mathbf{x}\|_2$  for all  $\mathbf{x} \in \mathbb{R}^N$ . Unless otherwise noted, we combine repeated rows in our experiments.

**4.2. Hybrid deterministic and random sampling.** One potential alternative to probability sampling is to sort by descending probability and deterministically construct a matrix sketch using the top  $s$  rows. For instance Papailiopoulos, Kyrillidis, and Boutsidis [\[30\]](#) theoretically analyzed the quality of such approximations and show they perform comparably to a randomized approach if the leverage scores fall off according to a moderately steep power law.

In this section we propose a more flexible alternative in which a subset of the highest probability rows are included deterministically and the remaining rows are chosen randomly,

proportionally to their original probabilities. Hybrid methods combining deterministic and randomized methods have also been considered in the context of the CUR decomposition [26]. We combine deterministic and random sampling for KRP matrices by constructing a sampling matrix of the following form:

$$\mathbf{\Omega} = \begin{bmatrix} \mathbf{\Omega}_{\text{det}} \\ \mathbf{\Omega}_{\text{rnd}} \end{bmatrix} \in \mathbb{R}^{s \times N}.$$

Note that this matrix is never actually formed explicitly, as detailed in [section 6](#).

Let  $\mathcal{D} \subset [N]$  be the set of indices that are included deterministically, with  $s_{\text{det}} = |\mathcal{D}|$  assumed to be  $O(1)$ . We presume that  $\mathcal{D}$  contains the highest-probability indices which would be more likely to be repeated randomly, but our analysis regarding the reweighting of the remainder does not depend on this. In particular, it still applies if only a subset of the highest probability rows are included. Let  $k_j$  denote the  $j$ th member of  $\mathcal{D}$ ,  $j \in [s_{\text{det}}]$ . Then we have the corresponding deterministic row sampling matrix

$$(4.2) \quad \omega_{\text{det}}(j, i) = \begin{cases} 1 & \text{if } i = k_j \\ 0 & \text{otherwise} \end{cases} \quad \text{for all } (j, i) \in [s_{\text{det}}] \times [N].$$

We randomly sample the remaining rows from  $[N] \setminus \mathcal{D}$ . Define  $p_{\text{det}} = \sum_{i \in \mathcal{D}} p_i$ . The probability of selecting item  $i \in [N] \setminus \mathcal{D}$  is rescaled to  $p_i / (1 - p_{\text{det}})$ . (We do not compute these explicitly, as detailed in [subsection 5.3](#).) Then we have

$$\omega_{\text{rnd}}(j, i) = \begin{cases} \sqrt{\frac{1 - p_{\text{det}}}{s p_i}} & \text{if } \xi_j = i \\ 0 & \text{otherwise.} \end{cases}$$

**4.3. Combining rows for the hybrid deterministic and random sampling.** We can also combine repeated rows in  $\mathbf{\Omega}_{\text{rnd}}$ . Let  $\bar{s}_{\text{rnd}}$  be the number of unique randomly sampled row indices. As discussed in [subsection 4.1](#), let  $\bar{\xi}_j$  be the  $j$ th unique row index. Then we can define  $\bar{\mathbf{\Omega}}_{\text{rnd}} \in \mathbb{R}^{\bar{s}_{\text{rnd}} \times N}$  as follows:

$$(4.3) \quad \bar{\omega}(j, i) = \begin{cases} \sqrt{\frac{c_j}{s} \frac{1 - p_{\text{det}}}{p_i}} & \text{if } \bar{\xi}_j = i \\ 0 & \text{otherwise} \end{cases} \quad \text{for all } (j, i) \in [\bar{s}_{\text{rnd}}] \times [N].$$

**5. Efficient leverage score sampling for KRP matrices.** Our aim is to use sketching for least squares where the matrix is a KRP matrix of the form  $\mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}$  as defined in (2.1). We cannot afford to explicitly form  $\mathbf{Z}$  or explicitly compute its leverage scores since either would cost  $O(Nr)$ . In [subsection 5.1](#), we review how to upper bound the leverage scores and use that to compute sampling probabilities so that  $\beta$  in [Theorem 3.7](#) is upper bounded by  $\beta \leq 1/r^{d-1}$ . Our main result in [Theorem 5.3](#) shows that the number of samples needed for sampling KRP matrices in (3.1) is  $s = O(r^d \log n \epsilon^{-2})$ . In [subsection 5.2](#), we describe how to sample rows according to the probabilities established in the previous section without forming the probabilities or  $\mathbf{Z}$  explicitly. In [subsection 5.3](#), we describe how to do the deterministic inclusion proposed in [subsection 4.2](#) without explicitly computing all the probabilities.

**5.1. Sampling probabilities for KRP matrices and main theorem.** It is possible to obtain an upper bound on the leverage scores for  $\mathbf{Z}$  by using the leverage scores for the factor matrices, as follows.

**Lemma 5.1 (Leverage Score Bounds for KRP [8, 6]).** *Let  $\mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}$  be a KRP as in (2.1). Letting  $(i_1, \dots, i_d)$  be the multi-index corresponding to  $i$  as defined in (2.3), the leverage scores can be bounded as*

$$\ell_i(\mathbf{Z}) \leq \bar{\ell}_i(\mathbf{Z}) \equiv \prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k).$$

Using this lemma, we directly derive the following result for sketching the tensor least squares problem (1.1) for the case of  $n = 1$ .

**Theorem 5.2.** *Let  $\mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}$  be a KRP as in (2.1),  $\boldsymbol{\nu} \in \mathbb{R}^N$ , and  $\boldsymbol{\alpha}_* \equiv \arg \min_{\boldsymbol{\alpha} \in \mathbb{R}^r} \|\mathbf{Z}\boldsymbol{\alpha} - \boldsymbol{\nu}\|_2^2$ . Let  $\mathbf{p} \in [0, 1]^N$  be defined as*

$$(5.1) \quad p_i = \frac{\bar{\ell}_i(\mathbf{Z})}{r^d} \quad \text{where} \quad \bar{\ell}_i(\mathbf{Z}) \equiv \prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k) \quad \text{for all } i \in [N].$$

*For any  $\epsilon, \delta \in (0, 1)$ , set  $s = O(r^d \log(r/\delta)/\epsilon^2)$  and let  $\boldsymbol{\Omega} = \text{RANDSAMPLE}(s, \mathbf{p})$ . Then  $\tilde{\boldsymbol{\alpha}}_* \equiv \arg \min_{\boldsymbol{\alpha} \in \mathbb{R}^r} \|\boldsymbol{\Omega}\mathbf{Z}\boldsymbol{\alpha} - \boldsymbol{\Omega}\boldsymbol{\nu}\|_2^2$  satisfies*

$$\|\mathbf{Z}\tilde{\boldsymbol{\alpha}}_* - \boldsymbol{\nu}\|_2^2 \leq (1 + O(\epsilon))\|\mathbf{Z}\boldsymbol{\alpha}_* - \boldsymbol{\nu}\|_2^2$$

*with probability at least  $1 - \delta$ .*

*Proof.* Apply Theorem 3.6, Lemma 5.1, and (5.1) to get

$$\beta = \min_{i \in [N]} \frac{p_i r}{\ell_i(\mathbf{Z})} = \min_{i \in [N]} \frac{(\bar{\ell}_i(\mathbf{Z})/r^d) r}{\ell_i(\mathbf{Z})} \leq \frac{1}{r^{d-1}}.$$

Plugging this bound into the bound for  $s$  yields the desired result. ■

Our main result for sketching the tensor least squares problem (1.1) follows. For  $n > r$ ,  $s = O(r^d \log n/\epsilon^2)$  samples yields an  $(1+O(\epsilon))$ -accurate residual with high probability. This can be derived from Theorem 5.2 using the same union bound method that allowed Theorem 3.7 to be derived from Theorem 3.6.

**Theorem 5.3 (Tensor Least Squares Sketching with Leverage Scores).** *Let  $\mathbf{Z} = \mathbf{A}_d \odot \cdots \odot \mathbf{A}_1 \in \mathbb{R}^{N \times r}$  be a KRP as in (2.1),  $\mathbf{X} \in \mathbb{R}^{n \times N}$ ,  $r < n$ , and  $\mathbf{B}_* \equiv \arg \min_{\mathbf{B} \in \mathbb{R}^{r \times n}} \|\mathbf{Z}\mathbf{B}^\top - \mathbf{X}^\top\|^2$ . Let  $\mathbf{p} \in [0, 1]^N$  be defined as*

$$p_i = \frac{\bar{\ell}_i(\mathbf{Z})}{r^d} \quad \text{where} \quad \bar{\ell}_i(\mathbf{Z}) \equiv \prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k) \quad \text{for all } i \in [N].$$

*For any  $\epsilon, \delta \in (0, 1)$ , set  $s = O(r^d \log(n/\delta)/\epsilon^2)$  and let  $\boldsymbol{\Omega} = \text{RANDSAMPLE}(s, \mathbf{p})$ . Then  $\tilde{\mathbf{B}}_* \equiv \arg \min_{\mathbf{B} \in \mathbb{R}^{r \times n}} \|\boldsymbol{\Omega}\mathbf{Z}\mathbf{B}^\top - \boldsymbol{\Omega}\mathbf{X}\|_F^2$  satisfies*

$$\|\mathbf{Z}\tilde{\mathbf{B}}_*^\top - \mathbf{X}^\top\|_F^2 \leq (1 + O(\epsilon))\|\mathbf{Z}\mathbf{B}_*^\top - \mathbf{X}^\top\|_F^2$$

*with probability at least  $1 - \delta$ .*

Hence, our sampling probability for row  $i$  in  $\mathbf{Z}$  is given by

$$(5.2) \quad p_i = \frac{1}{r^d} \prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k) \quad \text{for all } i \in [N].$$

**5.2. Implicit random row sampling for KRP matrices.** Calculating the leverage scores for factor matrix  $\mathbf{A}_k$  is inexpensive, costing  $O(r^2 n_k)$ ; however, computing the sampling probabilities in (5.2) requires the Kronecker product of the leverages scores at a cost of  $O(N)$ . To avoid this  $O(N)$  expense, we sample from the distribution implicitly by sampling each mode independently, which is equivalent per the following result.

**Lemma 5.4.** *Let  $\mathbf{A}_k \in \mathbb{R}^{n_k \times r}$  for  $r \in [d]$ , and let  $\ell(\mathbf{A}_k)$  be the vector of leverage scores for  $\mathbf{A}_k$ . Let*

$$i_k \sim \text{MULTINOMIAL}(\ell(\mathbf{A}_k)/r) \quad \text{for } k \in [d].$$

*The probability of selecting the multi-index  $(i_1, \dots, i_d)$  is equal to*

$$p_i = \frac{\bar{\ell}_i(\mathbf{Z})}{r^d} \quad \text{where} \quad \bar{\ell}_i(\mathbf{Z}) \equiv \prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k)$$

*and  $i \in [N]$  is the linear index corresponding to  $(i_1, \dots, i_d)$  with  $N \equiv \prod_{k=1}^d n_k$ .*

Row  $i$  of  $\mathbf{Z}$  can be assembled in  $O(rd)$  work by taking the Hadamard product of the rows of the factor matrices specified by the multi-index.

**5.3. Implicit computation of high-probability rows for deterministic inclusion.** As explained in subsection 4.2, it can be useful to deterministically include all rows whose sampling probability is above a specified threshold,  $\tau$ . However, it would be prohibitively expensive to find those above the threshold by explicitly computing all  $N$  probabilities. Instead, we perform a coarse-grained elimination of most candidate rows and then only compute the probabilities on a small subset of all rows.

For each factor matrix, define the normalized leverage scores  $\mathbf{p}_k = \ell(\mathbf{A}_k)/r$  where the  $i_k$ th entry is denoted as  $(\mathbf{p}_k)_{i_k}$ . Recall that the probability of sampling row  $\mathbf{Z}(i, :)$  is given by

$$p_i = \frac{\prod_{k=1}^d \ell_{i_k}(\mathbf{A}_k)}{r^d} = \prod_{k=1}^d (\mathbf{p}_k)_{i_k} \quad \text{for all } i \in [N],$$

where  $i$  is the linear index associated with subindices  $(i_1, \dots, i_d)$ . The key insight is that only a subset of rows in each  $\mathbf{A}_k$  could possibly contribute to a row of  $\mathbf{Z}$  with a sampling probability greater than  $\tau$ .

Our goal is to identify the set  $\mathcal{D} = \{i \in [N] \mid p_i > \tau\}$ . Define

$$\alpha_k = \max_{i_k \in [n_k]} (\mathbf{p}_k)_{i_k}, \quad \alpha_* = \prod_{k=1}^d \alpha_k = \max_{i \in [N]} p_i, \quad \text{and} \quad \bar{\mathcal{D}}_k = \{i_k \in [n_k] \mid (\mathbf{p}_k)_{i_k} > \tau \alpha_k / \alpha_*\}.$$



It is easy to show that if  $i_k \notin \bar{\mathcal{D}}_k$ , then  $p_i \leq \tau$  for any linear index  $i$  with row  $i_k$  in its constituent subindices. Hence, we can conclude

$$\mathcal{D} \subseteq \bar{\mathcal{D}}_1 \otimes \cdots \otimes \bar{\mathcal{D}}_d.$$

This means we need only check a small number of combinations. If  $\bar{n}_k = |\bar{\mathcal{D}}_k|$ , then we need only check  $\prod_{k=1}^d \bar{n}_k \ll N$  possibilities. It is easy to see that  $\bar{n}_k < 1/\tau$ , so we can limit the number of possibilities to consider by the choice of  $\tau$ . We have found that  $\tau = 1/s$  is effective in practice, and this is the choice we use in all experiments.

Once we have obtained the deterministic indices, we need to sample the remaining rows randomly as described in [subsection 4.2](#) for the hybrid sample. Because we will not have explicit access to the probabilities for every sample to rescale, we use *rejection sampling*. Suppose  $\xi_j$  be the  $j$ th random sample, sampled according to the original sampling probabilities in  $\mathbf{p}$ . We reject the random sample  $\xi_j$  if  $\xi_j \in \mathcal{D}$  and resample until  $\xi_j \notin \mathcal{D}$ . This yields that the probability of selection  $\xi_j = p_i/(1 - p_{\text{det}})$ , as desired. We continue to sample in this manner until we have  $s_{\text{rnd}} = s - s_{\text{det}}$  successful random samples.

The problem of determining which combination of independent random variables has a probability greater than a set threshold has also been studied in the context of cryptography. Here a key is defined to be a string of the form  $X_1, \dots, X_m$  where each entry  $X_i$  can take on one of  $n$  values. We are also supplied with a matrix of probabilities  $\mathbf{M}$  such that  $M_{ij} = \Pr[X_i = j]$  and the assignment of each  $X_i$ . The problem of key rank asks for a given probability  $p$ , how many keys have probability greater than  $p$  and has been addressed in [\[15\]](#) and [\[25\]](#). If the key assignments with probability greater than  $p$  are also to be returned, the problem is called key enumeration which has been addressed in [\[32\]](#). Thus, key rank is similar to our problem of calculating  $s_{\text{det}}$  and key enumeration to finding the members of  $\mathcal{D}$ .

**6. Alternating randomized least squares with leverage score sampling.** In this section, we explain how all the algorithm components come together. The sampling procedure to find the indices and weights (i.e.,  $\mathbf{\Omega}$ ) to construct the reduced system is detailed in [subsection 6.1](#). Note that we avoid forming  $\mathbf{\Omega}$  explicitly. Instead, we form  $\tilde{\mathbf{Z}} \equiv \mathbf{\Omega}\mathbf{Z}$  and  $\tilde{\mathbf{X}}^\top \equiv \mathbf{\Omega}\mathbf{X}^\top$  directly. The full CP algorithm that cycles through all modes of the tensors and uses randomized sampling with the leverage scores is given in [subsection 6.2](#). The computations are extremely efficient, and memory movement to extract the right-hand-side from the large tensor  $\mathcal{X}$  actually dominates cost in practice. We explain our method for reducing those costs in [subsection 6.3](#). Finally, the fit calculation is generally too expensive to compute exactly for tensors with billions of nonzeros, so we estimate the fit as described in [subsection 6.4](#).

**6.1. Finding indices and weights.** The first and most important step is identifying the rows and associated weights for probabilistic inclusion in the reduced subproblem. [Algorithm 6.1](#) outlines procedure SKRPLEV for finding these. The inputs are the normalized leverage scores for each factor matrix ( $\mathbf{p}_k = \ell(\mathbf{A}_k)/r$  for  $k = 1, \dots, d$ ), the number of samples ( $s$ ), and the deterministic threshold ( $\tau$ ). A few notes are in order.

- Function DETSKRP, called in [Line 2](#), computes hybrid deterministic indices

$$\text{idet} = \left\{ i \in [N] \mid p_i = \prod_{k=1}^d (\mathbf{p}_k)_{i_k} > \tau \right\}, \quad s_{\text{det}} = |\text{idet}|, \quad \text{and} \quad p_{\text{det}} = \sum_{i \in \text{idet}} p_i.$$

**Algorithm 6.1** Hybrid Deterministic and Random KRP Indices by Leverage Score

---

```

1: function SKRPLEV( $\mathbf{p}_1, \dots, \mathbf{p}_d, s, \tau$ )  $\triangleright \mathbf{p}_k \equiv \ell(\mathbf{A}_k)/r$ 
2:   ( $\text{idet}, s_{\text{det}}, p_{\text{det}}$ )  $\leftarrow$  DETSKRP( $\mathbf{p}_1, \dots, \mathbf{p}_d, \tau$ )  $\triangleright$  Find  $\{i \in [N] \mid p_i > \tau\}$ 
3:    $s_{\text{rnd}} \leftarrow s - s_{\text{det}}$ 
4:   ( $\text{irnd}, \text{wrrnd}$ )  $\leftarrow$  RNSKRP( $\mathbf{p}_1, \dots, \mathbf{p}_d, s_{\text{rnd}}, \tau, p_{\text{det}}$ )  $\triangleright$  See Algorithm 6.2
5:   ( $\text{irnd}, \text{wrrnd}, \bar{s}_{\text{rnd}}$ )  $\leftarrow$  COMBINEREPEATS( $\text{irnd}, \text{wrrnd}$ )  $\triangleright$  After rejection sampling
6:    $\text{idx} \leftarrow \text{CAT}(\text{idet}, \text{irnd})$ 
7:    $\text{wgt} \leftarrow \text{CAT}(\mathbf{1}_{s_{\text{det}}}, \text{wrrnd})$   $\triangleright$  Weights for deterministic indices is 1
8:    $s \leftarrow s_{\text{det}} + \bar{s}_{\text{rnd}}$ 
9:   return ( $\text{idx}, \text{wgt}, s$ )  $\triangleright$  Return indices and weights
10: end function

```

---

**Algorithm 6.2** Random KRP Indices by Leverage Score

---

```

1: function RNSKRP( $\mathbf{p}_1, \dots, \mathbf{p}_d, s_{\text{rnd}}, \tau, p_{\text{det}}$ )  $\triangleright p_{\text{det}} \equiv \sum_{p_i > \tau} p_i$ 
2:   while  $j < s_{\text{rnd}}$  do
3:     for  $k = 1, \dots, d$  do  $\triangleright$  Sample random index  $i \equiv (i_1, \dots, i_k) \in [N]$ 
4:        $i_k \leftarrow \text{MULTINOMIAL}(\mathbf{p}_k)$ 
5:     end for
6:      $p_i \leftarrow \prod_{k=1}^d (\mathbf{p}_k)_{i_k}$ 
7:     if  $p_i \leq \tau$  then  $\triangleright$  Reject if  $p_i > \tau$ 
8:        $\text{irnd}(j) \leftarrow i$ 
9:        $\text{wrrnd}(j) \leftarrow \sqrt{\frac{1-p_{\text{det}}}{p_i s_{\text{rnd}}}}$   $\triangleright$  Weight adjusted for rejected indices
10:       $j \leftarrow j + 1$ 
11:     end if
12:   end while
13:   return ( $\text{irnd}, \text{wrrnd}$ )
14: end function

```

---

without explicitly computing all the probabilities, as described in [subsection 5.3](#). We assume that  $s_{\text{det}} < s$ . If not, we take the  $s$  highest probabilities that are found. Setting  $\tau = 1$  means that no samples are included deterministically ( $\text{idet} = \emptyset, s_{\text{det}} = 0, p_{\text{det}} = 0$ ).

- Function RNSKRP, called in [Line 4](#), is detailed in [Algorithm 6.2](#). It randomly samples indices  $i \sim \text{MULTINOMIAL}(\mathbf{p})$  where  $p_i = \prod_{k=1}^d (\mathbf{p}_k)_{i_k}$  for all  $i \in [N]$ . Any sample with  $p_i > \tau$  is rejected, and the weights are correspondingly adjusted by multiplying them by  $\sqrt{1 - p_{\text{det}}}$ . The same index may be sampled multiple times. Our actual implementation samples and rejects indices in bulk, oversampling to ensure that we still have at least  $s_{\text{rnd}}$  indices after the rejection is complete.
- Function COMBINEREPEATS combines multiple indices as described in [subsection 4.1](#). If row  $i$  appeared  $c_i$  times in  $\text{irnd}$ , then its weight is scaled by  $\sqrt{c_i}$ . The count  $\bar{s}_{\text{rnd}}$  is the number of *unique* indices in that was produced by RNSKRP.

**6.2. Full algorithm.** The CP tensor decomposition of rank  $r$  for an order- $(d+1)$  tensor is defined by  $(d+1)$  factor matrices  $\mathbf{A}_1, \dots, \mathbf{A}_{d+1}$  that minimizes the sum of the squares error between the data tensor  $\mathbf{X}$  and CP model  $\mathbf{M}$ . We use the shorthand  $\mathbf{M} = \llbracket \mathbf{A}_1, \mathbf{A}_2, \dots, \mathbf{A}_{d+1} \rrbracket$  where  $m(i_1, \dots, i_{d+1}) = \sum_{j=1}^r \prod_{k=1}^d a_k(i_k, j)$ . It is usual to normalize the columns of the factor matrices to norm one and absorb the norms into a weight vector  $\boldsymbol{\lambda} \in \mathbb{R}^r$ , in which case we write  $\mathbf{M} = \llbracket \boldsymbol{\lambda}; \mathbf{A}_1, \mathbf{A}_2, \dots, \mathbf{A}_{d+1} \rrbracket$  and  $m(i_1, \dots, i_{d+1}) = \sum_{j=1}^r \lambda_j \prod_{k=1}^d a_k(i_k, j)$ . The standard CP-ALS algorithm solves for each factor matrix in turn (inner iterations), keeping the others fixed. Each least squares problem is of the form shown in (1.1). Although (1.1) is specific to solving for  $\mathbf{A}_{d+1}$ , this is really just a notational convenience. Each outer iteration, we compute the proportion of the data described by the model, i.e.,

$$(6.1) \quad \text{fit} = 1 - \frac{\|\mathbf{X} - \mathbf{M}\|}{\|\mathbf{X}\|}.$$

The method halts when the fit ceases to improve by at least  $10^{-4}$ . We refer the reader to [20] for further details and references on CP-ALS.

Our randomized variant CP-ARLS-LEV is presented in Algorithm 6.3. The inputs are the order- $(d+1)$  tensor,  $\mathbf{X}$ ; the desired rank,  $r \in \mathbb{N}$ ; the number of samples for each least squares problem,  $s \in \mathbb{N}$ ; the deterministic cutoff,  $\tau \in [0, 1]$  (defaults to 1 for random and  $1/s$  for hybrid); the number of outer iterations per epoch,  $\eta \in \mathbb{N}$  (which defaults to 5); the number of failed epochs allowed before convergence,  $\pi$  (which defaults to 3); and the initial guesses for the factor matrices.

We group the iterations into epochs of  $\eta$  outer iterations since the method does not necessarily improve with every step due to the randomness. Further, we may not want to quit until the fit fails to improve for  $\pi$  epochs. In many cases, computing the fit exactly would be too expensive, so we use the approximate fit as documented in subsection 6.4.

We presented the canonical least squares problem in (1.1) in terms of the specific least squares problem for mode  $d+1$ , but the CP-ALS method requires that we solve such a problem for every mode. This is an important implementation detail but does not otherwise require any change in thinking. At inner iteration  $k$ , for instance, we can call the SKRPLEV methods with  $d$  leverage scores vectors — the only difference is that we leave out the  $k$ th vector of leverage scores rather than the  $(d+1)$ st. We let  $\bar{s}$  denote the actual number of sampled rows required by SKRPLEV, which may be less than  $s$  due to combining repeated rows. The function KRPSAMP builds the sampled KRP matrix given the factor matrices, indices of the rows to be combined, and corresponding weights. The work to construct  $\tilde{\mathbf{Z}}$  is  $O(\bar{s}dr)$ . The function TNSRSAMP extracts the appropriate rows of the unfolded matrix as described in subsection 6.3. (Note that we do not explicitly provide KRPSAMP or TNSRSAMP.) The solution of the least squares problem costs  $O(\bar{s}r^2)$ .

We use the same  $s$  for every mode of the tensor, and making  $s$  mode dependent is a topic for future work; see, e.g., [2].

**6.3. Efficient sampling from sparse tensor.** A final consideration for efficiency is quickly compiling the right hand side,  $\tilde{\mathbf{X}}$ . Recall that  $\mathbf{X}$  is the  $(d+1)$ -mode unfolding of the  $(d+1)$ -way tensor  $\mathbf{X}$ . The tensor  $\mathbf{X}$  is sparse, so we store only the nonzeros. We use coordinate format which stores the coordinates  $(i_1, \dots, i_{d+1})$  and value  $x_{i_1, \dots, i_{d+1}}$  for each nonzero [4], for a total storage of  $(d+2) \text{nnz}(\mathbf{X})$  for a  $(d+1)$ -way tensor  $\mathbf{X}$ .

**Algorithm 6.3** CP via Alternating Randomized Least Squares with Leverage Scores

---

```

1: function CP-ARLS-LEV( $\mathcal{X}, r, s, \tau, \eta, \pi, \text{tol}, \{\mathbf{A}_k\}$ )
2:   for  $k = 1, \dots, d+1$  do
3:      $\mathbf{p}_k \leftarrow \ell(\mathbf{A}_k)/r$  ▷ Compute scaled leverage scores for initial guess
4:   end for
5:   repeat
6:     for  $\ell = 1, \dots, \eta$  do ▷ Group outer iterations into epochs
7:       for  $k = 1, \dots, d+1$  do ▷ Cycle through tensor modes
8:          $(\text{idx}, \text{wgt}, \bar{s}) \leftarrow \text{SKRPLEV}(\mathbf{p}_1, \dots, \mathbf{p}_{k-1}, \mathbf{p}_{k+1}, \dots, \mathbf{p}_{d+1}, s, \tau)$  ▷  $\bar{s} \leq s$ 
9:          $\tilde{\mathbf{Z}} \leftarrow \text{KRPSAMP}(\mathbf{A}_1, \dots, \mathbf{A}_{k-1}, \mathbf{A}_{k+1}, \dots, \mathbf{A}_{d+1}, \text{idx}, \text{wgt})$  ▷  $\tilde{\mathbf{Z}} \in \mathbb{R}^{\bar{s} \times r}$ 
10:         $\tilde{\mathbf{X}} \leftarrow \text{TNSRSAMP}(\mathcal{X}, k, \text{idx}, \text{wgt})$  ▷  $\tilde{\mathbf{X}} \in \mathbb{R}^{\bar{s} \times n_k}$ 
11:         $\mathbf{A}_k \leftarrow \arg \min_{\mathbf{B} \in \mathbb{R}^{n_k \times r}} \|\tilde{\mathbf{Z}}\mathbf{B}^\top - \tilde{\mathbf{X}}^\top\|$ 
12:         $\lambda_k \leftarrow$  column norms of  $\mathbf{A}_k$ 
13:         $\mathbf{A}_k \leftarrow \mathbf{A}_k / \lambda_k$  ▷ Rescale columns of  $\mathbf{A}_k$  to length 1
14:         $\mathbf{p}_k \leftarrow \ell(\mathbf{A}_k)/r$ 
15:      end for
16:    end for
17:    Compute fit (exact or approximate) ▷ Computed only after each epoch
18:    until fit has not improved by more than tol for  $\pi$  subsequent epochs
19:    return  $\llbracket \lambda; \mathbf{A}_1, \mathbf{A}_2, \dots, \mathbf{A}_{d+1} \rrbracket$ 
20: end function

```

---

The mode- $(d+1)$  unfolding of  $\mathcal{X}$  produces a matrix of size  $n \times N$  where  $N = \prod_{k=1}^d n_k$  and  $n = n_{d+1}$ . We need to select and reweight the  $s$  columns of  $\mathbf{X}$  (rows of  $\mathbf{X}^\top$ ) that correspond to the selected rows of  $\mathbf{Z}$ , per [Algorithm 6.1](#). In this way, we can quickly build the sparse matrix  $\tilde{\mathbf{X}}$  as follows:

$$\tilde{\mathbf{X}}(i, j) = \begin{cases} \text{wgt}(j) x(i_1, \dots, i_d, i_{d+1}) & \text{if } \text{idx}(j) = (i_1, \dots, i_d) \text{ and } i = i_{d+1} \\ 0 & \text{otherwise.} \end{cases}$$

We typically store the entries of  $\text{idx}$  as linear indices, so, for efficiency, we recommend to precompute and store the linearized indices corresponding to  $(i_1, \dots, i_d)$ . Further, we will operate on all  $(d+1)$  modes, so these should be precomputed for every mode. This requires  $(d+1) \text{nnz}(\mathcal{X})$  additional storage.

**6.4. Estimating the fit.** The tensor fit (6.1) is used in the stopping condition for CP-ARLS-LEV. Unfortunately, calculating the fit costs  $O(n^d)$  and can therefore take many times longer than an epoch. Instead, we *estimate* the fit based on a random sample of tensor elements as in [6]. Since we are focused on sparse tensors, we have the additional difficulty that a uniform sample will return predominantly zero entries, by the definition of sparsity, and is likely to lead to an inaccurate estimate of the fit. To correct this, we use a technique called stratified sampling to sample a specified proportion of zero and nonzero entries [21]. Let  $s_{\text{fit}}$  be the user-specified number of samples and  $\alpha \in [0, 1]$  be the fraction of nonzero elements (by default we use  $\alpha = 0.5$ ). We sample  $\lceil \alpha s_{\text{fit}} \rceil$  nonzero entries uniformly at random and

Name	Size	Nonzeros	Density
Uber	$183 \times 24 \times 1,140 \times 1,717$	3,309,490	0.038%
Enron	$6,066 \times 5,699 \times 244,268 \times 1,176$	54,202,099	$5.5 \times 10^{-7}\%$
Amazon	$4,821,207 \times 1,774,269 \times 1,805,187$	1,741,809,018	$1.1 \times 10^{-8}\%$
Reddit	$8,211,298 \times 176,962 \times 8,116,559$	4,687,474,081	$4.0 \times 10^{-8}\%$

Table 7.1: Large-scale tensors used in experiments

$\lfloor (1 - \alpha)s_{\text{fit}} \rfloor$  zero entries elements uniformly at random. The zeros are selected via *rejection sampling* as described in [21]. The result is a set of  $s_{\text{fit}}$  linear indices, denoted by  $\mathcal{F}$ . If we define  $F = \|\mathbf{X} - \mathbf{M}\|^2$ , then the fit (6.1) is  $1 - \sqrt{F}/\|\mathbf{X}\|$ . We estimate  $F$  as

$$(6.2) \quad \hat{F} = \sum_{i \in \mathcal{F}} \phi_i (m_i - x_i)^2 \quad \text{where} \quad \phi_i = \begin{cases} \text{nnz}(\mathbf{X}) / \lceil \alpha s_{\text{fit}} \rceil & \text{if } x_i \neq 0, \\ (n^{d+1} - \text{nnz}(\mathbf{X})) / \lfloor (1 - \alpha)s_{\text{fit}} \rfloor & \text{if } x_i = 0, \end{cases}$$

where  $m_i$  and  $x_i$  are the  $i$ th entries of  $\mathbf{M}$  and  $\mathbf{X}$ , respectively. The  $\mathbf{M}$  is updated at each step of the algorithm. For the estimated fit, we use  $1 - \sqrt{\hat{F}}/\|\mathbf{X}\|$ . We sample the elements of the tensor once at the beginning of the algorithm and then use that sample for all subsequent estimates.

**7. Numerical results.** We present experiments to demonstrate the benefits of combining repeated rows in sketching algorithms (subsection 7.1), differences between random and hybrid sampling (subsection 7.2), comparisons between our proposed and standard methods

- **Random:** Proposed CP-ARLS-LEV method (Algorithm 6.3) using  $\tau = 1$  (i.e., no deterministic inclusion of rows),  $\eta = 5$ ,  $\pi = 3$ , and  $\text{tol} = 10^{-4}$
- **Hybrid:** Proposed CP-ARLS-LEV method, same as above except  $\tau = 1/s$  (i.e., high-probability rows included deterministically)
- **Standard:** CP-ALS method with standard settings, including  $\text{tol} = 10^{-4}$

(subsections 7.3 to 7.6), example factors for a massive tensor (subsection 7.5), and the benefits of using a randomized range finder for initialization (subsection 7.6). Comparisons to CP-ARLS for dense tensors [6] is provided in the appendix (Appendix C).

The experiments are based on four large-scale sparse tensors from FROSTT [35], the largest having nearly 5B nonzeros, whose sizes are given in Table 7.1. Briefly, we describe the tensors below.

- **Uber:** 4-way count tensor of New York City Taxi Cab pickups between April–August 2014, comprising  $183 \text{ days} \times 24 \text{ hours} \times 1,140 \text{ latitudes} \times 1,717 \text{ longitudes}$  with 3M nonzeros.
- **Amazon:** 3-way count tensor based on user review text of  $5\text{M users} \times 2\text{M words} \times 2\text{M reviews}$  with 2B nonzeros.
- **Reddit:** 3-way log-count<sup>2</sup> tensor of social network postings of  $8\text{M users} \times 200\text{K subreddits} \times 8\text{M words}$  with 5B nonzeros.

<sup>2</sup>This tensor has been modified from the raw count tensor provided by FROSTT. Each entry is  $\log(c + 1)$  where  $c$  is the count. Note that the zeros are unchanged. The primary effect is that large entries are damped.

- **Enron:** 4-way log-count<sup>2</sup> tensor of emails from 6K senders  $\times$  6K receivers  $\times$  244K words  $\times$  1K days with 54M nonzeros.

For the three largest tensors (Enron, Amazon, Reddit), we estimate the fit as specified in [subsection 6.4](#) using the same sampled entries *across all runs* for consistency of comparisons.

For each tensor, we use the same ten initializations across all runs of the randomized algorithms; this is to ensure that, as we vary the sample number, differences in algorithm performance are not due to the quality of initialization. The standard method uses its own initialization. Unless otherwise stated, factor matrices are initialized by drawing each entry from a standard Gaussian distribution.

All experiments were run using MATLAB (Version 2018a) using the Tensor Toolbox for MATLAB [5]. We used a Dual Socket Intel E5-2683v3 2.00 GHz CPU with 256 GB memory for smaller tensors (Uber and Enron) and a Dual Socket AMD Epyc 7601 2.20 GHz CPU with 1 TB memory for the larger tensors (Amazon and Reddit).

**7.1. Combining repeated rows.** We show that combining repeated rows ([subsection 4.1](#)) can significantly decrease the time dedicated to solving the sampled system. This does not change the sampling methodology nor the solution; instead, it merely introduces a preprocessing step that removes redundancies in the linear system. We rarely see repeated rows with random factor matrices since they are incoherent, but we often see repeated rows as we converge toward a solution because the leverage scores are skewed. Therefore, in this experiment, we use the *solution* factor matrices for the Amazon tensor from a run of CP-ALS with rank  $r = 10$  (producing a final fit of 0.3055). We consider the least squares subproblems for modes 1–3.

[Figure 7.1](#) shows the results for problems of the form in (1.1) with  $d = 4$ ,  $r = 10$ , and different values of  $N$  and  $n$ , for both the random and hybrid leverage score sampling schemes. (Note that we have not provided sufficient information here to compare the random and hybrid schemes — comparing those two methods is explored in the next subsection.) First, the time to solution, plotted in blue, is *always* improved by combining rows. The difference is particularly dramatic for the random method in mode 2. Second, although all the systems are roughly the same size ( $N = O(10^{12})$  and  $n = O(10^6)$ ), the solution time depends on the number of nonzeros in the right-hand side, which is plotted in red. Combining rows also reduces the nonzeros and correlates closely to the improvements in time. Third, the reductions are much smaller for the hybrid sampling since deterministic inclusion of high-probability rows results in fewer repeats.

In general, the dominant cost for each subproblem is usually in the setup for the least squares solve. Specifically, extracting the sampled fibers (discussed in [subsection 6.3](#)) from the sparse tensor costs approximately 14s for mode 1, 25s for mode 2, and 11s seconds for mode 3. In our implementation, this step has small variance in cost between the four methods as we find the unique fiber indices before extracting the relevant fibers of the tensor. But as mode 2 in our experiments show, without combining repeats or hybrid sampling the solve can eclipse the fiber extraction and greatly increase the overall runtime.

As there is essentially no downside to combining rows, we recommend that combining rows should be a default in any leverage-score based sampling scheme. All remaining experiments in this work do so.



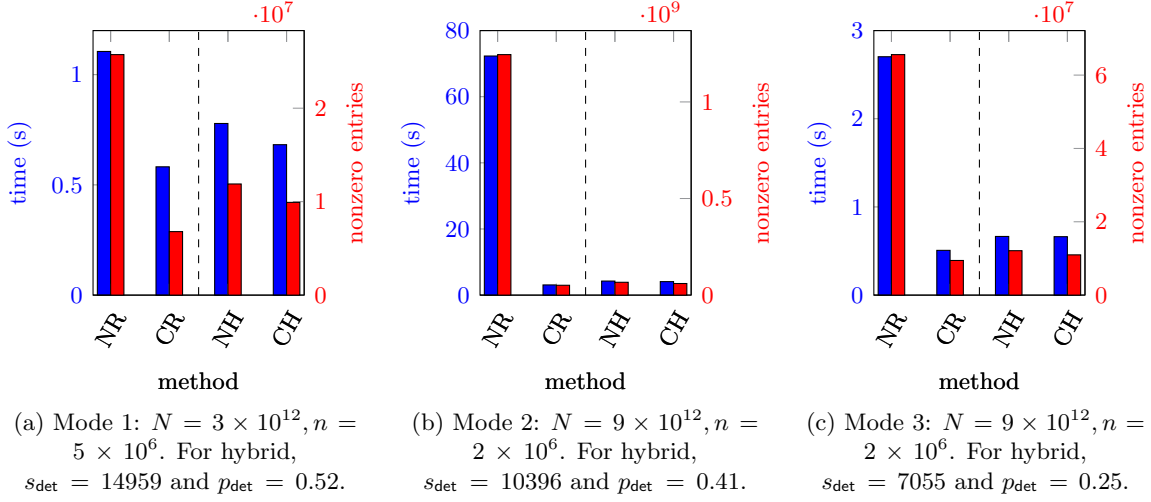


Figure 7.1: Comparing combining rows (C) with not combining (N) for both random (R) and hybrid (H) sampling schemes for least squares sketching. We report both the combined reweight and solution time (blue) and number of nonzeros in the sampled right-hand side (red), which closely correlate. The matrix is of size  $N \times 10$ , with  $n$  right-hand sides, based on modes 1–3 of the Amazon tensor and factor matrices from a solution of rank  $r = 10$ . The methods sample  $s = 2^{17}$  rows, random uses  $\tau = 1$ , and hybrid uses  $\tau = 1/s$ . The results are averaged across 10 runs. Note that each mode is on a different scale.

**7.2. Comparing random and hybrid sampling.** We consider a specific least squares problem to illustrate the differences between random and hybrid sampling. We use the Uber tensor and solve for the first factor matrix, fixing the factors for modes 2–4 to a solution produced by CP-ALS. This corresponds to a least squares problem of the form (1.1) with  $N = 46,977,120$  rows,  $r = 10$  columns, and  $n = 183$  right-hand sides. The example was chosen for two reasons: (1) It is small enough to compute the true solution, which would be too expensive for the larger tensors. (2) It shows a marked difference between random and hybrid sampling because it has concentrated leverage score structure.

Figure 7.2a shows the relative residual difference between the sampled solution and the exact solution as the number of samples increases from  $2^7$  to  $2^{19}$ . Specifically, using the notation of Theorem 5.3, the y-axis corresponds to

$$\frac{\left| \|\mathbf{Z}\tilde{\mathbf{B}}_*^\top - \mathbf{X}^\top\|_F^2 - \|\mathbf{Z}\mathbf{B}_*^\top - \mathbf{X}^\top\|_F^2 \right|}{\max\{1, \|\mathbf{Z}\mathbf{B}_*^\top - \mathbf{X}^\top\|_F^2\}}.$$

We compare random sampling method and the hybrid-deterministic sampling with  $\tau = 1/s$ . For each number of samples, we solve the least squares problem 10 times, and the error bars indicate the range of values obtained while the solid line denotes the median. Note that the maximum number of samples,  $s = 2^{19}$ , represents only 1.1% of the rows in the matrix and achieves an accuracy of  $10^{-4}$ . For this problem, hybrid sampling clearly improves over random


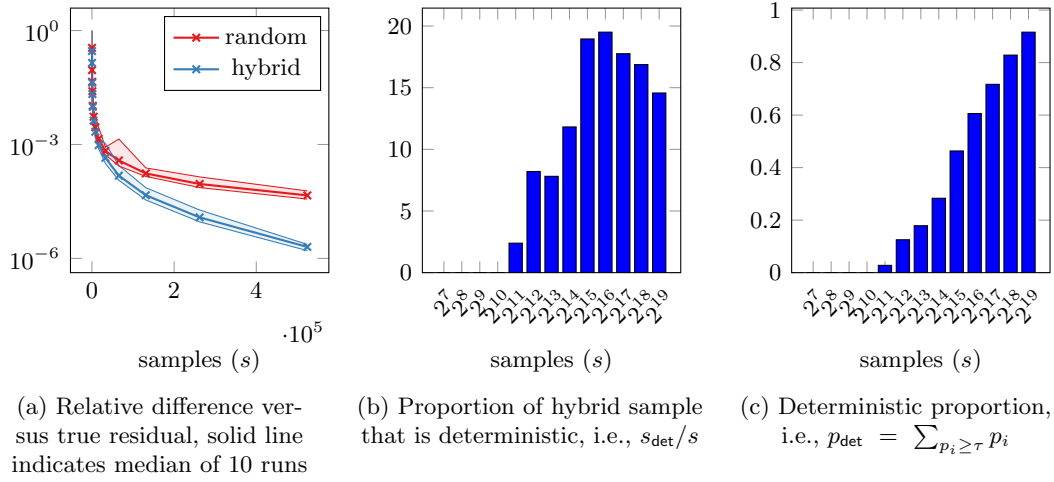


Figure 7.2: Single least squares problem with  $N = 46,977,120$  rows,  $r = 10$  columns, and  $n = 183$  right-hand sides, corresponding to solving for the first factor matrix in the Uber problem. Random uses  $\tau = 1$  and hybrid uses  $\tau = 1/s$ .


sampling, obtaining approximately 2 more digits of accuracy for  $s = 2^{19}$  samples. Figure 7.2b show the fraction of the hybrid sample that is deterministically included ( $s_{\text{det}}/s$ ), which peaks at less than 20%. Figure 7.2c shows the fraction of the total sampling probability contained in these samples ( $p_{\text{det}}$ ), which goes as high as 90%. Note that these values are the same across all runs as they are deterministic based on the threshold  $\tau$ . If we look at the case of  $s = 2^{19}$ , this means that 15% of the rows that are included deterministically would account for approximately 90% of the sampled rows in the random method. Hence, we are getting better sample efficiency with the hybrid method for some added computational cost. The next sections explore some tradeoffs between these approaches.

**7.3. Equivocal performance on small tensor.** We consider the rank  $r = 25$  CP tensor decomposition using matrix sketching on the Uber tensor. On this relatively small tensor, leverage score sampling is able to perform as well as the standard method.

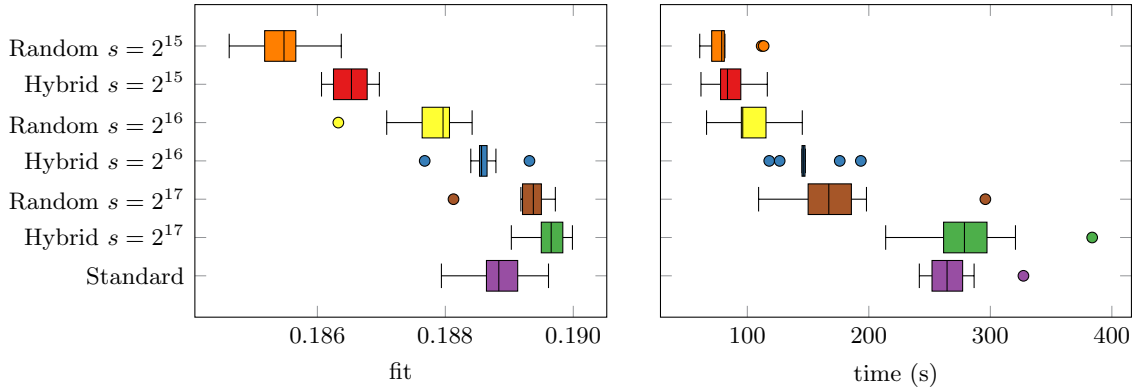Figure 7.3 shows results of tens run each for CP-ARLS-LEV (random and hybrid) for sample sizes  $s \in \{2^{15}, 2^{16}, 2^{17}\}$  and CP-ALS (standard). Figure 7.3a presents box plots to compare the final fit and total run time; Figure 7.3b shows the median performance for each method (individual runs are shown in the appendix in Figure D.1). For each value of  $s$ , hybrid deterministic sampling improved the median final fit as compared to random, but hybrid is slower than random. For  $s = 2^{17}$ , both randomized algorithms achieve a slightly better final fit than the standard method. In this case, the random method is substantially faster than the standard method, but the hybrid method is somewhat slower. As this is a relatively small problem, we did not expect much improvement in time but instead use this to demonstrate the correctness of the sampling method.



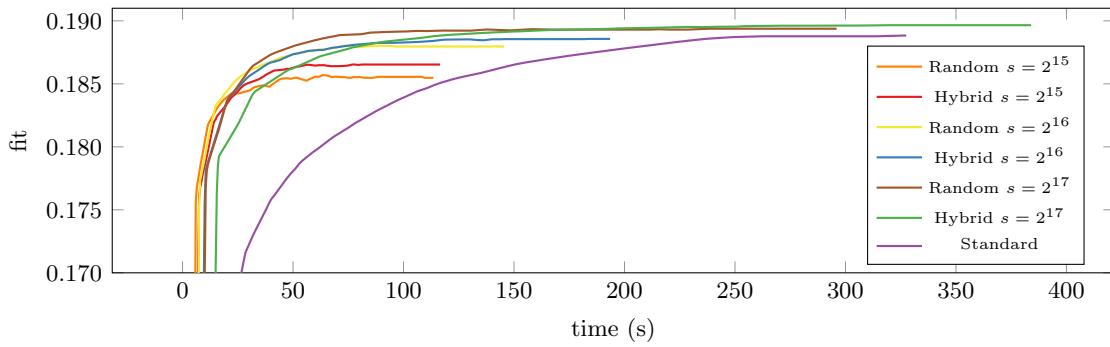(a) Box plot of final fit and total time over 10 runs.



(b) Median fit (computed exactly) across 10 runs plotted for all methods.


Figure 7.3: Comparison of CP-ARLS-LEV (random and hybrid) with varying number of samples  $s \in \{2^{16}, 2^{17}, 2^{18}\}$  and CP-ALS (standard) to compute a rank  $r = 25$  CP decomposition of the Uber tensor with 3.3 million nonzeros. Random uses  $\tau = 1$  and hybrid uses  $\tau = 1/s$ . Each experiment is run 10 times.

**7.4. Order of magnitude speed improvement on massive sparse tensors.** This section demonstrates how leverage score sampling scales favorably for massive sparse tensors, comparing CP-ALS (standard) and CP-ARLS-LEV (random and hybrid). Figure 7.4 shows runs for the Amazon tensor with rank  $r = 25$  using  $s \in \{2^{16}, 2^{17}\}$  samples. Figure 7.5 shows runs for the Reddit tensor with rank  $r = 25$  and  $s = 2^{17}$  samples. For both tensors, the random and hybrid runs use an estimated fit (as described in subsection 6.4) with  $s_{\text{fit}} = 2^{27}$  stratified samples, evenly divided between zeros and nonzeros, and the plots of the estimated fits are bias corrected.

Figures 7.4a and 7.5a display statistics for the 10 runs for Amazon and Reddit, respectively. For Amazon, the maximum mean run time is 47 minutes for the random and hybrid methods versus almost 8 hours for the standard method, yielding over a 10 times speedup. For Reddit, we have 6 hours for random and 8 hours for hybrid methods versus 4 days for the standard method, yield over a 12 times speedup. Each method varies in the number of iterations

Method	Mean Time (s)	Speedup	Time Per Epoch (s)	Median Fit	Best Fit
Random $s = 2^{16}$	$2.18 \times 10^3$	12.97	333.6	0.3374	0.3380
Hybrid $s = 2^{16}$	$2.83 \times 10^3$	10.00	346.5	0.3384	0.3391
Random $s = 2^{17}$	$2.51 \times 10^3$	11.27	358.2	0.3387	0.3388
Hybrid $s = 2^{17}$	$2.38 \times 10^3$	11.87	378.8	0.3387	0.3397
Standard	$2.83 \times 10^4$	1.00	N/A	0.3393	0.3396

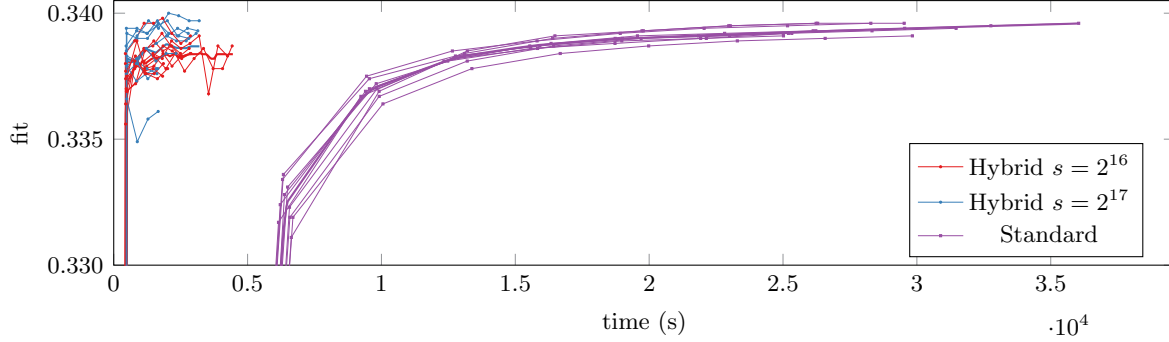(a) Statistics for 10 runs. Total time and speedup do not include finding the true fit for runs of the random and hybrid methods, which was only done to compare to the standard method.



(b) Individual runs with bias-corrected estimated fit plotted for hybrid and true fit for standard.

Figure 7.4: Comparison of CP-ARLS-LEV (random and hybrid) with varying number of samples  $s \in \{2^{16}, 2^{17}\}$  and CP-ALS (standard) to compute a rank  $r = 25$  CP decomposition of the Amazon tensor with 1.7 billion nonzeros. Random uses  $\tau = 1$  and hybrid uses  $\tau = 1/s$ . Each experiment is run 10 times.


required to terminate, so we also report the average epoch time to facilitate comparison between the random and hybrid methods. We see that the epochs are always faster for the random method. The best fits are essentially equivalent across all methods.

Figures 7.4b and 7.5b shows the estimated fit versus time for the hybrid method, and the true fit versus time for standard method. We omit the random method because the plots look nearly identical to the hybrid method. The estimated fit curves in this figure were bias-corrected by the difference between the final true fit and final estimated fit. The dotted lines correspond to individual runs and the solid lines to the median fit or estimated fit calculated across all runs. Each dot corresponds to an epoch for the hybrid runs and an iteration for the standard run.

**7.5. Example factors for massive tensor.** This section shows that factors for the Reddit tensor computed by CP-ARLS-LEV. Reddit is a community forum wherein users comment within subreddits related to their interests. The number of users associated with a subreddit can vary widely, with `r/AskReddit` and `r/funny` being two of the larger subreddits. A few notes about the data processing are in order: common stop words were removed and the

Method	Mean Time (s)	Speedup	Time Per Epoch (s)	Median Fit	Best Fit
Random $s = 2^{17}$	$2.16 \times 10^4$	16.27	1832.6	0.0585	0.0590
Hybrid $s = 2^{17}$	$2.92 \times 10^4$	12.00	2231.0	0.0585	0.0589
Standard	$3.51 \times 10^5$	1.00	-	0.0588	0.0593

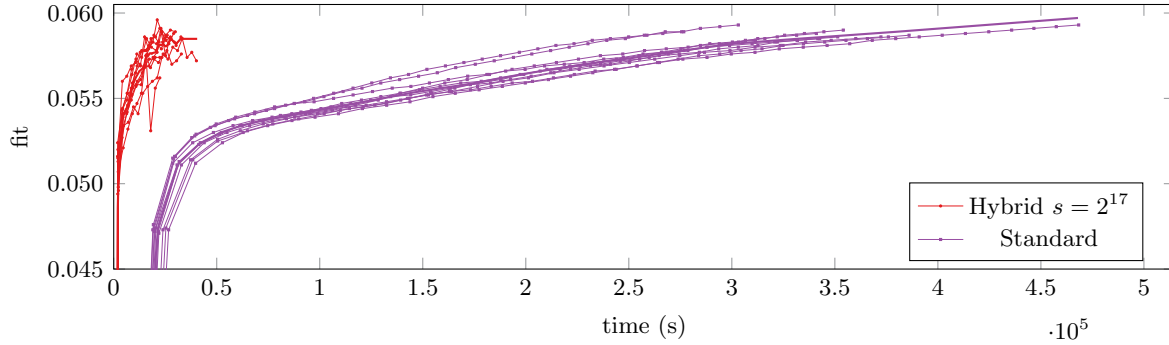(a) Median statistics and best fit across 10 runs. Total time and speedup do not include finding the true fit for runs of the randomized methods, which was done to compare to the Standard method.



(b) Individual runs with the bias-corrected estimated fit plotted for CP-ARLS-LEV and true fit plotted for CP-ALS.

Figure 7.5: Comparison of CP-ARLS-LEV (random and hybrid) with number of samples  $s = 2^{17}$  and CP-ALS (standard) to compute a rank  $r = 25$  CP decomposition of the Reddit tensor with 4.68 billion nonzeros. Random uses  $\tau = 1$  and hybrid uses  $\tau = 1/s$ . Each experiment is run 10 times.

remaining worked were stemmed (e.g., “people” becomes “peopl”); users, subreddits, and words with fewer than five entries were removed.

We give some examples of the components computed for this tensor in Figures 7.6 to 7.8. We cannot show the entirety of any component since the smallest dimension is 176k. Instead, we show the top-25 highest-magnitude subreddits, the top-25 highest-magnitude words, and the top 1000 highest-magnitude users as bar charts. The length of a bar represents the magnitude and the color represents the *overall* prevalence in the data, on a scale of zero to one. In this manner, blue colors indicate rarer words or subreddits and are of interest since they are less likely to appear in many factors.

- Figure 7.6 shows component 6 (of 25) which is focused on non-U.S. news. The word factor includes rarer words like countries (stemmed to “countri”) and world. One can see the top subreddits include “worldnews”, “europe”, “unitedkingdom”, “canada”, “australia”, “syriancivilwar”, “india”, “Israel”, “UkraineConflict”, and “Scotland”.
- Figure 7.7 shows component 6 (of 25) focused on soccer and sports. The top words include “player”, “team”, “leagu” (stemmed version of league), “goal”, “fan”, and “club”. The top subreddits include “soccer”, “reddevils”, “Gunners”, “FIFA”, “Liv-

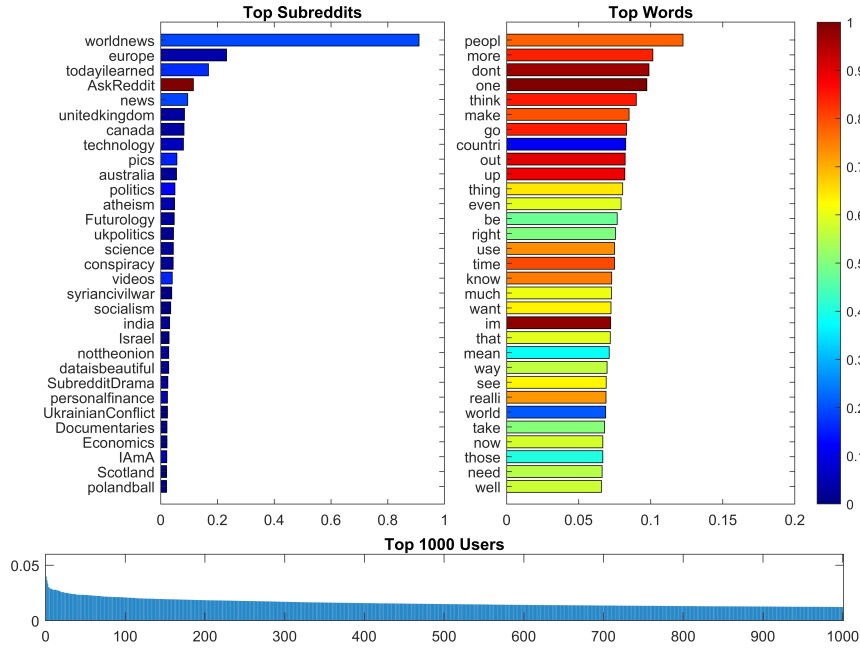


Figure 7.6: Reddit Factor 6/25: Politics and World News

erpoolIFC”, etc.

- Figure 7.8 shows component 19 (of 25) focused on movies and television, with a lean toward science fiction and fantasy. The top words include “movi[e]”, “film”, “watch”, and “charact[er]”. The top subreddits include “movies”, “television”, “StarWars”, “gameofthrones”, “marvelstudios”, etc.

The remaining factors are shown in Appendix E.

**7.6. Initialization via randomized range finder.** This section uses the Enron tensor to illustrate how performance can be improved for some tensors via randomized range finder (RRF) initialization. The quality of the randomized least squares is adversely affected by the norm of the right hand side that is outside the range of the matrix, which we denote as  $\mathbf{X}^\perp$ . A random initialization could result in large  $\mathbf{X}^\perp$ , hurting the performance of the run. We show that this can be fixed by simply initializing with a random linear combination of the fibers in the matricized tensor, a method referred to in the literature as RRF [16]. (It can also be that  $\mathbf{X}^\perp$  is large because the method does not have multilinear structure, but this is a property of the tensor that would generally lead to sub par performance of any method on the problem.)

Figure 7.9 shows the difference between runs with a random initialization and runs initialized via RRF on the Enron tensor. As before, the random initialization draws from a standard Gaussian for each element of the factor matrix. Runs initialized via RRF formed the initial factor matrix from a random linear combination of the matricized fibers. This was done by first drawing  $s_{\text{init}}$  fibers uniformly from the nonzero fibers of the matricized tensor, in this case using  $s_{\text{init}} = 10^5$ . As CP-ARLS-LEV already forms the linear indices of elements along



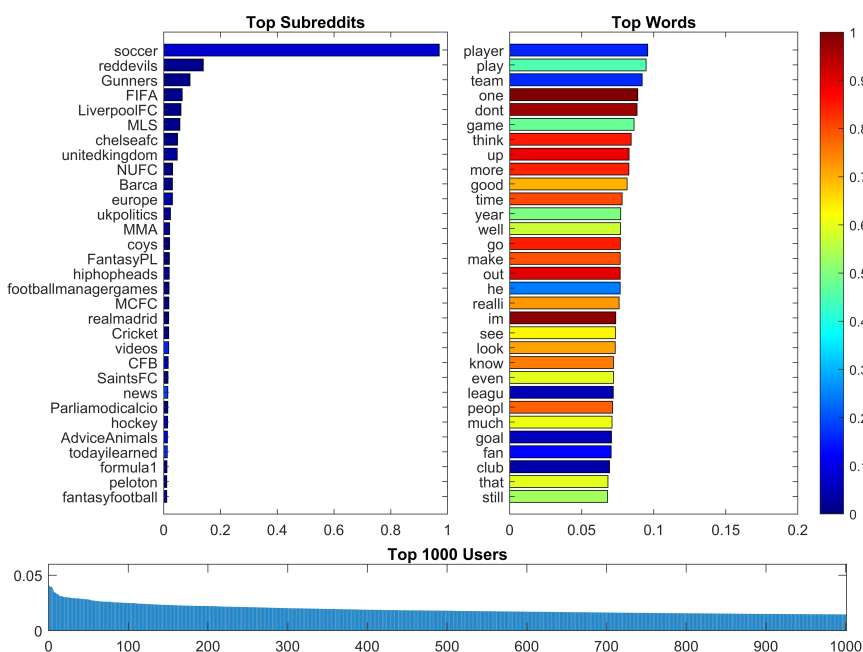


Figure 7.7: Reddit Factor 18/25: Soccer

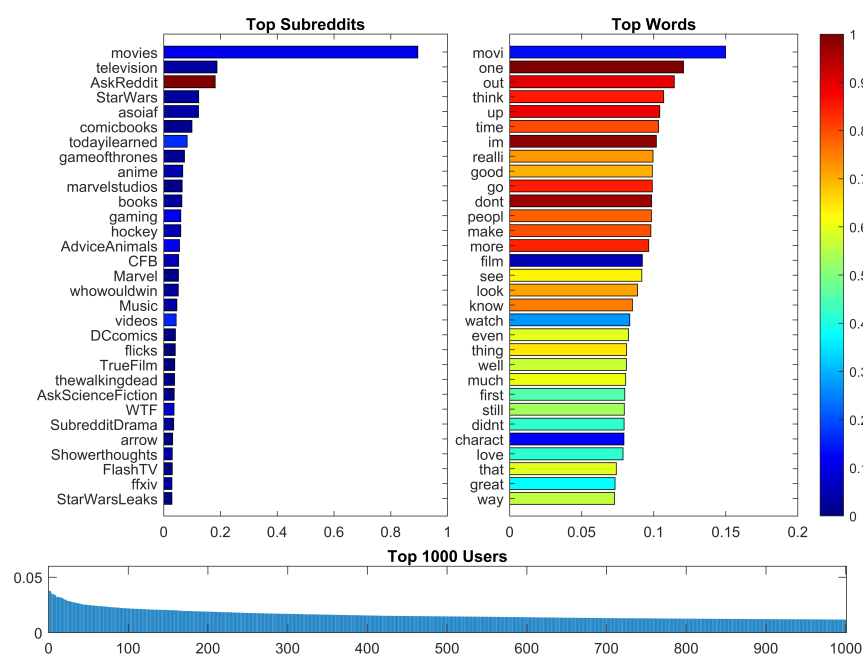


Figure 7.8: Reddit Factor 19/25: Film and Television

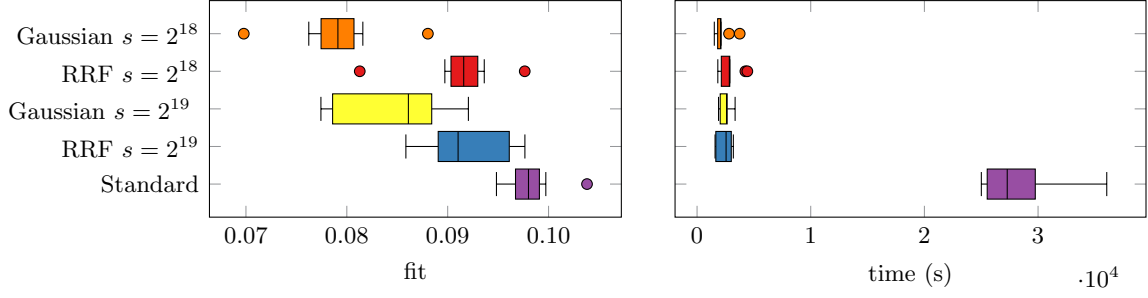


Figure 7.9: Comparison of different methods of initialization for CP-ARLS-LEV hybrid ( $\tau = 1/s$ ) on the Enron tensor with 54.2 million nonzeros and rank  $r = 25$ . Each box plot represents 10 runs, and the experiments show that initializing via the Randomized Range Finder (RRF) with  $s_{\text{init}} = 10^5$  provides a significant improvement in fit compared to Gaussian initialization.

each mode unfolding as a preprocessing step, sampling and extracting the fibers is an efficient computation. These are then multiplied by a random Gaussian matrix  $\mathbf{\Omega} \in \mathbb{R}^{s_{\text{init}} \times r}$  in order to form a random linear combination of the sampled fibers for each column of the factor matrix. By forming the columns of our initialization out of the columns of the matricized tensor we tend to decrease the magnitude of  $\mathbf{X}^\perp$ , or the part of  $\mathbf{X}$  that is perpendicular to the column space of our factor matrix.

For each of the runs of hybrid (CP-ARLS-LEV), we used an estimated fit with  $s_{\text{fit}} = 2^{25}$  stratified samples, evenly divided between zeros and nonzeros with tensor elements were only sampled once and shared across all epochs and runs for consistency of reporting. For both methods, the stopping tolerance is  $10^{-4}$ .

The left panel of Figure 7.9 shows the fit values across 10 runs for each initialization method for sample size  $s = 2^{18}$  and  $s = 2^{19}$ ; 10 runs of CP-ALS are also included for comparison. The experiments show that the RRF greatly improves the fit found by CP-ARLS-LEV and that the fit is only comparable to CP-ALS if the RRF method is used. The right panel of Figure 7.9 shows that the total run time is roughly the same for either initialization method. Furthermore, the median runtime with RRF initialization for  $s = 2^{18}$  samples is 5.78 times faster and for  $s = 2^{19}$  samples is 4.39 times faster than the median runtime for CP-ALS.

**8. Conclusions.** We propose CP-ARLS-LEV, a randomized algorithm which applies leverage score-based sketching to the overdetermined least squares problem in CP-ALS. By sampling according to leverage score estimates, we avoid destroying the sparse structure of the tensor while still limiting the number of samples for an  $\epsilon$ -accurate solution. Making this algorithm practical for large sparse tensors requires special application. First, we use a known bound on the Khatri-Rao product leverage scores to efficiently sample by independently drawing rows from each factor matrix. From this, we can derive the number of samples required. Second, we extract the sampled tensor fibers efficiently by storing precomputed linear indices of the tensor fibers. Finally, we avoid repeated samples by combining repeated rows and deterministically including high-probability rows, techniques which have applications in matrix sketching more broadly. In our numerical results, we show that CP-ARLS-LEV implemented

with all these techniques yields an order of magnitude speed ups on large-scale sparse tensors.

The paper leaves open many exciting theoretical directions. What is the optimal way to pick the number of samples (per mode even) and the deterministic threshold? In general, these were chosen in this paper through numerical experiments. Is it possible to show that hybrid sampling improves the  $\beta$  factor in the leverage score estimates or to give a bound on the improvement in the  $\epsilon$ -accuracy? And is there a more robust stopping condition for the algorithm than estimated fit? Especially on the large tensors, obtaining a low-variance estimate of the fit required an extremely large number of samples.

Finally, CP-ARLS-LEV has another advantage over CP-ALS in that it can be used on large distributed datasets. Say one wanted to decompose a tensor that had to be stored across multiple nodes. Each iteration of CP-ALS requires solving a system involving the entire tensor, but using CP-ARLS-LEV one could store all the factor matrices on one node and sample based off the associated leverage scores. The node could then gather the sampled fibers from the distributed tensor and solve the much smaller sampled system on one node. Implementing this distributed algorithm and parallelizing much of the current implementation is a direction of future work.

**Appendix A. Acknowledgments.** This work was supported by the Department of Energy Office of Science Advanced Scientific Computing Research Applied Mathematics. B.W.L. was also supported by the Department of Energy Computational Science Graduate Fellowship program (DE-FG02-97ER25308). We would like to thank Daniel Martin for pointing us to the relevant problems of key rank and key enumeration in cryptography and providing us with the relevant references [15, 25, 32]. Thanks to Jimmy Peng for alerting us of typos in an earlier draft.

Sandia National Laboratories is a multitechnology laboratory managed and operated by National Technology and Engineering Solutions of Sandia, LLC., a wholly owned subsidiary of Honeywell International, Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA-0003525.

**Appendix B. Proof of Theorem 3.6.** We provide a clear explanation of Theorem 3.6 since the ingredients are spread through several references. For ease of reference to existing literature, we use standard least squares notation as follows.

Consider the overdetermined least squares problem defined by the *design matrix*  $\mathbf{A} \in \mathbb{R}^{n \times d}$  and  $\mathbf{b} \in \mathbb{R}^n$  with  $n > d$  and  $\text{rank}(\mathbf{A}) = d$ . Define the optimal squared residual to be

$$(B.1) \quad \mathcal{R}^2 \triangleq \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{Ax} - \mathbf{b}\|_2^2.$$

The SVD of the design matrix is  $\mathbf{A} = \mathbf{U}_\mathbf{A} \Sigma_\mathbf{A} \mathbf{V}_\mathbf{A}^\top$ , so  $\mathbf{U}_\mathbf{A}$  is an orthonormal basis for the  $d$ -dimensional column space of  $\mathbf{A}$ . Let  $\mathbf{U}_\mathbf{A}^\perp$  be an orthonormal basis for the  $(n - d)$ -dimensional subspace orthogonal to the column space of  $\mathbf{A}$ . We define  $\mathbf{b}^\perp$  to be the projection of the vector  $\mathbf{b}$  onto this orthogonal subspace:  $\mathbf{b}^\perp \triangleq \mathbf{U}_\mathbf{A}^\perp \mathbf{U}_\mathbf{A}^{\perp\top} \mathbf{b}$ . This vector is important because the residual of the least squares problem is the norm of this vector;  $\mathbf{x}$  can be chosen so that  $\mathbf{Ax}$  exactly matches the part of  $\mathbf{b}$  in the column space of  $\mathbf{A}$  but cannot, by definition, match

anything in the range spanned by  $\mathbf{U}_\mathbf{A}^\perp$ :

$$\mathcal{R}^2 = \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{A}\mathbf{x} - \mathbf{b}\|_2^2 = \|\mathbf{U}_\mathbf{A}^\perp \mathbf{U}_\mathbf{A}^{\perp\top} \mathbf{b}\|_2^2 = \|\mathbf{b}^\perp\|_2^2$$

We denote the solution to the least squares problem by  $\mathbf{x}_{\text{opt}}$ , and thus  $\mathbf{b} = \mathbf{A}\mathbf{x}_{\text{opt}} + \mathbf{b}^\perp$ .

We are specifically interested in the sketching problem defined by a matrix  $\mathbf{S} \in \mathbb{R}^{s \times n}$ :

$$(B.2) \quad \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{S}\mathbf{A}\mathbf{x} - \mathbf{S}\mathbf{b}\|_2^2.$$

Following the technique in Drineas et al. [13], we split the proof into two parts. In [Appendix B.1](#), we prove bounds on both the residual and the solution of the sketched system for a *specific* sketching matrix  $\mathbf{S}$  that satisfies certain *structural conditions*. The proofs follow deterministically and do not consider the random aspect of the sketching matrix generation. In [Appendix B.2](#), we then consider that  $\mathbf{S}$  is drawn from a distribution over matrices  $\mathcal{D}$ , i.e.,  $\mathbf{S} \sim \mathcal{D}$ , and prove that the required structural conditions hold with high probability if the number of samples is large enough. Finally, the proof is completed by union bounding over these two properties occurring so that the bound on the residual and solution hold with high probability.

**B.1. Properties of sketching matrix under structural conditions.** The results in this section are Lemma 1 and 2 in [13]. The structure is similar to Theorem 23 in Woodruff [39], except that work uses CountSketch, a different type of sketching.

We begin by assuming that our matrix satisfies two *structural conditions*:

$$(SC1) \quad \sigma_{\min}^2(\mathbf{S}\mathbf{U}_\mathbf{A}) \geq 1/\sqrt{2}, \quad \text{and}$$

$$(SC2) \quad \|\mathbf{U}_\mathbf{A}^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_2^2 \leq \epsilon \mathcal{R}^2/2.$$

We first consider bounds with no restraints on the vector  $\mathbf{b}$ .

**Theorem B.1 ([13]).** *For the overdetermined least squares problem (B.2), assume the sketch matrix  $\mathbf{S}$  satisfies (SC1) and (SC2) for some  $\epsilon \in (0, 1)$ . Then the solution to the sketched problem, denoted  $\tilde{\mathbf{x}}_{\text{opt}}$ , satisfies the following two bounds:*

$$\begin{aligned} \|\mathbf{A}\tilde{\mathbf{x}}_{\text{opt}} - \mathbf{b}\|_2^2 &\leq (1 + \epsilon) \|\mathbf{A}\mathbf{x}_{\text{opt}} - \mathbf{b}\|_2^2, \quad \text{and} \\ \|\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}}\|_2^2 &\leq \frac{\epsilon \|\mathbf{A}\mathbf{x}_{\text{opt}} - \mathbf{b}\|_2^2}{\sigma_{\min}^2(\mathbf{A})}. \end{aligned}$$

*Proof.* We begin by rewriting the sketched regression problem:

$$\begin{aligned} \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{S}\mathbf{A}\mathbf{x} - \mathbf{S}\mathbf{b}\|_2^2 &= \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{S}\mathbf{A}(\mathbf{x} + \mathbf{x}_{\text{opt}} - \mathbf{x}_{\text{opt}}) - \mathbf{S}(\mathbf{A}\mathbf{x}_{\text{opt}} + \mathbf{b}^\perp)\|_2^2, \\ &= \min_{\mathbf{x} \in \mathbb{R}^d} \|\mathbf{S}\mathbf{A}(\mathbf{x} - \mathbf{x}_{\text{opt}}) - \mathbf{S}\mathbf{b}^\perp\|_2^2, \\ &= \min_{\mathbf{y} \in \mathbb{R}^d} \|\mathbf{S}\mathbf{U}_\mathbf{A}(\mathbf{y} - \mathbf{y}_{\text{opt}}) - \mathbf{S}\mathbf{b}^\perp\|_2^2. \end{aligned}$$

In the last line, we reparameterize the vectors  $\mathbf{x}$  and  $\mathbf{x}_{\text{opt}}$  in terms of the orthonormal basis  $\mathbf{U}_{\mathbf{A}}$  such that  $\mathbf{U}_{\mathbf{A}}\mathbf{y} = \mathbf{A}\mathbf{x}$  and the analogous relationships hold for  $\mathbf{x}_{\text{opt}}/\mathbf{y}_{\text{opt}}$  and  $\tilde{\mathbf{x}}_{\text{opt}}/\tilde{\mathbf{y}}_{\text{opt}}$ . The solution,  $\tilde{\mathbf{y}}_{\text{opt}}$ , satisfies the normal equation, i.e.,

$$(\mathbf{S}\mathbf{U}_{\mathbf{A}})^{\top}\mathbf{S}\mathbf{U}_{\mathbf{A}}(\tilde{\mathbf{y}}_{\text{opt}} - \mathbf{y}_{\text{opt}}) = (\mathbf{S}\mathbf{U}_{\mathbf{A}})^{\top}\mathbf{S}\mathbf{b}^{\perp}.$$

By (SC1) we have that  $\sigma_i((\mathbf{S}\mathbf{U}_{\mathbf{A}})^{\top}\mathbf{S}\mathbf{U}_{\mathbf{A}}) = \sigma_i^2(\mathbf{S}\mathbf{U}_{\mathbf{A}}) \geq 1/\sqrt{2}$ . Thus taking the norm squared of both sides gives and applying this conditions gives:

$$\|(\tilde{\mathbf{y}}_{\text{opt}} - \mathbf{y}_{\text{opt}})\|_2^2/2 \leq \|(\mathbf{S}\mathbf{U}_{\mathbf{A}})^{\top}\mathbf{S}\mathbf{U}_{\mathbf{A}}(\tilde{\mathbf{y}}_{\text{opt}} - \mathbf{y}_{\text{opt}})\|_2^2 = \|(\mathbf{S}\mathbf{U}_{\mathbf{A}})^{\top}\mathbf{S}\mathbf{b}^{\perp}\|_2^2.$$

Finally we apply (SC2) to the right hand side of this inequality to obtain:

$$\begin{aligned} \|(\tilde{\mathbf{y}}_{\text{opt}} - \mathbf{y}_{\text{opt}})\|_2^2/2 &\leq \|\mathbf{U}_{\mathbf{A}}^{\top}\mathbf{S}^{\top}\mathbf{S}\mathbf{b}^{\perp}\|_2^2 \leq \epsilon\mathcal{R}^2/2, \\ \text{(B.3)} \quad &\implies \|(\tilde{\mathbf{y}}_{\text{opt}} - \mathbf{y}_{\text{opt}})\|_2^2 \leq \epsilon\mathcal{R}^2. \end{aligned}$$

We can then immediately show that this result implies the desired result on the residual:

$$\begin{aligned} \|\mathbf{b} - \mathbf{A}\tilde{\mathbf{x}}_{\text{opt}}\|_2^2 &= \|\mathbf{b} - \mathbf{A}\mathbf{x}_{\text{opt}} + \mathbf{A}\mathbf{x}_{\text{opt}} - \mathbf{A}\tilde{\mathbf{x}}_{\text{opt}}\|_2^2, \\ &= \|\mathbf{b} - \mathbf{A}\mathbf{x}_{\text{opt}}\|_2^2 + \|\mathbf{A}(\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}})\|_2^2, \\ &= \mathcal{R}^2 + \|\mathbf{U}_{\mathbf{A}}(\mathbf{y}_{\text{opt}} - \tilde{\mathbf{y}}_{\text{opt}})\|_2^2 = \mathcal{R}^2 + \|(\mathbf{y}_{\text{opt}} - \tilde{\mathbf{y}}_{\text{opt}})\|_2^2, \\ &\leq \mathcal{R}^2 + \epsilon\mathcal{R}^2 = (1 + \epsilon)\|\mathbf{b} - \mathbf{A}\mathbf{x}_{\text{opt}}\|_2^2, \end{aligned}$$

where we have used in line 2 that  $\mathbf{b} - \mathbf{A}\mathbf{x}_{\text{opt}} = \mathbf{b}^{\perp}$  is orthogonal to  $\mathbf{A}$  times any vector and in the third line that  $\mathbf{U}_{\mathbf{A}}$  is a matrix with orthonormal columns.

Lastly, to obtain the bound on the solution recall that  $\mathbf{A}(\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}}) = \mathbf{U}_{\mathbf{A}}(\mathbf{y}_{\text{opt}} - \tilde{\mathbf{y}}_{\text{opt}})$ . Taking the norm of both sides we have:

$$\sigma_{\min}^2(\mathbf{A})\|(\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}})\|_2^2 \leq \|\mathbf{A}(\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}})\|_2^2 = \|\mathbf{U}_{\mathbf{A}}(\mathbf{y}_{\text{opt}} - \tilde{\mathbf{y}}_{\text{opt}})\|_2^2.$$

Recall that we assume  $\text{rank}(\mathbf{A}) = d$  so that  $\sigma_{\min}(\mathbf{A}) > 0$ . We then apply (B.3) and rearrange to obtain the desired result: ■

$$\|(\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}})\|_2^2 \leq \frac{\|(\mathbf{y}_{\text{opt}} - \tilde{\mathbf{y}}_{\text{opt}})\|_2^2}{\sigma_{\min}^2(\mathbf{A})} \leq \frac{\epsilon^2\mathcal{R}^2}{\sigma_{\min}^2(\mathbf{A})}.$$

We can obtain a tighter bound if we assume a constant fraction of  $\mathbf{b}$  is in the column space of  $\mathbf{A}$ . This is typically a reasonable assumption for real-world least squares problems as the fit is only practically interesting if this is true.

**Theorem B.2 ([13]).** *For the overdetermined least squares problem (B.2), assume the sketch matrix  $\mathbf{S}$  satisfies (SC1) and (SC2) for some  $\epsilon \in (0, 1)$ . Furthermore, assume that  $\|\mathbf{U}_{\mathbf{A}}\mathbf{U}_{\mathbf{A}}^{\top}\mathbf{b}\|_2 \geq \gamma\|\mathbf{b}\|_2$  for some fixed  $\gamma \in (0, 1]$ . Then the solution to the sketched problem, denoted  $\tilde{\mathbf{x}}_{\text{opt}}$ , satisfies the following bound:*

$$\|\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}}\|_2^2 \leq \epsilon^2\kappa(\mathbf{A})^2(\gamma^{-2} - 1)\|\mathbf{x}_{\text{opt}}\|_2^2,$$

where  $\kappa(\mathbf{A})$  denotes the condition number of the matrix  $\mathbf{A}$ .

*Proof.* Start by bounding the residual squared using our assumption on  $\mathbf{b}$  as follows:

$$\begin{aligned}
\|\mathbf{Ax}_{\text{opt}} - \mathbf{b}\|_2^2 &= \|\mathbf{b}^\perp\|_2^2 = \|\mathbf{b}\|_2^2 - \|\mathbf{U}_\mathbf{A} \mathbf{U}_\mathbf{A}^\top \mathbf{b}\|_2^2, \\
&\leq \gamma^{-2} \|\mathbf{U}_\mathbf{A} \mathbf{U}_\mathbf{A}^\top \mathbf{b}\|_2^2 - \|\mathbf{U}_\mathbf{A} \mathbf{U}_\mathbf{A}^\top \mathbf{b}\|_2^2, \\
&= (\gamma^{-2} - 1) \|\mathbf{U}_\mathbf{A} \mathbf{U}_\mathbf{A}^\top \mathbf{b}\|_2^2, \\
&= (\gamma^{-2} - 1) \|\mathbf{Ax}_{\text{opt}}\|_2^2, \\
&\leq \sigma_{\max}^2(\mathbf{A})(\gamma^{-2} - 1) \|\mathbf{x}_{\text{opt}}\|_2^2.
\end{aligned}$$

By the previous theorem, we have that  $\|\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}}\|_2^2 \leq \frac{1}{\sigma_{\min}^2(\mathbf{A})} \epsilon^2 \|\mathbf{Ax}_{\text{opt}} - \mathbf{b}\|_2^2$ . Plugging in the above inequality yields the desired result:

$$\begin{aligned}
\|\mathbf{x}_{\text{opt}} - \tilde{\mathbf{x}}_{\text{opt}}\|_2^2 &\leq \frac{1}{\sigma_{\min}^2(\mathbf{A})} \epsilon^2 \|\mathbf{Ax}_{\text{opt}} - \mathbf{b}\|_2^2, \\
&\leq \epsilon^2 \frac{\sigma_{\max}^2(\mathbf{A})}{\sigma_{\min}^2(\mathbf{A})} (\gamma^{-2} - 1) \|\mathbf{x}_{\text{opt}}\|_2^2, \\
&= \epsilon^2 \kappa(\mathbf{A})^2 (\gamma^{-2} - 1) \|\mathbf{x}_{\text{opt}}\|_2^2. \quad \blacksquare
\end{aligned}$$

**B.2. Proof that sketching matrix meets structural conditions.** The first structural condition (SC1) is elucidated in Woodruff [39], so we just state the result here.

**Lemma B.3 ([39]).** Consider  $\mathbf{A} \in \mathbb{R}^{n \times d}$ , its SVD  $\mathbf{U}_\mathbf{A} \Sigma_\mathbf{A} \mathbf{V}_\mathbf{A}^\top$ , and row leverage scores  $\ell_i(\mathbf{A})$ . Let  $\bar{\ell}(\mathbf{A})$  be an overestimate of the leverage score such that for some positive  $\beta \leq 1$ , we have  $p_i(\bar{\ell}(\mathbf{A})) \geq \beta \cdot p_i(\ell(\mathbf{A}))$  for all  $i \in [n]$ . Construct row sampling and rescaling matrix  $\mathbf{S} \in \mathbb{R}^{s \times n}$  by importance sampling according to the leverage score overestimates,  $\bar{\ell}(\mathbf{A})$ . If  $s > 144d \ln(2d/\delta)/(\beta\epsilon^2)$ , then the following holds with probability at least  $1 - \delta$  simultaneously for all  $i$ :

$$1 - \epsilon \leq \sigma_i^2(\mathbf{S} \mathbf{U}_\mathbf{A}) \leq 1 + \epsilon$$

The second structural condition, (SC2), can be proven using results for randomized matrix-matrix multiplication. Consider the matrix product  $\mathbf{U}_\mathbf{A}^\top \mathbf{b}^\perp$ . This is the projection of the part of  $\mathbf{b}$  outside of the column space of  $\mathbf{A}$  onto the column space of  $\mathbf{A}$  and thus by definition is equal to the all zeros vector  $\mathbf{0}_{\text{rank}(\mathbf{A})}$ . This condition requires us to bound how well the sampled product  $\mathbf{U}_\mathbf{A}^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp$  approximates the original product. We can do this via the following lemma:

**Lemma B.4 ([10]).** Consider two matrices of the form  $\mathbf{A} \in \mathbb{R}^{n \times m}$  and  $\mathbf{B} \in \mathbb{R}^{n \times p}$  and let  $s$  denote the number of samples. We form an approximation of the product  $\mathbf{A}^\top \mathbf{B}$  in the following manner. Choose  $s$  rows, denoted  $\{\xi^{(1)}, \dots, \xi^{(s)}\}$ , according to the probability distribution defined by  $\mathbf{p} \in [0, 1]^n$  with the property that

$$p_k \geq \frac{\beta \|\mathbf{A}(k, :)\|_2^2}{\|\mathbf{A}\|_F^2} \quad \text{for all } k \in [n].$$



Then form the approximate product

$$\frac{1}{s} \sum_{t=1}^s \frac{1}{p_{\xi^{(t)}}} \mathbf{A}(\xi^{(t)}, :)^\top \mathbf{B}(\xi^{(t)}, :) \triangleq (\mathbf{SA})^\top \mathbf{SB},$$

where we define  $\mathbf{S}$  to be the random row sampling and rescaling operator. We then have the following guarantee on the quality of the approximate product:

$$\mathbb{E} \left[ \|\mathbf{A}^\top \mathbf{B} - (\mathbf{SA})^\top \mathbf{SB}\|_F^2 \right] \leq \frac{1}{\beta s} \|\mathbf{A}^\top\|_F^2 \|\mathbf{B}\|_F^2.$$

*Proof.* Fix  $i, j$  to specify an element of the matrix product and let  $\{\xi^{(1)}, \dots, \xi^{(s)}\}$  be the indices of the sampled rows of  $\mathbf{A}$  (and  $\mathbf{B}$ ). We begin by calculating the expected value and variance of the corresponding element of the sampled matrix product, i.e.,  $[(\mathbf{SA})^\top \mathbf{SB}]_{ij}$ . This can be written in terms of scalar random variables  $X_t$  for  $t = 1, \dots, s$  as follows:

$$X_t = \frac{\mathbf{A}(\xi^{(t)}, i)^\top \mathbf{B}(\xi^{(t)}, j)}{s p_{\xi^{(t)}}} \implies [(\mathbf{SA})^\top \mathbf{SB}]_{ij} = \sum_{t=1}^s X_t$$

The expectation of  $X_t$  and  $X_t^2$  for all  $t$  can be calculated as follows:

$$\begin{aligned} \mathbb{E}[X_t] &= \sum_{k=1}^n p_k \frac{\mathbf{A}_{ki} \mathbf{B}_{kj}}{s p_k} = \frac{1}{s} (\mathbf{A}^\top \mathbf{B})_{ij}, \\ \mathbb{E}[X_t^2] &= \sum_{k=1}^n p_k^2 \frac{\mathbf{A}_{ki}^2 \mathbf{B}_{kj}^2}{s^2 p_k} = \sum_{k=1}^n \frac{\mathbf{A}_{ki}^2 \mathbf{B}_{kj}^2}{s^2 p_k}. \end{aligned}$$

The relation between  $X_t$  and  $[(\mathbf{SA})^\top \mathbf{SB}]_{ij}$  gives  $\mathbb{E} [[(\mathbf{SA})^\top \mathbf{SB}]_{ij}] = \sum_{t=1}^s \mathbb{E}[X_t] = (\mathbf{A}^\top \mathbf{B})_{ij}$  and hence the estimator is unbiased. Furthermore, since the estimated matrix element is the sum of  $s$  independent random variables, its variance can be calculated as follows:

$$\begin{aligned} \text{Var} \left[ [(\mathbf{SA})^\top \mathbf{SB}]_{ij} \right] &= \text{Var} \left[ \sum_{t=1}^s X_t \right] = \sum_{t=1}^s \text{Var}[X_t] \\ &= \sum_{t=1}^s (\mathbb{E}[X_t^2] - \mathbb{E}[X_t]^2) \\ &= \sum_{t=1}^s \left( \sum_{k=1}^n p_k^2 \frac{\mathbf{A}_{ki}^2 \mathbf{B}_{kj}^2}{s^2 p_k} - \frac{1}{s^2} (\mathbf{A}^\top \mathbf{B})_{ij}^2 \right) \\ &= \sum_{k=1}^n \frac{\mathbf{A}_{ki}^2 \mathbf{B}_{kj}^2}{s p_k} - \frac{1}{s} (\mathbf{A}^\top \mathbf{B})_{ij}^2 \end{aligned}$$

Now we turn to the expectation we want to bound and apply these results:

$$\begin{aligned}
\mathbb{E} \left[ \|\mathbf{A}\mathbf{B} - (\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}\|_F^2 \right] &= \sum_{i=1}^m \sum_{j=1}^p \mathbb{E} \left[ \left( [(\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}]_{ij} - (\mathbf{A}^\top \mathbf{B})_{ij} \right)^2 \right], \\
&= \sum_{i=1}^m \sum_{j=1}^p \mathbb{E} \left[ \left( [(\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}]_{ij} - \mathbb{E} [ [(\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}]_{ij} ] \right)^2 \right], \\
&= \sum_{i=1}^m \sum_{j=1}^p \text{Var} \left[ [(\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}]_{ij} \right], \\
&= \sum_{i=1}^m \sum_{j=1}^p \left( \sum_{k=1}^n \frac{\mathbf{A}_{ki}^2 \mathbf{B}_{kj}^2}{s p_k} - \frac{1}{s} (\mathbf{A}^\top \mathbf{B})_{ij} \right), \\
&= \sum_{k=1}^n \frac{(\sum_{i=1}^m \mathbf{A}_{ki}^2) (\sum_{j=1}^p \mathbf{B}_{kj}^2)}{s p_k} - \frac{1}{s} \sum_{i=1}^m \sum_{j=1}^p (\mathbf{A}^\top \mathbf{B})_{ij}, \\
&= \frac{1}{s} \sum_{k=1}^n \frac{\|\mathbf{A}(k, :)\|_2^2 \|\mathbf{B}(k, :)\|_2^2}{p_k} - \frac{1}{s} \|\mathbf{A}^\top \mathbf{B}\|_F^2, \\
&\leq \frac{1}{s} \sum_{k=1}^n \frac{\|\mathbf{A}(k, :)\|_2^2 \|\mathbf{B}(k, :)\|_2^2}{p_k},
\end{aligned}$$

where in the last line we have used that the Frobenius norm of a matrix is strictly positive. Lastly, we use our assumption on the probabilities  $p_k \geq \frac{\beta \|\mathbf{A}(k, :)\|_2^2}{\|\mathbf{A}^\top\|_F^2}$  to obtain the desired bound:

$$\begin{aligned}
\mathbb{E} \left[ \|\mathbf{A}^\top \mathbf{B} - (\mathbf{S}\mathbf{A})^\top \mathbf{S}\mathbf{B}\|_F^2 \right] &\leq \frac{1}{s} \sum_{k=1}^n \frac{\|\mathbf{A}(k, :)\|_2^2 \|\mathbf{B}(k, :)\|_2^2}{p_k}, \\
&\leq \frac{1}{s} \sum_{k=1}^n \left( \|\mathbf{A}^\top\|_F^2 \frac{\|\mathbf{A}(k, :)\|_2^2 \|\mathbf{B}(k, :)\|_2^2}{\beta \|\mathbf{A}(k, :)\|_2^2} \right), \\
&= \frac{1}{\beta s} \|\mathbf{A}^\top\|_F^2 \sum_{k=1}^n \|\mathbf{B}(k, :)\|_2^2 = \frac{1}{\beta s} \|\mathbf{A}^\top\|_F^2 \|\mathbf{B}\|_F^2. \quad \blacksquare
\end{aligned}$$

We can apply Lemma B.4 to obtain a bound on the probability of (SC2) holding.

**Lemma B.5.** Consider  $\mathbf{A} \in \mathbb{R}^{n \times d}$ , its SVD  $\mathbf{U}_\mathbf{A} \mathbf{\Sigma}_\mathbf{A} \mathbf{V}_\mathbf{A}^\top$ , and row leverage scores  $\ell_i(\mathbf{A})$ . Define the probability distribution  $\mathbf{p} \in [0, 1]^n$  such that for some positive  $\beta \leq 1$ , we have  $p_i \geq \beta \ell_i(\mathbf{A})/d$  for all  $i \in [n]$ . Construct row sampling and rescaling matrix  $\mathbf{S} \in \mathbb{R}^{s \times n}$  by importance sampling by the leverage score overestimates. Then provided  $s \geq \frac{2d}{\beta \delta \epsilon}$ , the property  $\|\mathbf{U}_\mathbf{A}^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_2^2 \leq \epsilon \mathcal{R}^2/2$  holds with probability  $\delta$ .

*Proof.* Apply Lemma B.4 to obtain a bound on the expected value:

$$\begin{aligned}\mathbb{E} \left[ \|\mathbf{U}_A^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_F^2 \right] &= \mathbb{E} \left[ \|\mathbf{0}_{\text{rank}(\mathbf{A})} - \mathbf{U}_A^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_F^2 \right], \\ &= \mathbb{E} \left[ \|\mathbf{U}_A \mathbf{b}^\perp - \mathbf{U}_A^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_F^2 \right], \\ &\leq \frac{1}{\beta s} \|\mathbf{U}_A\|_F^2 \|\mathbf{b}^\perp\|_F^2 = \frac{d}{\beta s} \|\mathbf{b}^\perp\|_F^2.\end{aligned}$$

Markov's inequality states that for non-negative random variable  $X$  and scalar  $t > 0$ , we can bound the probability  $\Pr[X \geq t]$  as follows:

$$\Pr[X \geq t] \leq \frac{\mathbb{E}[X]}{t}$$

We can apply this inequality to bound the probability that the sketching matrix violates (SC2):

$$\Pr_{\mathbf{S} \sim \mathcal{D}} \left[ \|\mathbf{U}_A^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_F^2 \geq \frac{\epsilon \|\mathbf{b}^\perp\|_F^2}{2} \right] \leq \frac{2\mathbb{E} [\|\mathbf{U}_A^\top \mathbf{S}^\top \mathbf{S} \mathbf{b}^\perp\|_F^2]}{\epsilon \|\mathbf{b}^\perp\|_F^2} \leq \frac{2d}{\beta \epsilon s}$$

where in the last step we have used our bound the expected value. Thus if we set the right-hand side equal to  $\delta$ , we obtain that the probability that (SC2) holds is greater than or equal to  $1 - \delta$  as desired. Solving for  $s$  yields that we thus must have  $s \geq \frac{2d}{\beta \delta \epsilon}$ . ■

Lastly, we require both (SC1) and (SC2) to hold with probability  $1 - \delta$ . If we use  $\delta/2$  in the proofs of both conditions, we can union bound over the two results at a cost of a factor of 2 in the samples required. Furthermore, (SC1) requires more samples than (SC2) and thus Theorem 3.6 requires  $s = O(r \log(r/\delta)/(\beta \epsilon^2))$  to hold.

**Appendix C. Synthetic dense tensor.** The final comparison we consider is the performance of CP-ARLS-LEV (random, i.e.,  $\tau = 1$ ) on a synthetic dense tensor as compared to both the standard CP-ALS method and CP-ARLS [6]. We consider CP-ARLS with mixing (-MIX) and plain uniform sampling without mixing (-UNI). Only the method with mixing is guaranteed to work. We show only the results of CP-ARLS-LEV using the random method ( $\tau = 1$ ) since the hybrid method ( $\tau = 1/s$ ) is similar.

Figure C.1 plots total run time on the x-axis and the *factor match score*<sup>3</sup> corresponding to the best fit of the ten runs on the y-axis. We describe the specifics of the data generation in Appendix C.1 and the specifics of the experimental setup in Appendix C.1. The tensor has been constructed so that the subproblems are incoherent (difficult for CP-ARLS-UNI), which has the side effect of making several of the factors highly collinear (difficult for CP-ALS). As a result, CP-ALS only achieves a factor match score around 0.814, and all the other methods achieve better scores in less time (CP-ARLS-LEV with  $s = 2^9$ , CP-ARLS-MIX with

<sup>3</sup>Because this problem is synthetic, we know the true factor matrices and therefore can report the factor match score which says how similar the obtained solution is to the true solution; a factor match score of 1.0 is a perfect match.

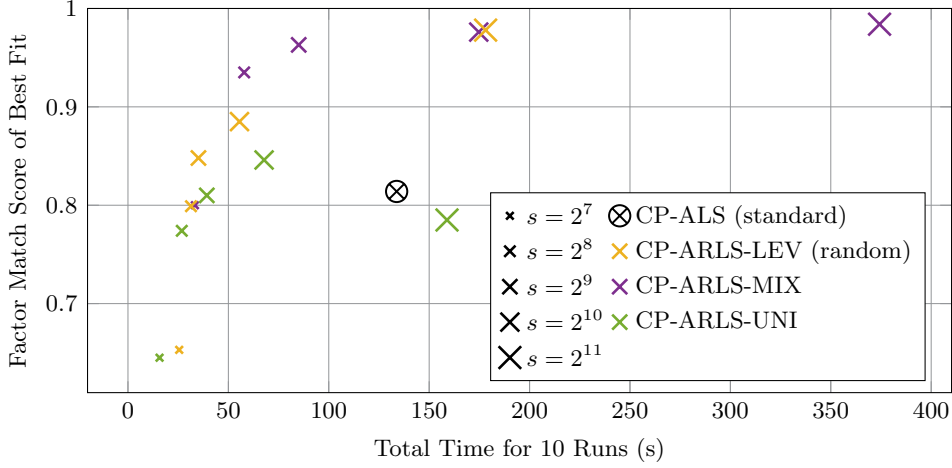


Figure C.1: Comparing methods on a  $500 \times 500 \times 500$  synthetic dense tensor engineered such that the factor matrices have a few rows with concentrated leverage scores. Each method is run 10 times from random initializations (the same 10 initializations were used across all methods).

$s = 2^8$ , CP-ARLS-UNI with  $s = 2^{10}$ ). CP-ARLS-UNI actually gets worse for  $s = 2^{11}$  samples. Between CP-ARLS-LEV and CP-ARLS-MIX, the latter had superior performance, achieving higher scores in less time, and this is further emphasized by looking at the fraction of runs that achieved a score above 0.93. CP-ARLS-MIX was successful, i.e. achieved a score greater than or equal to 0.93, 80% of time with  $s = 2^9$  samples, 70% with  $s = 2^{10}$  samples, and 30% with  $s = 2^{11}$  samples. CP-ARLS-LEV was only successful 10% of the time with  $s = 2^{11}$  samples. Thus, while CP-ARLS-LEV is a viable choice for dense tensors, the experiments give the advantage to CP-ARLS-MIX.

**C.1. Data generation.** For our experiment, we used a synthetic  $500 \times 500 \times 500$  tensor. We begin by generating three factor matrices of size  $500 \times 25$  with independent standard Gaussian entries. The first three columns of each factor matrix are set to 0 and then seeded with a small number of non-zeros based on user-specified parameters: spread and magnitude. The spread specifies how many non-zeros elements are added to each of these first three columns; these non-zero elements are chosen such that each row has no more than one non-zero in the first three columns. We use a spread of 5 such the first five rows are non-zero in the first column, the second set of five rows are non-zero in the second column, and the third set of five rows are non-zero in the third column. The leverage scores corresponding to each column's contribution to the column space are thus spread over at most 5 rows, giving 15 total rows with very high leverage score. The magnitude specifies the size of these non-zero elements (set to 3 in our experiments) and then has a small amount of independent noise added chosen uniformly between 0 and 0.05. Finally, we construct the associated rank 25 tensor and add 5% Gaussian noise to the elements.

**C.2. Experimental setup.** The experiments were run using MATLAB (Version 2018a) using the Tensor Toolbox for MATLAB [5]. We used a Dual Socket Intel E5-2683v3 2.00 GHz CPU with 256 GB memory, the same computational setup as the small sparse tensors. CP-ALS used the default settings except that  $\text{tol} = 10^{-5}$  and the maximum number of iterations was set to 250. For all the randomized algorithms, the epoch size  $\eta$  was set to 5 and the algorithm terminated once  $\pi = 5$  epochs failed to improve the estimated fit by  $\text{tol} = 10^{-4}$ . We created 10 random initializations and used the same initializations for *all* experiments. Each algorithm and sample combination were run from these 10 random initialization and the total time of all 10 runs was recorded. We computed the factor match score for the run that had the highest fit value.

**Appendix D. Full runs of Uber tensor.** This section provides the full run data for the experiments discussed in subsection 7.3 and summarized in Figure 7.3. Figure D.1b shows the hybrid method ( $\tau = 1/s$ ), and Figure D.1a shows the random method ( $\tau = 1$ ). In both figures, the dotted lines are the individual runs and the solid lines are the median over the interpolated runs. The standard method is included in both for ease of comparison. Each marker for random and hybrid represents one epoch of five outer iterations, and each marker for CP-ALS corresponds to one outer iteration.

**Appendix E. Reddit Factors.** This appendix shows the remaining factors for the Reddit tensor computed by CP-ARLS-LEV as discussed in subsection 7.5. Reddit is a community forum wherein users comment within subreddits related to their interests, and the Reddit tensor was created from comments posted on the website in the year 2015. The number of users associated with a subreddit can vary widely, with `r/AskReddit` and `r/funny` being two of the larger subreddits. A few notes about the data processing : common stop words were removed and the remaining words were stemmed (e.g., “people” becomes “peopl”); users, subreddits, and words with fewer than five entries were removed.

We cannot show the entirety of any component since the smallest dimension is 176k. Instead, we show the top-25 highest-magnitude subreddits, the top-25 highest-magnitude words, and the top 1000 highest-magnitude users as bar charts. The length of a bar represents the magnitude and the color represents the *overall* prevalence in the data, on a scale of zero to one. In this manner, blue colors indicate rarer words or subreddits and are of interest since they are less likely to appear in many factors.

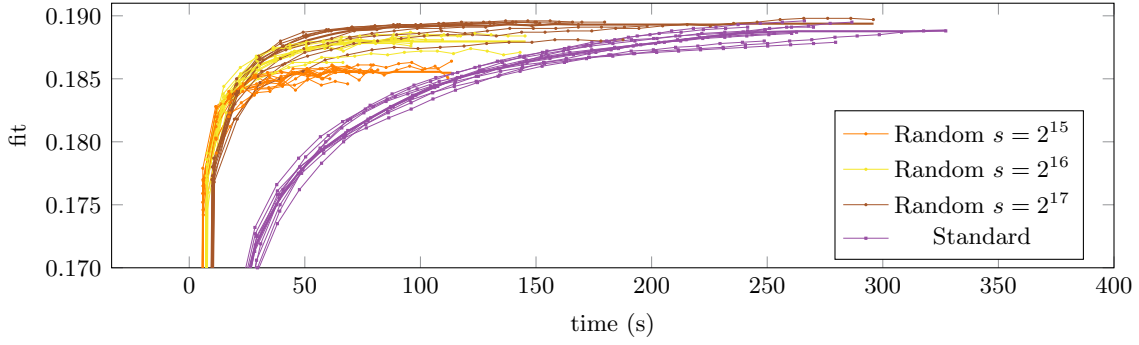
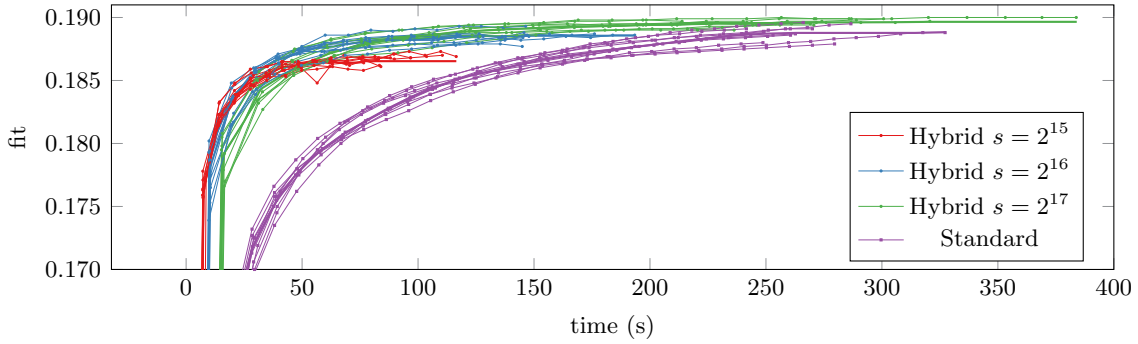
(a) Random ( $\tau=1$ ) versus standard(b) Hybrid ( $\tau=1/s$ ) versus standard

Figure D.1: Comparison of CP-ARLS-LEV (random and hybrid) with varying number of samples  $s \in \{2^{16}, 2^{17}, 2^{18}\}$  and CP-ALS (standard) to compute a rank  $r = 25$  CP decomposition of the Uber tensor with 3.3 million nonzeros, showing individual runs for the plot in Figure 7.3b. The dotted lines represent the individual runs with markers indicating epoch (5 iterations) for the randomized methods and one iteration for the standard method. The solid lines show medians.


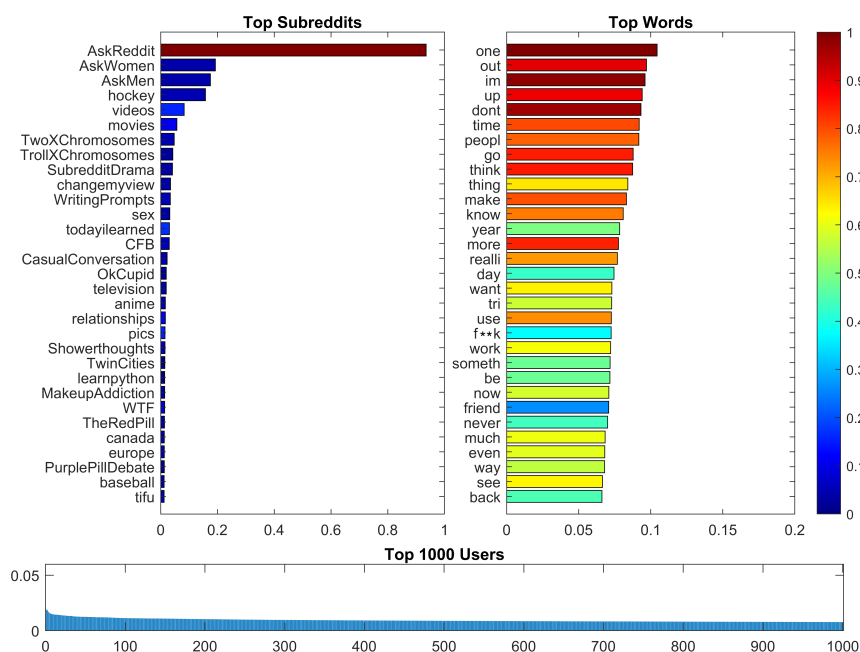
Figure E.1: Reddit Factor 1/25:  $r/AskReddit$ 

Figure E.2: Reddit Factor 2/25: Popular Subreddits

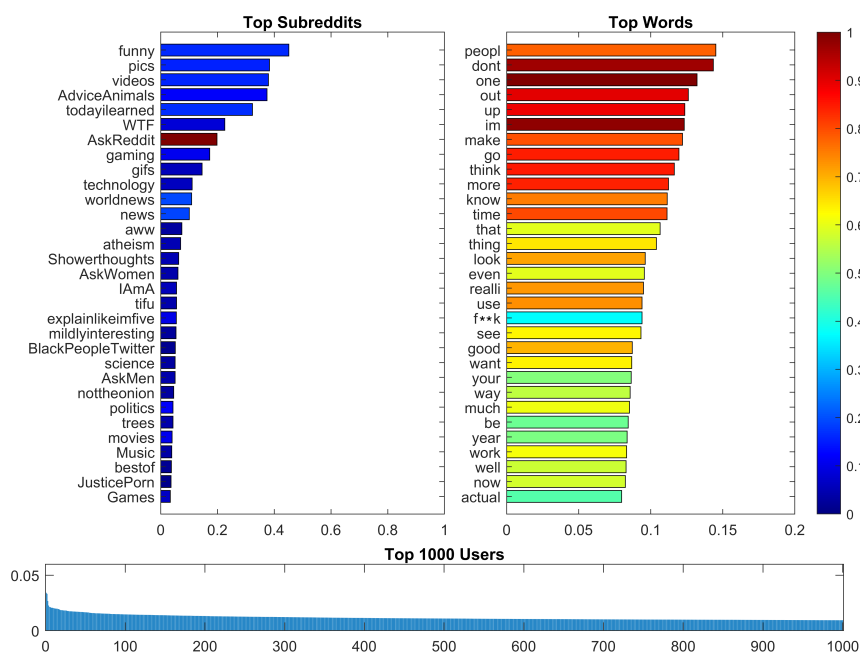

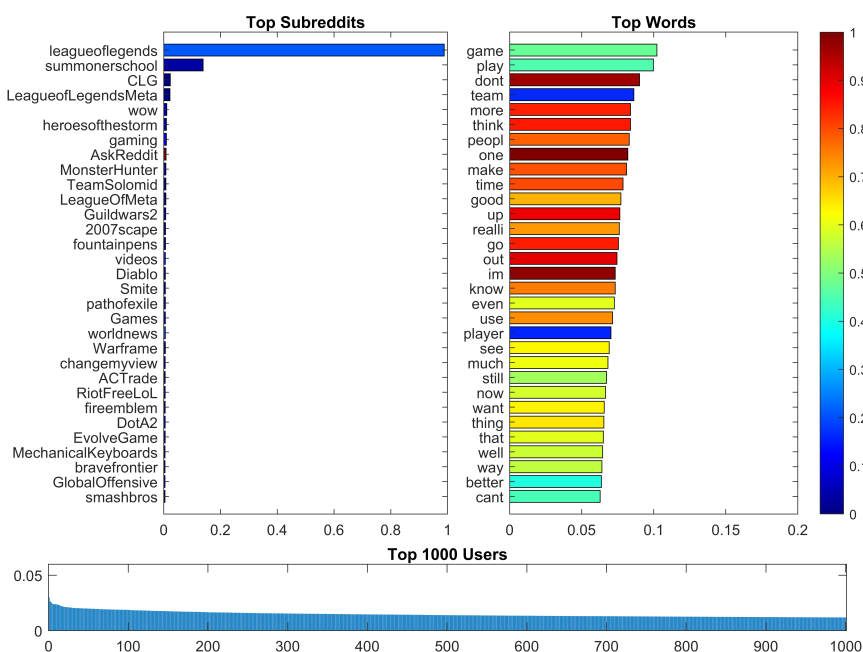


Figure E.3: Reddit Factor 3/25: League of Legends (Video Game)


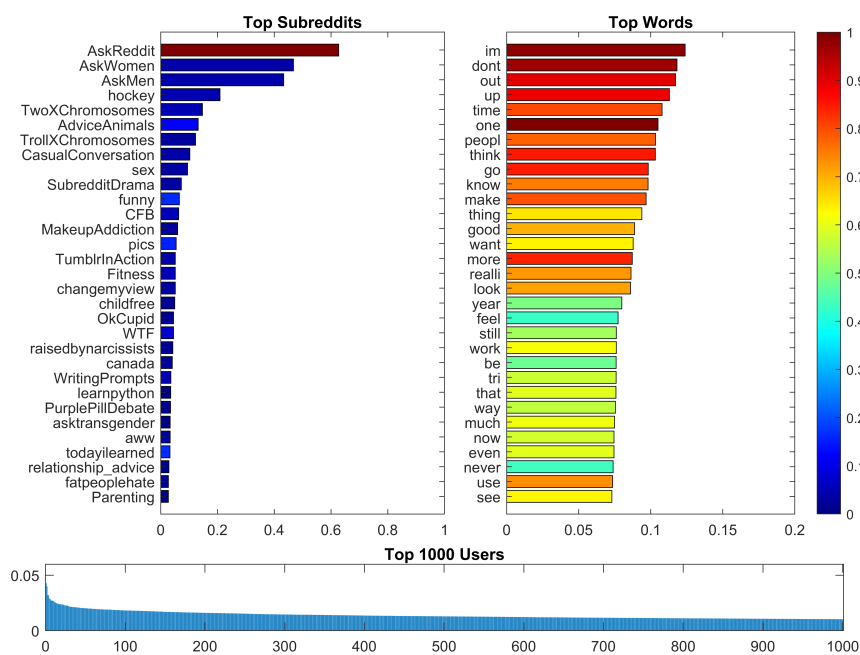


Figure E.4: Reddit Factor 4/25: Advice

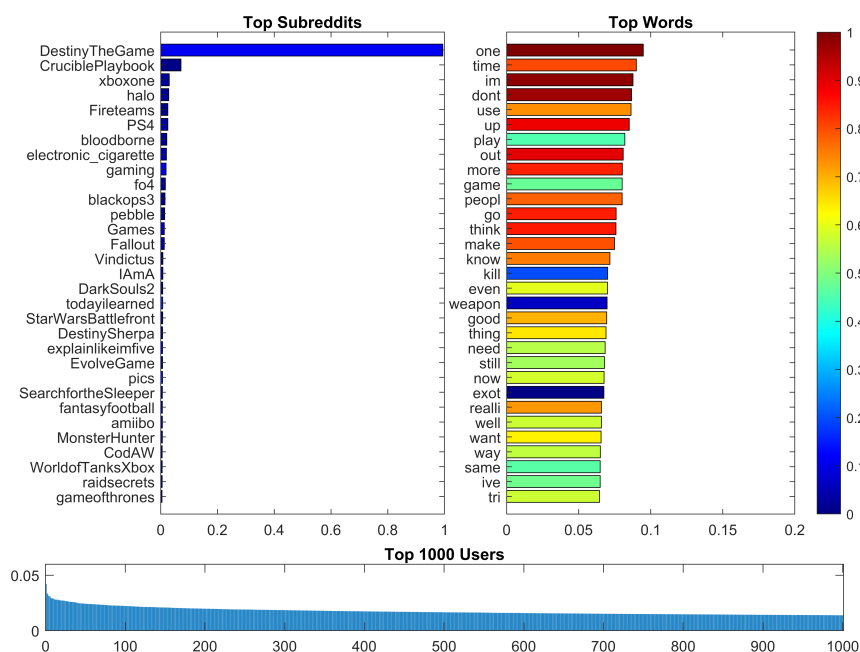

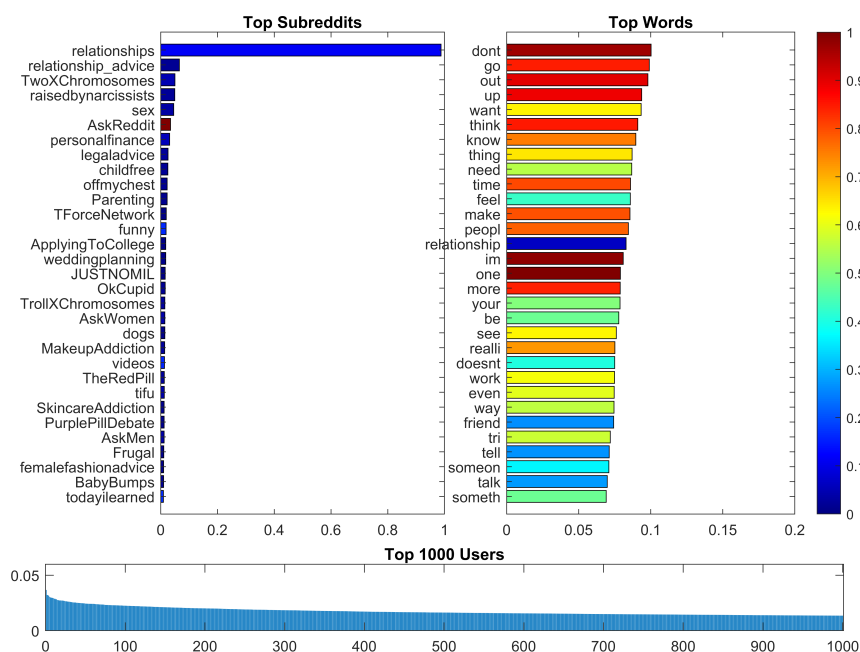


Figure E.7: Reddit Factor 8/25: Relationships

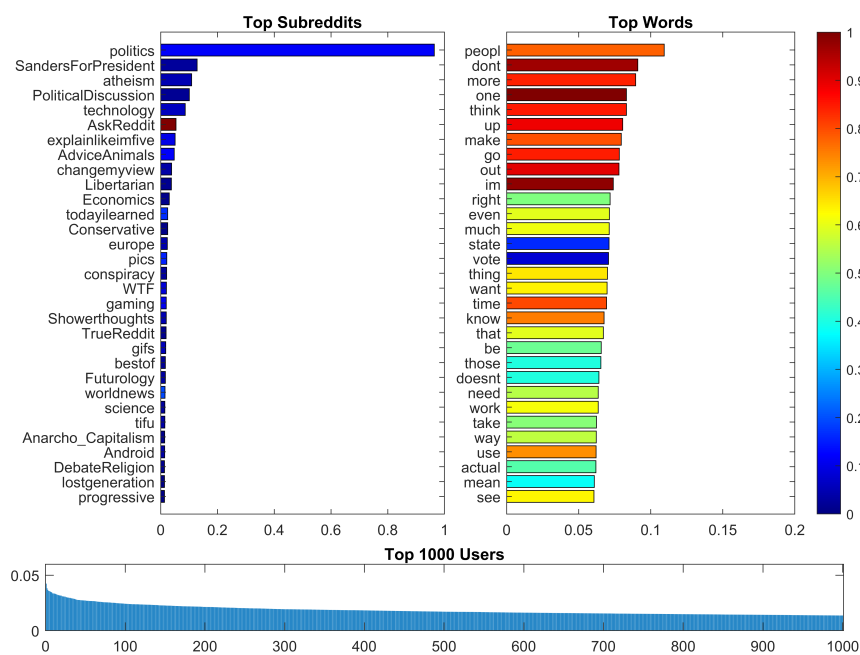


Figure E.8: Reddit Factor 9/25: Politics and Religion

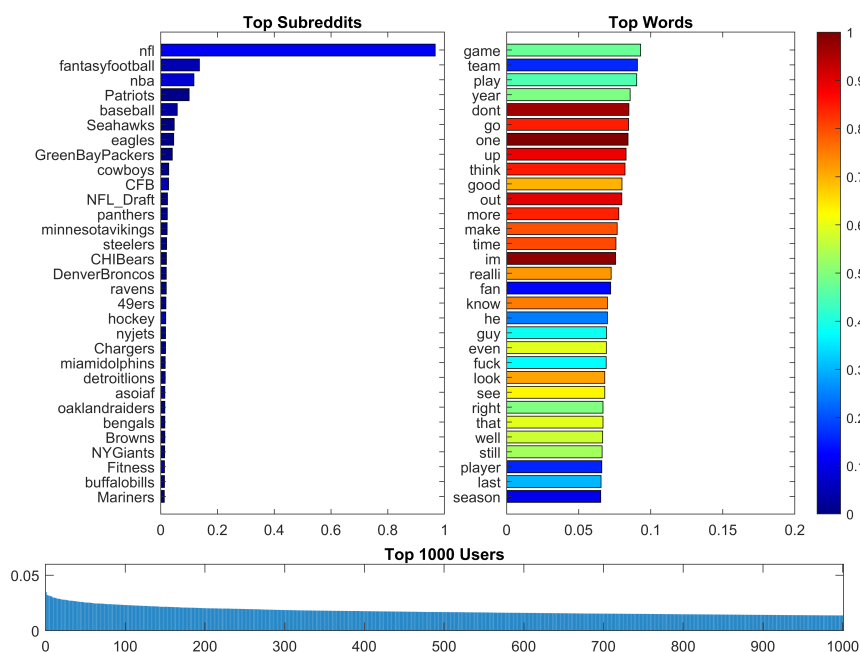


Figure E.9: Reddit Factor 10/25: American Football

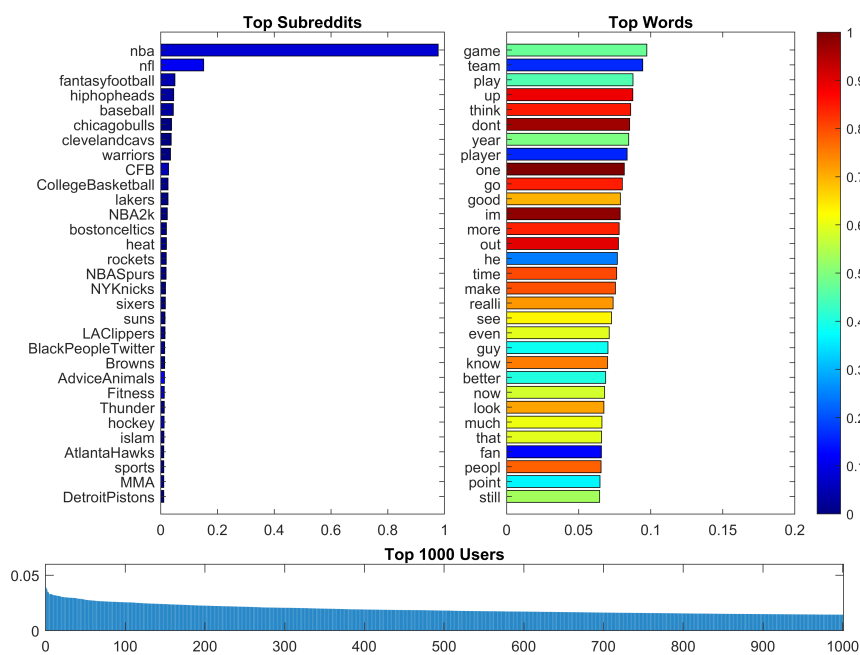


Figure E.10: Reddit Factor 11/25: Basketball

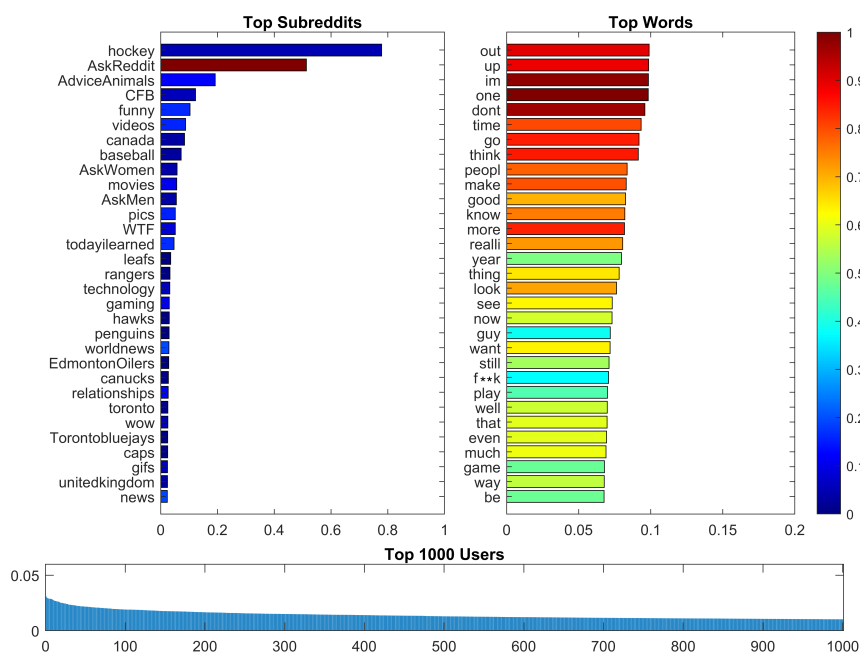


Figure E.11: Reddit Factor 12/25: Hockey and Canada

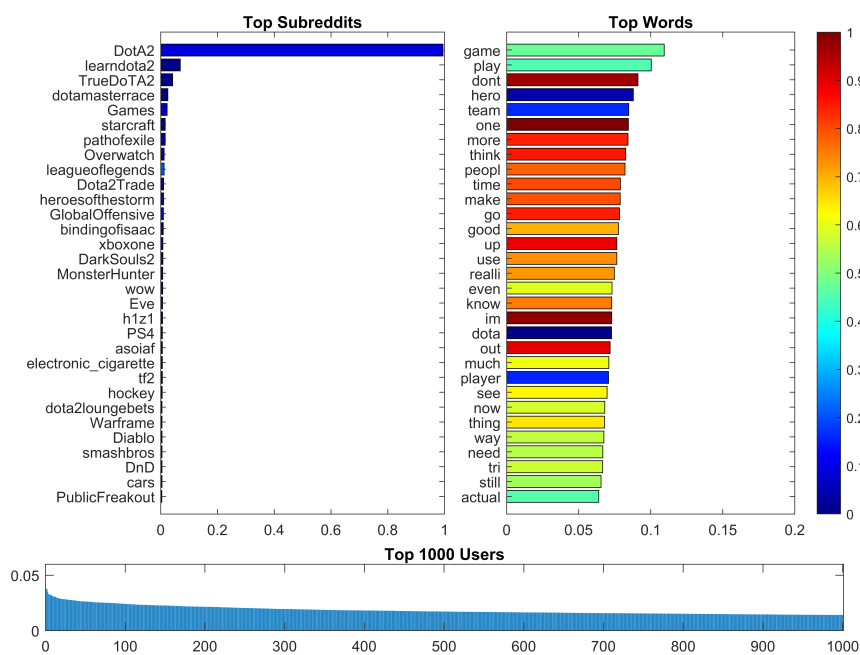


Figure E.12: Reddit Factor 13/25: Dota 2 (Video Game)

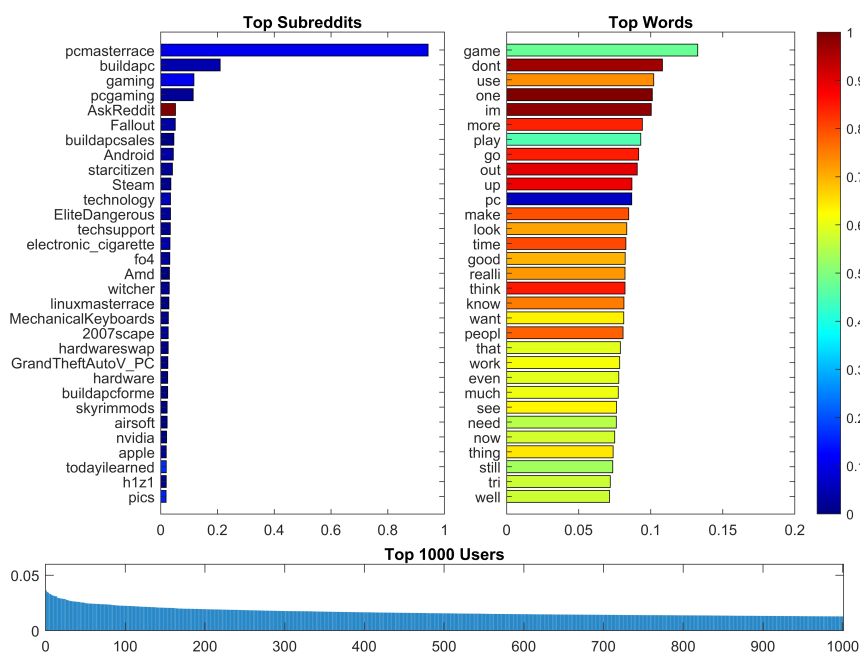


Figure E.13: Reddit Factor 14/25: PC Gaming and Computing

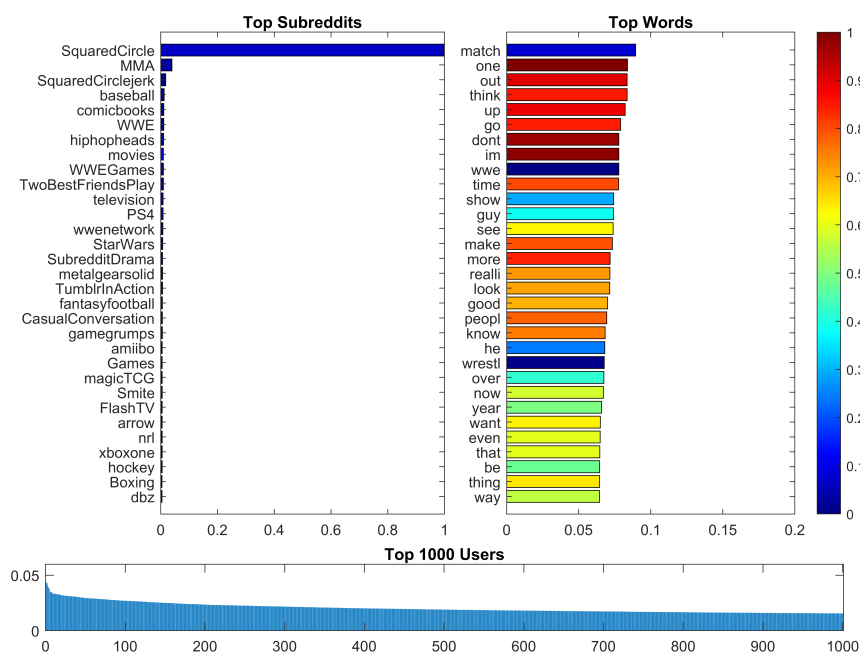


Figure E.14: Reddit Factor 15/25: Wrestling

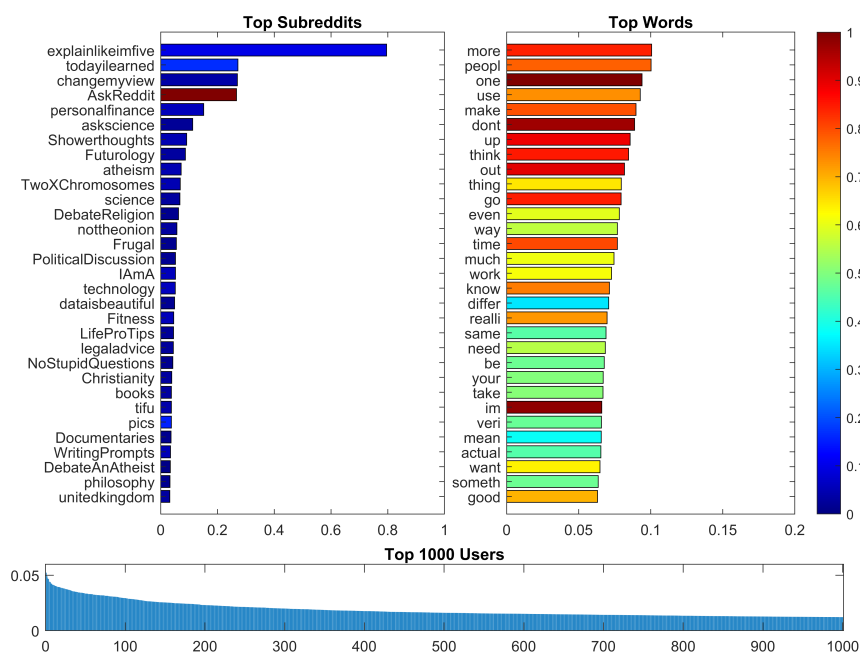


Figure E.15: Reddit Factor 16/25: Debate and Explanation

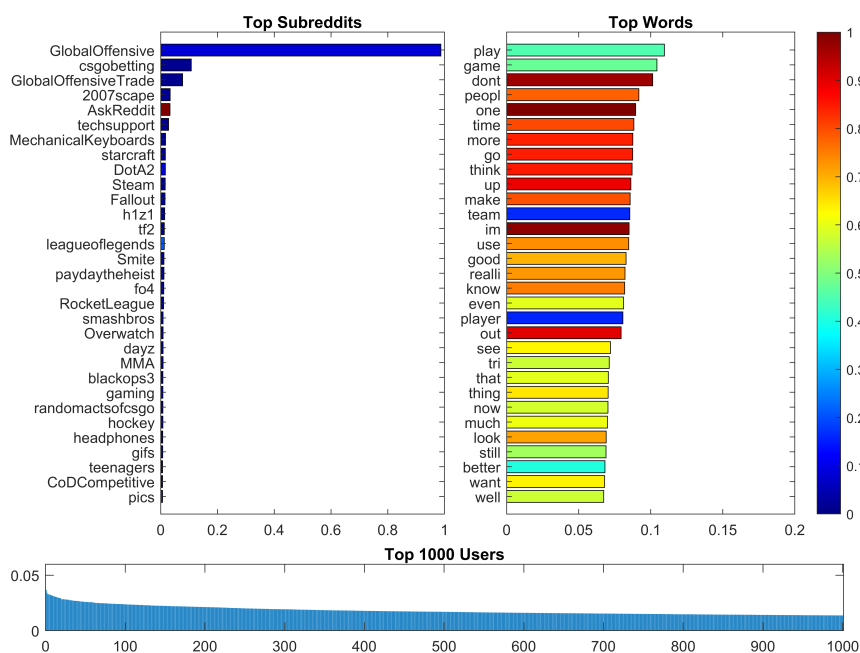


Figure E.16: Reddit Factor 17/25: Counter Strike Global Offensive (Video Game)



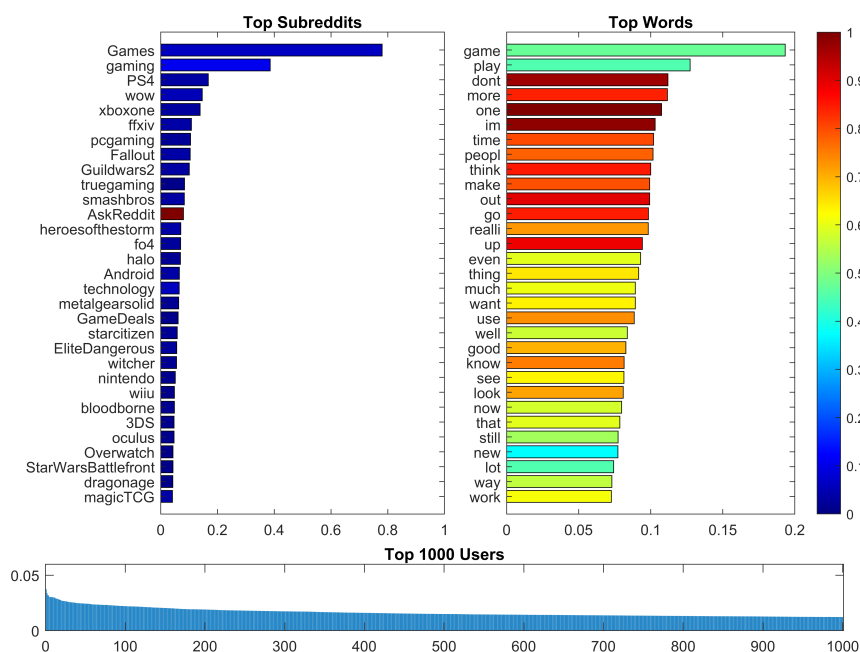


Figure E.17: Reddit Factor 20/25: Video Games

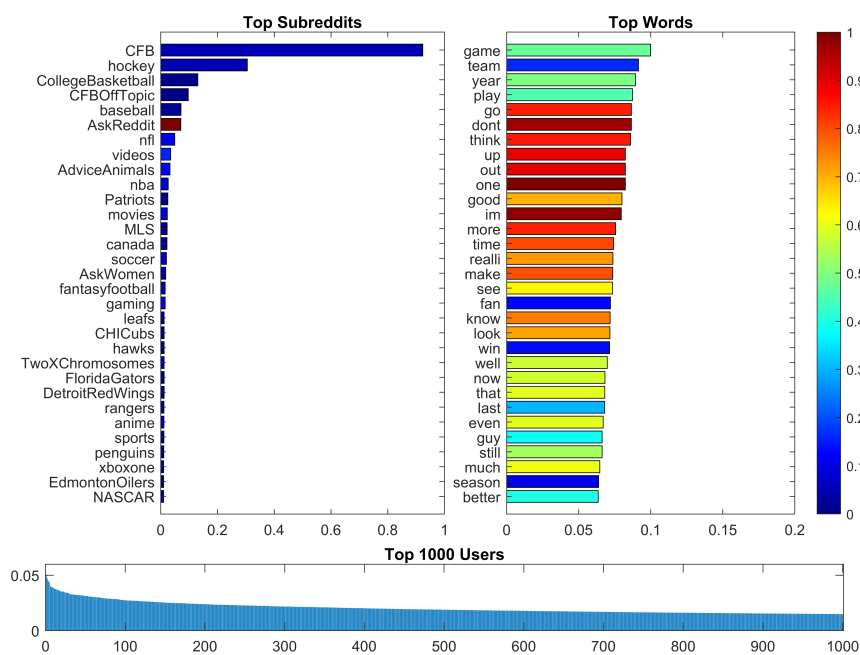


Figure E.18: Reddit Factor 21/25: Sports

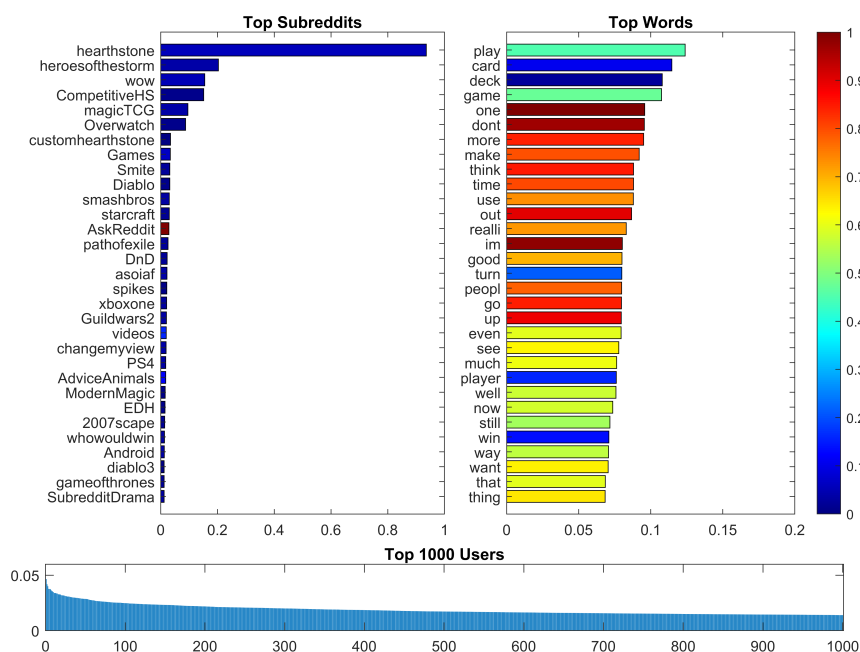


Figure E.19: Reddit Factor 22/25: Trading Card Games

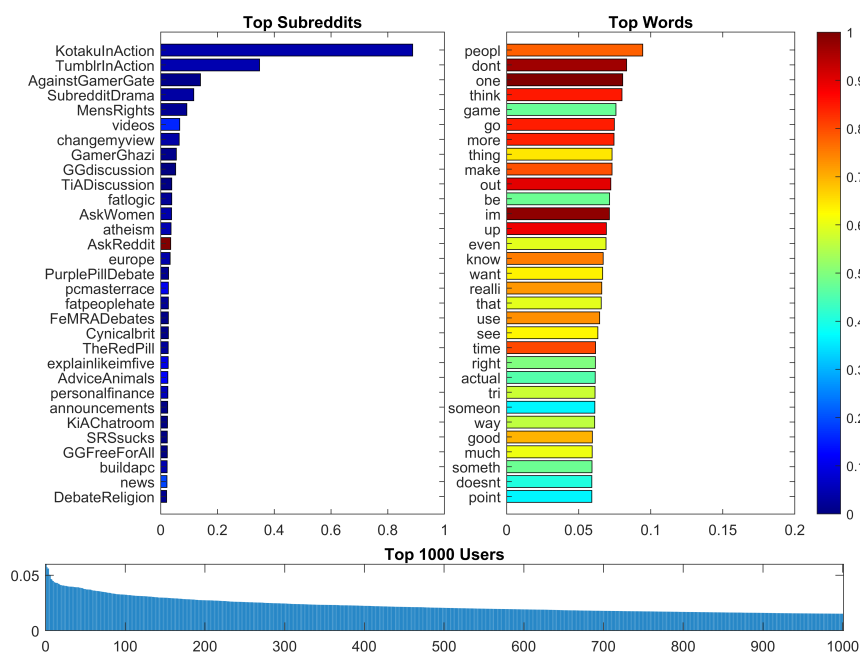


Figure E.20: Reddit Factor 23/25: Gamergate Controversy

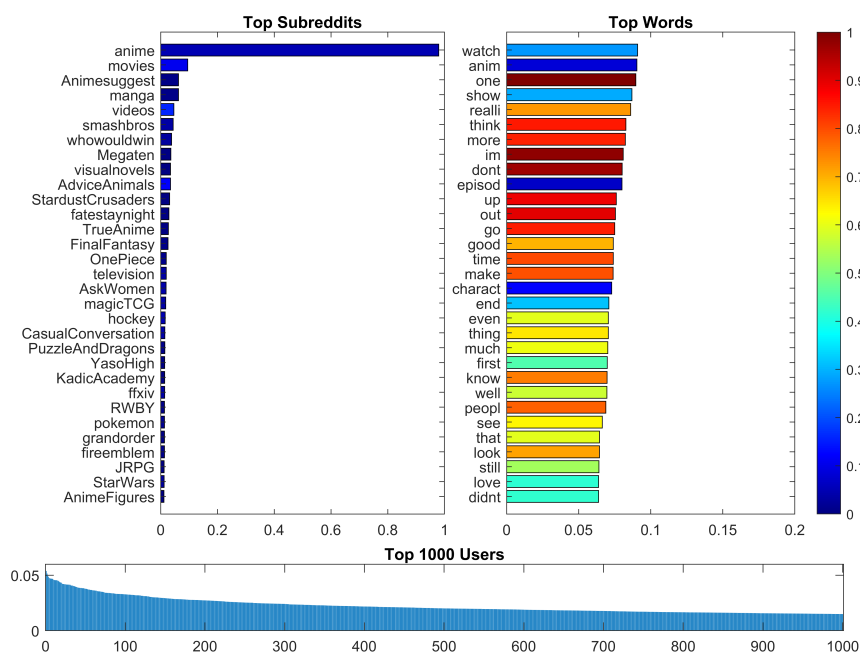


Figure E.21: Reddit Factor 24/25: Anime

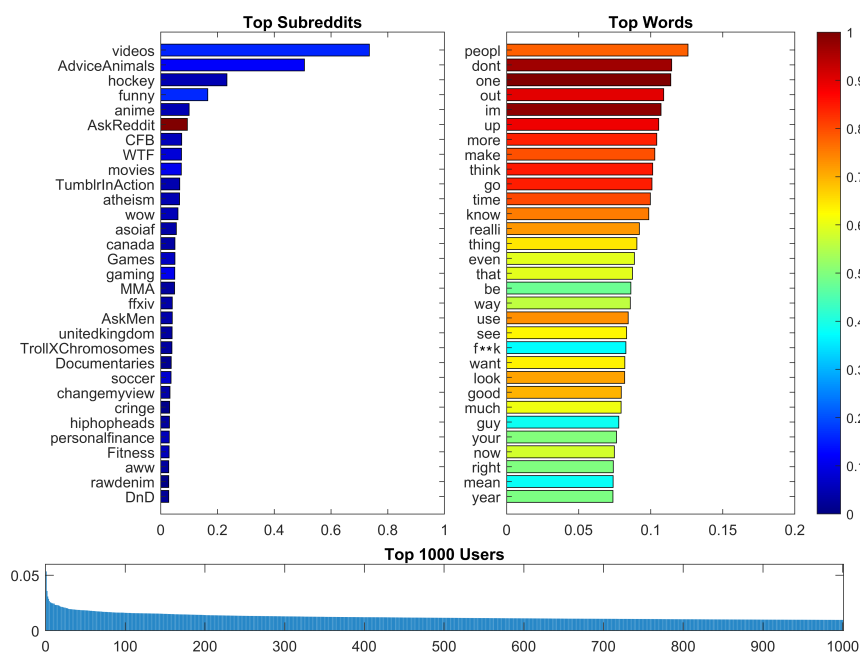


Figure E.22: Reddit Factor 25/25: Videos and Memes

## REFERENCES

- [1] E. ACAR AND B. YENER, *Unsupervised multiway data analysis: A literature survey*, IEEE Transactions on Knowledge and Data Engineering, 21 (2009), pp. 6–20, doi:10.1109/TKDE.2008.112.
- [2] K. S. AGGOUR, A. GITTENS, AND B. YENER, *Adaptive sketching for fast and convergent canonical polyadic decomposition*, in International Conference on Machine Learning (PMLR), 2020.
- [3] S. AHMADI-ASL, A. CICHOCKI, A. H. PHAN, I. OSELEDETS, S. ABUKHOVICH, AND T. TANAKA, *Randomized algorithms for computation of Tucker decomposition and higher order SVD (HOSVD)*, 2020, arXiv:2001.07124.
- [4] B. W. BADER AND T. G. KOLDA, *Efficient MATLAB computations with sparse and factored tensors*, SIAM Journal on Scientific Computing, 30 (2007), pp. 205–231, doi:10.1137/060676489.
- [5] B. W. BADER, T. G. KOLDA, ET AL., *MATLAB Tensor Toolbox Version 3.1*. Available online, June 2019, <https://www.tensortoolbox.org>.
- [6] C. BATTAGLINO, G. BALLARD, AND T. G. KOLDA, *A practical randomized CP tensor decomposition*, SIAM Journal on Matrix Analysis and Applications, 39 (2018), pp. 876–901, doi:10.1137/17M1112303, arXiv:1701.06600.
- [7] J. D. CARROLL AND J. J. CHANG, *Analysis of individual differences in multidimensional scaling via an N-way generalization of “Eckart-Young” decomposition*, Psychometrika, 35 (1970), pp. 283–319, doi:10.1007/BF02310791.
- [8] D. CHENG, R. PENG, I. PERROS, AND Y. LIU, *SPALS: Fast alternating least squares via implicit leverage scores sampling*, in Advances In Neural Information Processing Systems, 2016, <https://papers.nips.cc/paper/6436-spals-fast-alternating-least-squares-via-implicit-leverage-scores-sampling.pdf>.
- [9] G. DRAKOPOULOS, A. KANAVOS, I. KARYDIS, S. SIOUTAS, AND A. G. VRAHATIS, *Tensor-based semantically-aware topic clustering of biomedical documents*, Computation, 5 (2017), p. 34, doi:10.3390/computation5030034.
- [10] P. DRINEAS, R. KANNAN, AND M. W. MAHONEY, *Fast monte carlo algorithms for matrices i: Approximating matrix multiplication*, SIAM Journal on Computing, 36 (2006), pp. 132–157.
- [11] P. DRINEAS, M. MAGDON-ISMAIL, M. W. MAHONEY, AND D. P. WOODRUFF, *Fast approximation of matrix coherence and statistical leverage*, Journal of Machine Learning Research, 13 (2012), pp. 3475–3506, <http://www.jmlr.org/papers/v13/drineas12a.html>.
- [12] P. DRINEAS AND M. W. MAHONEY, *Lectures on randomized numerical linear algebra*, 2017, arXiv:1712.08880.
- [13] P. DRINEAS, M. W. MAHONEY, S. MUTHUKRISHNAN, AND T. SARLÓS, *Faster least squares approximation*, Numerische mathematik, 117 (2011), pp. 219–249.
- [14] A. ESHRAGH, F. ROOSTA, A. NAZARI, AND M. W. MAHONEY, *LSAR: Efficient leverage score sampling algorithm for the analysis of big time series data*, 2019, arXiv:1911.12321.
- [15] C. GLOWACZ, V. GROSSO, R. POUSSIER, J. SCHÜTH, AND F.-X. STANDAERT, *Simpler and more efficient rank estimation for side-channel security assessment*, in International Workshop on Fast Software Encryption, Springer, 2015, pp. 117–129, doi:10.1007/978-3-662-48116-5\_6.
- [16] N. HALKO, P. G. MARTINSSON, AND J. A. TROPP, *Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions*, SIAM Rev., 53 (2011), pp. 217–288, doi:10.1137/090771806, <http://dx.doi.org/10.1137/090771806>.
- [17] R. A. HARSHMAN, *Foundations of the PARAFAC procedure: Models and conditions for an “explanatory” multi-modal factor analysis*, UCLA working papers in phonetics, 16 (1970), pp. 1–84. Available at <http://www.psychology.uwo.ca/faculty/harshman/wpppfac0.pdf>.
- [18] M. A. IWEN, D. NEEDELL, E. REBROVA, AND A. ZARE, *Lower memory oblivious (tensor) subspace embeddings with fewer random bits: Modewise methods for least squares*, 2019, arXiv:1912.08294 [math.NA].
- [19] R. JIN, T. G. KOLDA, AND R. WARD, *Faster Johnson-Lindenstrauss transforms via Kronecker products*, Information and Inference: A Journal of the IMA, (2020), doi:10.1093/imaiai/iaaa028, arXiv:1909.04801.
- [20] T. G. KOLDA AND B. W. BADER, *Tensor decompositions and applications*, SIAM Review, 51 (2009), pp. 455–500, doi:10.1137/07070111X.
- [21] T. G. KOLDA AND D. HONG, *Stochastic gradients for large-scale tensor decomposition*, SIAM Journal on

- Mathematics of Data Science, 2 (2020), pp. 1066–1095, doi:10.1137/19m1266265, arXiv:1906.01687.
- [22] M. W. MAHONEY, *Randomized algorithms for matrices and data*, Foundations and Trends in Machine Learning, 3 (2011), pp. 123–224, doi:10.1561/22000000035, arXiv:1104.5557.
  - [23] O. A. MALIK AND S. BECKER, *Low-rank tucker decomposition of large tensors using TensorSketch*, in Advances in Neural Information Processing Systems, 2018, pp. 10096–10106, <https://proceedings.neurips.cc/paper/2018/hash/45a766fa266ea2eb6b6680fa139d2a3d-Abstract.html>.
  - [24] O. A. MALIK AND S. BECKER, *Guarantees for the Kronecker fast Johnson–Lindenstrauss transform using a coherence and sampling argument*, Linear Algebra and its Applications, 602 (2020), pp. 120–137, doi:10.1016/j.laa.2020.05.004.
  - [25] D. P. MARTIN, J. F. O’CONNELL, E. OSWALD, AND M. STAM, *Counting keys in parallel after a side channel attack*, in International Conference on the Theory and Application of Cryptology and Information Security, Springer, 2015, pp. 313–337, doi:10.1007/978-3-662-48800-3\_13.
  - [26] P.-G. MARTINSSON AND J. TROPP, *Randomized numerical linear algebra: Foundations & algorithms*, 2020, arXiv:2002.01387.
  - [27] K. MARUHASHI, F. GUO, AND C. FALOUTSOS, *Multiaspectforensics: Pattern mining on large-scale heterogeneous networks with tensor analysis*, in 2011 International Conference on Advances in Social Networks Analysis and Mining, IEEE, 2011, pp. 203–210, doi:10.1109/ASONAM.2011.80.
  - [28] Y. MU, W. DING, M. MORABITO, AND D. TAO, *Empirical discriminative tensor analysis for crime forecasting*, in International Conference on Knowledge Science, Engineering and Management, Springer, 2011, pp. 293–304, doi:10.1007/978-3-642-25975-3\_26.
  - [29] M. NAKATSUJI, Q. ZHANG, X. LU, B. MAKNI, AND J. A. HENDLER, *Semantic social network analysis by cross-domain tensor factorization*, IEEE Transactions on Computational Social Systems, 4 (2017), pp. 207–217, doi:10.1109/TCSS.2017.2732685.
  - [30] D. PAPAILIOPOULOS, A. KYRILLIDIS, AND C. BOUTSIDIS, *Provable deterministic leverage score sampling*, in Proceedings of the 20th ACM SIGKDD international conference on Knowledge discovery and data mining, ACM, 2014, pp. 997–1006, doi:10.1145/2623330.2623698.
  - [31] E. E. PAPALEXAKIS, K. PELECHINIS, AND C. FALOUTSOS, *Location based social network analysis using tensors and signal processing tools*, in 2015 IEEE 6th International Workshop on Computational Advances in Multi-Sensor Adaptive Processing (CAMSAP), IEEE, 2015, pp. 93–96, doi:10.1109/CAMSAP.2015.7383744.
  - [32] R. POUSSIER, F.-X. STANDAERT, AND V. GROSSO, *Simple key enumeration (and rank estimation) using histograms: an integrated approach*, in International Conference on Cryptographic Hardware and Embedded Systems, Springer, 2016, pp. 61–81, doi:10.1007/978-3-662-53140-2\_4.
  - [33] A. SAPIENZA, A. BESSI, AND E. FERRARA, *Non-negative tensor factorization for human behavioral pattern mining in online games*, Information, 9 (2018), p. 66, doi:10.3390/info9030066.
  - [34] N. D. SIDIROPOULOS, L. DE LATHAUWER, X. FU, K. HUANG, E. E. PAPALEXAKIS, AND C. FALOUTSOS, *Tensor decomposition for signal processing and machine learning*, IEEE Transactions on Signal Processing, 65 (2017), pp. 3551–3582, doi:10.1109/TSP.2017.2690524, arXiv:1607.01668.
  - [35] S. SMITH, J. W. CHOI, J. LI, R. VUDUC, J. PARK, X. LIU, AND G. KARYPIS, *FROSTT: The formidable repository of open sparse tensors and tools*, 2017, <http://frostdt.io/>.
  - [36] Z. SONG, D. P. WOODRUFF, AND P. ZHONG, *Relative error tensor low rank approximation*, in Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA ’19, 2019, pp. 2772–2789, doi:10.1137/1.9781611975482.172.
  - [37] Y. SUN, Y. GUO, C. LUO, J. TROPP, AND M. UDELL, *Low-rank Tucker approximation of a tensor from streaming data*, 2019, arXiv:1904.10951 [cs.NA].
  - [38] Y. WANG, H.-Y. TUNG, A. J. SMOLA, AND A. ANANDKUMAR, *Fast and guaranteed tensor decomposition via sketching*, in Advances in Neural Information Processing Systems, 2015, pp. 991–999.
  - [39] D. P. WOODRUFF, *Sketching as a tool for numerical linear algebra*, FNT in Theoretical Computer Science, 10 (2014), pp. 1–157, doi:10.1561/04000000060, arXiv:1411.4357.
  - [40] Y. YAN, Y. TAO, J. XU, S. REN, AND H. LIN, *Visual analytics of bike-sharing data based on tensor factorization*, Journal of Visualization, 21 (2018), pp. 495–509, doi:10.1007/s12650-017-0463-1.
  - [41] B. YANG, A. ZAMZAM, AND N. D. SIDIROPOULOS, *Parasketch: Parallel tensor factorization via sketching*, in Proceedings of the 2018 SIAM International Conference on Data Mining, SIAM, 2018, pp. 396–404, doi:10.1137/1.9781611975321.45.

- [42] A. R. ZHANG, Y. LUO, G. RASKUTTI, AND M. YUAN, *ISLET: Fast and optimal low-rank tensor regression via importance sketching*, SIAM Journal on Mathematics of Data Science, 2 (2020), pp. 444–479, [doi:10.1137/19M126476X](https://doi.org/10.1137/19M126476X).
- [43] G. ZHOU, A. CICHOCKI, AND S. XIE, *Decomposition of big tensors with low multilinear rank*, Dec. 2014, [arXiv:1412.1885](https://arxiv.org/abs/1412.1885).