

# Variable Selection via Thompson Sampling

Yi Liu\* and Veronika Ročková†

December 7, 2021

## Abstract

Thompson sampling is a heuristic algorithm for the multi-armed bandit problem which has a long tradition in machine learning. The algorithm has a Bayesian spirit in the sense that it selects arms based on posterior samples of reward probabilities of each arm. By forging a connection between combinatorial binary bandits and spike-and-slab variable selection, we propose a stochastic optimization approach to subset selection called Thompson Variable Selection (TVS). TVS is a framework for interpretable machine learning which does not rely on the underlying model to be linear. TVS brings together Bayesian reinforcement and machine learning in order to extend the reach of Bayesian subset selection to non-parametric models and large datasets with very many predictors and/or very many observations. Depending on the choice of a reward, TVS can be deployed in offline as well as online setups with streaming data batches. Tailoring multiplay bandits to variable selection, we provide regret bounds without necessarily assuming that the arm mean rewards be unrelated. We show a very strong empirical performance on both simulated and real data. Unlike deterministic optimization methods for spike-and-slab variable selection, the stochastic nature makes TVS less prone to local convergence and thereby more robust.

**Keywords:** *BART, Combinatorial Bandits, Interpretable Machine Learning, Spike-and-Slab, Thompson Sampling, Variable Selection*

---

\*Yi Liu is a 4<sup>th</sup> year PhD student at the Department of Statistics at the University of Chicago

†Veronika Rockova is Associate Professor in Econometrics and Statistics at the Booth School of Business of the University of Chicago. The author gratefully acknowledges the support from the James S. Kemper Foundation Research Fund at the Booth School of Business.

# 1 Interpretable Machine Learning

A fundamental challenge in statistics that goes beyond mere prediction is to glean interpretable insights into the nature of real-world processes by identifying important correlates of variation. Many today’s most powerful prediction tools, however, lack an intuitive algebraic form which renders their interpretability (i.e. insight into the black box decision process) far from straightforward. Substantial effort has been recently devoted to enhancing the explainability of machine learning through the identification of key variables that drive predictions (Garson (1991); Olden and Jackson (2002); Zhang et al. (2000); Lu et al. (2018); Burns et al. (2020); Horel and Giesecke (2019)). While these procedures may possess nice theoretical guarantees, they may not yet be feasible for large-scale applications. This work develops a new computational platform for understanding black-box predictions which is based on reinforcement learning and which can be applied to very large datasets.

A variable can be important because its change has a causal impact or because leaving it out reduces overall prediction capacity (Mase et al. (2019)). Such leave-one-covariate-out type inference has a long tradition, going back to at least Breiman (2001). In random forests, for example, variable importance is assessed by the difference between prediction errors in the out-of-bag sample before and after noising the covariate through a permutation. Lei et al. (2018) propose the LOCO method which gauges local effects of removing each covariate on the overall prediction capability and derives an asymptotic distribution for this measure to conduct proper statistical tests. There is a wealth of literature on variable importance measures, see Fisher et al. (2019) for a recent overview. In Bayesian forests, such as BART (Chipman et al. (2001)), one keeps track of predictor inclusion frequencies and outputs an average proportion of all splitting rules inside a tree ensemble that split on a given variable. In deep learning, one can construct variable importance measures using network weights (Garson (1991); Ye and Sun (2018)). Owen and Prieur (2017) introduce a variable importance based on a Shapley value and Hooker (2007) investigates diagnostics of black box functions using functional ANOVA decompositions with dependent covariates. While useful for ranking variables, importance measures are less intuitive for model selection and are often not well-understood theoretically (with a few exceptions including Ishwaran et al. (2007); Kazemitabar et al. (2017)).

This work focuses on high-dimensional applications (either very many predictors or very

many observations, or both), where computing importance measures and performing tests for predictor effects quickly becomes infeasible. We consider the non-parametric regression model which provides a natural statistical framework for supervised machine learning. The data setup consists of a continuous response vector  $\mathbf{Y}^{(n)} = (Y_1, \dots, Y_n)'$  that is linked stochastically to a fixed set of predictors  $\mathbf{x}_i = (x_{i1}, \dots, x_{ip})'$  for  $1 \leq i \leq n$  through

$$Y_i = f_0(\mathbf{x}_i) + \epsilon_i \quad \text{where } \epsilon_i \stackrel{iid}{\sim} N(0, \sigma^2), \quad (1)$$

and where  $f_0$  is an unknown regression function. The variable selection problem occurs when there is a subset  $\mathcal{S}_0 \subset \{1, \dots, p\}$  of  $q_0 = |\mathcal{S}_0|$  predictors which exert influence on the mixing function  $f_0$  and we do not know which subset it is. In other words,  $f_0$  is constant in directions outside  $\mathcal{S}_0$  and the goal is to identify active directions (regressors) in  $\mathcal{S}_0$  while, at the same time, permitting nonlinearities and interactions. The traditional Bayesian approach to this problem starts with a prior distribution over the  $2^p$  sets of active variables. This is typically done in a hierarchical fashion by first assigning a prior distribution  $\pi(q)$  on the subset size  $q = |\mathcal{S}|$  and then a conditionally uniform prior on  $\mathcal{S}$ , given  $q$ , i.e.  $\pi(\mathcal{S}|q) = \frac{1}{\binom{p}{q}}$ . This prior can be translated into the *spike-and-slab* prior where, for each coordinate  $1 \leq i \leq p$ , one assumes a binary indicator  $\gamma_i$  for whether or not the variable  $x_i$  is active and assigns a prior

$$\mathbb{P}(\gamma_i | \theta) = \theta, \quad \theta \sim \text{Beta}(a, b) \text{ for some } a, b > 0. \quad (2)$$

The active subset  $\mathcal{S}$  is then constructed as  $\mathcal{S} = \{j : \gamma_j = 1\}$ . There is no shortage of literature on spike-and-slab variable selection in the linear model, addressing prior choices (Mitchell and Beauchamp (1988); Rockova and George (2018); Rossell and Telesca (2017); Vannucci and Stingo (2010); Brown et al. (1998)), computational aspects (Carbonetto et al. (2012); Rockova and George (2014); Bottolo et al. (2010), George and McCulloch (1993), George and McCulloch (1997)) and/or variable selection consistency results (Castillo et al. (2015); Johnson and Rossell (2012); Narisetty et al. (2014)). Traditionally, spike-and-slab methodology relies on the underlying model to be linear, which may be woefully inaccurate, and can be computationally slow. In this work, we leave behind the linear model framework and focus on interpretable machine learning linking spike-and-slab methods with binary bandits. The two major methodological benefits are (a) ability to capture

non-linear effects and (b) scalability to very large datasets. Existing non-linear variable selection approaches include grouped shrinkage/selection of basis-expansion coefficients (Lin and Zhang, 2006; Radchenko and James, 2010; Ravikumar et al., 2009; Scheipl, 2011), regularization of the derivative expectation operator (Lafferty and Wasserman, 2008) or model-free knockoffs (Candes et al., 2018). The main distinguishing feature of our approach is the development of a new computational platform via a spike-and-slab wrapper that extends the reach of machine learning to large-scale data.

This paper introduces Thompson Variable Selection (TVS), a stochastic optimization approach to subset selection based on reinforcement learning. The key idea behind TVS is that variable selection can be regarded as a combinatorial bandit problem where each variable is treated as an arm. TVS sequentially learns promising combinations of arms (variables) that are most likely to provide a reward. Depending on the learning tool for modeling  $f_0$  (not necessarily a linear model), TVS accommodates a wide range of rewards for both offline and online (streaming batches) setups. The fundamental appeal of active learning for subset selection (as opposed to MCMC sampling) is that those variables which provided a small reward in the past are less likely to be pulled again in the future. This exploitation aspect steers model exploration towards more promising combinations and offers dramatic computational dividends. Indeed, similarly as with backward elimination TVS narrows down the inputs contributing to  $f_0$  but does so in a stochastic way by learning from past mistakes. TVS aggregates evidence for variable inclusion and quickly separates signal from noise by minimizing regret motivated by the median probability model rule (Barbieri and Berger, 2004). We provide regret bounds which do not necessarily assume that the arm outcomes be unrelated. In addition, we show strong empirical performance and demonstrate the potential of TVS to meet demands of very large datasets.

This paper is structured as follows. Section 2 revisits known facts about multi-armed bandits. Section 3 develops the bandits framework for variable selection and Section 4 proposes Thompson Variable Selection and presents a regret analysis. Section 5 presents two implementations (offline and online) on two benchmark simulated data. Section 6 presents a thorough simulation study and Section 7 showcases TVS performance on real data. We conclude with a discussion in Section 8.

## 2 Multi-Armed Bandits Revisited

Before introducing Thompson Variable Selection, it might be useful to review several known facts about multi-armed bandits. The multi-armed bandit (MAB) problem can be motivated by the following gambling metaphor. A slot-machine player needs to decide between multiple arms. When pulled at time  $t$ , the  $i^{th}$  arm gives a random payout  $\gamma_i(t)$ . In the Bernoulli bandit problem, the rewards  $\gamma_i(t) \in \{0, 1\}$  are binary and  $\mathbb{P}(\gamma_i(t) = 1) = \theta_i$ . The distributions of rewards are unknown and the player can only learn about them through playing. In doing so, the player faces a dilemma: *exploiting* arms that have provided high yields in the past and *exploring* alternatives that may give higher rewards in the future.

More formally, an algorithm for MAB must decide which of the  $p$  arms to play at time  $t$ , given the outcome of the previous  $t - 1$  plays. A natural goal in the MAB game is to minimize *regret*, i.e. the amount of money one loses by not playing the optimal arm at each step. Denote with  $i(t)$  the arm played at time  $t$ , with  $\theta^* = \max_{1 \leq i \leq p} \theta_i$  the best average reward and with  $\Delta_i = \theta^* - \theta_i$  the gap between the rewards of an optimal action and a chosen action. The expected regret after  $T$  plays can be then written as  $\mathbb{E}[\mathcal{R}(T)] = \sum_{i=1}^p \Delta_i \mathbb{E}[k_i(T)]$ , where  $k_j(T) = \sum_{t=1}^T \mathbb{I}[i(t) = j]$  is the number of times an arm  $j$  has been played up to step  $T$ . There have been two main types of algorithms designed to minimize regret in the MAB problem: Upper Confidence Bound (UCB) of Lai and Robbins (1985) and Thompson Sampling (TS) of Thompson (1933). Thompson Sampling is a Bayesian-inspired heuristic algorithm that achieves a logarithmic expected regret (Agrawal and Goyal, 2012) in the Bernoulli bandit problem. Starting with a non-informative prior  $\theta_i \stackrel{iid}{\sim} \text{Beta}(1, 1)$  for  $1 \leq i \leq p$ , this algorithm: (a) updates the distribution of  $\theta_i$  as  $\text{Beta}(a_i(t) + 1, b_i(t) + 1)$ , where  $a_i(t)$  and  $b_i(t)$  are the number of successes and failures of the arm  $i$  up to time  $t$ , (b) samples  $\theta_i(t)$  from these posterior distributions, and (c) plays the arm with the highest  $\theta_i(t)$ . Agrawal and Goyal (2012) extended this algorithm to the general case where rewards are not necessarily Bernoulli but general random variables on the interval  $[0, 1]$ .

The MAB problem is most often formulated as a single-play problem, where only one arm can be selected at each round. Komiyama et al. (2015) extended Thompson sampling to a *multi-play scenario*, where at each round  $t$  the player selects a subset  $\mathcal{S}_t$  of  $L < p$  arms and receives binary rewards of all selected arms. For each  $1 \leq i \leq p$ , these rewards  $r_i(t)$  are iid Bernoulli with unknown success probabilities  $\theta_i$  where  $\gamma_i(t)$  and  $\gamma_j(t)$  are independent

for  $i \neq j$  and where, without loss of generality,  $\theta_1 > \theta_2 > \dots > \theta_p$ . The player is interested in maximizing the sum of expected rewards over drawn arms, where the optimal action is playing the top  $L$  arms  $\mathcal{S}_0 = \{1, \dots, L\}$ . The regret depends on the combinatorial structure of arms drawn and, similarly as before, is defined as the gap between an expected cumulative reward and the optimal drawing policy, i.e.  $\mathbb{E}[\mathcal{R}(T)] = \mathbb{E} \sum_{t=1}^T (\sum_{i \in \mathcal{S}_0} \theta_i - \sum_{i \in \mathcal{S}_t} \theta_i)$ . Fixing  $L$ , the number of arms played, Komiyama et al. (2015) propose a Thompson sampling algorithm for this problem and show that it has a logarithmic expected regret with respect to time and a linear regret with respect to the number of arms. Our metamorphosis of multi-armed bandits into a variable selection algorithm will ultimately require that the number  $L$  of arms played is random and that the rewards at each time  $t$  can be dependent.

Finally, we complete the review of MAB techniques with *combinatorial bandits* (Chen et al. (2013); Gai et al. (2012); Cesa-Bianchi and Lugosi (2012)) which are the closest relative to our proposed method here. Combinatorial bandits can be seen as a generalization of multi-play bandits, where any arbitrary combination of arms  $\mathcal{S}$  (called super-arms) is played at each round and where the reward  $r(\mathcal{S})$  can be revealed for the entire collective  $\mathcal{S}$  (a full-bandit feedback) or for each contributing arm  $i \in \mathcal{S}$  (a semi-bandit feedback), see e.g. Wang and Chen (2018); Combes and Proutiere (2014); Kveton et al. (2015); Combes and Proutiere (2014); Kveton et al. (2015). We will draw upon connections between combinatorial bandits and variable selection multiple times throughout Section 3 and 4.

### 3 Variable Selection as a Bandit Problem

The purpose of this section is to link spike-and-slab model selection with multi-armed bandits. Before formalizing the ideas, we discuss two possibilities inspired by the search for the MAP (maximum-a-posteriori) model and the MPM (median probability) model.

Bayesian model selection [with spike-and-slab priors](#) has often been synonymous to finding the MAP model  $\hat{\mathcal{S}} = \arg \max_{\mathcal{S}} \pi(\mathcal{S} | \mathbf{Y}^{(n)})$ . Even when the marginal likelihood is available, this model can be computationally unattainable for  $p$  as small as 20. In order to accelerate Bayesian variable selection using multi-armed bandits techniques one idea immediately comes to mind. One could treat each of the  $2^p$  models as a base arm. Assigning prior model probabilities according to  $\theta_i \sim \text{Beta}(a_i, b_i)$  for  $1 \leq i \leq 2^p$  for some<sup>1</sup>  $a_i > 0$  and

---

<sup>1</sup>chosen to correspond to marginals of a Dirichlet distribution

$b_i > 0$ , one could play a game by sequentially trying out various arms (variable subsets) and collect rewards to prioritize subsets that were suitably “good”. Identifying the arm with the highest mean reward could then serve as a proxy for the best model. This naive strategy, however, would not be operational due to the exponential number of arms to explore.

Instead of the MAP model, it has now been standard practice to report the *median probability model* (MPM) (Barbieri and Berger (2004)) consisting of those variables whose posterior inclusion probability  $\pi_i \equiv \mathbb{P}(\gamma_i = 1 \mid \mathbf{Y}^{(n)})$  is at least 0.5. More formally, MPM is defined, for  $\boldsymbol{\pi} = (\pi_1, \dots, \pi_p)'$ , as

$$\hat{\mathcal{S}}_{MPM} = \arg \max_{\mathcal{S}} r_{\boldsymbol{\pi}}(\mathcal{S}) = \{i : \pi_i \geq 0.5\} \quad \text{where} \quad r_{\boldsymbol{\pi}}(\mathcal{S}) = \left\{ \prod_{i \in \mathcal{S}} \pi_i \prod_{i \notin \mathcal{S}} (1 - \pi_i) \right\}. \quad (3)$$

This is now the default model selection rule with spike-and-slab priors (2). The MPM model is the optimal predictive model in linear regression under some assumptions (Barbieri et al., 2020). Obtaining  $\pi_i$ ’s, albeit easier than finding the MAP model, requires posterior sampling over variable subsets. While this can be done using standard MCMC sampling techniques in linear regression (George and McCulloch (1997); Narisetty et al. (2014); Bhattacharya et al. (2016)), here we explore new curious connections to bandits in order to develop a much faster stochastic optimization routine for finding MPM-alike models when the true model is not necessarily linear.

Having reviewed the two traditional Bayesian model choice reporting methods (MAP and MPM), we can now forge connections to multi-armed bandits. While the MAP model suggests treating *each model*  $\mathcal{S}$  as a bandit arm, the MPM model suggests treating *each variable*  $\gamma_i$  as a bandit arm. Under the MAP framework, the player would be required to play a single arm (i.e. a model) at each step. The MPM framework, on the other hand, requires playing a random subset of arms (i.e. a model) at each play opportunity. This is appealing for at least two reasons: (1) there are fewer arms to explore more efficiently, (2) the quantity  $r_{\boldsymbol{\pi}}(\mathcal{S})$  in (3) can be regarded as a mean regret of a combinatorial arm (more below) which, given  $\boldsymbol{\pi}$ , has MPM as its computational oracle. The computational oracle is defined as the regret minimizer when an oracle furnishes yield probabilities  $\theta_i$  (see forthcoming Lemma 1). Based on the discussion above, we regard the MPM framework as more intuitively appealing for bandit techniques. We thereby reframe spike-and-slab

selection with priors (2) as a bandit problem treating each variable as an arm. This idea is formalized below.

We view Bayesian spike-and-slab selection through the lens of *combinatorial bandit problems* (reviewed earlier in Section 2) by treating variable selection indicators  $\gamma_i$ 's in (2) as Bernoulli rewards. From now on, we will refer to each  $\theta_i$  as an unknown mean reward, i.e. a probability that the  $i^{th}$  variable exerts influence on the outcome. In sharp contrast to (2) which deploys one  $\theta$  for all arms, each arm  $i \in \{1, \dots, p\}$  now has *its own* prior inclusion probability  $\theta_i$ , i.e.

$$\mathbb{P}(\gamma_i = 1 \mid \theta_i) = \theta_i, \theta_i \stackrel{ind}{\sim} \text{Beta}(a_i, b_i) \text{ for some } a_i, b_i > 0. \quad (4)$$

In the original spike-and-slab setup (2), the mixing weight  $\theta$  served as a global shrinkage parameter determining the level of sparsity and linking coordinates to borrow strength (Rockova and George (2018)). In our new bandit formulation (4), on the other hand, the reward probabilities  $\theta_i$  serve as a proxy for posterior inclusion probabilities  $\pi_i$  whose distribution we want to learn by playing the bandits game. Recasting the spike-and-slab prior in this way allows one to approach Bayesian variable selection from a more algorithmic (machine learning) perspective.

### 3.1 The Global Reward

Before proceeding, we need to define the reward in the context of variable selection. One conceptually appealing strategy would be to collect a joint reward  $R(\mathcal{S}_t)$  (e.g. goodness of model fit) reflecting the collective effort of all contributing arms and then redistribute it among arms inside the super-arm  $\mathcal{S}_t$  played at time  $t$ . One example would be the Shapley value (Shapley (1953); Owen and Prieur (2017)), a construct from cooperative game theory for the attribution problem that distributes the value created by a team to its individual members.

We try a different route. Rather than distributing, we will aggregate. Namely, instead of collecting a global reward first and then redistributing it, we first collect individual rewards  $\gamma_i^t \in \{0, 1\}$  for each played arm  $i \in \mathcal{S}_t$  and then weave them into a global reward  $R(\mathcal{S}_t)$ . We assume that  $\gamma_i^t$ 's are iid from (4) for each  $i \in \{1, \dots, p\}$ . Unlike traditional combinatorial bandits that define the global reward  $R(\mathcal{S}_t) = \sum_{i \in \mathcal{S}_t} \gamma_i^t$  as a sum of individual outcomes (Gai



et al., 2012), we consider a global reward for variable selection motivated by the median probability model.

One natural choice would be a *binary* global reward  $R(\mathcal{S}_t) = \prod_{i \in \mathcal{S}_t} \gamma_i^t \prod_{i \notin \mathcal{S}_t} (1 - \gamma_i^t) \in \{0, 1\}$  for whether or not *all* arms inside  $\mathcal{S}_t$  yielded a reward and, at the same time, *none* of the arms outside  $\mathcal{S}_t$  did. Assuming independent arms, the expected reward equals  $\mathbb{E}[R(\mathcal{S}_t)] = \prod_{i \in \mathcal{S}_t} \theta_i \prod_{i \notin \mathcal{S}_t} (1 - \theta_i) = r_{\boldsymbol{\theta}}(\mathcal{S}_t)$  and has the “median probability model” as its computational oracle, as can be seen from (3). However, this expected reward is not monotone in  $\theta_i$ ’s (a requirement needed for regret analysis) and, due to its dichotomous nature, it penalizes all mistakes (false positives and negatives) equally.

We consider an alternative reward function which also admits a computational oracle but treats mistakes *differentially*. For some  $0 < C < 1$ , we define the *global reward*  $R_C(\mathcal{S}_t)$  for a subset  $\mathcal{S}_t$  at time  $t$  as

$$R_C(\mathcal{S}_t) = \sum_{i \in \mathcal{S}_t} \log(C + \gamma_i^t). \quad (5)$$

Similarly as  $R(\mathcal{S}_t)$  (defined above) the reward is maximized for the model which includes all the positive arms and none of the negative arms, i.e.  $\arg \max_{\mathcal{S}} R_C(\mathcal{S}) = \{i : \gamma_i^t = 1\}$ . Unlike  $R(\mathcal{S}_t)$ , however, the reward will penalize subsets with false positives, a penalty  $\log(C)$  for each, and there is an opportunity cost of  $\log(1 + C)$  for each false negative. The expected global reward depends on the subset  $\mathcal{S}_t$  and the vector of yield probabilities  $\boldsymbol{\theta} = (\theta_1, \dots, \theta_p)'$ , i.e.

$$r_{\boldsymbol{\theta}}^C(\mathcal{S}_t) = \mathbb{E}[R_C(\mathcal{S}_t)] = \sum_{i \in \mathcal{S}_t} \left[ \theta_i \log\left(\frac{C+1}{C}\right) - \log\left(\frac{1}{C}\right) \right]. \quad (6)$$

Note that this expected reward *is monotone* in  $\theta_i$ ’s and is Lipschitz continuous. Moreover, it *also has* the median probability model as its computational oracle.

**Lemma 1** *Denote with  $\mathcal{S}_O = \arg \max_{\mathcal{S}} r_{\boldsymbol{\theta}}^C(\mathcal{S})$  the computational oracle. Then we have*

$$\mathcal{S}_O = \left\{ i : \theta_i \geq \frac{\log(1/C)}{\log[(C+1)/C]} \right\}. \quad (7)$$

*With  $C = (\sqrt{5} - 1)/2$ , the oracle is the median probability model  $\{i : \theta_i \geq 0.5\}$ .*

**Proof:** It follows immediately from the definition of  $R_C(\mathcal{S}_t)$  and the fact that  $\log(1/C) = 0.5 \log[(1+C)/C]$  for  $C = (\sqrt{5} - 1)/2$ .

Note that the choice of  $C = (\sqrt{5} - 1)/2$  incurs *the same* penalty/opportunity cost for false positives and negatives since  $\log(1 + C) = -\log(C)$ . In streaming feature selection, for example, Zhou et al. (2006) accommodate measurement cost and place cheaper variables earlier in the stream. In our framework, we can allow for different cost  $C_i$  (e.g. a measurement cost) for each variable  $1 \leq i \leq p$ . The existence of the computational oracle for the expected reward  $r_{\theta}^C(\mathcal{S})$  is very comforting and will be exploited in our Thompson sampling algorithm introduced in Section 4

### 3.2 The Local Rewards

The global reward (5) is a deterministic functional of the local rewards. We have opted for the reward functional (5) because the regret minimizer is the median probability model when the yield probabilities are provided (see Lemma 1). We now clarify the definition of local rewards  $\gamma_i^t$ . We regard  $\mathcal{S}_t$  as a smaller pool of candidate variables, which can contain false positives and false negatives. The goal is to play a game by sequentially trying out different subsets and reward true signals so that they are selected in the next round and to discourage false positives from being included again in the future. Denote with  $\mathbb{S}$  the set of all subsets of  $\{1, \dots, p\}$  and with  $\mathcal{D}$  the “data” at hand consisting of  $|\mathcal{D}|$  observations  $(Y_i, \mathbf{x}_i)$  from (1). We introduce a *feedback rule*

$$r(\mathcal{S}_t, \mathcal{D}) : \mathbb{S} \times \mathbb{R}^{|\mathcal{D}|} \rightarrow \{0, 1\}^{|\mathcal{S}_t|}, \quad (8)$$

which, when presented with data  $\mathcal{D}$  and a subset  $\mathcal{S}_t$ , outputs a vector of *binary rewards*  $r(\mathcal{S}_t, \mathcal{D}) = (\gamma_i^t : i \in \mathcal{S}_t)'$  for whether or not a variable  $x_i$  for  $i \in \mathcal{S}_t$  is relevant for predicting or explaining the outcome. This feedback is only revealed if  $i \in \mathcal{S}_t$ . We consider two sources of randomness that implicitly define the reward distribution  $r(\mathcal{S}_t, \mathcal{D})$ : (1) a *stochastic feedback rule*  $r(\cdot)$  assuming that data  $\mathcal{D}$  is given, and (2) a *deterministic feedback rule*  $r(\cdot)$  assuming that data  $\mathcal{D}$  is stochastic.

The first reward type has a Bayesian flavor in the sense that it is *conditional* on the observed data  $\mathcal{D}_n = \{(Y_i, \mathbf{x}_i) : 1 \leq i \leq n\}$ , where rewards can be sampled using Bayesian stochastic computation (i.e. MCMC sampling). Such rewards are natural in *offline settings* with Bayesian feedback rules, as we explore in Section 5.1. As a lead example of this strategy in this paper, we consider a stochastic reward based on BART (Chipman et al. (2001)).

We refer to Hill et al. (2020) and references therein for a nice recent overview of BART. In particular, we use the following binary local reward  $r(\mathcal{S}_t, \mathcal{D}_n) = (\gamma_i^t : i \in \mathcal{S}_t)'$  where

$$\gamma_i^t = \mathbb{I}(M^{th} \text{ sample from the BART posterior splits on the variable } x_i). \quad (9)$$

The mean reward  $\theta_i = \mathbb{P}(\gamma_i^t = 1) = \mathbb{P}[i \in \mathcal{F} | \mathcal{D}_n]$  can be interpreted as the posterior probability that a variable  $x_i$  is split on in a Bayesian forest  $\mathcal{F}$  given the entire data  $\mathcal{D}_n$ . The stochastic nature of the BART computation allows one to regard the reward (9) as an actual random variable, whose values can be sampled from using standard software. Since BART is run *only* with variables inside  $\mathcal{S}_t$  (where  $|\mathcal{S}_t| \ll p$ ) and *only* for  $M$  burn-in MCMC iterations, computational gains are dramatic (as we will see in Section 5.1).

The second reward type has a frequentist flavor in the sense that rewards are sampled by applying deterministic feedback rules on new streams (or bootstrap replicates)  $\mathcal{D}_t$  of data. Such rewards are natural in *online settings*, as we explore in Section 5.2. As a lead example of this strategy in this paper, we assume that the dataset  $\mathcal{D}_n$  consist of  $n = sT$  observations and is partitioned into minibatches  $\mathcal{D}_t = \{(Y_i, \mathbf{x}_i) : (t-1)s + 1 \leq i \leq ts\}$  for  $t = 1, \dots, T$ . One could think of these batches as new independent observations arriving in an online fashion or as manageable snippets of big data. The ‘deterministic’ screening rule we consider here is running BART for a large number  $M$  of MCMC iterations and collecting an aggregated importance measure  $IM(i; \mathcal{D}_t, \mathcal{S}_t)$  for each variable.<sup>2</sup> We define  $IM(i; \mathcal{D}_t, \mathcal{S}_t)$  as the average number of times a variable  $x_i$  was used in a forest where the average is taken over the  $M$  iterations and we then reward those arms which were used at least once on average,

$$\gamma_i^t = \mathbb{I}[IM(i; \mathcal{D}_t, \mathcal{S}_t) \geq 1]. \quad (10)$$

The mean reward  $\theta_i = \mathbb{P}(\gamma_i^t = 1)$  can be then interpreted as the (frequentist) probability that BART, when run on  $s = n/T$  observations arising from (1), uses a variable  $x_i$  at least once on average over  $M$  iterations. We illustrate this online variant in Section 5.2.

---

<sup>2</sup>This rule is deterministic in the sense that computing it again on the same data should in principle provide the same answer. One could, in fact, deploy any other machine learning method that outputs some measure of variable importance.

### 3.3 Other Feedback Rules

TVS is not confined to a BART reward function. Deploying any variable selection method using only a subset  $\mathcal{S}_t$  will yield a binary feedback rule. For example, the LASSO method yields  $\hat{\beta}_i$  for  $i \in \mathcal{S}_t$  which can be turned into the following feedback  $\gamma_i^t = \mathbb{I}(\hat{\beta}_i \neq 0)$  for  $i \in \mathcal{S}_t$ . In offline setups, randomness of  $\gamma_i^t$ 's can be induced by taking a bootstrap replicate of  $\mathcal{D}_n$  at each play time  $1 \leq t \leq T$ . Another possibility for a binary reward is dichotomizing  $p$ -values, similarly as in alpha-investing for streaming variable selection by Zhou et al. (2006). Instead of binary local rewards (8), one can also consider continuous rewards  $\gamma_i^t \in [0, 1]^{|\mathcal{S}_t|}$  by rescaling variable importance measures obtained by a machine learning method (e.g. random forests (Louppe et al. (2013)), deep learning (Horel and Giesecke (2019)), and BART (Chipman et al. (2010))). Our Thompson sampling algorithm can be then modified by dichotomizing these rewards through independent Bernoulli trials with probabilities equal to the continuous rewards (Agrawal and Goyal, 2012).

## 4 Introducing Thompson Variable Selection (TVS)

This section introduces Thompson Variable Selection (TVS), a reinforcement learning algorithm for subset selection in non-parametric regression environments. The computation alternates between *Choose*, *Reward* and *Update* steps that we describe in more detail below.

The unknown mean rewards will be denoted with  $\theta_i^*$  and the ultimate goal of TVS is to learn their distribution once we have seen the ‘data’<sup>3</sup>. To this end, we take the *combinatorial bandits* perspective (Chen et al. (2013), Gai et al. (2010)) where, instead of playing one arm at each play opportunity  $t$ , we play a random subset  $\mathcal{S}_t \subseteq \{1, \dots, p\}$  of multiple arms. Each such *super-arm*  $\mathcal{S}_t$  corresponds to a *model* configuration and the goal is to discover promising models by playing more often the more promising variables.

Similarly as with traditional Thompson Sampling, the  $t^{th}$  iteration of TVS starts off by sampling mean rewards  $\theta_i(t) \sim \text{Beta}(a_i(t), b_i(t))$  from a posterior distribution that incorporates past reward experiences up to time  $t$  (as we discussed in Section 2). The *Choose Step* then decides which arms will be played in the next round. While the single-play Thompson sampling policy dictates playing the arm with the highest sampled expected reward, the combinatorial Thompson sampling policy (Wang and Chen (2018)) dictates

---

<sup>3</sup>The ‘data’ here refers to the sequence of observed rewards.

<b>Algorithm 1:</b> <i>Thompson Variable Selection with BART</i>
<b>INPUT</b>
Define $\tilde{C} = \frac{\log(1/C)}{\log[(1+C)/C]}$ for some $0 < C < 1$ and pick $M, a, b > 0$ Initialize $a_i(0) := a$ and $b_i(0) := b$ for each arm $1 \leq i \leq p$ .
<b>LOOP</b>
For $t = 1, \dots, T$ repeat steps C(1)-(3), R and U.
<b>Choose Step</b>
C(1): Set $\mathcal{S}_t = \emptyset$ and for $i = 1 \dots p$ do C(2): Sample $\theta_i(t) \sim \text{Beta}(a_i(t), b_i(t))$ C(3): (Unknown $q^*$ ) Compute $\mathcal{S}_t = \{i : \theta_i(t) \geq \tilde{C}\}$ from (7) C(3)*: (Known $q^*$ ) Compute $\mathcal{S}_t$ from (13)
<b>Reward Step</b>
R: Collect local rewards $\gamma_i^t$ for each $1 \leq i \leq p$ from (9) (offline) or (10) (online)
<b>Update Step</b>
U: If $\gamma_i^t = 1$ then set $a_i(t+1) = a_i(t) + 1$ , else $b_i(t+1) = b_i(t) + 1$
<b>OUTPUT</b>
Evidence probabilities $\pi_i(t) = a_i(t)/[a_i(t) + b_i(t)]$ for $1 \leq i \leq p$ and $1 \leq t \leq T$ .

Algorithm 1: Thompson Variable Selection with BART (\* is an alternative with known  $q^*$ )

playing the *subset* that maximizes the expected global reward, given the vector of sampled probabilities  $\boldsymbol{\theta}(t) = (\theta_1(t), \dots, \theta_p(t))'$ . The availability of the computational oracle (from Lemma 1) makes this step awkwardly simple as it boils down to computing  $\mathcal{S}_O$  in (7). Unlike multi-play bandits where the number of played arms is predetermined (Komiyama (2015)), this strategy allows one to adapt to the size of the model. We do, however, consider a variant of the computational oracle (see (13) below) for when the size  $q^* = |\mathcal{S}^*|$  of the ‘true’ model  $\mathcal{S}^* = \arg \max_{\mathcal{S}} r_{\boldsymbol{\theta}^*}^C(\mathcal{S})$  is known. The *Choose Step* is then followed by the *Reward Step* (step R in Table 1) which assigns a prize to the chosen subset  $\mathcal{S}_t$  by collecting individual rewards  $\gamma_i^t$  (for the offline setup in (9) or for the online setup (10)). Finally, each TVS iteration concludes with an *Update Step* which updates the beta posterior distribution (step U in Table 1).

The fundamental goal of Thompson Variable Selection is to learn the distribution of mean rewards  $\theta_i$ ’s by playing a game, i.e. sequentially creating a dataset of rewards by sampling from beta posterior<sup>4</sup> distributions that incorporate past rewards and the observed data  $\mathcal{D}$ . One natural way to distill evidence for variable selection is through the means

<sup>4</sup>This posterior treats the past rewards as the actual data.

$\boldsymbol{\pi}(t) = (\pi_1(t), \dots, \pi_p(t))'$  of these beta distributions

$$\pi_i(t) = \frac{a_i(t)}{a_i(t) + b_i(t)}, \quad 1 \leq i \leq p, \quad (11)$$

which serve as a proxy for posterior inclusion probabilities. Similarly as with the classical median probability model (Barbieri and Berger, 2004), one can deem important those variables with  $\pi_i(t)$  above 0.5 (this corresponds to one specific choice of  $C$  in Lemma 1). More generally, at each iteration  $t$  TVS outputs a model  $\widehat{\mathcal{S}}_t$ , which satisfies  $\widehat{\mathcal{S}}_t = \arg \max_{\mathcal{S}} r_{\boldsymbol{\pi}(t)}^C$ . From Lemma 1, this model can be simply computed by truncating individual  $\pi_i(t)$ 's. Upon convergence, i.e. when trajectories  $\pi_i(t)$  stabilize over time, TVS will output the same model  $\widehat{\mathcal{S}}_t$ . We will see from our empirical demonstrations in Section 5 that the separation between signal and noise (based on  $\pi_i(t)$ 's) and the model stabilization occurs fast. Before our empirical results, however, we will dive into the regret analysis of TVS.

## 4.1 Regret Analysis

Thompson sampling (TS) is a policy that uses Bayesian ideas to solve a fundamentally frequentist problem of regret minimization. In this section, we explore regret properties of TVS and expand current theoretical understanding of combinatorial TS by allowing for correlation between arms. Theory for TS was essentially unavailable until the path-breaking paper by Agrawal and Goyal (2012) where the first finite-time analysis was presented for single-play bandits. Later, Leike et al. (2016) proved that TS converges to the optimal policy in probability and almost surely under some assumptions. Several theoretical and empirical studies for TS in *multi-play* bandits are also available. In particular, Komiyama et al. (2015) extended TS to multi-play problems with a fixed number of played arms and showed that it achieves the optimal regret bound. Recently, Wang and Chen (2018) introduced TS for combinatorial bandits and derived regret bounds for Lipschitz-continuous rewards under an offline oracle. We build on their development and extend their results to the case of related arms.

Recall that the goal of the player is to minimize the total (expected) regret under time horizon  $T$  defined below

$$Reg(T) = \mathbb{E} \left[ \sum_{t=1}^T (r_{\boldsymbol{\theta}^*}^C(\mathcal{S}^*) - r_{\boldsymbol{\theta}^*}^C(\mathcal{S}_t)) \right], \quad (12)$$

where  $\mathcal{S}^* = \arg \max_{\mathcal{S}} r_{\theta^*}^C(\mathcal{S}_t)$  with  $q^* = |\mathcal{S}^*|$ ,  $\theta_i^* = \mathbb{E}[\gamma_i^t]$  and where the expectation is taken over the unknown drawing policy. Choosing  $C$  as in Lemma 1, one has  $\log(1+C) = -\log(C) = D$  and thereby

$$Reg(T) = D \mathbb{E} \left[ \sum_{t=1}^T \sum_{i=1}^p (2\theta_i^* - 1) [\mathbb{I}(i \in \mathcal{S}^* \setminus \mathcal{S}_t) - \mathbb{I}(i \in \mathcal{S}_t \setminus \mathcal{S}^*)] \right].$$

Note that  $(2\theta_i^* - 1)$  is positive iff  $i \in \mathcal{S}^*$ . Upper bounds for the regret (12) under the drawing policy of our TVS Algorithm 1 can be obtained under various assumptions. Below, we first review two available regret bounds following from Wang and Chen (2018) for when (a)  $q^*$  is known and arms are independent (Lemma 2) and (b) arms are related and  $q^*$  is unknown (Lemma 3). Later in our Theorem 1, we relax these assumptions and provide a regret bound assuming that  $q^*$  unknown and, at the same time, arms are related.

Assuming that the size  $q^*$  of the optimal model  $\mathcal{S}^*$  is *known*, one can modify Algorithm 1 to confine the search to models of size up to  $q^*$ . Denoting  $\mathcal{I} = \{\mathcal{S} \subset \{1, \dots, p\} : |\mathcal{S}| \leq q^*\}$ , one plays the optimal set of arms *within the set*  $\mathcal{I}$ , i.e. replacing the computational oracle in (7) with  $\mathcal{S}_O^* = \arg \max_{\mathcal{S} \in \mathcal{I}} r_{\theta}(\mathcal{S})$ . We denote this modification with  $C2^*$  in Table 1. It turns out that this oracle can also be easily computed, where the solution consists of (up to) the top  $q^*$  arms that pass the selection threshold, i.e.

$$\mathcal{S}_O^* = \left\{ i : \theta_i \geq \frac{\log(1/C)}{\log[(1+C)/C]} \right\} \cap J(\theta) = \{(i_1, \dots, i_{q^*})' \in \mathbb{N}^{q^*} : \theta_{i_1} \geq \theta_{i_2} \geq \dots \geq \theta_{i_{q^*}}\}. \quad (13)$$

We have the following regret bound which, unlike the majority of existing results for Thompson sampling, *does not* require the arms to have independent outcomes  $\gamma_i^t$ . The regret bound depends on the amount of separation between signal and noise.

**Lemma 2** *Define the identifiability gap  $\Delta_i = \min \{\theta_j^* : \theta_j^* > \theta_i^* \text{ for } j \in \mathcal{S}^*\}$  for each arm  $i \notin \mathcal{S}^*$ . The Algorithm 1 with a computational oracle  $\mathcal{S}_O^*$  in  $C2^*$  achieves the following regret bound*

$$Reg(T) \leq \sum_{i \notin \mathcal{S}^*} \frac{(\Delta_i - \varepsilon) \log T}{(\Delta_i - 2\varepsilon)^2} + C \left( \frac{p}{\varepsilon^4} \right) + p^2$$

for any  $\varepsilon > 0$  such that  $\Delta_i > 2\varepsilon$  for each  $i \notin \mathcal{S}^*$  and for some constant  $C > 0$ .

**Proof:** Since  $\mathcal{I}$  is a matroid (Kveton et al. (2014)) and our mean regret function is Lipschitz continuous and it depends only on expected rewards of revealed arms, one can apply Theorem 4 of Wang and Chen (2018).

Assuming that the size  $q^*$  of the optimal model is *unknown* and the rewards  $\gamma_i^t$  are *independent*, one can derive the following bound for the original Algorithm 1 (without restricting the solution to up to  $q^*$  variables).

**Lemma 3** Define the maximal reward gap  $\Delta_{max} = \max_{\mathcal{S}} \Delta_{\mathcal{S}}$  where  $\Delta_{\mathcal{S}} = [r_{\theta}(\mathcal{S}^*) - r_{\theta}(\mathcal{S})]$  and for each arm  $i \in \{1, \dots, p\}$  define  $\eta_i \equiv \max_{\mathcal{S}: i \in \mathcal{S}} \frac{8B^2|\mathcal{S}|}{\Delta_{\mathcal{S}} - 2B(q^{*2} + 2)\varepsilon}$  for  $B = \log[(C + 1)/C]$ . Assume that  $\gamma_i^t$ 's are independent for each  $t$ . Then the Algorithm 1 achieves the following regret bound

$$Reg(T) \leq \log(T) \sum_{i=1}^p \eta_i + p \left( \frac{p^2}{\varepsilon^2} + 3 \right) \Delta_{max} + C \frac{8\Delta_{max}}{\varepsilon^2} \left( \frac{4}{\varepsilon^2} + 1 \right)^{q^*} \log(q^*/\varepsilon^2)$$

for some constant  $C > 0$  and for any  $\varepsilon > 0$  such that  $\Delta_{\mathcal{S}} > 2B(q^{*2} + 2)\varepsilon$  for each  $\mathcal{S}$ .

**Proof:** Follows from Theorem 1 of Wang and Chen (2018).

The bandit literature has largely focused on studying the regret in terms of time  $T$  rather than the number of arms  $p$ . Note that the dependence on  $p$  in Lemma 3 is cubic, which (albeit relevant for large  $n$  setups) makes the bound less useful when  $p$  is very large. Lai and Robbins (1985) showed a lower regret bound (in terms of  $p$ ) that is  $\mathcal{O}(p)$  for any bandit algorithm. Agrawal and Goyal (2012) (Remark 3) further showed that Thompson Sampling does achieve this lower bound in a single-play bandit problem. Our Theorem 1 below shows a linear dependence on  $p$  for combinatorial bandits with correlated arms when  $q^*$  is unknown.

We now extend Lemma 3 to the case when the rewards obtained from pulling different arms are related to one another. Gupta et al. (2020) introduced a correlated single-play bandit version of Thompson sampling using pseudo-rewards (upper bounds on the conditional mean reward of each arm). Similarly as with structured bandits (Pandey et al. (2007)) we instead interweave the arms by allowing their mean rewards to depend on  $\mathcal{S}_t$ , i.e. instead of a single success probability  $\theta_i$  we now have

$$\theta_i(\mathcal{S}) = \mathbb{P}(\gamma_i^t = 1 | \mathcal{S}_t = \mathcal{S}). \quad (14)$$

We are interested in obtaining a regret bound for the Algorithm 1 assuming (14) in which case the expected global regret (6) writes as

$$r_{\theta}^C(\mathcal{S}_t) = \mathbb{E}[R_C(\mathcal{S}_t)] = \sum_{i \in \mathcal{S}_t} \left[ \theta_i(\mathcal{S}_t) \log \left( \frac{C+1}{C} \right) - \log \left( \frac{1}{C} \right) \right]. \quad (15)$$



To this end we impose an identifiability assumption, which requires a separation gap between the reward probabilities of signal and noise arms.

**Assumption 1** Denote with  $\mathcal{S}^* = \arg \max_{\mathcal{S}} r_{\theta^*}^C(\mathcal{S}_t)$  the optimal set of arms. We say that  $\mathcal{S}^*$  is strongly identifiable if there exists  $0 < \alpha < 1/2$  such that

$$\begin{aligned} \forall i \in \mathcal{S}^* \quad & \text{we have} \quad \theta_i(\mathcal{S}^*) \geq \theta_i(\mathcal{S}) > 0.5 + \alpha \quad \forall \mathcal{S} \quad \text{such that} \quad i \in \mathcal{S}, \\ \forall i \notin \mathcal{S}^* \quad & \text{we have} \quad \theta_i(\mathcal{S}) < 0.5 - \alpha \quad \forall \mathcal{S} \quad \text{such that} \quad i \in \mathcal{S}. \end{aligned}$$

Under this assumption we provide the following regret bound.

**Theorem 1** Suppose that  $\mathcal{S}^*$  is strongly identifiable with  $\alpha > 0$ . Choosing  $C$  as in Lemma 1, the regret of Algorithm 1 satisfies

$$\text{Reg}(T) \leq \Delta_{\max} \left[ \frac{8p \log(T)}{\alpha^2} + c(\alpha)q^* + \left(2 + \frac{4}{\alpha^2}\right)p \right], \quad (16)$$

where  $c(\alpha) = \tilde{C} \left[ \frac{e^{-4\alpha}}{1-e^{-\alpha^2/2}} \right] + \frac{8}{\alpha^2} \frac{1}{e^{2\alpha}-1} + \frac{e^{-1}}{1-e^{-\alpha/8}} + \left\lceil \frac{8}{\alpha} \right\rceil \left(3 + \frac{1}{\alpha}\right)$  and  $\tilde{C} = (C_1 + C_2 \frac{1-2\alpha}{32\alpha})$  for some  $C_1, C_2 > 0$  not related to the Algorithm 1, and  $\Delta_{\max} = \max_{\mathcal{S}} [r_{\theta^*}^C(\mathcal{S}^*) - r_{\theta^*}^C(\mathcal{S})]$ .

**Proof:** Appendix (Section ??)

Two of the most common problems studied in reinforcement learning with bandits are (1) regret minimization, and (b) best arm identification (Even-Dar et al., 2006; Bubeck et al., 2009). Variable selection could be loosely regarded as the ‘top  $q^*$ -arms’ identification problem when  $q^*$  is unknown. While Thompson sampling is devised to minimize regret, not necessarily to select the best arms (see e.g. Russo (2016)), we nevertheless show that our sampling policy satisfies a version of variable selection consistency in the sense that the event  $\{\mathcal{S}_t = \mathcal{S}^*\}$  occurs all but finitely many times as  $t \rightarrow \infty$ . This result is summarized in the following theorem.

**Theorem 2** Under the Assumption 1 with  $p$  fixed, the TVS sampling policy in Table 1 with  $C = (\sqrt{5} - 1)/2$  satisfies  $\mathbb{P} \left( \liminf_{t \rightarrow \infty} \{\mathcal{S}_t = \mathcal{S}^*\} \right) = 1$ .

**Proof:** Appendix (Section ??)

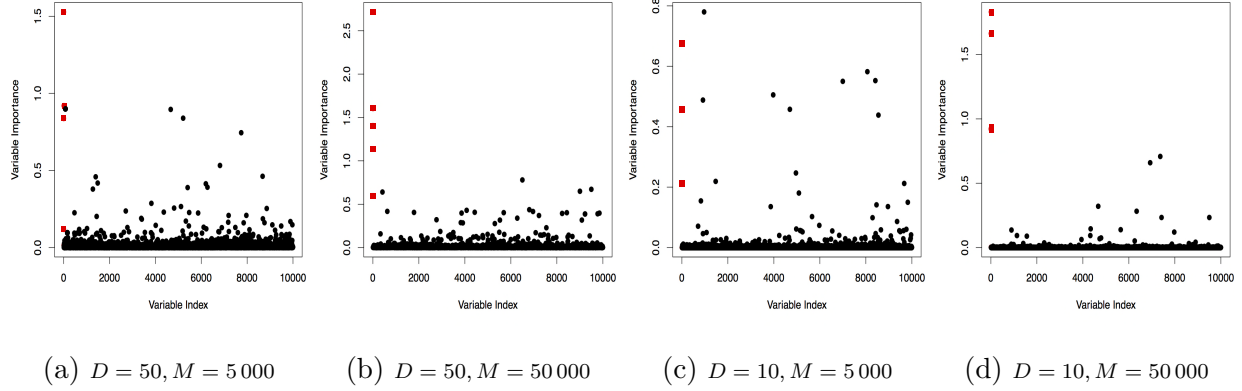


Figure 1: BART variable importance using `sparse=TRUE` and various number of trees  $D$  and MCMC iterations  $M$ . Red squares (the first five covariates) are signals and black dots are noise variables.

## 5 TVS in Action

This section serves to illustrate Thompson Variable Selection on benchmark simulated datasets and to document its performance. While various implementations are possible (by choosing different rewards  $r(\mathcal{S}_t, \mathcal{D})$  in (8)), we will focus on two specific choices that we broadly categorize into *offline* variants for when  $p \gg n$  (Section 5.1) and *streaming/online* variants for when  $n \gg p$  (Section 5.2).

### 5.1 Offline TVS

As a lead example in this section, we consider the benchmark Friedman data set (Friedman (1991)) with a vastly larger number of  $p = 10\,000$  predictors  $\mathbf{x}_i \in [0, 1]^p$  obtained by iid sampling from `Uniform(0, 1)` and responses  $\mathbf{Y} = (Y_1, \dots, Y_n)'$  obtained from (1) with  $\sigma^2 = 1$  and

$$f_0(\mathbf{x}_i) = 10 \sin(\pi x_{i1} x_{i2}) + 20(x_{i3} - 0.5)^2 + 10x_{i4} + 5x_{i5} \quad \text{for } i = 1, \dots, 300.$$

Due to the considerable number of covariates, feeding *all* 10 000 predictors into a black box to obtain variable importance may not be computationally feasible and/or reliable. However, TVS can overcome this limitation by deploying subsets of predictors. For instance, we considered variable importance using the BART method (using the option `sparse=TRUE`

for variable selection) with  $D \in \{10, 50\}$  trees and  $M \in \{5\,000, 50\,000\}$  MCMC iterations are plotted them in Figure 1. While increasing the number of iterations certainly helps in separating signal from noise, it is not necessarily obvious where to set the cutoff for selection. One natural rule would be selecting those variables which have been used at least once on average over the  $M$  iterations. With  $D = 50$  and  $M = 50\,000$ , this rule would identify 4 true signals, leaving out the quadratic signal variable  $x_3$ . The computation took around 8.5 minutes.

The premise of TVS is that one can deploy a weaker learner (such as a forest with fewer trees) which generates a random reward that roughly captures signal and is allowed to make mistakes. With reinforcement learning, one hopes that each round will be wrong in a different way so that mistakes will not be propagated over time. The expectation is that (a) feeding *only a small subset*  $\mathcal{S}_t$  in a black box and (b) reinforcing positive outcomes, one obtains a more principled way of selecting variables and speeds up the computation. We illustrate the effectiveness of this mechanism below.

We use the offline local binary reward defined in (9). We start with a non-informative prior  $a_i(0) = b_i(0) = 1$  for  $1 \leq i \leq p$  and choose  $T = 10$  trees in BART so that variables are discouraged from entering the model too wildly. This is a *weak learner* which does not seem to do perfectly well for variable selection even after very many MCMC iterations (see Figure 1(d)). We use the TVS implementation in Table 1 with a dramatically smaller number  $M \in \{100, 500, 1\,000\}$  of MCMC burn-in iterations for BART inside TVS. We will see below that large  $M$  is *not needed* for TVS to unravel signal even with as few as 10 trees.

TVS results are summarized in Figure 2, which depicts ‘posterior inclusion probabilities’  $\pi_i(t)$  defined in (11) over time  $t$  (the number of plays), one line for each of the  $p = 10\,000$  variables. To better appreciate informativeness of  $\pi_i(t)$ ’s, true variables  $x_1, \dots, x_5$  are depicted in red while the noise variables are black. Figure 2 shows a very successful demonstration for several reasons. The first panel (Figure 2a) shows a very weak learner (as was seen from Figure 1) obtained by sampling rewards only after  $M = 100$  burnin iterations. Despite the fact that learning at each step is weak, it took only around  $T = 300$  iterations (obtained in less than 40 seconds!) for the  $\pi_i(t)$  trajectories of the 5 signals to cross the 0.5 decision boundary. After  $T = 300$  iterations, the noise covariates are safely suppressed below the decision boundary and the trajectories  $\pi_i(t)$  stabilize towards the end

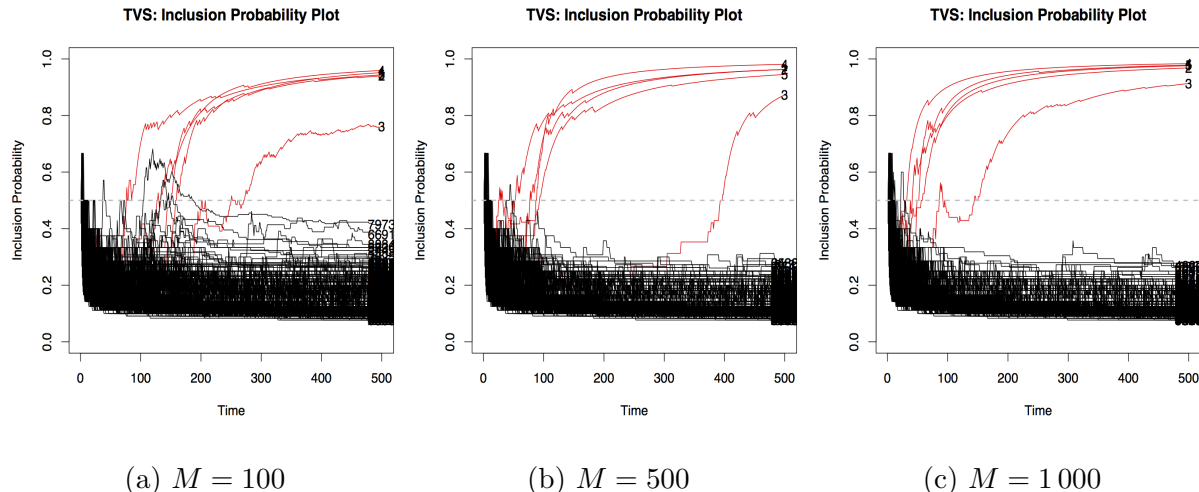


Figure 2: The evolution of inclusion probabilities (11) over “time”  $t$  for the Friedman data set. The plot depicts posterior inclusion probabilities  $\pi_i(t)$  in (11) over time (number of TVS iterations). Red lines indicate the 5 signal variables and black lines indicate the noise variables.

of the plot. Using more MCMC iterations  $M$ , fewer TVS iterations are needed to obtain a cleaner separation between signal and noise (noise  $\pi_t$ ’s are closer to zero while signal  $\pi_t$ ’s are closer to one). With enough internal MCMC iterations ( $M = 1000$  in the right panel), TVS is able to effectively separate signal from noise in around 200 iterations (obtained in less than 2 minutes). We have not seen such conclusive separation with plain BART (Figure 1) even after very many MCMC iterations which took considerably longer. Note that each iteration of TVS uses *only a small subset of predictors* and much fewer iterations  $M$  and TVS is thereby destined to be faster than BART on the entire dataset (compare 8.5 minutes for 20 000 iterations with 40 seconds in Figure 2a). Applying the more traditional variable selection techniques was also not as successful. For example, the Spike-and-Slab LASSO (SSL) method ( $\lambda_1 = 0.1$  and  $\lambda_0 \in \{0.1 + k \times 10 : k = 1, \dots, 10\}$ ) which relies on a linear model missed the quadratic predictor but identified all 4 remaining signals with no false positives.

## 5.2 Online TVS

As the second TVS example, we focus on the case with many more observations than covariates, i.e.  $n \gg p$ . As we already pointed out in Section 3.2, we assume that the

dataset  $\mathcal{D}_n = \{(Y_i, \mathbf{x}_i) : 1 \leq i \leq n\}$  has been partitioned into mini-batches  $\mathcal{D}_t$  of size  $s = n/T$ . We deploy our online TVS method (Table 1 with C2\*) to sequentially screen each batch and transmit the posterior information onto the next mini-batch through a prior. This should be distinguished from streaming variable selection, where new features arrive at different time points (Foster and Stine (2008)). Using the notation  $r_t \equiv r(\mathcal{S}_t, \mathcal{D}_t)$  in (8) with  $\mathcal{D}_t = \{(Y_i, \mathbf{x}_i) : (t-1)s + 1 \leq i \leq ts\}$  and having processed  $t-1$  mini-batches, one can treat the beta posterior as a new prior for the incoming data points, where

$$\pi(\boldsymbol{\theta} | r_1, \dots, r_t) \propto \pi(\boldsymbol{\theta} | r_1, \dots, r_{t-1}) \prod_{i \in \mathcal{S}_t} \theta_i^{\gamma_i^t} (1 - \theta_i)^{1 - \gamma_i^t}.$$

Parsing the observations in batches will be particularly beneficial when processing the entire dataset (with overwhelmingly many rows) is not feasible for the learning algorithm. TVS leverages the fact that applying a machine learning method  $T$  times using only a subset of  $s$  observations and a subset  $\mathcal{S}_t$  of variables is a lot faster than processing the entire data. While the posterior distribution<sup>5</sup> of  $\theta_i$ 's after one pass through the entire dataset will have seen all the data  $\mathcal{D}_n$ ,  $\theta_i$ 's can be interpreted as the frequentist probability that the screening rule picks a variable  $x_i$  having access to only  $s$  measurements.

We illustrate this sequential learning method on a challenging simulated example from (Liang et al., 2018, Section 5.1). We assume that the explanatory variables  $\mathbf{x}_i \in [0, 1]^p$  have been obtained from  $x_{ij} = (e_i + z_{ij})/2$  for  $1 \leq i \leq n$  and  $1 \leq j \leq p$ , where  $e_i, z_{ij} \stackrel{iid}{\sim} \mathcal{N}(0, 1)$ . This creates a sample correlation of about 0.5 between all variables. The responses  $\mathbf{Y} = (Y_1, \dots, Y_n)'$  are then obtained from (1), where

$$f_0(\mathbf{x}_i) = \frac{10x_{i2}}{1 + x_{i1}^2} + 5 \sin(x_{i3}x_{i4}) + 2x_{i5}$$

with  $\sigma^2 = 0.5$ . This is a challenging scenario due to (a) the non-negligible correlation between signal and noise, and (b) the non-linear contributions of  $x_1 - x_4$ . Unlike Liang et al. (2008) who set  $n = p = 500$ , we make the problem considerably more difficult by choosing  $n = 20\,000$  and  $p = 1\,000$ . We would expect a linear model selection method to miss these two nonlinear signals. Indeed, the Spike-and-Slab LASSO method (using  $\lambda_1 = 0.1$  and  $\lambda_0 \in \{0.1 + k \times 10 : k = 1, \dots, 10\}$ ) only identifies variables  $x_1, x_2$  and  $x_5$ . Next, we deploy the BART method with variable selection (Linero 2016) by setting

---

<sup>5</sup>Treating the rewards as data.

	$s = 100$		$s = 200$		$s = 500$		$s = 1\,000$		$s = 5\,000$		$s = 10\,000$		$s = 20\,000$	
T	Time	HAM	Time	HAM	Time	HAM	Time	HAM	Time	HAM	Time	HAM	Time	HAM
5 000	6.7	4	7.7	5	11.4	3	21.5	2	103.1	3	264.2	8	794.1	16
10 000	16.2	4	16	4	23.6	2	37.8	3	213	8	549.9	18	2368.4	25
20 000	27.3	4	31.1	4	47.7	1	74.7	1	418.4	10	1090.6	21	4207.4	29

Table 1: Computing times (in seconds) and Hamming distance of BART on subsets of observations using all  $p$  covariates. Hamming distance compares the true model with a model obtained by truncating the BART importance measure at 1.

`sparse=TRUE` (Linero and Yang (2018)) and 50 trees<sup>6</sup> in the BART software (Chipman et al. (2010)). The choice of 50 trees for variable selection was recommended in Bleich et al. (2014) and was seen to work very well. Due to the large size of the dataset, it might be reasonable to first inquire about variable selection from smaller fractions of data. We consider random subsets of different sizes  $s \in \{100, 500, 1\,000\}$  as well as the entire dataset and we run BART for  $M = 20\,000$  iterations. Figure 3 depicts BART importance measures (average number of times each variable was used in the forest). We have seen BART separating the signal from noise rather well on batches of size  $s \geq 1\,000$  and with MCMC iterations  $M \geq 10\,000$ . The scale of the importance measure depends on  $s$  and it is not necessarily obvious where to make the cut for selection. A natural (but perhaps ad hoc) criterion would be to pick variables which were on average used at least once. This would produce false negatives for smaller  $s$  and many false positives (29 in this example) for  $s = 20\,000$ . The Hamming distance between the true and estimated model as well as the computing times are reported in Table 1. This illustrates how selection based on the importance measure is difficult to automate. While visually inspecting the importance measure for  $M = 20\,000$  and  $s = 20\,000$  (the entire dataset) in Figure 3d is very instructive for selection, it took more than 70 minutes on this dataset. To enhance the scalability, we deploy our reinforcement learning TVS method for streaming batches of data.

Using the online local reward (10) with BART (with 10 trees and `sparse=TRUE` and  $M$  iterations) on batches of data  $\mathcal{D}_n$  of size  $s$ . This is a weaker learning rule than the one considered in Figure 3 (50 trees). Choosing  $s = 100$  and  $M = 10\,000$ , BART may

<sup>6</sup>Results with 10 were not nearly as satisfactory.

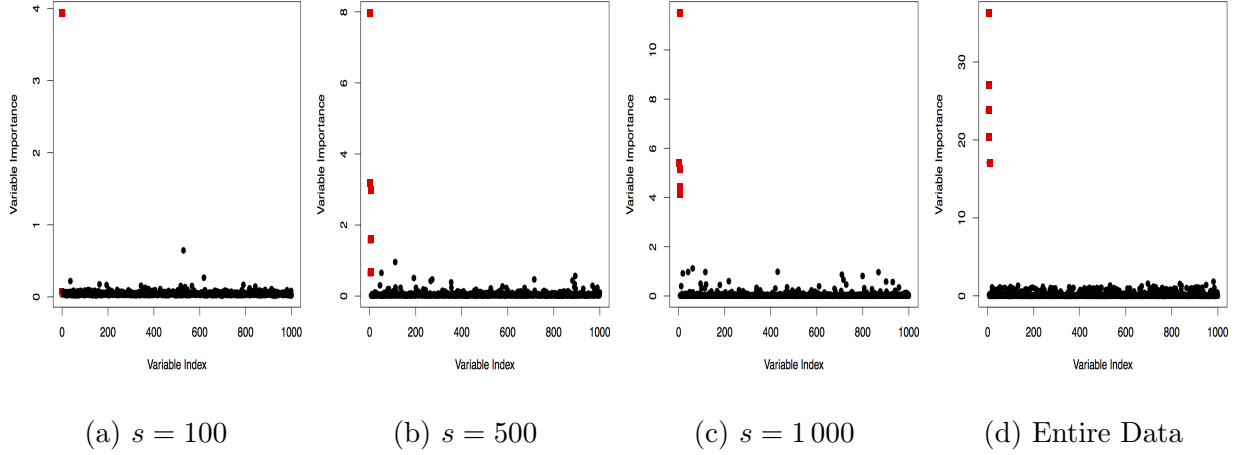


Figure 3: BART variable importance using  $T = 20\,000$  (using 50 trees and `sparse=TRUE`) and various data subsets. Red squares (the first five covariates) are signals and black dots are noise variables.

not be able to obtain perfect signal isolation on a single data batch (see Figure 3(a) which identifies only one signal variable). However, by propagating information from one batch onto the next, TVS is able to tease out more signal (Figure 4(a)). Comparing Figure 3(b) and Figure 4(c) is even more interesting, where TVS inclusion probabilities for all signals eventually cross the decision boundary after merely 40 TVS iterations. There is ultimately a tradeoff between the batch size  $s$  and the number of iterations needed for the TVS to stabilize. For example, with  $s = 1\,000$  one obtains a far stronger learner (Figure 3(c)), but the separation may not be as clear after only  $T = n/s = 20$  TVS iterations (Figure 4(d)). One can increase the number of TVS iterations by performing multiple passes through the data after bootstrapping the entire dataset and chopping it into new batches which are a proxy for future data streams. Plots of TVS inclusion probabilities after 5 such passes through the data are in Figure 5. Curiously, one obtains much better separation even for  $s = 200$  and with larger batches ( $s = 500$ ) the signal is perfectly separated. Note that TVS is a random algorithm and thereby the trajectories in Figure 5 at the beginning are slightly different from Figure 4. Despite the random nature, however, we have seen the separation apparent from Figure 5 occur consistently across multiple runs of the method.

Several observations can be made from the timing and performance comparisons presented in Table 2. When the batch size is not large enough, repeated runs will not help.

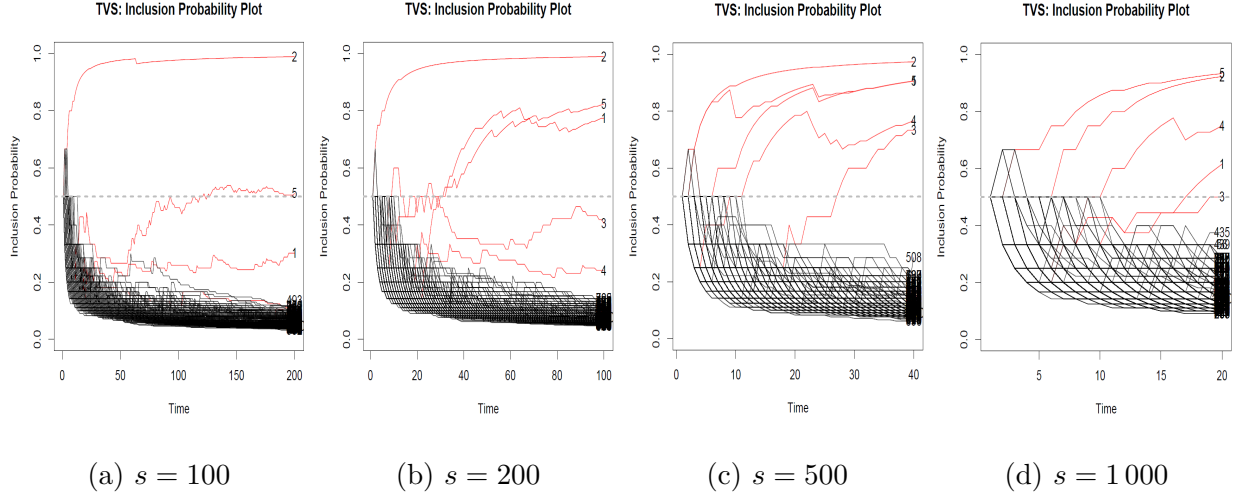


Figure 4: TVS inclusion probabilities  $T = 10\,000$  (using 10 trees and `sparse=TRUE`) and various batch sizes after single pass through the data.

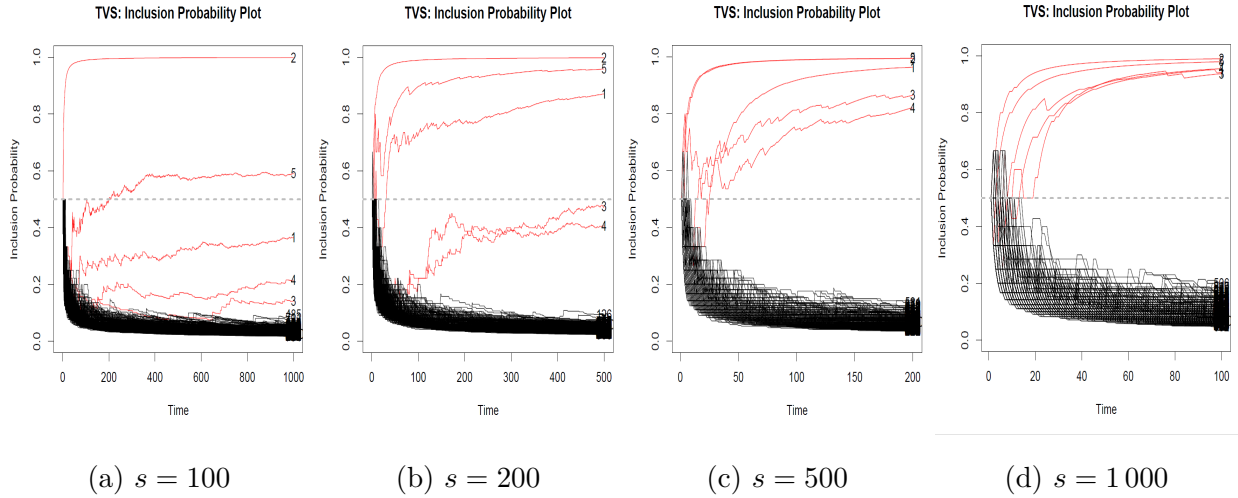


Figure 5: TVS inclusion probabilities  $T = 10\,000$  (using 10 trees and `sparse=TRUE`) and various batch sizes after 5 passes through the data.

The Hamming distance in all cases only consists of false negatives and can be decreased by increasing the batch size or increasing the number of iterations and rounds. Computationally, it seems beneficial to increase the batch size  $s$  and supply enough MCMC iterations. Variable selection accuracy can also be increased with multiple rounds.



	$s = 100$		$s = 200$		$s = 500$		$s = 1000$	
	Time	HAM	Time	HAM	Time	HAM	Time	HAM
$T = 500$								
1 round	58.9	4	34.1	3	19.3	3	15.7	4
5 rounds	251.5	4	165	3	91.2	3	68.7	2
10 rounds	467.5	4	348.8	3	187.8	3	137.2	1
$T = 1000$								
1 round	84	4	49.8	3	29.5	3	23.6	2
5 rounds	411.8	4	241.5	3	140.8	1	111.4	0
10 rounds	870.6	3	507	2	288.2	1	224.2	0
$T = 10000$								
1 round	541.8	3	330.9	2	220.4	0	182.8	0
5 rounds	2421.2	3	1501.9	2	1060.2	0	972.2	0
10 rounds	4841.9	3	3027.9	0	2248.3	0	2087.6	0

Table 2: Computing times (in seconds) and Hamming distance for TVS using different batch sizes  $s$  and BART iterations  $T$  and multiple passes through the data. The Hamming distance compares the true model with a model truncating the last TVS inclusion probability at 0.5.

## 6 Simulation Study

We further evaluate the performance of TVS in a more comprehensive simulation study. We compare TVS with several related non-parametric variable selection methods and with classical parametric ones. We assess these methods based on the following performance criteria: False Discovery Proportion (FDP) (i.e. the proportion of discoveries that are false), Power (i.e. the proportion of true signals discovered as such), Hamming Distance (between the true and estimated model) and Time.

### 6.1 Offline Cases

For a more comprehensive performance evaluation, we consider the following 4 mean functions  $f_0(\cdot)$  to generate outcomes using (1). For each setup, we summarize results over 50 datasets of a dimensionality  $p \in \{1000, 10000\}$  and a sample size  $n = 300$ .

- **Linear Setup:** The regressors  $\mathbf{x}_i$  are drawn independently from  $N(0, \Sigma)$ , where  $\Sigma = (\sigma_{jk})_{j,k=1,1}^{p,p}$  with  $\sigma_{jj} = 1$  and  $\sigma_{jk} = 0.9^{|j-k|}$  for  $j \neq k$ . Only the first 5 variables are related to the outcome (which is generated from (1) with  $\sigma^2 = 5$ ) via the mean function  $f_0(\mathbf{x}_i) = x_{i1} + 2x_{i2} + 3x_{i3} - 2x_{i4} - x_{i5}$ .

- **Friedman Setup:** The Friedman setup was described earlier in Section 4. In addition, we now introduce correlations of roughly 0.3 between the explanatory variables.
- **Forest Setup:** We generate  $\mathbf{x}_i$  from  $N(0, \Sigma)$ , where  $\Sigma = (\sigma_{jk})_{j,k=(11)}^{p,p}$  with  $\sigma_{jj} = 1$  and  $\sigma_{jk} = 0.3^{|j-k|}$  for  $j \neq k$ . We then draw the mean function  $f_0(\cdot)$  from a BART prior with 200 trees, using only first 5 covariates for splits. The outcome is generated from (1) with  $\sigma^2 = 0.5$ .
- **Liang et al (2016) Setup:** This setup was described earlier in Section 5.2. We now use  $\sigma^2 = 0.5$ .

We run TVS with  $M = 500$  and  $M = 1\,000$  internal BART MCMC iterations and with  $T = 500$  TVS iterations. As two benchmarks for comparison, we consider the original BART method (in the R-package `BART`) and a newer variant called DART (Linero and Yang (2018)) which is tailored to high-dimensional data and which can be obtained in BART by setting `sparse=TRUE` (`a=1`, `b=1`). We ran BART and DART for  $M = 50\,000$  MCMC iterations using the default prior settings with  $D = 20$ ,  $D = 50$  and  $D = 200$  trees for BART and  $D = 10$ ,  $D = 50$  and  $D = 200$  trees for DART. We considered two variable selection criteria: (1) posterior inclusion probability (calculated as the proportion of sampled forests that split on a given variable) at least 0.5 (see Linero (2018) and Bleich et al. (2014) for more discussion on variable selection using BART), (2) the average number of splits in the forest (where the average is taken over the  $M$  iterations) at least 1. We report the settings with the best performance, i.e. BART with  $D = 20$  trees and DART with  $D = 50$  trees using the second inclusion criterion. The third benchmark method we use for comparisons is the Spike-and-Slab LASSO (Rockova and George (2018)) implemented in the R-package `SSLASSO` with `lambda1=0.1` and the spike penalty ranging from  $\lambda_1$  to the number of variables  $p$  (i.e. `lambda0 = seq(1, p, length=p)`). We choose the same set of variable chosen by `SSLASSO` function after the regularization path has stabilized using the `model` output. We have also implemented Sure Independence Screen (SIS) (Fan and Lv (2008)) as a variable filter before applying BART variable selection<sup>7</sup>. Next, we applied one of the benchmark Bayesian variable selection methods, the horseshoe prior (van der Pas et al. (2017); Carvalho et al. (2010)) implementation from the R-package `horseshoe`. We

---

<sup>7</sup>SIS on its own yielded too many false positives.

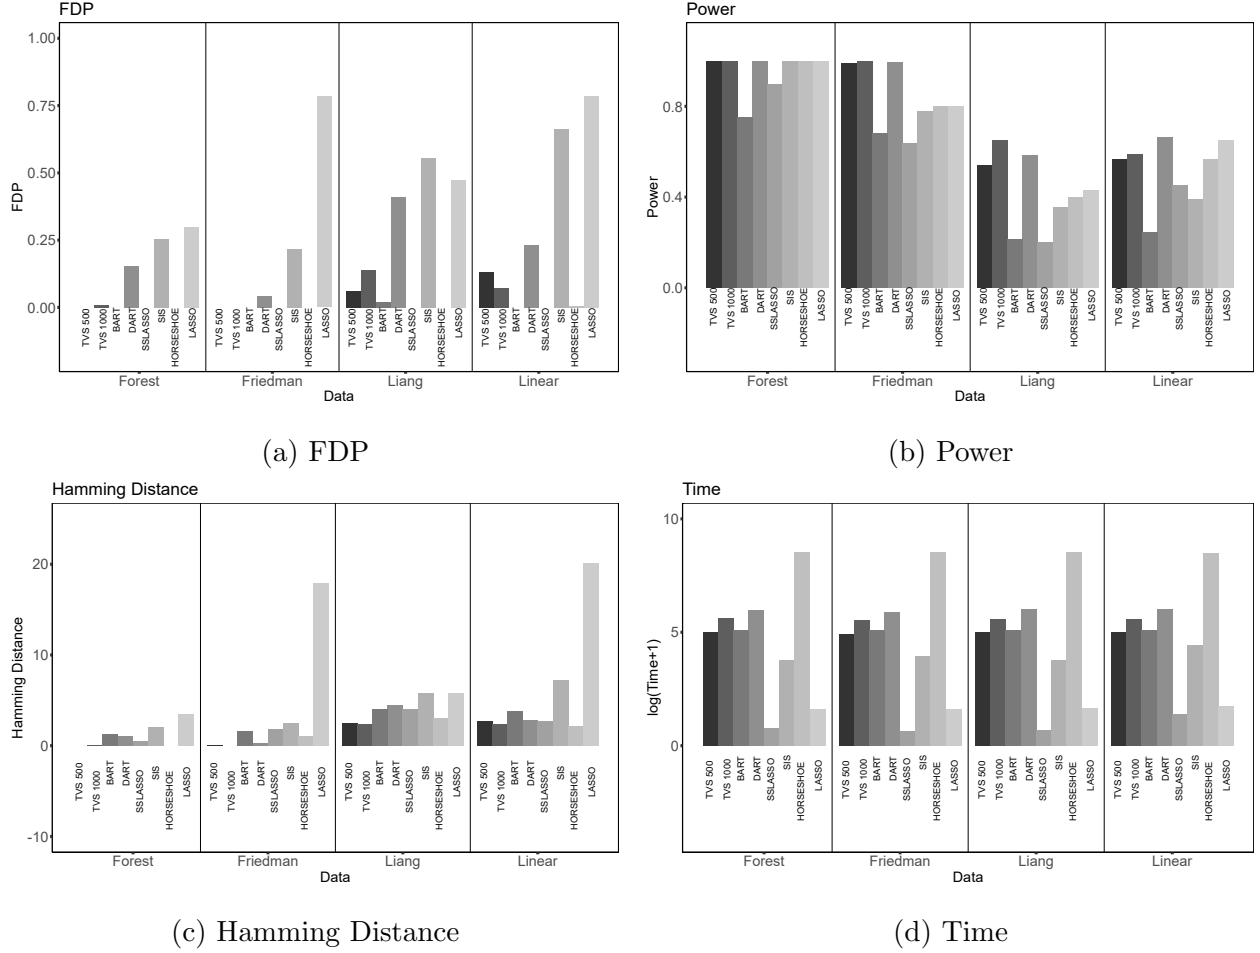


Figure 6: Graphs denoting FDP (6a), Power (6b), Hamming Distance (6c), and Time (6d) for the 4 choices of  $f_0$  assuming  $p = 10\,000$  and  $n = 300$ . The  $x$ -axis denotes the choice of  $f_0$  and the various methods are marked with various shades of gray. For TVS, we have two choices  $M = 500$  and  $M = 1000$ .

run the Markov chain for 55 000 iterations, discarding the first 5 000 as a burnin period. Variable selection is performed by checking whether 0 is contained in the credible set (see van der Pas et al. (2019)). Finally, we implement the LASSO (Tibshirani (2011)) and report the model chosen according to the 1-s.e. rule (Friedman et al. (2001)).

We report the average performance (over 50 datasets) for  $p = 10\,000$  in Figure 6 and the rest (for  $p = 1\,000$ ) in the Appendix. Recall that the model estimated by TVS is obtained by truncating  $\pi_i(500)$ 's at 0.5. In terms of the Hamming distance, we notice that TVS performs best across-the-board. DART (with  $D = 50$ ) performs consistently well in terms of variable selection, but the timing comparisons are less encouraging. BART (with

$D = 20$ ) takes a relatively comparable amount of time as TVS with  $M = 1\,000$ , but suffers from less power. SS-LASSO’s performance is strong, in particular for the less non-linear data setups. The performance of TVS is seen to improve with  $M$ . SIS is a screening method based on a linear model assumption. Albeit faster than TVS, we observe that SIS generally over-selects. In addition, SIS screens out key signals with non-linear effects (Liang and Friedman datasets). The Horseshoe prior performs very well but is much slower. LASSO seems to overfit, in spite of the 1-se rule.

We also implement a stopping criterion for TVS based on the stabilization of the inclusion probabilities  $\pi_i(t) = \frac{a_i(t)}{a_i(t)+b_i(t)}$ . One possibility is to stop TVS when the estimated model  $\hat{\mathcal{S}}_t$  obtained by truncating  $\pi_i(t)$ ’s at 0.5 has *not* changed for over, say, 100 consecutive TVS iterations. With this convergence criterion, the convergence times differs across the different data set-ups. Generally, TVS is able to converge in  $\sim 200$  iterations for  $p = 1\,000$  and  $\sim 300$  iterations for  $p = 10\,000$ . While the computing times are faster, TVS may be more conservative (lower FDP but also lower Power). The Hamming distance is hence a bit larger, but comparable to TVS with 500 iterations (Appendix C.1)

## 6.2 Online Cases

We now consider a simulation scenario where  $n \gg p$ , i.e.  $p = 1\,000$  and  $n = 10\,000$ . As described earlier in Section 5.2, we partition the data into minibatches  $(\mathbf{Y}^{(b)}, \mathbf{X}^{(b)})$  of size  $s$ , where  $\mathbf{Y}^{(b)} = (Y_i : (b-1)s + 1 \leq i \leq bs)$  and  $\mathbf{X}^{(b)} = [\mathbf{x}_i : (b-1)s + 1 \leq i \leq bs]'$  for  $b = 1, \dots, n/s$  with  $s \in \{500, 1000\}$  and  $M \in \{500, 1000\}$  using  $D = 10$  trees. In this study, we consider the same four set-ups as in Section 6.1. We implemented TVS with a fixed number of rounds  $r \in \{1, 5, 10\}$  and a version with a stopping criterion based on the stabilization of the inclusion probabilities  $\pi_i(t) = \frac{a_i(t)}{a_i(t)+b_i(t)}$ . This means that TVS will terminate when the estimated model  $\hat{\mathcal{S}}_t$  obtained by truncating  $\pi(t)$ ’s at 0.5 has not changed for 100 consecutive iterations. The results using the stopping criterion are reported in Figure 7 and the rest is in the Appendix (Section ??). As before, we report the best configuration for BART and DART, namely  $D = 20$  for BART and  $D = 50$  for DART (both with 50 000 MCMC iterations). For both methods, there are non-negligible false discoveries and the timing comparisons are not encouraging. In addition, we could not apply both BART and DART with  $n \geq 50\,000$  observations due to insufficient memory. For

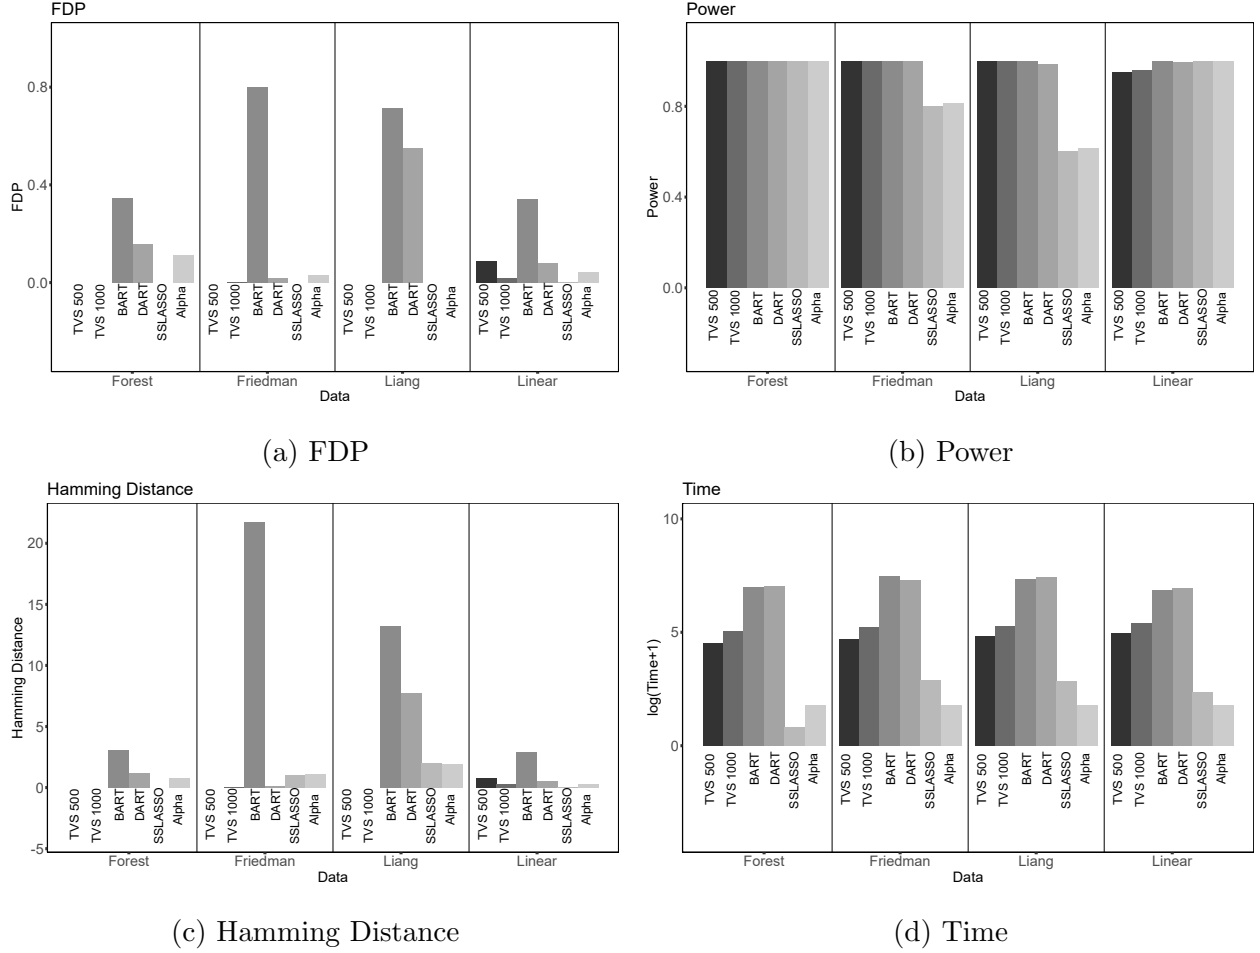


Figure 7: Graphs denoting FDP (7a), Power (7b), Hamming Distance (7c), and Time (7d) for the 4 choices of  $f_0$  assuming  $p = 1000$  and  $n = 10000$ . The  $x$ -axis denotes the choice of  $f_0$  and the various methods are marked with various shades of gray. For TVS, we have two choices  $M = 500$  and  $M = 1000$ , both with  $s = 1000$ .

TVS, we found the batch size  $s = 1000$  to work better, as well as running the algorithm for enough rounds until the inclusion probabilities have stabilized (Figure 7 reports the results with a stopping criterion). The results are very encouraging.

Streaming feature selection methods are still being developed (Wang et al. (2018); Fahy and Yang (Fahy and Yang); Ramdas, Yang, Wainwright, and Jordan (Ramdas et al.); Javanmard et al. (2018)). We have compared our online variant with the  $\alpha$ -investing method for streaming variable selection of Zhou et al. (2006). This method dynamically adjusts  $p$ -value thresholds for adding features to the model. We run this method using  $p$ -values from applying linear regression on batches of streaming data. The results are

shown in Figure 7. This procedure performs well in Forest and Linear set-ups but misses the key non-linear variables in Friedman and Liang setups. While SSLASSO’s performance is very strong, we notice that in the non-linear setup of Liang et al. (2018) there are false non-discoveries.

## 7 Application on Real Data

### 7.1 HIV Data

We will apply (offline) TVS on a benchmark Human Immunodeficiency Virus Type I (HIV-I) data described and analyzed in Rhee et al. (2006) and Barber et al. (2015). This publicly available<sup>8</sup> dataset consists of genotype and resistance measurements (decrease in susceptibility on a log scale) to three drug classes: (1) protease inhibitors (PIs), (2) nucleoside reverse transcriptase inhibitors (NRTIs), and (3) non-nucleoside reverse transcriptase inhibitors (NNRTIs).

The goal in this analysis is to find mutations in the HIV-1 protease or reverse transcriptase that are associated with drug resistance. Similarly as in Barber et al. (2015) we analyze each drug separately. The response  $Y_i$  is given by the log-fold increase of lab-tested drug resistance in the  $i^{th}$  sample with the design matrix  $X$  consisting of binary indicators  $x_{ij} \in \{0, 1\}$  for whether or not the  $j^{th}$  mutation has occurred at the  $i^{th}$  sample.<sup>9</sup>

In an independent experimental study, (Rhee et al., 2005) identified mutations that are present at a significantly higher frequency in virus samples from patients who have been treated with each class of drugs as compared to patients who never received such treatments. While, as with any other real data experiment, the ground truth is unknown, we treat this independent study as a good approximation to the ground truth. Similarly as Barber et al. (2015), we only compare mutation positions since multiple mutations in the same position are often associated with the same drug resistance outcomes.

For illustration, we now focus on one particular drug called Lopinavir (LPV). There

---

<sup>8</sup>Stanford HIV Drug Resistance Database [https://hivdb.stanford.edu/pages/published\\_analysis/genophenoPNAS2006/](https://hivdb.stanford.edu/pages/published_analysis/genophenoPNAS2006/)

<sup>9</sup>As suggested in the analysis of Barber et al. (2015), when analyzing each drug, only mutations that appear 3 or more times in the samples are taken into consideration.

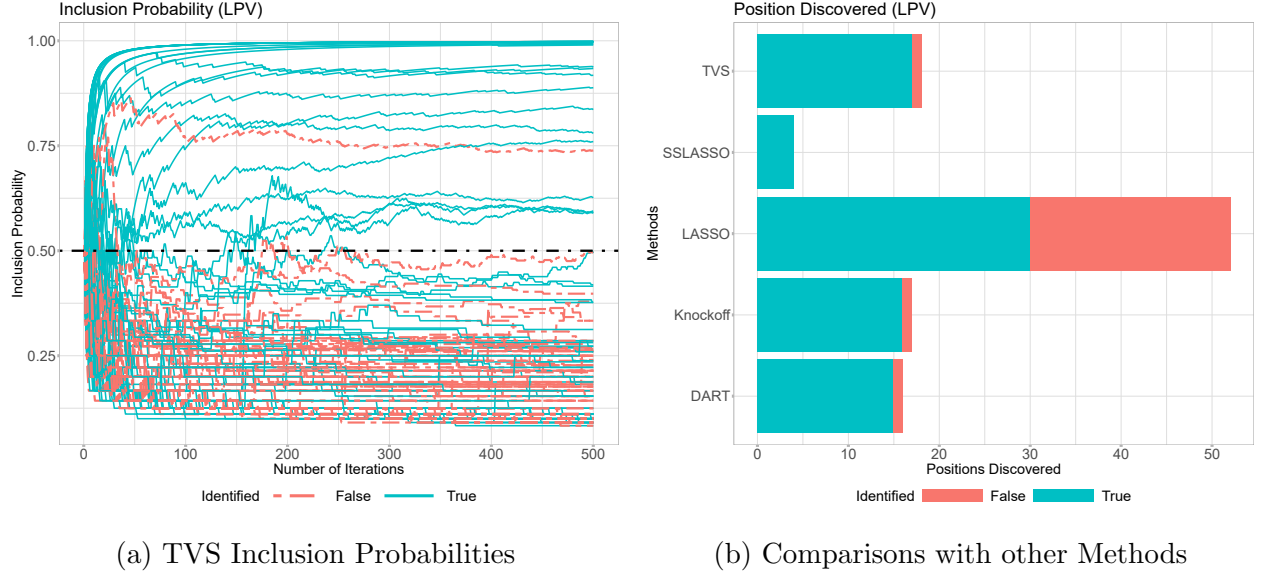


Figure 8: Thompson Variable Selection on the LPV dataset. (Left) Trajectories of the inclusion probabilities  $\pi_j(t)$ . (Right) Number of signals discovered, where blue denotes the experimentally validated signals and red are the unvalidated ones.

are  $p = 206$  mutations and  $n = 824$  independent samples available for this drug. TVS was applied to this data for  $T = 500$  iterations with  $M = 1000$  inner BART iterations. In Figure 8, we differentiate those mutations whose position were identified by Rhee et al. (2005) and mutations which were not identified with blue and red colors, respectively. From the plot of inclusion probabilities in Figure 8a, it is comforting to see that only one unidentified mutation has a posterior probability  $\pi_j(t)$  stabilized above the 0.5 threshold. Generally, we observe the experimentally identified mutations (blue curves) to have higher inclusion probabilities.

Comparisons are made with DART, Knockoffs (Barber et al., 2015), LASSO (10-fold cross-validation), and Spike-and-Slab LASSO (Rockova and George (2018)), choosing  $\lambda_1 = 0.1$  and  $\lambda_0 \in \{\lambda_1 + 10 \times k; k = 0, 1, \dots, p\}$ . Knockoffs, LASSO, and the Spike-and-Slab LASSO assume a linear model with no interactions. DART was implemented using  $T = 50$  trees and 50 000 MCMC iterations, where we select those variables whose average number splits was at least one. The numbers of discovered Positions for each method are plotted in Figure 8b. While LASSO selects many more experimentally validated mutations, it also includes many unvalidated ones. TVS, on the other hand, has a very small number of

“false discoveries” while maintaining good power. Additional results are included in the Appendix (Section ??).

## 7.2 Durable Goods Marketing Data Set

Our second application examines a cross-sectional dataset described in Ni et al. (2012) consisting of durable goods sales data from a major anonymous U.S. consumer electronics retailer. The dataset features the results of a direct-mail promotion campaign in November 2003 where roughly half of the  $n = 176\,961$  households received a promotional mailer with 10\$ off their purchase during the promotion time period (December 4-15). If they did purchase, they would get 10% off on a subsequent purchase through December. The treatment assignment was random. The data contains  $p = 146$  descriptors of all customers including prior purchase history, purchase of warranties etc. We will investigate the effect of the promotional campaign (as well as other covariates) on December sales. In addition, we will interact the promotion mail indicator with customer characteristics to identify the “mail-deal-prone” customers.

We dichotomized December purchase (in dollars) to create a binary outcome  $Y_i = \mathbb{I}(\text{December-sales}_i > 0)$  for whether or not the  $i^{th}$  customer made any purchase in December. Regarding predictor variables, we removed any variables with missing values and any binary variables with less than 10 samples in one group. This pre-filtering leaves us with 114 variables whose names and descriptive statistics are reported in Section ?? in the Appendix. We interact the promotion mail indicator with these variables to obtain  $p = 227$  predictors. Due to the large volume of data ( $n \approx 180\,000$ ), we were unable to run DART and BART (BART package implementation) due to memory problems. This highlights the need for TVS as a variable selector which can handle such voluminous data.

Unlike the HIV-I data in Section 7.1, there is no proxy for the ground truth. To understand the performance quality of TVS, we added 227 normally distributed knock-offs. The knockoffs are generated using `create.second.order` function in the `knockoff` R package (Patterson and Sesia (2018)) using a Gaussian Distributions with the same mean and covariance structure (Candes et al. (2018)). We run TVS with a batch size  $s \in \{1\,000, 2\,000, 5\,000\}$  and  $M = 1\,000$  inner iterations until the posterior probabilities have stabilized. The inclusion probabilities are plotted in Figure 9 for two cases (a) with-



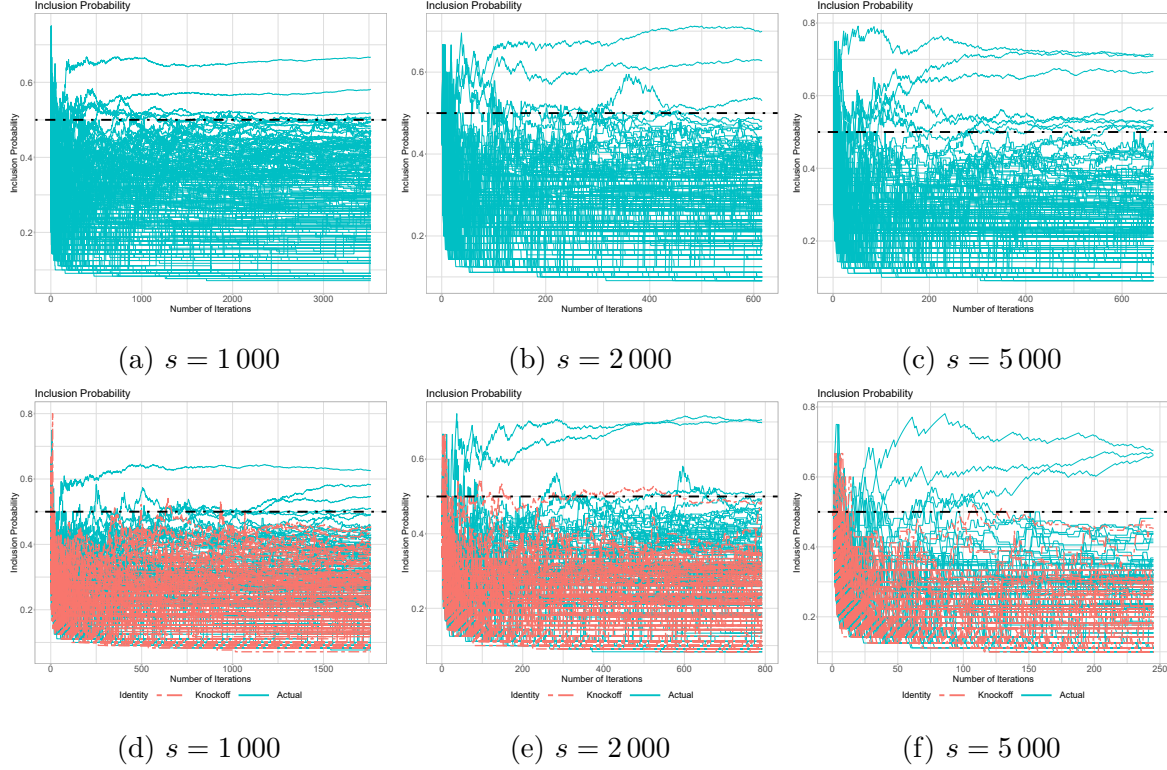


Figure 9: Thompson Variable Selection on the marketing data. (Left) Trajectories of the inclusion probabilities  $\pi_j(t)$  without knockoffs. (Right) Trajectories of the inclusion probabilities  $\pi_j(t)$  with knockoffs (in red).

out knockoffs (the first row) and (b) with knockoffs (the second row). It is interesting to note that, apart from one setting with  $s = 1000$ , the knockoff trajectories are safely suppressed below 0.5 (dashed line). Both with and without knockoffs, TVS chooses ‘the number of months with purchases in past 24 month’ and ‘the November Promotion Sales’ as important variables. The selected variables for each combination of settings are summarized in Table 3.

Finally, we used the same set of variables (including knockoff variables) for different variable selection methods and recorded the number of knockoffs chosen by each one. We used BART ( $D = 20$ , MCMC iteration = 50 000), and DART ( $D = 50$ , MCMC iteration = 50 000) with the same selection criteria as before, i.e. a variable is selected if it was split on average at least once. We also consider LASSO where the sparsity penalty  $\lambda$  was chosen by cross-validation. BART and DART cannot be run on the entire data set so we only run it on a random subset of 10 000 data points. While TVS with large enough  $s$  does not

	$s = 1\,000$		$s = 2\,000$		$s = 5\,000$	
Knockoff	Yes	No	Yes	No	Yes	No
total number of medium ticket items in previous 60 months	0.30	<b>0.51</b>	<b>0.51</b>	0.46	0.44	<b>0.51</b>
total number of small ticket items in previous 60 months	0.49	<b>0.52</b>	0.40	0.41	0.25	<b>0.53</b>
number of months shopped once in previous 12 months	0.34	0.41	0.44	0.42	0.41	<b>0.57</b>
number of months shopped once in previous 24 months	<b>0.63</b>	<b>0.67</b>	<b>0.70</b>	<b>0.63</b>	<b>0.66</b>	<b>0.71</b>
count of unique purchase trips in previous 24 months	<b>0.55</b>	0.26	0.48	<b>0.53</b>	<b>0.68</b>	<b>0.67</b>
total number of items purchased in previous 12 months	<b>0.51</b>	0.30	0.24	0.21	0.24	0.11
promo_nov period: total sales	<b>0.58</b>	<b>0.58</b>	<b>0.71</b>	<b>0.70</b>	0.33	0.45
mailed in holiday 2001 mailer	0.25	0.43	0.08	0.41	0.42	<b>0.52</b>
percent audio category sales of total sales $\times$ mail indicator	0.41	<b>0.50</b>	0.15	0.28	0.13	0.10
promo_nov period: total sales $\times$ mail indicator	0.15	0.35	0.46	0.41	<b>0.66</b>	<b>0.71</b>
indicator of holiday mailer 2002 promotion response $\times$ mail indicator	0.19	0.38	0.44	0.21	0.44	<b>0.52</b>

Table 3: Variables Selected by TVS with different  $s$  and with/without knockoff. The numbers report conditional inclusion probabilities  $\pi_i(t)$  after convergence, where values above 0.5 are in bold.

include any of the knockoffs, LASSO does include 14 and DART includes 4.

## 8 Discussion

Our work pursues an intriguing connection between spike-and-slab variable selection and binary bandit problems. This pursuit has lead to a proposal of Thompson Variable Selection, a reinforcement learning wrapper algorithm for fast variable selection in high dimensional non-parametric problems. In related work, Liu et al. (2018) developed an ABC sampler for variable subsets through a split-sample approach by (a) first proposing a subset  $\mathcal{S}_t$  from a prior, (b) keeping only those subsets that yield pseudo-data that are sufficiently close to the left-out sample. TVS can be broadly regarded as a reinforcement learning elaboration of this strategy where, instead of sampling from a (non-informative) prior  $\pi(\mathcal{S}_t)$ , one “updates the prior  $\pi(\mathcal{S}_t)$ ” by learning from previous successes.

TVS can be regarded as a stochastic optimization approach to subset selection which balances exploration and exploitation. TVS is suitable in settings when very many predictors and/or very many observations can be too overwhelming for machine learning. By sequentially parsing subsets of data and reinforcing promising covariates, TVS can effec-

tively separate signal from noise, providing a platform for interpretable machine learning. TVS minimizes regret by sequentially computing a median probability model rule obtained by truncating sampled mean rewards. We provide bounds for this regret without necessarily assuming that the mean arm rewards be unrelated. We observe strong empirical performance of TVS under various scenarios, both on real and simulated data. [The TVS approach, coupled with BART, captures non-linearities and may thus be beneficial over linear techniques. In addition, TVS scales to very large datasets.](#)

Thompson sampling is ultimately designed to minimize regret, not to select the best arms. Bubeck et al. (2009) point out that algorithms satisfying regret bounds of order  $\log(T)$  can be far from optimal for finding the best arm. Russo (2016) proposed a ‘top-two’ sampling version of Thompson sampling which is tailored for single best-arm identification. Alternative algorithms have been proposed including the Successive Elimination algorithm of Even-Dar et al. (2006) for single top-arm identification and the SAR (Successive Accepts Rejects) algorithm of Bubeck et al. (2013) for top  $m$ -arm identification. These works suggest possible refinements of our approach for directly targeting multiple best arms in correlated combinatorial bandits.

## References

- Agrawal, S. and N. Goyal (2012). Analysis of Thompson sampling for the multi-armed bandit problem. In *Conference on Learning Theory*.
- Barber, R. F., E. J. Candès, et al. (2015). Controlling the false discovery rate via knockoffs. *The Annals of Statistics* 43(5), 2055–2085.
- Barbieri, M., J. O. Berger, E. I. George, and V. Rockova (2020). The median probability model and correlated variables. *Bayesian Analysis (to appear)*.
- Barbieri, M. M. and J. O. Berger (2004). Optimal predictive model selection. *Annals of Statistics* 32(3), 870–897.
- Bhattacharya, A., A. Chakraborty, and B. K. Mallick (2016). Fast sampling with Gaussian scale mixture priors in high-dimensional regression. *Biometrika* 103(4), 985.

- Bleich, J., A. Kapelner, E. George, and S. Jensen (2014). Variable selection for BART: An application to gene regulation. *Annals of Applied Statistics* 8(3), 1750–1781.
- Bottolo, L., S. Richardson, et al. (2010). Evolutionary stochastic search for Bayesian model exploration. *Bayesian Analysis* 5(3), 583–618.
- Breiman, L. (2001). Random forests. *Machine learning* 45(1), 5–32.
- Brown, P. J., M. Vannucci, and T. Fearn (1998). Multivariate Bayesian variable selection and prediction. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 60(3), 627–641.
- Bubeck, S., R. Munos, and G. Stoltz (2009). Pure exploration in multi-armed bandits problems. In *International Conference on Algorithmic Learning Theory*.
- Bubeck, S., T. Wang, and N. Viswanathan (2013). Multiple identifications in multi-armed bandits. In *International Conference on Machine Learning*.
- Burns, C., J. Thomason, and W. Tansey (2020). Interpreting black box models via hypothesis testing. In *Proceedings of the 2020 ACM-IMS on Foundations of Data Science*.
- Candes, E., Y. Fan, L. Janson, and J. Lv (2018). Panning for gold: ‘model-x’knockoffs for high dimensional controlled variable selection. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 80(3), 551–577.
- Carbonetto, P., M. Stephens, et al. (2012). Scalable variational inference for Bayesian variable selection in regression, and its accuracy in genetic association studies. *Bayesian analysis* 7(1), 73–108.
- Carvalho, C. M., N. G. Polson, and J. G. Scott (2010). The horseshoe estimator for sparse signals. *Biometrika* 97(2), 465–480.
- Castillo, I., J. Schmidt-Hieber, and A. Van der Vaart (2015). Bayesian linear regression with sparse priors. *The Annals of Statistics* 43(5), 1986–2018.
- Cesa-Bianchi, N. and G. Lugosi (2012). Combinatorial bandits. *Journal of Computer and System Sciences* 78(5), 1404–1422.

- Chen, W., Y. Wang, and Y. Yuan (2013). Combinatorial multi-armed bandit: General framework and applications. In *International Conference on Machine Learning*.
- Chipman, H., E. I. George, and R. E. McCulloch (2001). The Practical Implementation of Bayesian Model Selection. In *Institute of Mathematical Statistics Lecture Notes - Monograph Series*. Institute of Mathematical Statistics.
- Chipman, H. A., E. I. George, and R. E. McCulloch (2010). BART: Bayesian additive regression trees. *The Annals of Applied Statistics* 4(1), 266–298.
- Combes, R. and A. Proutiere (2014). Unimodal bandits: Regret lower bounds and optimal algorithms. In *International Conference on Machine Learning*.
- Even-Dar, E., S. Mannor, and Y. Mansour (2006). Action elimination and stopping conditions for the multi-armed bandit and reinforcement learning problems. *Journal of Machine Learning Research* 7, 1079–1105.
- Fahy, C. and S. Yang. Dynamic feature selection for clustering high dimensional data streams. *IEEE Access* 7.
- Fan, J. and J. Lv (2008). Sure independence screening for ultrahigh dimensional feature space. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 70(5), 849–911.
- Fisher, A., C. Rudin, and F. Dominici (2019). All models are wrong, but many are useful: Learning a variable’s importance by studying an entire class of prediction models simultaneously. *Journal of Machine Learning Research* 20(177), 1–81.
- Foster, D. P. and R. A. Stine (2008).  $\alpha$ -investing: a procedure for sequential control of expected false discoveries. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 70(2), 429–444.
- Friedman, J., T. Hastie, and R. Tibshirani (2001). *The elements of statistical learning*, Volume 1. Springer series in statistics New York.
- Friedman, J. H. (1991). Multivariate Adaptive Regression Splines. *The Annals of Statistics* 19(1), 1–141.

- Gai, Y., B. Krishnamachari, and R. Jain (2012). Combinatorial network optimization with unknown variables: Multi-armed bandits with linear rewards and individual observations. *IEEE/ACM Transactions on Networking* 20(5), 1466–1478.
- Garson, G. D. (1991). A comparison of neural network and expert systems algorithms with common multivariate procedures for analysis of social science data. *Social Science Computer Review* 9(3), 399–434.
- George, E. I. and R. E. McCulloch (1993). Variable selection via Gibbs sampling. *Journal of the American Statistical Association* 88(423), 881–889.
- George, E. I. and R. E. McCulloch (1997). Approaches for Bayesian variable selection. *Statistica Sinica* 7, 339–373.
- Gupta, S., G. Joshi, and O. Yagan (2020). Correlated multi-armed bandits with a latent random source. In *IEEE International Conference on Acoustics, Speech and Signal Processing*.
- Hill, J., A. Linero, and J. Murray (2020). Bayesian additive regression trees: A review and look forward. *Annual Review of Statistics and Its Application* 7, 251–278.
- Hooker, G. (2007). Generalized functional anova diagnostics for high-dimensional functions of dependent variables. *Journal of Computational and Graphical Statistics* 16(3), 709–732.
- Horel, E. and K. Giesecke (2019). Towards explainable AI: Significance tests for neural networks. arXiv:1902.06021.
- Ishwaran, H. et al. (2007). Variable importance in binary regression trees and forests. *Electronic Journal of Statistics* 1, 519–537.
- Javanmard, A., A. Montanari, et al. (2018). Online rules for control of false discovery rate and false discovery exceedance. *The Annals of Statistics* 46(2), 526–554.
- Johnson, V. E. and D. Rossell (2012). Bayesian model selection in high-dimensional settings. *Journal of the American Statistical Association* 107(498), 649–660.

- Kazemitabar, J., A. Amini, A. Bloniarz, and A. S. Talwalkar (2017). Variable importance using decision trees. In *Advances in Neural Information Processing Systems*.
- Komiyama, J., J. Honda, and H. Nakagawa (2015). Optimal regret analysis of thompson sampling in stochastic multi-armed bandit problem with multiple plays. In *International Conference on Machine Learning*.
- Kveton, B., Z. Wen, A. Ashkan, H. Eydgahi, and B. Eriksson (2014). Matroid bandits: fast combinatorial optimization with learning. In *Proceedings of the 30th Conference on Uncertainty in Artificial Intelligence*, pp. 420–429.
- Kveton, B., Z. Wen, A. Ashkan, and C. Szepesvari (2015). Combinatorial cascading bandits. In *Advances in Neural Information Processing Systems*.
- Lafferty, J. and L. Wasserman (2008). RODEO: sparse, greedy nonparametric regression. *The Annals of Statistics*, 28–63.
- Lai, T. and H. Robbins (1985). Asymptotically efficient adaptive allocation rules. *Advances in Applied Mathematics* 6(1), 4–22.
- Lei, J., M. G’Sell, A. Rinaldo, R. J. Tibshirani, and L. Wasserman (2018). Distribution-free predictive inference for regression. *Journal of the American Statistical Association* 113(523), 1094–1111.
- Leike, J., T. Lattimore, L. Orseau, and M. Hutter (2016). Thompson sampling is asymptotically optimal in general environments. In *Conference on Uncertainty in Artificial Intelligence*. AUAI Press.
- Liang, F., Q. Li, and L. Zhou (2018). Bayesian neural networks for selection of drug sensitive genes. *Journal of the American Statistical Association* 113(523), 955–972.
- Lin, Y. and H. H. Zhang (2006). Component selection and smoothing in multivariate nonparametric regression. *The Annals of Statistics* 34(5), 2272–2297.
- Linero, A. R. and Y. Yang (2018). Bayesian regression tree ensembles that adapt to smoothness and sparsity. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 80(5), 1087–1110.

- Liu, Y., V. Rockova, and Y. Wang (2018). ABC Variable Selection with Bayesian Forests. arXiv:1806.02304.
- Louppe, G., L. Wehenkel, A. Suter, and P. Geurts (2013). Understanding variable importances in forests of randomized trees. In *Advances in Neural Information Processing Systems*.
- Lu, Y., Y. Fan, J. Lv, and W. S. Noble (2018). DeepPINK: reproducible feature selection in Deep Neural Networks. In *Advances in Neural Information Processing Systems*.
- Mase, M., A. B. Owen, and B. Seiler (2019). Explaining black box decisions by shapley cohort refinement. arXiv:1911.00467.
- Mitchell, T. J. and J. J. Beauchamp (1988). Bayesian variable selection in linear regression. *Journal of the American Statistical Association* 83(404), 1023–1032.
- Narisetty, N. N., X. He, et al. (2014). Bayesian variable selection with shrinking and diffusing priors. *The Annals of Statistics* 42(2), 789–817.
- Olden, J. D. and D. A. Jackson (2002). Illuminating the “black box”: a randomization approach for understanding variable contributions in artificial neural networks. *Ecological modelling* 154(1-2), 135–150.
- Owen, A. B. and C. Prieur (2017). On Shapley value for measuring importance of dependent inputs. *SIAM/ASA Journal on Uncertainty Quantification* 5(1), 986–1002.
- Pandey, S., D. Chakrabarti, and D. Agarwal (2007). Multi-armed bandit problems with dependent arms. In *International Conference on Machine learning*.
- Patterson, E. and M. Sesia (2018). *Knockoff: The Knockoff Filter for Controlled Variable Selection*. Statistics Department, Stanford University. R package version 0.3.2.
- Radchenko, P. and G. M. James (2010). Variable selection using adaptive nonlinear interaction structures in high dimensions. *Journal of the American Statistical Association* 105(492), 1541–1553.



- Ramdas, A., F. Yang, M. J. Wainwright, and M. I. Jordan. Online control of the false discovery rate with decaying memory. In *Advances In Neural Information Processing Systems*.
- Ravikumar, P., J. Lafferty, H. Liu, and L. Wasserman (2009). Sparse additive models. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 71(5), 1009–1030.
- Rhee, S.-Y., W. J. Fessel, A. R. Zolopa, L. Hurley, T. Liu, J. Taylor, D. P. Nguyen, S. Slome, D. Klein, M. Horberg, et al. (2005). HIV-1 protease and reverse-transcriptase mutations: correlations with antiretroviral therapy in subtype b isolates and implications for drug-resistance surveillance. *The Journal of infectious diseases* 192(3), 456–465.
- Rhee, S.-Y., J. Taylor, G. Wadhera, A. Ben-Hur, D. L. Brutlag, and R. W. Shafer (2006). Genotypic predictors of Human Immunodeficiency Virus type 1 drug resistance. *Proceedings of the National Academy of Sciences* 103(46), 17355–17360.
- Rockova, V. and E. I. George (2014). EMVS: The EM Approach to Bayesian Variable Selection. *Journal of the American Statistical Association* 109(506), 828–846.
- Rockova, V. and E. I. George (2018). The spike-and-slab LASSO. *Journal of the American Statistical Association* 113(521), 431–444.
- Rossell, D. and D. Telesca (2017). Nonlocal priors for high-dimensional estimation. *Journal of the American Statistical Association* 112(517), 254–265.
- Russo, D. (2016). Simple Bayesian algorithms for best arm identification. In *Conference on Learning Theory*.
- Scheipl, F. (2011). spikeslabgam: Bayesian variable selection, model choice and regularization for generalized additive mixed models in r. *arXiv preprint arXiv:1105.5253*.
- Shapley, L. S. (1953). A value for n-person games. *Contributions to the Theory of Games* 2(28), 307–317.
- Thompson, W. R. (1933). On the likelihood that one unknown probability exceeds another in view of the evidence of two sample. *Biometrika* 25(3/4), 285–294.

- Tibshirani, R. (2011). Regression shrinkage and selection via the LASSO: a retrospective. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)* 73(3), 273–282.
- van der Pas, S., J. Scott, A. Chakraborty, and A. Bhattacharya (2019). *horseshoe: Implementation of the Horseshoe Prior*. R package version 0.2.0.
- van der Pas, S., B. Szabó, A. van der Vaart, et al. (2017). Uncertainty quantification for the horseshoe (with discussion). *Bayesian Analysis* 12(4), 1221–1274.
- Vannucci, M. and F. C. Stingo (2010). Bayesian models for variable selection that incorporate biological information. *Bayesian Statistics* 9, 1–20.
- Wang, J., J. Shen, and P. Li (2018). Provable variable selection for streaming features. In *International Conference on Machine Learning*.
- Wang, S. and W. Chen (2018). Thompson sampling for combinatorial semi-bandits. In *International Conference on Machine Learning*, pp. 5114–5122.
- Ye, M. and Y. Sun (2018). Variable selection via penalized neural network: a drop-out-one loss approach. In *International Conference on Machine Learning*.
- Zhang, T., S. S. Ge, and C. C. Hang (2000). Adaptive neural network control for strict-feedback nonlinear systems using backstepping design. *Automatica* 36(12), 1835–1846.
- Zhou, J., D. P. Foster, R. A. Stine, and L. H. Ungar (2006). Streamwise feature selection. *Journal of Machine Learning Research* 7, 1861–1885.

# Variable Selection via Thompson Sampling

Yi Liu\* and Veronika Ročková†

December 7, 2021

## Supplementary Material

### A Proof of Theorem ??

We will denote with  $\mathcal{S}^* = \arg \max_{\mathcal{S}} r_{\theta^*}^C(\mathcal{S})$  the optimal model where

$$r_{\theta^*}^C(\mathcal{S}) = \sum_{i \in \mathcal{S}} \left[ \theta_i^*(\mathcal{S}) \log \left( \frac{C+1}{C} \right) - \log \left( \frac{1}{C} \right) \right].$$

First, we define the reward gap of a set of arms  $\mathcal{S}_t$  as

$$\Delta_{\mathcal{S}_t} = \mathbb{E}[r_{\theta^*}^C(\mathcal{S}^*) - r_{\theta}^C(\mathcal{S}_t)].$$

and write the expected regret in (??) as  $Reg(T) = \mathbb{E} \sum_{t=1}^T \Delta_{\mathcal{S}_t}$ . Before proceeding, we need to introduce some notation. We denote with  $N_i(t) = \sum_{k < t} \mathbb{I}(i \in \mathcal{S}_k)$  the number of times an arm  $i$  has been pulled up to time  $t$ . Next,

$$\hat{\mu}_i(t) = \frac{a_i(t) - 1}{N_i(t)} = \frac{1}{N_i(t)} \sum_{k < t} \mathbb{I}(i \in \mathcal{S}_k) \gamma_i^t \quad (1)$$

denotes the empirical mean of an arm  $i$ , i.e. the proportion of times an arm  $i$  has yielded a reward when pulled, i.e.  $\gamma_i^t = 1$  when  $i \in \mathcal{S}_t$ . We will be using the following usual Chernoff-Hoeffding bounds which we state without a proof.

**Lemma 1 (Chernoff-Hoeffding Bound)** *Let  $X_1, \dots, X_n$  be independent Bernoulli random variables with  $\mathbb{E}[X_i] = p_i$  and denote with  $X = \frac{1}{n} \sum_{i=1}^n X_i$  and  $\mu = \frac{1}{n} \sum_{i=1}^n p_i$ . Then, for any  $0 < \lambda < 1 - \mu$ , we have*

$$\mathbb{P}(X \geq \mu + \lambda) \leq \exp\{-nd(\mu + \lambda, \mu)\},$$

and, for any  $0 < \lambda < \mu$ ,

$$\mathbb{P}(X \leq \mu - \lambda) \leq \exp\{-nd(\mu - \lambda, \mu)\},$$

where  $d(a, b) = a \ln a/b + (1 - a) \ln(1 - a)/(1 - b)$ .

---

\*Yi Liu is a 4<sup>th</sup> year PhD student at the Department of Statistics at the University of Chicago

†Veronika Rockova is Assistant Professor in Econometrics and Statistics at the Booth School of Business of the University of Chicago. The author gratefully acknowledges the support from the James S. Kemper Foundation Research Fund at the Booth School of Business.

Similarly as in other regret bound proofs (Komiyama et al., 2015; Wang and Chen, 2018) we will bound the expected regret separately on the intersection of combinations of the following events:

$$\begin{aligned}\mathcal{A}(t) &= \{\mathcal{S}_t \neq \mathcal{S}^*\}, \\ \mathcal{B}(t) &= \left\{ \exists i \in \mathcal{S}^* \text{ s.t. } \hat{\mu}_i(t) < 0.5 + \frac{\alpha}{2} \text{ or } \exists i \in \mathcal{S}_t \setminus \mathcal{S}^* \text{ s.t. } \hat{\mu}_i(t) > 0.5 - \frac{\alpha}{2} \right\}, \\ \mathcal{C}(t) &= \left\{ \exists i \in \mathcal{S}^* \text{ s.t. } \hat{\mu}_i(t) - \theta_i(t) > \frac{\alpha}{2} \text{ or } \exists i \in \mathcal{S}_t \setminus \mathcal{S}^* \text{ s.t. } \theta_i(t) - \hat{\mu}_i(t) > \frac{\alpha}{2} \right\}, \\ \mathcal{D}(t) &= \bigcap_{i \in \mathcal{S}_t} \left\{ N_i(t) > \frac{8 \log T}{\alpha^2} \right\},\end{aligned}$$

where  $\alpha$  occurred in Assumption ???. First, we focus on the following term

$$Reg_1(T) = \sum_{t=1}^T \mathbb{E}[\Delta_{\mathcal{S}_t} \times \mathbb{I}(\mathcal{A}(t) \cap \mathcal{B}(t))]. \quad (2)$$

The following Lemma finds an upper bound on  $Reg_1(T)$ :

**Lemma 2** *Under the Assumption 1, the TVS sampling policy in Table ?? with  $C = (\sqrt{5} - 1)/2$  yields, for  $\Delta_{\max} = \max_{\mathcal{S}} \Delta_{\mathcal{S}}$*

$$Reg_1(T) \leq \Delta_{\max} \sum_{i \in \mathcal{S}^*} \mathbb{E} \left( \sum_{t=1}^T \mathbb{I} \left\{ i \in \mathcal{S}_t, \hat{\mu}_i(t) < 0.5 + \frac{\alpha}{2} \right\} \right) \quad (3)$$

$$+ \Delta_{\max} \sum_{i \notin \mathcal{S}^*} \mathbb{E} \left( \sum_{t=1}^T \mathbb{I} \left\{ i \in \mathcal{S}_t, \hat{\mu}_i(t) > 0.5 - \frac{\alpha}{2} \right\} \right) \quad (4)$$

$$\leq \Delta_{\max} \times p \left( 1 + \frac{4}{\alpha_{\max}^2} \right). \quad (5)$$

**Proof:** We will first prove that

$$\mathbb{E} \left( \sum_{t=1}^T \mathbb{I} \left\{ i \in \mathcal{S}_t, \hat{\mu}_i(t) < 0.5 + \frac{\alpha}{2} \right\} \right) \leq 1 + \frac{4}{\alpha_{\max}^2}. \quad (6)$$

The second inequality for the term in (22) can be obtained analogously. With  $\theta_i(\mathcal{S}_t)$  as in (??) we denote with

$$\bar{\theta}_i(T) = \frac{1}{N_i(T)} \sum_{t=1}^T \mathbb{I}(i \in \mathcal{S}_t) \theta_i(\mathcal{S}_t)$$

and with  $d(a, b) = a \log[a/b] + (1 - a) \log[(1 - a)/(1 - b)]$ . Note that for any  $b \in (0, 1)$  both functions  $d(x, b)$  and  $d(b, x)$  are monotone increasing on  $[b, 1]$  and, at the same time, monotone decreasing on  $[0, b]$ . Under the Assumption 1 and for  $i \in \mathcal{S}^*$  we have  $\bar{\theta}_i(T) > 0.5 + \alpha$  and thereby

$$d(0.5 + \alpha/2, \bar{\theta}_i(T)) > d(0.5 + \alpha/2, 0.5 + \alpha).$$

Similarly as in the proof of Lemma 3 in Wang and Chen (2018), we denote with  $\tau_1, \tau_2, \dots$  the times such that  $i \in \mathcal{S}_t$ , define  $\tau_0 = 0$  and write

$$\begin{aligned}
\mathbb{E} \left( \sum_{t=1}^T \mathbb{I}\{i \in \mathcal{S}_t, \hat{\mu}_i(t) < 0.5 + \alpha/2\} \right) &\leq 1 + \sum_{w=0}^T \mathbb{P}(\hat{\mu}_i(\tau_w) < 0.5 + \alpha/2, N_i(t) = w) \\
&\leq 1 + \sum_{w=0}^T \exp(-w d(0.5 + \alpha/2, \bar{\theta}(T))) \\
&\leq 1 + \sum_{w=0}^T \exp(-w d(0.5 + \alpha/2, 0.5 + \alpha)) \\
&\leq 1 + \sum_{w=0}^{\infty} \exp(-w d(0.5 + \alpha/2, 0.5 + \alpha)) \\
&\leq 1 + \frac{\exp(-d(0.5 + \alpha/2, 0.5 + \alpha))}{1 - \exp(-d(0.5 + \alpha/2, 0.5 + \alpha))} \\
&\leq 1 + \frac{4}{\alpha^2}.
\end{aligned}$$

This concludes the proof of (29). The second term can be bounded analogously, which concludes the proof of the Lemma.  $\square$

Next, we focus on the following term

$$Reg_2(T) = \sum_{t=1}^T \mathbb{E}[\Delta_{\mathcal{S}_t} \times \mathbb{I}(\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t))]. \quad (7)$$

To bound this term, we will be using the following Lemma (Lemma 4 from Wang and Chen (2018)) which we, again, state without a proof.

**Lemma 3** *Denote with  $\theta_i(t)$  the mean reward for an arm  $i$  sampled from  $\mathcal{B}(a_i(t), b_i(t))$  during the step C1 in Table ???. Using the TVS algorithm from Table ??, we have the following two inequalities for any base arm  $i$ :*

$$\begin{aligned}
\mathbb{P} \left[ \theta_i(t) - \hat{\mu}_i(t) > \sqrt{\frac{2 \log T}{N_i(t)}} \right] &\leq \frac{1}{T}, \\
\mathbb{P} \left[ \hat{\mu}_i(t) - \theta_i(t) > \sqrt{\frac{2 \log T}{N_i(t)}} \right] &\leq \frac{1}{T}.
\end{aligned}$$

**Proof:** The proof relies on the observation that  $\theta_i(t)$ 's only depend on values  $a_i(t)$  and  $b_i(t)$ . The proof is then the same as in Lemma 4 in Wang and Chen (2018).

The following lemma bounds the regret term (7).

**Lemma 4** *Using the TVS algorithm from Table ??, we have the following bound:*

$$Reg_2(T) = \sum_{t=1}^T \mathbb{E}[\Delta_{\mathcal{S}_t} \times \mathbb{I}(\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t))] \leq \Delta_{\max} \times p.$$

**Proof:** On the event  $\mathcal{D}(t)$ , we have  $N_i(t) > \frac{8 \log T}{\alpha^2}$  and thereby  $\frac{\alpha}{2} > \sqrt{2 \frac{\log T}{N_i(t)}}$ . The set  $\mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t)$  is then subsumed within

$$\left\{ \exists i \in \mathcal{S}_t \setminus \mathcal{S}^* : \theta_i(t) - \hat{\mu}_i(t) > \sqrt{\frac{2 \log T}{N_i(t)}} \text{ or } \exists i \in \mathcal{S}_t \cap \mathcal{S}^* : \hat{\mu}_i(t) - \theta_i(t) > \sqrt{\frac{2 \log T}{N_i(t)}} \right\}.$$

We can then directly apply Lemma 3 to write

$$\begin{aligned} \sum_{t=1}^T \Delta_{\mathcal{S}_t} \mathbb{P}(\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t)) &\leq \Delta_{\max} \sum_{t=1}^T \mathbb{P}(\mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t)) \\ &\leq \Delta_{\max} \sum_{t=1}^T p/T. \quad \square \end{aligned}$$

Finally, we focus on the following term

$$\text{Reg}_3 = \sum_{t=1}^T \mathbb{E}(\Delta_{\mathcal{S}_t} \times \mathbb{I}(\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}^c(t))). \quad (8)$$

**Lemma 5** *Let  $i \in \mathcal{S}^*$  and let  $f_i^*(j, s)$  be the probability that after  $j$  pulls of an arm  $i$ ,  $s$  of those pulls result in a reward. If  $s \leq \lfloor 0.5j \rfloor$ , then*

$$f_i^*(j, s) \leq \binom{j}{s} (0.5 + \alpha)^s (0.5 - \alpha)^{j-s} \quad (9)$$

**Proof:** We denote with  $\tau_j^i$  the  $j^{\text{th}}$  time such that the arm  $i$  has been pulled (i.e.  $\theta_i(t) > 0.5$ ). We denote the probability of yielding a reward at time  $\tau_j$  as  $p_j = \mathbb{P}(\gamma_i^{\tau_j} = 1 | \mathcal{S}_{\tau_j})$  and, for a given  $j$  and  $s$  write  $f_{j,s}^*(p_1, \dots, p_j) := f_i^*(j, s)$ . Since we are studying one particular arm, we have dropped the subscript  $i$  without any loss of generality. Consider now a vector of binary indicators  $\mathbf{B} = (B_1, B_2, B_3, \dots, B_j)' \in \{0, 1\}^j$  where  $B_k = \gamma_i^{\tau_k} \in \{0, 1\}$  for whether or not the  $k^{\text{th}}$  pull of an arm  $i$  has yielded a reward. Denoting  $|\mathbf{B}| = \sum_{k=1}^j B_k$ , we can write

$$f_{j,s}^*(p_1, \dots, p_j) = \sum_{\mathbf{B}: |\mathbf{B}|=s} \prod_{l=1}^j p_l^{B_l} (1 - p_l)^{1-B_l}.$$

We want to show that  $\mathbf{p}^* = (p_1^*, \dots, p_j^*)' = \arg \max f_{j,s}^*(p_1, \dots, p_j)$  when  $p_i^* = 0.5 + \alpha$  for all  $1 \leq i \leq j$ . First, we notice is that this is a multi-linear polynomial in the sense that  $\frac{\partial f_{j,s}^*(p_1, \dots, p_j)}{\partial p_k}$  is independent of  $p_k$ . Keeping every other coordinate constant, the value  $p_k^*$  that maximizes  $f_{j,s}^*(\cdot)$  in the  $k^{\text{th}}$  direction has to be either  $0.5 + \alpha$  or 1. The vector  $(p_1^*, \dots, p_j^*)'$  maximizing  $f_{j,s}^*(p_1, \dots, p_j)$  will thus have each coordinate  $p_k^*$  either equal to 1 or  $0.5 + \alpha$ . Let  $r \in \mathbb{N} \cup \{0\}$  be the number of coordinates  $k$  for which  $p_k^* = 1$  and  $j - r$  be the number of coordinates  $k$  for which  $p_k^* = 0.5 + \alpha$  (notice that  $r \leq s$ ). Since  $f_{j,s}^*(p_1, \dots, p_j)$  is a symmetric polynomial (i.e. the value of the function is not affected by a permutation of its argument) we assume, without loss of generality, that  $p_1^* = p_2^* = \dots = p_r^* = 1$  and  $p_{r+1}^* = p_{r+2}^* = \dots = p_j^* = 0.5 + \alpha$ . In this case, we have the constraint on the binary

indicators  $\mathbf{B}$  where the first  $r$  indices have to be 1 and the remaining  $s - r$  1's can be anywhere between the index  $r + 1$  and  $j$  ( $j - r$  indices). Therefore, we have

$$f_{j,s,r}^*(\mathbf{p}^*) = \binom{j-r}{s-r} (0.5 + \alpha)^{s-r} (0.5 - \alpha)^{j-s}.$$

It is sufficient to prove that this function is maximized at  $r = 0$ . We have

$$\begin{aligned} \frac{f_{j,s,r+1}^*(\mathbf{p}^*)}{f_{j,s,r}^*(\mathbf{p}^*)} &= \frac{\binom{j-r-1}{s-r-1} (0.5 + \alpha)^{s-r-1} (0.5 - \alpha)^{j-s}}{\binom{j-r}{s-r} (0.5 + \alpha)^{s-r} (0.5 - \alpha)^{j-s}} = \frac{s-r}{(j-r)(1/2 + \alpha)} \\ &\leq \frac{j/2 - r}{(j-r)(1/2 + \alpha)} \quad (\text{using the assumption } s \leq \lfloor j/2 \rfloor) \\ &= 1 - \frac{(1/2 - \alpha)r + \alpha j}{(j-r)(1/2 + \alpha)} < 1 \end{aligned}$$

since  $1/2 - \alpha \geq 0$  and  $\alpha > 0$ . Since this is true for all  $r$ , the function  $\frac{f_{j,s,r+1}^*(p_1, \dots, p_j)}{f_{j,s,r}^*(p_1, \dots, p_j)}$  is maximized at  $r = 0$ . This concludes the proof.  $\square$

**Lemma 6** *Let  $i \in \mathcal{S}^*$  and let  $\tau_j^i$  be the  $j^{\text{th}}$  time such that  $\theta_i(t) > 0.5$ . Suppose that Assumption 1 is true, then the TVS Algorithm 1 with  $C = (\sqrt{5} - 1)/2$  satisfies*

$$\mathbb{E} [\tau_{j+1} - \tau_j] \leq \begin{cases} 4 + \frac{1}{\alpha} & \text{when } j \leq \frac{8}{\alpha} \\ 1 + \frac{1}{e^{\alpha^2 j/4} - 1} + e^{-\alpha^2 j/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(j+1)} \right) & \text{when } j > \frac{8}{\alpha}, \end{cases} \quad (10)$$

where constants  $C_1, C_2 > 0$  are not related to Algorithm 1.

**Proof:** We denote with  $\tau_j^i$  the  $j^{\text{th}}$  time such that the arm  $i$  has been pulled (i.e.  $\theta_i(t) > 0.5$ ). First, we consider the time interval  $[\tau_j^i, \tau_{j+1}^i)$ . For any  $t \in [\tau_j^i, \tau_{j+1}^i)$  we know that the arm  $i$  has been played  $j$  times and, thereby,  $\theta_i(t)$  comes from a beta distribution

$$\theta_i(t) \sim \mathcal{B}[a_i(t), b_i(t)],$$

where  $j = a_i(t) + b_i(t) - 2$ . The parameters of the beta distribution are only updated if the arm  $i$  is pulled and the distribution thus does not change until we reach the iteration  $\tau_{j+1}^i$ . Therefore, given  $\hat{\mu}_i(\tau_j^i)$  the expected difference between  $\tau_{j+1}^i - \tau_j^i$  has a geometric distribution with an expectation

$$\mathbb{E} [\tau_{j+1} - \tau_j \mid \hat{\mu}_i(\tau_j^i)] = \frac{1}{\mathbb{P}(B_{ij} > 0.5)} = \frac{1}{p_{i,j}(0.5)}$$

where  $B_{ij} \sim \mathcal{B}[a_i(\tau_{j+1}), b_i(\tau_{j+1})]$ . We let  $F_{n,p}(\cdot)$  and  $f_{n,p}(\cdot)$  denote the cumulative distribution function (CDF) and the probability density function of a Binomial distribution with parameters  $(n, p)$ . We now recall the following fact (see e.g. Fact 3 in Agrawal and Goyal (2012)) about the CDF  $F_{\alpha,\beta}^{\text{beta}}(x)$  of a beta distribution with parameters  $(\alpha, \beta)$ . We have the following identity which links the CDF of a beta distribution and a CDF of a binomial distribution:

$$F_{\alpha,\beta}^{\text{beta}}(y) = 1 - F_{\alpha+\beta-1,y}(\alpha - 1) \quad (11)$$

for all positive integers  $\alpha, \beta$ . Let  $f_i^*(j, s)$  be the probability that after  $j$  pulls of an arm  $i$ ,  $s$  out of those  $j$  pulls result in a reward. Here, we have the following relationship  $a_i(\tau_j) = s+1$  and  $b_i(\tau_j) = j+1-s$ . Using the identity (11) and given  $s$  successes among  $j$  pulls, we can write  $p_{i,j}(0.5) = F_{s+1,j-s+1}^{\text{beta}}(0.5) = 1 - F_{j+1,0.5}(s)$  and thereby

$$\mathbb{E} \left[ \frac{1}{p_{i,j}(0.5)} \right] = \sum_{s=0}^j \frac{f_i^*(j, s)}{F_{j+1,0.5}(s)}. \quad (12)$$

First, we consider the case when  $j \leq \frac{8}{\alpha}$ . In the following calculations, we will use the result from Lemma 5. Let  $p_{\max} = \alpha + 0.5$  and  $R = \frac{p_{\max}}{1-p_{\max}}$ . Using the fact  $F_{j+1,0.5}(s) \geq 0.5F_{j,0.5}(s)$  and  $F_{j,0.5}(s) \geq 1/2$  when  $s \geq \lceil j/2 \rceil$  (since the median of Binomial distribution with parameters  $(j, 1/2)$  is either  $\lfloor j/2 \rfloor$  or  $\lceil j/2 \rceil$ ) we have

$$\mathbb{E} \left[ \frac{1}{p_{i,j}(0.5)} \right] \leq 2 \sum_{s=0}^j \frac{f_i^*(j, s)}{F_{j,0.5}(s)} \quad (13)$$

$$\leq 2 \sum_{s=0}^{\lfloor j/2 \rfloor} \frac{\binom{j}{s} p_{\max}^s (1-p_{\max})^{j-s}}{f_{j,0.5}(s)} + 4 \sum_{s=\lceil j/2 \rceil}^j f_i^*(j, s) \quad (14)$$

$$\leq 2 \sum_{s=0}^{\lfloor j/2 \rfloor} \frac{p_{\max}^s (1-p_{\max})^{j-s}}{1/2^j} + 4 \quad (15)$$

$$\leq 2 \frac{(1-p_{\max})^j}{1/2^j} \sum_{s=0}^{\lfloor j/2 \rfloor} R^s + 4 \quad (16)$$

$$\leq 2 \left( \frac{R^{\lfloor j/2 \rfloor + 1} - 1}{R - 1} \right) \frac{(1-p_{\max})^j}{1/2^j} + 4 \quad (17)$$

$$\leq 2 \left( \frac{R}{R-1} \right) R^{j/2} \frac{(1-p_{\max})^j}{1/2^j} + 4 \quad (18)$$

$$\leq \frac{1}{\alpha} e^{-j d(1/2, p_{\max})} + 4 \quad (19)$$

$$\leq \frac{1}{\alpha} + 4, \quad (20)$$

where from (18) to (19) we have used the following two facts. First, using the definition of  $d(\cdot, \cdot)$  in Lemma 4 and the fact that  $d(p_1, p_2) > (p_1 - p_2)^2$  we obtain

$$\begin{aligned} \frac{(1-p_{\max})^j}{1/2^j} R^{\lfloor j/2 \rfloor} &\leq \frac{(1-p_{\max})^j}{1/2^j} R^{j/2} = e^{j \log(1-p_{\max}) - j \log(1/2) + j/2 \log(p_{\max}) - j/2 \log(1-p_{\max})} \\ &= e^{-j \left\{ \frac{1}{2} \log\left(\frac{1}{2}/p_{\max}\right) + \frac{1}{2} \log\left[\frac{1}{2}/(1-p_{\max})\right] \right\}} = e^{-j d(1/2, p_{\max})} \leq e^{-\alpha^2 j}. \end{aligned}$$

Second, since  $p_{\max} = 0.5 + \alpha$ , we have  $\frac{R}{R-1} = \frac{p_{\max}}{2\alpha} \leq \frac{1}{2\alpha}$ .

When  $j > \frac{8}{\alpha}$ , we will divide the sum  $\Sigma(0, j) \equiv \sum_{s=0}^j \frac{f_i^*(j, s)}{F_{j+1,0.5}(s)}$  into 4 pieces and bound each



one of them

$$\Sigma(0, \lfloor j/2 \rfloor - 1) \leq c_2 \left[ e^{-\alpha^2 j} \frac{1 - 2\alpha}{4\alpha^2(j+1)} \right] + c_3 e^{-2\alpha^2 j} \quad (21)$$

$$\Sigma(\lfloor j/2 \rfloor, \lfloor j/2 \rfloor) \leq 3 e^{-\alpha^2 j} \quad (22)$$

$$\Sigma(\lceil j/2 \rceil, \lfloor (1/2 + \alpha/2)j \rfloor) \leq c_3 \left( e^{-\alpha^2 j/2} \right) \quad (23)$$

$$\Sigma(\lceil (1/2 + \alpha/2)j \rceil, j) \leq 1 + \frac{1}{e^{\alpha^2 j/4} - 1}, \quad (24)$$

where  $c_2 > 0$  and  $c_3 > 0$  are constants unrelated to Algorithm ???. This will complete the proof. We now prove the bounds in the last display. We start with the first inequality in (21). When  $s \leq (j+1)/2 - \sqrt{(j+1)/4}$ , we use the following bound for the Binomial CDF (Jeřábek (2004))

$$F_{j+1,0.5}(s) \geq \frac{1}{c_2} \left[ \frac{j+1-s}{j+1-2s} \binom{j+1}{s} \frac{1}{2^{j+1}} \right],$$

for some  $c_2 > 0$ . When  $s \geq (j+1)/2 - \sqrt{(j+1)/4}$  we use that fact that, for some  $c_3 > 0$ ,

$$F_{j+1,0.5}(s) \geq \frac{1}{c_3} > 0.$$

Altogether, we arrive at the following bound (using again Lemma 5 and denoting  $p_{\max} = 1/2 + \alpha$  and  $R = \frac{p_{\max}}{1-p_{\max}}$ )

$$\begin{aligned} \Sigma(0, \lfloor j/2 \rfloor - 1) &\leq c_2 \sum_{s=0}^{\lceil (j+1)/2 - \sqrt{(j+1)/4} \rceil} \frac{f_i^*(j, s)}{\frac{j+1-s}{j+1-2s} \binom{j+1}{s} \frac{1}{2^{j+1}}} + c_3 \sum_{s=\lceil (j+1)/2 - \sqrt{(j+1)/4} \rceil + 1}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s) \\ &\leq c_2 \sum_{s=0}^{\lfloor j/2 \rfloor - 1} \frac{f_i^*(j, s)}{\frac{j+1-s}{j+1-2s} \binom{j+1}{s} \frac{1}{2^{j+1}}} + c_3 \sum_{s=0}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s) \\ &\leq c_2 \left( \frac{(1-p_{\max})^j}{1/2^{j+1}} \sum_{s=0}^{\lfloor j/2 \rfloor - 1} \left( 1 - \frac{2s}{j+1} \right) R^s \right) + c_3 \sum_{s=0}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s). \end{aligned} \quad (25)$$

Now we bound the first term in (25) to obtain

$$\begin{aligned}
& \frac{(1 - p_{\max})^j}{1/2^{j+1}} \sum_{s=0}^{\lfloor j/2 \rfloor - 1} \left( 1 - \frac{2s}{j+1} \right) R^s \\
&= \frac{(1 - p_{\max})^j}{1/2^{j+1}} \left\{ \frac{R^{\lfloor j/2 \rfloor} - 1}{R - 1} - \frac{2}{j+1} \left[ \frac{(\lfloor j/2 \rfloor - 1)R^{\lfloor j/2 \rfloor}}{R - 1} - \frac{R^{\lfloor j/2 \rfloor} - R}{(R - 1)^2} \right] \right\} \\
&\leq \frac{(1 - p_{\max})^j}{1/2^{j+1}} \left\{ \frac{R^{\lfloor j/2 \rfloor}}{R - 1} - \frac{2}{j+1} \left[ \frac{(\lfloor j/2 \rfloor - 1)R^{\lfloor j/2 \rfloor}}{R - 1} - \frac{R^{\lfloor j/2 \rfloor}}{(R - 1)^2} \right] \right\} \\
&\leq \frac{(1 - p_{\max})^j}{1/2^{j+1}} \left[ \frac{2}{j+1} \frac{R^{\lfloor j/2 \rfloor}}{(R - 1)^2} + \frac{2[(j+1)/2 - \lfloor j/2 \rfloor + 1]}{j+1} \frac{R^{\lfloor j/2 \rfloor}}{R - 1} \right] \\
&\leq \frac{(1 - p_{\max})^j}{1/2^{j+1}} \frac{6}{j+1} \frac{R^{\lfloor j/2 \rfloor + 1}}{(R - 1)^2} \\
&\leq e^{-\alpha^2 j} \frac{12}{j+1} \frac{R}{(R - 1)^2},
\end{aligned}$$

where we have used the following facts. First, for any  $x > 1$  we have

$$\sum_{s=0}^n s x^s = \frac{n x^{n+2} - (n+1) x^{n+1} + x}{(1-x)^2} = \frac{n x^{n+1}}{x-1} - \frac{x^{n+1} - x}{(x-1)^2}.$$

Second,  $j/2 + 1/2 - \lfloor j/2 \rfloor + 1 < 3$  and (similarly as before)

$$\frac{(1 - p_{\max})^j}{1/2^j} R^{\lfloor j/2 \rfloor} \leq e^{-j d(1/2, p_{\max})} \leq e^{-\alpha^2 j}.$$

Finally, since  $R/(R-1) \leq \frac{1}{2\alpha}$  and  $1/(R-1) = \frac{1-2\alpha}{4\alpha}$ , we have

$$\frac{1}{(j+1)/4} \frac{R}{(R-1)^2} \leq \frac{1-2\alpha}{4\alpha^2(j+1)}.$$

For the second term in (25), we notice that  $\sum_{s=0}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s)$  is equal to the probability that the total number of successes is less than  $\lfloor j/2 \rfloor - 1$ . Here, we invoke Lemma 1 and note that the success probability of each pull is always greater than  $1/2 + \alpha$  and the difference between the average success probability over the  $j$  pulls and  $1/2$  is thereby greater than  $\alpha$ . Hence,  $\sum_{s=0}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s) \leq e^{-2\alpha^2 j}$ . We put the two terms together to finally obtain

$$\Sigma(0, \lfloor j/2 \rfloor - 1) \leq c_2 \left[ e^{-\alpha^2 j} \frac{1-2\alpha}{4\alpha^2(j+1)} \right] + c_3 \sum_{s=0}^{\lfloor j/2 \rfloor - 1} f_i^*(j, s) \quad (26)$$

$$\leq c_2 \left[ e^{-\alpha^2 j} \frac{1-2\alpha}{4\alpha^2(j+1)} \right] + c_3 e^{-2\alpha^2 j}. \quad (27)$$

Next, to bound the term  $\Sigma(\lfloor j/2 \rfloor, \lfloor j/2 \rfloor)$  in (22), we use Lemma 5 and the fact that  $p_{\max} > 1/2$  to find that for  $s = \lfloor j/2 \rfloor$

$$\begin{aligned}\Sigma(\lfloor j/2 \rfloor, \lfloor j/2 \rfloor) &= \frac{f_i^*(j, s)}{F_{j+1,0.5}(s)} \leq \frac{f_i^*(j, s)}{f_{j+1,0.5}(s)} \leq 2 \left(1 - \frac{s}{j+1}\right) R^s \left(\frac{1-p_{\max}}{1/2}\right)^j \\ &\leq \frac{2}{j+1} \left(\frac{j}{2} + 2\right) R^{j/2} \left(\frac{1-p_{\max}}{1/2}\right)^j \\ &\leq \left(1 + \frac{3}{j+1}\right) e^{-\alpha^2 j} \leq 2 e^{-\alpha^2 j},\end{aligned}$$

where we used the assumption  $j \geq 1/\alpha > 2$ .

In order to bound the third term  $\Sigma(\lceil j/2 \rceil, \lfloor (\alpha+1)j/2 \rfloor)$  in (23), we first note that if  $j \geq \frac{8}{\alpha} > \frac{1}{\alpha} \geq 2$  (our assumption above), we have  $\sqrt{(j+1)/4} > \sqrt{3/4} \geq \sqrt{1/2} > 1/2$  and thereby  $(j+1)/2 - \sqrt{(j+1)/4} < j/2 \leq \lceil j/2 \rceil \leq s$ . This implies that the condition in Jeřábek (2004) is satisfied and we can apply the bound  $F_{j+1,0.5}(s) \geq \frac{1}{c_3}$ . Then we have

$$\begin{aligned}\Sigma(\lceil j/2 \rceil, \lfloor (\alpha+1)j/2 \rfloor) &\leq c_3 \left( \sum_{s=\lceil j/2 \rceil}^{\lfloor (\alpha+1)j/2 \rfloor} f_i^*(j, s) \right) \leq c_3 \left( \sum_{s=0}^{\lfloor (\alpha+1)j/2 \rfloor} f_i^*(j, s) \right) \\ &\leq c_3 \left( e^{-\alpha^2 j/2} \right),\end{aligned}$$

where the last inequality stems from the Chernoff-Hoeffding inequality in Lemma 1 and Assumption 1 which guarantees that the success probability of each pull is greater than  $1/2 + \alpha$ . This implies that the difference between the average probability of success over all the  $j$  pulls and  $1/2 + \alpha/2$  is greater than  $\alpha/2$ .

Finally, to bound the term  $\Sigma(\lceil (\alpha+1)j/2 \rceil, j)$  in (24) we use the Hoeffding inequality in Lemma 1 with  $\lambda = (\alpha+1)j/[2(j+1)] - 1/2 \leq s/(j+1) - 1/2$  to find (for a r.v.  $X \sim \text{Bin}(j+1, 1/2)$ ) that

$$\begin{aligned}F_{j+1,0.5}(s) &\geq 1 - \mathbb{P}\left(\frac{X}{j+1} - \frac{1}{2} > \lambda\right) \geq 1 - e^{-2(j+1)\lambda^2} = 1 - e^{(-\frac{j\alpha^2}{2} + \frac{j\alpha^2}{2(j+1)} + \alpha\frac{j}{j+1} - \frac{1}{2(j+1)})} \\ &\geq 1 - e^{-\alpha^2 j/2},\end{aligned}$$

where we used the fact that  $1/j \leq \alpha/8$  and thereby  $2\alpha \geq \frac{j\alpha^2}{2(j+1)} + \alpha\frac{j}{j+1} - \frac{1}{2(j+1)}$ . Finally, we write

$$\Sigma(\lceil (\alpha+1)j/2 \rceil, j) \leq \sum_{s=\lceil (\alpha+1)j/2 \rceil}^j \frac{f_i^*(j, s)}{F_{j+1,0.5}(s)} \leq \frac{1}{1 - e^{-\alpha^2 j/4}} = 1 + \frac{1}{e^{\alpha^2 j/4} - 1}.$$

Now, denoting  $C_1 = 2 + 2c_3$  and  $C_2 = c_2$  we get the statement in the Lemma. This concludes our proof.  $\square$

Using Lemma 6, we can achieve a similar bound in Lemma 6 of Wang and Chen (2018),

**Lemma 7** Under Assumption 1, the TVS Algorithm ?? with  $C = (\sqrt{5} - 1)/2$  satisfies the following property. For any signal arm  $i \in \mathcal{S}^*$ , the expected number of total pulls before the given arm  $i$  is pulled  $\frac{8 \log(T)}{\alpha^2}$  times is bounded by

$$\left\lceil \frac{8 \log(T)}{\alpha^2} \right\rceil + \left\lceil \frac{8}{\alpha} \right\rceil \left( 3 + \frac{1}{\alpha} \right) + \tilde{C} \frac{e^{-4\alpha}}{1 - e^{-\alpha^2/2}} + \frac{8}{\alpha^2} \frac{1}{e^{2\alpha} - 1} + \frac{e^{-1}}{1 - e^{-\alpha/8}},$$

where  $\tilde{C} = C_1 + C_2 \frac{1-2\alpha}{32\alpha}$  for some  $C_1 > 0$  and  $C_2 > 0$  not related to the Algorithm ??.

**Proof:** We use the notation from Lemma 6, where  $\tau_j^i$  is the time when the arm  $i$  has been pulled for the  $j^{\text{th}}$  time. Denoting with  $\tilde{T} = \lfloor \frac{8 \log(T)}{\alpha^2} \rfloor$ , we want to find an upper bound for  $\mathbb{E}[\tau_{\tilde{T}}^i]$ . We can write

$$\mathbb{E}[\tau_{\tilde{T}}^i] = \sum_{j=0}^{\tilde{T}} \mathbb{E}[\tau_{j+1}^i - \tau_j^i] = \sum_{j=0}^{\tilde{T}} \mathbb{E}\left(\frac{1}{p_{i,j}(0.5)}\right)$$

and using Lemma 6 we obtain

$$\mathbb{E}[\tau_{\tilde{T}}^i] \leq \sum_{j=0}^{\lfloor \frac{8}{\alpha} \rfloor} \left( 4 + \frac{1}{\alpha} \right) + \sum_{j=\lfloor \frac{8}{\alpha} \rfloor + 1}^{\tilde{T}} \left[ 1 + \frac{1}{e^{\alpha^2 j/4} - 1} + e^{-\alpha^2 j/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(j+1)} \right) \right]. \quad (28)$$

First, we note that  $\sum_{j=0}^{\lfloor \frac{8}{\alpha} \rfloor} (4 + \frac{1}{\alpha}) + \sum_{j=\lfloor \frac{8}{\alpha} \rfloor + 1}^{\tilde{T}} 1 \leq \lceil \frac{8 \log(T)}{\alpha^2} \rceil + \lceil \frac{8}{\alpha} \rceil (3 + \frac{1}{\alpha})$ . Next, we write

$$\sum_{j=\lceil \frac{8}{\alpha} \rceil + 1}^{\tilde{T}} e^{-\frac{j\alpha^2}{2}} \leq \frac{e^{-4\alpha}}{1 - e^{-\alpha^2/2}}$$

and

$$\sum_{j=\lceil \frac{8}{\alpha} \rceil + 1}^{\tilde{T}} e^{-\frac{j\alpha^2}{2}} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(j+1)} \right) < \sum_{j=\lceil \frac{8}{\alpha} \rceil + 1}^{\tilde{T}} e^{-\frac{j\alpha^2}{2}} \left( C_1 + C_2 \frac{1-2\alpha}{32\alpha} \right) \leq \tilde{C} \frac{e^{-4\alpha}}{1 - e^{-\alpha^2/2}}.$$

Finally, we use the fact that  $\frac{1}{e^x - 1} \leq e^{-x/2}$  for  $x \geq 1$  to obtain

$$\begin{aligned} \sum_{j=\lceil \frac{8}{\alpha} \rceil + 1}^{\tilde{T}} \frac{1}{e^{\frac{j\alpha^2}{4}} - 1} &\leq \sum_{j=\lceil \frac{8}{\alpha} \rceil + 1}^{\lfloor \frac{8}{\alpha^2} \rfloor} \frac{1}{e^{\frac{j\alpha^2}{4}} - 1} + \sum_{j=\lceil \frac{8}{\alpha^2} \rceil}^{\lfloor \frac{8 \log(T)}{\alpha^2} \rfloor} \frac{1}{e^{\frac{j\alpha^2}{4}} - 1} \\ &\leq \frac{8}{\alpha^2} \frac{1}{e^{2\alpha} - 1} + \sum_{j=\lceil \frac{8}{\alpha^2} \rceil}^{\lfloor \frac{8 \log(T)}{\alpha^2} \rfloor} e^{-\alpha^2 j/8} \leq \frac{8}{\alpha^2} \frac{1}{e^{2\alpha} - 1} + \frac{e^{-1}}{1 - e^{-\alpha^2/8}} \end{aligned} \quad \square$$

Using these lemmas we can prove the following lemma about  $\text{Reg}_3(T)$ .

**Lemma 8** We denote with  $Reg_3(T)$  the regret term in (8). Under Assumption 1, the TVS Algorithm ?? with  $C = (\sqrt{5} - 1)/2$  yields

$$Reg_3(T) \leq \Delta_{\max} \left\{ \frac{8p \log(T)}{\alpha^2} + \tilde{C} q^* \frac{e^{-4\alpha}}{1 - e^{-\alpha^2/2}} + q^* \left[ \frac{8}{\alpha^2} \frac{1}{e^{2\alpha} - 1} + \frac{e^{-1}}{1 - e^{-\alpha/8}} + \left\lceil \frac{8}{\alpha} \right\rceil \left( 3 + \frac{1}{\alpha} \right) \right] \right\},$$

where  $\tilde{C} = C_1 + C_2 \frac{1-2\alpha}{32\alpha}$  for some  $C_1 > 0$  and  $C_2 > 0$  not related to the Algorithm ??.

**Proof:** We start with the following facts  $Reg_3(T) \leq \sum_{t=1}^T \Delta_{\mathcal{S}_t} \mathbb{E} [\mathbb{I}(\mathcal{A}(t) \cap \mathcal{D}^c(t))]$  and

$$Reg_3(T) \leq \sum_{t=1}^T \sum_{i \in \mathcal{S}_t} \Delta_{\mathcal{S}_t} \mathbb{E} \left[ \mathbb{I} \left( \mathcal{A}(t) \cap \left\{ N_i(t) \leq \frac{8 \log(T)}{\alpha^2} \right\} \right) \right],$$

where we used the fact that on the event  $\mathcal{D}^c(t)$ , there exists at least one arm  $i \in \mathcal{S}_t$  such that  $N_i(t) \leq \frac{8 \log(T)}{\alpha^2}$ . We now decompose the sum above into signal arms and noise arms

$$Reg_3(T) \leq \sum_{t=1}^T \left[ \sum_{i \in \mathcal{S}_t \cap \mathcal{S}^*} \Delta_{\mathcal{S}_t} \mathbb{E} \left[ \mathbb{I} \left( \mathcal{A}(t) \cap \left\{ N_i(t) \leq \frac{8 \log(T)}{\alpha^2} \right\} \right) \right] \right] \quad (29)$$

$$+ \sum_{t=1}^T \left[ \sum_{i \in \mathcal{S}_t \setminus \mathcal{S}^*} \Delta_{\mathcal{S}_t} \mathbb{E} \left[ \mathbb{I} \left( \mathcal{A}(t) \cap \left\{ N_i(t) \leq \frac{8 \log(T)}{\alpha^2} \right\} \right) \right] \right]. \quad (30)$$

If  $i \in \mathcal{S}_t \setminus \mathcal{S}^*$ , then  $\mathcal{S}_t$  contributes to the regret but this can *only* happen  $\frac{8 \log(T)}{\alpha^2}$  times so the total regret contribution of pulling a subset  $\mathcal{S}_t$  including an arm  $i$  before  $N_i(t) > \frac{8 \log(T)}{\alpha^2}$  is bounded by  $\max_{\mathcal{S}: i \in \mathcal{S}} \frac{8 \Delta_{\mathcal{S}} \log(T)}{\alpha^2}$ . There are  $p - q^*$  noise arms  $i \notin \mathcal{S}^*$  and the term (30) can be thus bounded by  $(p - q^*) \Delta_{\max} \frac{8 \log(T)}{\alpha^2}$ .

If  $i \in \mathcal{S}^* \cap \mathcal{S}_t$ , then the arm  $i$  contributes to the regret when  $\mathcal{S}_t \neq \mathcal{S}^*$ . However, by Lemma 6 and Lemma 7 we can bound the expected number of pulls of an arm  $i$  before  $N_i(t)$  reaches  $\frac{8 \log(T)}{\alpha^2}$ . This means that the contribution to the regret when  $i \in \mathcal{S}^* \cap \mathcal{S}_t$  is bounded by  $\Delta_{\max} \left( \left\lceil \frac{8 \log(T)}{\alpha^2} \right\rceil + \left\lceil \frac{8}{\alpha} \right\rceil \left( 3 + \frac{1}{\alpha} \right) + \tilde{C} \frac{e^{-4\alpha}}{1 - e^{-\alpha^2/2}} + \frac{8}{\alpha^2} \frac{1}{e^{2\alpha} - 1} + \frac{e^{-1}}{1 - e^{-\alpha/8}} \right)$ . Because there are  $q^*$  signal arms, we can combine (29) and (30) to arrive at the bound in the statement of this lemma.  $\square$

We now put the various pieces together to finally prove Theorem ??.

**Proof:** We start by noticing that

$$\begin{aligned} \mathbb{I}[\mathcal{A}(t)] &= \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}(t)] + \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t)] \\ &= \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}(t)] + \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t)] + \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}^c(t)]. \end{aligned}$$

Now we note that  $\mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}^c(t)] = 0$  because

$$\mathcal{B}^c(t) \cap \mathcal{C}^c(t) = \{ \forall i \in \mathcal{S}^* \text{ we have } \theta_i(t) > 0.5 \text{ and } \forall i \in \mathcal{S}_t \setminus \mathcal{S}^* \text{ we have } \theta_i(t) < 0.5 \} = \mathcal{A}^c(t).$$

Thereby we can write

$$\mathbb{I}[\mathcal{A}(t)] = \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}(t)] + \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}^c(t)] + \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t)]$$

which leads to the following decomposition

$$\begin{aligned}
Reg(T) &= \sum_{t=1}^T \Delta_{\mathcal{S}_t} \mathbb{E} [\mathbb{I}(\mathcal{A}(t))] \\
&\leq \sum_{t=1}^T \mathbb{E} \left[ \Delta_{\mathcal{S}_t} \times \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}(t)] + \Delta_{\mathcal{S}_t} \times \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}(t)] \right. \\
&\quad \left. + \Delta_{\mathcal{S}_t} \times \mathbb{I}[\mathcal{A}(t) \cap \mathcal{B}^c(t) \cap \mathcal{C}(t) \cap \mathcal{D}^c(t)] \right] \\
&= Reg_1(T) + Reg_2(T) + Reg_3(T).
\end{aligned}$$

Now, we bound  $Reg_1(T)$ ,  $Reg_2(T)$  and  $Reg_3(T)$  with Lemma 2, Lemma 4, and Lemma 8. This gives us Theorem ??.

## A.1 Proof of Theorem ??

**Proof:**

Let's define the event  $\mathcal{A}(t) = \{\mathcal{S}_t \neq \mathcal{S}^*\}$ . It is sufficient to show that the probability of infinitely many events  $\mathcal{A}(t)$  occurring is zero, i.e.  $\mathbb{P} \left( \limsup_{t \rightarrow \infty} \mathcal{A}(t) \right) = 0$ . This implies that  $\mathbb{P} \left( \liminf_{t \rightarrow \infty} \{\mathcal{S}_t = \mathcal{S}^*\} \right) = 1$ . By the Borel-Cantelli Lemma, it suffices to show that

$$\sum_{t=1}^{\infty} \mathbb{P}(\mathcal{A}(t)) < \infty. \quad (31)$$

For each  $i \in \{1, \dots, p\}$  we define an event

$$\mathcal{A}_i(t) = \begin{cases} \{\theta_i(t) > 0.5\} & \text{when } i \in \mathcal{S} \setminus \mathcal{S}^* \\ \{\theta_i(t) < 0.5\} & \text{when } i \in \mathcal{S}^* \end{cases}.$$

Using the fact that

$$\mathcal{A}(t) \subseteq \bigcup_{i=1}^p \mathcal{A}_i(t) \quad (32)$$

one has

$$\left( \sum_{t=1}^{\infty} \mathbb{P}(\mathcal{A}(t)) \right) \leq \left( \sum_{t=1}^{\infty} \sum_{i=1}^p \mathbb{P}(\mathcal{A}_i(t)) \right) = \sum_{i=1}^p \sum_{t=1}^{\infty} \mathbb{P}(\mathcal{A}_i(t)).$$

We now show that the sum on the right hand side is finite, splitting the arms into the true arms  $i \in \mathcal{S}^*$  and the fake arms  $i \in \mathcal{S} \setminus \mathcal{S}^*$ .

**Lemma 9** *Under assumptions of Theorem ?? we have, for each  $i \in \mathcal{S} \setminus \mathcal{S}^*$ ,*

$$\sum_{t=1}^{\infty} \mathbb{P}(\mathcal{A}_i(t)) < 1 + \frac{4}{\alpha^2} + \frac{1}{1 - \exp(-\alpha^2/8)}.$$

**Proof:**

We can write

$$\begin{aligned}
\mathcal{A}_i(t) &= \{\theta_i(t) > 0.5\} \\
&= \{\hat{\mu}_i(t) \geq 0.5 - \alpha/2, \theta_i(t) > 0.5\} \cup \{\hat{\mu}_i(t) \leq 0.5 - \alpha/2, \theta_i(t) > 0.5\} \\
&= \{\hat{\mu}_i(t) \geq 0.5 - \alpha/2, \theta_i(t) > 0.5\} \cup \{\hat{\mu}_i(t) \leq 0.5 - \alpha/2, \theta_i(t) - \hat{\mu}_i(t) > \alpha/2, \theta_i(t) > 0.5\} \\
&\subseteq \{\hat{\mu}_i(t) \geq 0.5 - \alpha/2, \theta_i(t) > 0.5\} \cup \{\theta_i(t) - \hat{\mu}_i(t) > \alpha/2, \theta_i(t) > 0.5\}.
\end{aligned}$$

Since  $\{\theta_i(t) > 0.5\} = \{i \in \mathcal{S}_t\}$ , we first show that

$$\sum_{t=1}^{\infty} \mathbb{P}(i \in \mathcal{S}_t, \hat{\mu}_i(t) \geq 0.5 - \alpha/2) \leq 1 + \frac{4}{\alpha^2} \quad (33)$$

We can write, using our Lemma 2 in the Supplement,

$$\sum_{t=1}^{\infty} \mathbb{P}(i \in \mathcal{S}_t, \hat{\mu}_i(t) \geq 0.5 - \alpha/2) = \lim_{T \rightarrow \infty} \mathbb{E} \sum_{t=1}^T \mathbb{I}(i \in \mathcal{S}_t, \hat{\mu}_i(t) \geq 0.5 - \alpha/2) \leq 1 + \frac{4}{\alpha^2}.$$

Recall the definition of  $N_i(t) = \sum_{k < t} \mathbb{I}(i \in \mathcal{S}_k) = a_i(t) + b_i(t) - 2$  and  $\hat{\mu}_i(t) = \frac{a_i(t)-1}{N_i(t)}$ .

Now, we want to show that for any fixed  $a_i(t) \geq 1$  and  $b_i(t) \geq 1$ , we have

$$\begin{aligned}
\mathbb{P}(\theta_i(t) > \hat{\mu}_i(t) + \alpha/2) &= 1 - F_{(a_i(t), b_i(t))}^{\text{beta}}(\hat{\mu}_i(t) + \alpha/2) \\
&= 1 - (1 - F_{a_i(t)+b_i(t)-1, \hat{\mu}_i(t)+\alpha/2}(a_i(t) - 1)) \\
&\quad \text{(Using equation (11) in the Appendix)} \\
&= F_{a_i(t)+b_i(t)-1, \hat{\mu}_i(t)+\alpha/2}(\hat{\mu}_i(t)(a_i(t) + b_i(t) - 2)) \\
&\quad \text{(Using the Chernoff-Hoeffding Bound)} \\
&\leq \exp(-(a_i(t) + b_i(t) - 2)d(\hat{\mu}_i(t) + \alpha/2, \hat{\mu}_i(t))) \\
&\leq \exp(-N_i(t)\alpha^2/8)
\end{aligned}$$

Then

$$\begin{aligned}
\sum_{t=1}^{\infty} \mathbb{E}(\mathbb{I}(\{\theta_i(t) - \hat{\mu}_i(t) > \alpha/2, i \in \mathcal{S}_t\})) &\leq \sum_{N_i=0}^{\infty} \exp(-N_i\alpha^2/8) \\
&\leq \frac{1}{1 - \exp(-\alpha^2/8)}.
\end{aligned}$$

Combining the two cases, we finally obtain  $\sum_{t=1}^{\infty} \mathbb{E}(\mathbb{I}(\mathcal{A}_i(t))) < 1 + \frac{4}{\alpha^2} + \frac{1}{1 - \exp(-\alpha^2/8)}$ . ■

**Lemma 10** *Under the Assumption 1, the TVS sampling policy in Table ?? with  $C = (\sqrt{5} - 1)/2$  satisfies, for each  $i \in \mathcal{S}^*$  and for some suitable  $C(\alpha) > 0$ ,*

$$\sum_{t=1}^{\infty} \mathbb{P}(\mathcal{A}_i(t)) < C(\alpha). \quad (34)$$

**Proof:** For a signal arm  $i \in \mathcal{S}^*$  we have  $\mathcal{A}_i(t) = \{\theta_i(t) < 0.5\}$ . We recall the arguments from Lemma 6 in the Supplement. There we denoted with  $\tau_j^i$  the  $j^{th}$  time the arm  $i$  has been pulled (i.e.  $\theta_i(t) > 0.5$ ). Now, we note that in between  $[\tau_j^i + 1, \tau_{j+1}^i - 1]$  we have  $\{\theta_i(t) < 0.5\}$  since the arm  $i$  is not being pulled. One can deduce that

$$\sum_{t=0}^{\infty} \mathbb{E}(\mathbb{I}(\mathcal{A}_i(t))) = \sum_{j=0}^{\infty} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1). \quad (35)$$

Then note that using the result from Lemma 6.

$$\mathbb{E}[\tau_{j+1}^i - \tau_j^i - 1] \leq \begin{cases} 3 + \frac{1}{\alpha} & \text{when } j \leq \frac{8}{\alpha} \\ \frac{1}{e^{\alpha^2 j/4} - 1} + e^{-\alpha^2 j/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(j+1)} \right) & \text{when } j > \frac{8}{\alpha}. \end{cases} \quad (36)$$

From this expression we can immediately see that (35) is summable. Below, we provide more details on the upper bound  $C(\alpha)$  in (34).

$$\sum_{j=0}^{\infty} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) \leq \sum_{j=0}^{\lceil \frac{8}{\alpha} \rceil} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) + \sum_{j=\lceil \frac{8}{\alpha} \rceil+1}^{\lceil \frac{4}{\alpha^2} \rceil} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) + \sum_{j=\lceil \frac{4}{\alpha^2} \rceil+1}^{\infty} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1). \quad (37)$$

Then we can bound each term separately as:  $\sum_{j=0}^{\lceil \frac{8}{\alpha} \rceil} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) \leq \lceil \frac{8}{\alpha} \rceil (3 + \frac{1}{\alpha})$ ,

$$\sum_{j=\lceil \frac{8}{\alpha} \rceil+1}^{\lceil \frac{4}{\alpha^2} \rceil} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) \leq \lceil \frac{4}{\alpha^2} \rceil \left( \frac{1}{e^{\alpha^2(\lceil \frac{8}{\alpha} \rceil)/4} - 1} + e^{-\alpha^2(\lceil \frac{8}{\alpha} \rceil)/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(\lceil \frac{8}{\alpha} \rceil + 1)} \right) \right),$$

$$\sum_{j=\lceil \frac{4}{\alpha^2} \rceil+1}^{\infty} \mathbb{E}(\tau_{j+1}^i - \tau_j^i - 1) \leq \sum_{j=\lceil \frac{4}{\alpha^2} \rceil+1}^{\infty} \left[ \frac{1}{e^{\alpha^2 j/4} - 1} + e^{-\alpha^2 j/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(j+1)} \right) \right]$$

Using the fact that  $\exp(-x/2) \geq 1/(\exp(x) - 1)$  for  $x \geq 1$

$$\begin{aligned} &\leq \sum_{j=\lceil \frac{4}{\alpha^2} \rceil+1}^{\infty} \left[ e^{-\alpha^2 j/8} + e^{-\alpha^2 j/2} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(\lceil \frac{4}{\alpha^2} \rceil + 1)} \right) \right] \\ &\leq \frac{1}{1 - e^{-\alpha^2/8}} + \frac{1}{1 - e^{-\alpha^2/2}} \left( C_1 + C_2 \frac{1-2\alpha}{4\alpha^2(\lceil \frac{4}{\alpha^2} \rceil + 1)} \right). \end{aligned}$$



## B Additional Simulation Results

### B.1 Offline Cases

The Figure 1 below shows simulation results for  $p = 1000$  under the same settings as Figure 6. In addition, we report convergence diagnostics (number of iterations until convergence) for the simulation study from Section 6.1, using the convergence criterion “ $\hat{S}_t$  stays the same for 100 consecutive TVS iterations”, are included in Table 1.

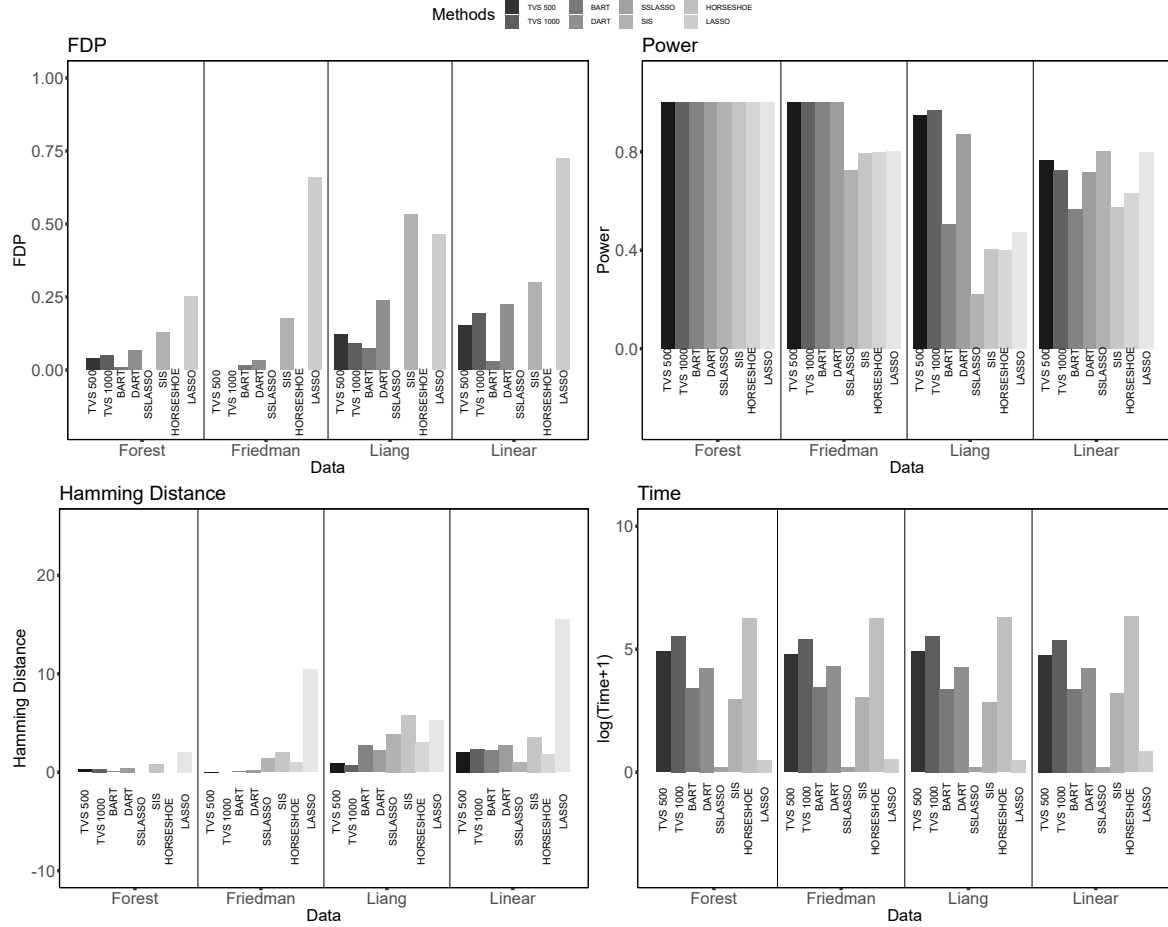


Figure 1: Graphs denoting FDP (??), Power (??), Hamming Distance (??), and Time (??) for the 4 choices of  $f_0$  assuming  $p = 1000$  and  $n = 300$ . The  $x$ -axis denotes the choice of  $f_0$  and the various methods are marked with various shades of gray. For TVS, we have two choices  $M = 500$  and  $M = 1000$ .

In addition to the convergence criterion, we tried different number of trees ( $D$ ) for DART and BART. We also considered a different variable selection rule, i.e. the Median Probability Model using the inclusion probability of BART and DART (as mentioned in Linero (2018)). Due to space constraints, we showed only the best settings for BART and DART in Section ???. The following tables present the entire simulation study and show that TVS yields better Hamming distance and computational speed gains. Tables 5-8 present the offline simulation study, one table for each data setup.

$p$	$M$	Friedman		Linear		Forest		Liang	
		Mean	SD	Mean	SD	Mean	SD	Mean	SD
1000	500	216.40	112.69	216.50	112.68	126.16	31.11	283.58	162.44
	1000	196.34	94.79	197.48	94.20	115.30	11.02	232.06	130.52
10000	500	298.04	100.51	299.58	101.01	230.14	39.74	247.20	156.05
	1000	280.46	82.96	280.28	82.98	205.10	31.86	235.74	109.29

Table 1: The table records the number of iterations needed for TVS to converge in the simulation study in Section ??.

Table 2: Linear Setup: BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1)

$p = 1000$										
Method	Convergence Criteria	M	Mean Time	SD Time	Mean FDP	SD FDP	Mean Power	SD Power	Mean Ham	SD Ham
TVS	YES	100	30.27	11.14	0.16	0.15	0.76	0.10	2.10	1.04
	NO	100	37.67	5.35	0.22	0.14	0.82	0.09	2.20	1.11
	YES	500	84.02	39.67	0.03	0.10	0.71	0.14	1.64	1.01
	NO	500	115.41	8.44	0.15	0.16	0.77	0.12	2.04	1.18
	YES	1000	147.72	71.70	0.07	0.12	0.66	0.16	2.04	0.90
	NO	1000	213.62	14.82	0.19	0.16	0.72	0.15	2.38	1.23
Avg Split/ Prob										
DART	Avg Split		38.25	2.17	0.07	0.15	0.52	0.15	2.62	0.97
	Prob		38.25	2.17	0.16	0.17	0.57	0.16	2.80	1.09
	Avg Split		83.47	4.68	0.23	0.19	0.72	0.16	2.78	1.56
	Prob		83.47	4.68	0.32	0.20	0.76	0.16	3.38	2.01
	Avg Split		281.94	34.48	0.42	0.19	0.66	0.17	4.46	1.96
	Prob		281.94	34.48	0.48	0.20	0.69	0.19	5.44	2.59
BART	Avg Split		34.93	3.13	0.03	0.10	0.57	0.15	2.24	0.87
	Prob		34.93	3.13	0.17	0.17	0.70	0.12	2.34	1.22
	Avg Split		83.39	6.19	0.03	0.08	0.66	0.15	1.82	0.83
	Prob		83.39	6.19	0.24	0.15	0.76	0.11	2.60	1.14
	Avg Split		321.77	21.53	0.06	0.11	0.72	0.11	1.68	0.77
	Prob		321.77	21.53	0.39	0.17	0.81	0.07	3.98	1.83
SSLASSO			0.40	0.06	0.00	0.00	0.80	0.10	0.98	0.51
$p=10000$										
TVS	YES	100	43.18	13.83	0.08	0.16	0.21	0.20	4.22	0.84
	NO	100	54.28	7.37	0.27	0.20	0.49	0.13	3.56	1.15
	YES	500	113.64	33.34	0.15	0.22	0.48	0.17	3.14	1.31
	NO	500	146.72	18.23	0.13	0.20	0.57	0.14	2.70	1.25
	YES	1000	184.65	52.60	0.07	0.15	0.50	0.12	2.74	0.90
	NO	1000	262.24	30.22	0.07	0.15	0.59	0.15	2.38	1.09
Avg Split/ Prob										
DART	Avg Split		251.30	30.96	0.17	0.23	0.44	0.14	3.30	1.23
	Prob		251.30	30.96	0.24	0.23	0.48	0.16	3.48	1.42
	Avg Split		544.92	79.06	0.23	0.20	0.66	0.15	2.84	1.60
	Prob		544.92	79.06	0.44	0.19	0.70	0.17	4.84	2.48
	Avg Split		1690.91	303.85	0.74	0.09	0.68	0.19	11.74	3.46
	Prob		1690.91	303.85	0.84	0.05	0.70	0.19	21.52	5.68
BART	Avg Split		238.08	54.78	0.00	0.00	0.25	0.15	3.76	0.74
	Prob		238.08	54.78	0.29	0.24	0.48	0.18	3.92	1.41
	Avg Split		542.44	104.17	0.06	0.16	0.37	0.15	3.26	0.90
	Prob		542.44	104.17	0.25	0.21	0.58	0.15	3.32	1.42
	Avg Split		2057.58	368.99	0.01	0.05	0.42	0.15	2.92	0.78
	Prob		2057.58	368.99	0.15	0.18	0.57	0.12	2.82	1.06
SSLASSO			9.59	0.61	0.00	0.00	0.45	0.09	2.74	0.44

Table 3: Liang Setup: BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1)

$p = 1000$										
Method	Convergence Criteria	M	Mean Time	SD Time	Mean FDP	SD FDP	Mean Power	SD Power	Mean Ham	SD Ham
TVS	YES	100	36.24	14.22	0.15	0.15	0.82	0.18	1.80	1.23
	NO	100	41.61	9.80	0.20	0.13	0.87	0.15	1.78	1.23
	YES	500	97.16	44.16	0.08	0.13	0.86	0.17	1.20	1.14
	NO	500	129.34	18.88	0.14	0.12	0.93	0.13	1.18	1.16
	YES	1000	143.95	81.27	0.06	0.14	0.87	0.16	1.04	1.35
	NO	1000	239.32	32.67	0.11	0.15	0.94	0.13	0.96	1.47
Avg Split/ Prob										
DART	Avg Split		42.08	6.82	0.14	0.18	0.56	0.16	2.74	1.23
	Prob		42.08	6.82	0.26	0.21	0.59	0.16	3.24	1.61
	Avg Split		91.97	14.56	0.24	0.17	0.87	0.15	2.22	1.72
	Prob		91.97	14.56	0.41	0.20	0.90	0.14	4.36	2.83
	Avg Split		285.21	46.55	0.33	0.21	0.91	0.14	3.18	2.69
	Prob		285.21	46.55	0.45	0.21	0.92	0.13	5.22	3.74
BART	Avg Split		37.46	6.25	0.06	0.13	0.50	0.16	2.70	0.99
	Prob		37.46	6.25	0.43	0.18	0.69	0.17	4.68	1.96
	Avg Split		87.44	13.23	0.09	0.15	0.62	0.17	2.28	1.13
	Prob		87.44	13.23	0.44	0.22	0.76	0.15	5.10	2.94
	Avg Split		334.66	50.66	0.01	0.06	0.58	0.16	2.16	0.87
	Prob		334.66	50.66	0.39	0.16	0.79	0.17	3.98	2.06
SSLASSO			0.35	0.05	0.00	0.00	0.22	0.08	3.90	0.42
$p=10000$										
TVS	YES	100	36.28	18.21	0.01	0.07	0.12	0.13	4.44	0.67
	NO	100	58.38	7.85	0.02	0.12	0.37	0.09	3.22	0.65
	YES	500	129.30	49.27	0.02	0.07	0.33	0.17	3.42	0.73
	NO	500	160.50	28.76	0.13	0.18	0.52	0.13	2.88	1.08
	YES	1000	215.42	77.68	0.02	0.08	0.41	0.16	3.02	0.80
	NO	1000	281.03	33.14	0.17	0.20	0.62	0.17	2.64	1.55
Avg Split/ Prob										
DART	Avg Split		264.51	45.73	0.12	0.21	0.33	0.14	3.64	1.01
	Prob		264.51	45.73	0.50	0.24	0.37	0.15	5.34	1.78
	Avg Split		568.41	105.58	0.41	0.24	0.58	0.18	4.44	2.36
	Prob		568.41	105.58	0.65	0.17	0.60	0.19	8.62	3.72
	Avg Split		1713.13	388.03	0.67	0.16	0.68	0.19	9.94	4.49
	Prob		1713.13	388.03	0.81	0.11	0.70	0.19	19.02	7.74
BART	Avg Split		235.79	48.24	0.02	0.10	0.21	0.05	3.98	0.32
	Prob		235.79	48.24	0.59	0.19	0.32	0.12	6.06	1.65
	Avg Split		538.84	103.64	0.05	0.17	0.25	0.09	3.90	0.65
	Prob		538.84	103.64	0.59	0.21	0.38	0.09	6.82	2.67
	Avg Split		2053.60	373.80	0.05	0.13	0.29	0.10	3.66	0.56
	Prob		2053.60	373.80	0.16	0.21	0.40	0.09	3.56	0.91
SSLASSO			2.45	0.22	0.00	0.00	0.20	0.00	4.00	0.00

Table 4: Friedman Setup: BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1)

$p = 1000$										
Method	Convergence Criteria	M	Mean Time	SD Time	Mean FDP	SD FDP	Mean Power	SD Power	Mean Ham	SD Ham
TVS	YES	100	31.06	12.07	0.17	0.14	0.77	0.10	2.08	1.03
	NO	100	38.42	6.13	0.23	0.14	0.82	0.10	2.26	1.14
	YES	500	86.28	41.23	0.04	0.11	0.70	0.15	1.72	1.05
	NO	500	119.10	12.98	0.16	0.16	0.77	0.13	2.08	1.21
	YES	1000	150.88	73.61	0.08	0.13	0.65	0.16	2.12	0.92
	NO	1000	221.15	24.51	0.20	0.16	0.71	0.16	2.48	1.22
Avg Split/ Prob										
DART	Avg Split		41.52	5.41	0.07	0.15	0.52	0.15	2.62	0.97
	Prob		41.52	5.41	0.17	0.17	0.57	0.16	2.80	1.09
	Avg Split		92.19	12.73	0.24	0.18	0.72	0.17	2.82	1.56
	Prob		92.19	12.73	0.33	0.19	0.76	0.17	3.46	1.99
	Avg Split		309.60	48.65	0.43	0.18	0.67	0.17	4.52	1.96
	Prob		309.60	48.65	0.49	0.19	0.69	0.19	5.52	2.56
BART	Avg Split		38.17	5.52	0.03	0.10	0.56	0.15	2.26	0.90
	Prob		38.17	5.52	0.17	0.17	0.70	0.12	2.38	1.28
	Avg Split		91.71	13.07	0.03	0.09	0.66	0.15	1.84	0.84
	Prob		91.71	13.07	0.25	0.15	0.75	0.11	2.68	1.17
	Avg Split		356.32	52.27	0.07	0.11	0.72	0.11	1.72	0.78
	Prob		356.32	52.27	0.39	0.18	0.82	0.08	4.02	1.86
SSLASSO			0.39	0.08	0.00	0.00	0.80	0.10	1.00	0.49
$p=10000$										
TVS	YES	100	42.50	13.82	0.08	0.16	0.20	0.20	4.24	0.85
	NO	100	53.41	6.40	0.26	0.20	0.50	0.12	3.50	1.15
	YES	500	113.50	35.77	0.15	0.22	0.48	0.17	3.14	1.31
	NO	500	145.87	15.29	0.13	0.20	0.57	0.14	2.70	1.25
	YES	1000	183.96	56.91	0.08	0.16	0.50	0.12	2.76	0.92
	NO	1000	259.48	26.15	0.08	0.16	0.58	0.16	2.42	1.11
Avg Split/ Prob										
DART	Avg Split		269.16	39.30	0.17	0.23	0.44	0.14	3.30	1.23
	Prob		269.16	39.30	0.24	0.23	0.48	0.16	3.48	1.42
	Avg Split		590.78	96.73	0.24	0.19	0.66	0.15	2.90	1.58
	Prob		590.78	96.73	0.45	0.19	0.70	0.17	4.92	2.45
	Avg Split		1839.84	382.64	0.74	0.09	0.69	0.19	11.78	3.45
	Prob		1839.84	382.64	0.84	0.05	0.71	0.19	21.58	5.70
BART	Avg Split		250.06	46.46	0.00	0.00	0.24	0.15	3.78	0.76
	Prob		250.06	46.46	0.29	0.24	0.47	0.18	3.94	1.42
	Avg Split		573.10	104.74	0.06	0.16	0.36	0.14	3.30	0.89
	Prob		573.10	104.74	0.26	0.21	0.58	0.15	3.34	1.41
	Avg Split		2211.11	394.91	0.01	0.05	0.42	0.15	2.92	0.78
	Prob		2211.11	394.91	0.14	0.18	0.56	0.12	2.82	1.06
SSLASSO			9.38	0.64	0.00	0.00	0.45	0.09	2.76	0.43

Table 5: Forest Setup: BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1)

$p = 1000$										
Method	Convergence Criteria	M	Mean Time	SD Time	Mean FDP	SD FDP	Mean Power	SD Power	Mean Ham	SD Ham
TVS	YES	100	18.34	12.51	0.00	0.02	1.00	0.00	0.02	0.14
	NO	100	39.30	3.53	0.05	0.08	1.00	0.00	0.32	0.51
	YES	500	45.56	34.00	0.01	0.04	1.00	0.00	0.06	0.24
	NO	500	126.55	10.66	0.06	0.09	1.00	0.00	0.36	0.56
	YES	1000	84.82	67.87	0.00	0.02	1.00	0.00	0.02	0.14
	NO	1000	235.24	19.79	0.08	0.10	1.00	0.00	0.50	0.61
Avg Split/ Prob										
DART	Avg Split		42.52	5.71	0.00	0.00	0.99	0.04	0.04	0.20
	Prob		42.52	5.71	0.00	0.02	1.00	0.00	0.02	0.14
	Avg Split		91.69	12.63	0.07	0.09	1.00	0.00	0.44	0.61
	Prob		91.69	12.63	0.17	0.15	1.00	0.00	1.24	1.20
	Avg Split		302.68	51.01	0.33	0.14	1.00	0.00	2.78	1.59
	Prob		302.68	51.01	0.42	0.14	1.00	0.00	4.14	2.00
BART	Avg Split		38.90	6.03	0.01	0.05	1.00	0.00	0.06	0.31
	Prob		38.90	6.03	0.24	0.15	1.00	0.00	1.88	1.52
	Avg Split		92.01	13.74	0.02	0.06	1.00	0.00	0.14	0.35
	Prob		92.01	13.74	0.39	0.17	1.00	0.00	3.94	2.82
	Avg Split		355.26	55.65	0.03	0.06	1.00	0.00	0.18	0.39
	Prob		355.26	55.65	0.52	0.11	1.00	0.00	5.86	2.33
SSLASSO			0.36	0.08	0.00	0.00	1.00	0.00	0.00	0.00
$p = 10000$										
TVS	YES	100	38.14	10.73	0.00	0.00	0.78	0.34	1.12	1.72
	NO	100	57.82	7.10	0.00	0.00	0.98	0.07	0.12	0.33
	YES	500	85.29	16.72	0.00	0.00	0.96	0.09	0.18	0.44
	NO	500	158.70	17.03	0.00	0.02	0.99	0.04	0.06	0.24
	YES	1000	143.99	41.27	0.00	0.00	0.97	0.08	0.14	0.40
	NO	1000	282.44	30.03	0.01	0.05	1.00	0.03	0.10	0.36
Avg Split/ Prob										
DART	Avg Split		262.89	38.21	0.00	0.00	0.94	0.10	0.28	0.50
	Prob		262.89	38.21	0.02	0.06	0.98	0.06	0.22	0.46
	Avg Split		585.06	100.00	0.15	0.14	1.00	0.00	1.10	1.15
	Prob		585.06	100.00	0.41	0.13	1.00	0.00	3.82	1.79
	Avg Split		1868.72	308.73	0.69	0.09	1.00	0.00	12.00	3.81
	Prob		1868.72	308.73	0.81	0.05	1.00	0.00	22.84	6.44
BART	Avg Split		251.37	53.89	0.00	0.00	0.76	0.17	1.20	0.86
	Prob		251.37	53.89	0.28	0.17	0.99	0.05	2.34	1.85
	Avg Split		571.27	115.64	0.01	0.05	0.95	0.12	0.32	0.62
	Prob		571.27	115.64	0.38	0.15	1.00	0.00	3.54	2.06
	Avg Split		2206.52	426.63	0.00	0.00	1.00	0.03	0.02	0.14
	Prob		2206.52	426.63	0.09	0.12	1.00	0.00	0.62	0.85
SSLASSO			2.99	0.72	0.00	0.00	0.90	0.15	0.52	0.74

## B.2 Online Cases

In Table 6, we report convergence diagnostics of the simulation from Section 6.2, where the convergence criterion is chosen as “ $\hat{S}_t$  stays the same for 100 consecutive TVS iterations”. Table 10,12,14 and 16 report the results with 10 000, comparing TVS with BART. These results show that TVS at the very least highly competitive with DART in terms of Hamming distance but offers vast computational benefits compared to BART and DART. Tables 11, 13,15 and 17 report TVS results with  $n = 50\,000$  and  $n = 100\,000$ . We could not run BART on these large datasets and thereby we report only on TVS.

$n$	$M$	$s$	Friedman		Forest		Linear		Liang	
			Mean	SD	Mean	SD	Mean	SD	Mean	SD
10 000	500	500	9.40	2.74	6.56	1.16	9.40	2.74	10.00	1.60
	1000	500	8.32	1.32	6.06	0.24	8.32	1.32	8.54	1.31
	500	1000	23.46	7.99	13.64	2.94	23.46	7.99	18.14	3.83
	1000	100	21.14	7.15	12.44	2.15	21.14	7.15	15.58	2.92
50 000	500	500	2.42	0.76	2.00	0.00	2.42	0.76	2.28	0.45
	1000	500	2.14	0.35	2.00	0.00	2.14	0.35	2.12	0.33
	500	1000	4.94	1.75	3.10	0.36	4.94	1.75	4.04	0.83
	1000	100	4.10	1.25	3.08	0.27	4.10	1.25	3.48	0.71
100 000	500	500	1.20	0.45	1.00	0.00	1.22	0.46	1.38	0.49
	1000	500	1.18	0.39	1.00	0.00	1.18	0.39	1.10	0.30
	500	1000	2.72	0.73	2.04	0.20	2.74	0.72	2.24	0.48
	1000	100	2.66	0.87	2.04	0.20	2.64	0.88	2.14	0.35

Table 6: The table records the number of rounds needed for TVS to converge in the simulation study in Section ??.

In addition to the results shown in Section 6.2, we tried a different number of trees  $D$  for DART and BART. We also considered a different variable selection rule, i.e. the Median Probability Model using the inclusion probability of BART and DART (as mentioned in Linero (2018)). Due to space constraints, we showed only the best settings for BART and DART in Section ??. Now we present additional simulation results for  $n = 50\,000$  and  $n = 100\,000$ . Since BART and DART cannot be run with such large  $n$ , we only show the results for TVS.

Table 7: Linear Setup with  $n = 10\,000$ , BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1);  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham
TVS	500	500	Till Converge	52.80	12.24	0.00	0.02	1.00	0.00	0.02	0.14
	500	500	1	8.33	1.21	0.00	0.00	0.96	0.09	0.18	0.44
	500	500	5	40.29	5.31	0.00	0.00	1.00	0.00	0.00	0.00
	500	500	10	79.77	10.26	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	Till Converge	88.68	11.37	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	1	14.79	1.95	0.00	0.00	0.98	0.05	0.08	0.27
	1000	500	5	73.30	9.15	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	10	145.98	18.12	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	Till Converge	91.11	23.10	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	1	6.42	1.01	0.03	0.09	0.69	0.19	1.68	1.00
	500	1000	5	33.02	5.05	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	10	66.82	9.69	0.00	0.02	1.00	0.00	0.02	0.14
	1000	1000	Till Converge	152.94	33.50	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	1	11.15	1.61	0.02	0.05	0.83	0.15	0.94	0.77
	1000	1000	5	60.73	8.66	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	10	122.70	16.98	0.00	0.02	1.00	0.00	0.02	0.14
	D	Avg Split / Prob									
DART	10	Avg Split		67.86	11.51	0.00	0.02	0.98	0.06	0.12	0.33
	10	Prob		196.43	43.41	0.00	0.00	1.00	0.00	0.00	0.00
	50	Avg Split		12.77	2.04	0.15	0.25	0.45	0.18	3.30	1.49
	50	Prob		196.80	43.34	0.00	0.00	1.00	0.00	0.00	0.00
	200	Avg Split		61.14	9.85	0.00	0.00	0.94	0.10	0.30	0.51
	200	Prob		196.89	43.85	0.00	0.00	1.00	0.00	0.00	0.00
BART	10	Avg Split		125.31	19.75	0.00	0.02	0.98	0.05	0.10	0.30
	10	Prob		949.38	128.93	0.63	0.06	1.00	0.00	9.00	2.18
	50	Avg Split		1715.54	218.52	0.37	0.13	1.00	0.00	3.32	1.66
	50	Prob		1715.54	218.52	0.66	0.06	1.00	0.00	10.26	2.95
	200	Avg Split		5717.13	529.43	0.29	0.14	1.00	0.00	2.36	1.43
	200	Prob		5717.13	529.43	0.73	0.06	1.00	0.00	14.38	3.76
SSLASSO				9.40	0.93	0.00	0.02	1.00	0.00	0.02	0.14
Alpha				4.98	0.17	0.04	0.09	1.00	0.00	0.28	0.61

## C Additional Results for the HIV Dataset

In this section, we show additional results on the analysis of the HIV dataset. First, we present some basic statistics about the data. The entire data comes from Stanford HIV Drug Resistance Database. The raw data can be downloaded from [https://hivdb.stanford.edu/pages/published\\_analysis/genophenoPNAS2006/](https://hivdb.stanford.edu/pages/published_analysis/genophenoPNAS2006/). Barber et al. (2015) published cleaning codes (available at <https://web.stanford.edu/group/candes/knockoffs/software/knockoffs/tutorial-4-r.html>) which we adopt. We provide a basic overview of the dataset in Table 15.

In Section ??, we illustrated TVS on only the drug LPV. Here, we present the rest of the results. As is done in Barber et al. (2015), we record both the number of verified positions discovered (True Discoveries) and the number of discovered unverified positions (False Discoveries) for each of the five methods.

Table 8: Linear Setup with  $n = 50\,000$  and  $n = 100\,000$ ;  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

$n = 50\,000$												
Method	$M$	$s$	$r$	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham	
TVS	500	500	Till Converge	89.20	31.75	0.00	0.00	0.82	0.07	0.92	0.34	
	500	500	1	37.34	5.51	0.04	0.08	0.76	0.11	1.38	0.64	
	500	500	5	181.80	26.01	0.00	0.00	0.88	0.10	0.60	0.49	
	500	500	10	364.25	51.93	0.00	0.00	0.96	0.08	0.18	0.39	
	1000	500	Till Converge	140.49	31.04	0.00	0.00	0.80	0.03	0.98	0.14	
	1000	500	1	66.15	9.06	0.00	0.00	0.76	0.08	1.22	0.42	
	1000	500	5	326.66	43.50	0.00	0.00	0.88	0.10	0.60	0.49	
	1000	500	10	656.69	85.25	0.00	0.00	0.97	0.07	0.16	0.37	
	500	1000	Till Converge	150.23	63.39	0.09	0.08	0.96	0.08	0.70	0.46	
	500	1000	1	29.93	4.74	0.08	0.11	0.76	0.13	1.56	0.76	
	500	1000	5	151.28	21.95	0.09	0.08	0.98	0.05	0.60	0.49	
	500	1000	10	304.49	43.17	0.14	0.07	1.00	0.03	0.84	0.42	
	1000	1000	Till Converge	220.03	65.18	0.02	0.05	0.96	0.08	0.30	0.46	
	1000	1000	1	53.29	7.90	0.04	0.08	0.81	0.14	1.14	0.67	
	1000	1000	5	270.67	37.17	0.02	0.05	0.99	0.04	0.14	0.35	
	1000	1000	10	545.72	72.54	0.02	0.06	1.00	0.00	0.14	0.35	
$n = 100\,000$												
TVS	500	500	Till Converge	93.14	39.67	0.00	0.02	0.82	0.07	0.92	0.34	
	500	500	1	76.60	12.54	0.00	0.02	0.81	0.06	0.96	0.28	
	500	500	5	379.48	58.92	0.00	0.00	0.99	0.05	0.06	0.24	
	500	500	10	764.01	116.22	0.00	0.00	1.00	0.03	0.02	0.14	
	1000	500	Till Converge	159.10	55.08	0.00	0.00	0.80	0.06	1.00	0.29	
	1000	500	1	135.46	19.98	0.00	0.00	0.79	0.04	1.04	0.20	
	1000	500	5	677.18	98.13	0.00	0.00	0.95	0.09	0.26	0.44	
	1000	500	10	1363.99	200.85	0.00	0.00	0.99	0.05	0.06	0.24	
	500	1000	Till Converge	173.36	60.13	0.07	0.08	0.97	0.07	0.58	0.57	
	500	1000	1	62.23	10.77	0.06	0.09	0.84	0.13	1.12	0.77	
	500	1000	5	315.53	51.68	0.13	0.07	1.00	0.00	0.78	0.42	
	500	1000	10	635.09	102.95	0.15	0.05	1.00	0.00	0.92	0.27	
	1000	1000	Till Converge	293.65	96.59	0.01	0.04	0.98	0.05	0.14	0.35	
	1000	1000	1	111.14	18.43	0.01	0.05	0.90	0.11	0.60	0.61	
	1000	1000	5	566.08	85.57	0.03	0.06	1.00	0.00	0.18	0.39	
	1000	1000	10	1140.65	166.47	0.09	0.08	1.00	0.00	0.52	0.50	

Table 16: PI Drugs

Methods	Knockoff	LASSO	DART	SSLASSO	TVS
APV					
True Discoveries	19	20	16	8	18
False Discoveries	3	3	0	0	1
ATV					
True Discoveries	22	29	19	6	20
False Discoveries	8	20	0	0	0
IDV					
True Discoveries	19	28	18	5	17
False Discoveries	12	24	3	0	4
LPV					
True Discoveries	16	30	15	4	17
False Discoveries	1	22	1	0	1
NFV					
True Discoveries	21	23	19	6	20
False Discoveries	2	2	2	0	3
RTV					
True Discoveries	19	34	16	4	18
False Discoveries	8	29	4	0	3
SQV					
True Discoveries	17	22	17	5	17
False Discoveries	4	8	1	0	2



Table 9: Liang Setup with  $n = 10000$ , BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1);  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham
TVS	500	500	Till Converge	80.68	18.66	0.00	0.02	0.99	0.04	0.06	0.24
	500	500	1	9.16	1.55	0.02	0.08	0.38	0.14	3.12	0.75
	500	500	5	39.81	6.38	0.00	0.00	0.92	0.11	0.40	0.57
	500	500	10	79.97	12.62	0.00	0.00	0.99	0.05	0.06	0.24
	1000	500	Till Converge	125.43	30.63	0.00	0.00	0.99	0.05	0.06	0.24
	1000	500	1	15.31	2.49	0.01	0.07	0.53	0.18	2.40	0.93
	1000	500	5	72.52	10.90	0.00	0.00	0.97	0.07	0.14	0.35
	1000	500	10	146.75	21.39	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	Till Converge	124.65	37.15	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	1	7.53	1.33	0.23	0.25	0.34	0.15	4.04	1.14
	500	1000	5	33.59	5.93	0.00	0.02	0.84	0.14	0.80	0.70
	500	1000	10	67.86	11.51	0.00	0.02	0.98	0.06	0.12	0.33
	1000	1000	Till Converge	196.43	43.41	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	1	12.77	2.04	0.15	0.25	0.45	0.18	3.30	1.49
	1000	1000	5	61.14	9.85	0.00	0.00	0.94	0.10	0.30	0.51
	1000	1000	10	125.31	19.75	0.00	0.02	0.98	0.05	0.10	0.30
	D	Avg Split / Prob									
DART	10	Avg Split		965.45	151.88	0.85	0.05	0.58	0.18	19.10	3.31
	10	Prob		965.45	151.88	0.87	0.04	0.58	0.18	22.90	4.07
	50	Avg Split		1647.39	110.13	0.55	0.18	0.98	0.05	7.76	4.63
	50	Prob		1647.39	110.13	0.67	0.14	0.98	0.05	11.86	5.27
	200	Avg Split		4695.72	626.39	0.27	0.19	1.00	0.00	2.48	2.60
	200	Prob		4695.72	626.39	0.42	0.20	1.00	0.00	5.18	5.29
BART	10	Avg Split		1525.58	221.31	0.71	0.07	1.00	0.00	13.22	3.77
	10	Prob		1525.58	221.31	0.91	0.01	1.00	0.00	48.66	6.26
	50	Avg Split		2315.53	294.10	0.71	0.07	1.00	0.00	13.34	4.35
	50	Prob		2315.53	294.10	0.91	0.01	1.00	0.00	52.74	9.04
	200	Avg Split		5801.02	605.46	0.74	0.05	1.00	0.00	15.34	3.92
	200	Prob		5801.02	605.46	0.90	0.01	1.00	0.00	46.92	6.89
SSLASSO				16.14	1.64	0.00	0.00	0.60	0.00	2.00	0.00
Alpha				4.91	0.66	0.00	0.00	0.62	0.05	1.92	0.27

Table 17: NRTI Drugs

Methods	Knockoff	LASSO	DART	SSLASSO	TVS
ABC					
True Discoveries	10	15	10	11	14
False Discoveries	1	7	4	3	6
AZT					
True Discoveries	16	23	15	5	18
False Discoveries	4	51	5	0	8
D4T					
True Discoveries	6	13	13	12	13
False Discoveries	1	2	5	4	6
DDI					
True Discoveries	0	23	11	17	12
False Discoveries	0	34	6	7	6
TDF					
True Discoveries	0	13	14	7	12
False Discoveries	0	9	7	1	6
X3TC					
True Discoveries	0	14	11	1	11
False Discoveries	0	8	4	0	6

Table 10: Liang Setup with  $n = 50\,000$  and  $n = 100\,000$ ;  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

n = 50000												
Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham	
TVS	500	500	Till Converge	92.32	20.87	0.00	0.00	0.99	0.05	0.06	0.24	
	500	500	1	40.68	6.15	0.00	0.00	0.90	0.13	0.52	0.65	
	500	500	5	203.82	29.86	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	10	410.74	59.11	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	157.52	33.75	0.00	0.00	0.98	0.07	0.08	0.34	
	1000	500	1	73.48	10.50	0.00	0.00	0.96	0.10	0.20	0.49	
	1000	500	5	376.54	51.66	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	759.76	103.03	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	139.35	33.68	0.00	0.00	0.99	0.05	0.06	0.24	
	500	1000	1	33.99	5.70	0.00	0.00	0.82	0.16	0.88	0.82	
	500	1000	5	172.82	26.65	0.00	0.02	1.00	0.03	0.04	0.20	
	500	1000	10	348.24	53.31	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	Till Converge	221.64	57.18	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	1	61.49	10.03	0.00	0.00	0.96	0.08	0.20	0.40	
	1000	1000	5	320.88	47.84	0.01	0.03	1.00	0.00	0.04	0.20	
	1000	1000	10	649.88	92.55	0.00	0.02	1.00	0.00	0.02	0.14	
n = 100000												
TVS	500	500	Till Converge	120.82	49.24	0.00	0.00	0.99	0.04	0.04	0.20	
	500	500	1	86.77	13.57	0.00	0.00	0.99	0.05	0.06	0.24	
	500	500	5	438.57	66.16	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	10	883.47	129.33	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	175.25	59.12	0.00	0.00	0.99	0.04	0.04	0.20	
	1000	500	1	158.25	22.10	0.00	0.00	0.99	0.04	0.04	0.20	
	1000	500	5	807.36	109.70	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	1625.51	219.19	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	167.40	46.18	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	1	74.04	11.86	0.01	0.03	0.98	0.06	0.14	0.35	
	500	1000	5	374.54	56.43	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	10	752.86	112.17	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	Till Converge	293.39	68.52	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	1	134.11	20.44	0.00	0.00	0.98	0.05	0.08	0.27	
	1000	1000	5	690.95	96.24	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	10	1380.91	192.17	0.00	0.00	1.00	0.00	0.00	0.00	

Table 18: NNRTI Drugs

Methods	Knockoff	LASSO	DART	SSLASSO	TVS
DLV					
True Discoveries	10	11	9	3	9
False Discoveries	14	31	6	1	9
EFV					
True Discoveries	11	14	10	5	11
False Discoveries	11	83	5	0	6
NVP					
True Discoveries	7	14	8	6	9
False Discoveries	10	87	6	0	11

Table 11: Friedman Setup with  $n = 10\,000$ , BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1);  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham
TVS	500	500	Till Converge	46.26	6.71	0.00	0.00	1.00	0.00	0.00	0.00
	500	500	1	7.42	0.50	0.00	0.00	0.94	0.10	0.32	0.51
	500	500	5	35.04	2.46	0.00	0.00	1.00	0.00	0.00	0.00
	500	500	10	69.44	5.05	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	Till Converge	80.81	6.85	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	1	13.08	1.01	0.00	0.00	0.98	0.06	0.10	0.30
	1000	500	5	65.29	4.65	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	10	129.90	9.27	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	Till Converge	110.23	41.32	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	1	6.46	0.50	0.07	0.12	0.86	0.15	1.08	1.16
	500	1000	5	32.55	2.33	0.01	0.04	1.00	0.00	0.06	0.24
	500	1000	10	65.30	4.27	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	Till Converge	181.50	50.55	0.00	0.02	1.00	0.00	0.02	0.14
	1000	1000	1	11.51	0.87	0.04	0.08	0.94	0.11	0.56	0.70
	1000	1000	5	60.74	4.40	0.00	0.02	1.00	0.03	0.04	0.20
	1000	1000	10	122.46	8.51	0.00	0.00	1.00	0.00	0.00	0.00
	D	Avg Split /Prob									
DART	10	Avg Split		1022.94	194.68	0.72	0.16	0.89	0.12	15.62	7.70
	10	Prob		1022.94	194.68	0.80	0.08	0.90	0.12	21.00	7.48
	50	Avg Split		1442.99	136.58	0.02	0.05	1.00	0.00	0.12	0.33
	50	Prob		1442.99	136.58	0.08	0.14	1.00	0.00	0.66	1.61
	200	Avg Split		4939.07	788.75	0.00	0.00	1.00	0.00	0.00	0.00
	200	Prob		4939.07	788.75	0.01	0.05	1.00	0.00	0.06	0.31
BART	10	Avg Split		1751.38	274.31	0.80	0.06	1.00	0.00	21.70	6.53
	10	Prob		1751.38	274.31	0.89	0.02	1.00	0.00	43.30	9.50
	50	Avg Split		1861.83	229.61	0.24	0.13	1.00	0.00	1.80	1.20
	50	Prob		1861.83	229.61	0.57	0.11	1.00	0.00	7.44	3.47
	200	Avg Split		6009.07	892.87	0.21	0.14	1.00	0.00	1.56	1.26
	200	Prob		6009.07	892.87	0.70	0.08	1.00	0.00	12.54	4.08
SSLASSO				16.75	2.62	0.00	0.00	0.80	0.00	1.00	0.00
Alpha				4.96	0.91	0.03	0.08	0.81	0.05	1.10	0.51

## D Details ont the Marketing Data

### Summary of Predictor Variables

Table 12: Friedman Setup with  $n = 50\,000$  and  $n = 100\,000$ ;  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

n = 50000												
Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham	
TVS	500	500	Till Converge	71.12	8.71	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	1	35.49	3.52	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	5	174.43	16.98	0.00	0.02	1.00	0.00	0.02	0.14	
	500	500	10	347.30	35.24	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	130.57	13.44	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	1	65.60	6.82	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	5	324.83	33.21	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	647.04	65.02	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	122.22	45.41	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	1	32.26	3.27	0.01	0.03	1.00	0.00	0.04	0.20	
	500	1000	5	162.98	16.85	0.00	0.02	1.00	0.00	0.02	0.14	
	500	1000	10	325.19	32.44	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	Till Converge	227.68	73.92	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	1	60.99	7.37	0.00	0.02	1.00	0.03	0.04	0.20	
	1000	1000	5	307.25	31.56	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	10	612.30	60.46	0.00	0.02	1.00	0.00	0.02	0.14	
n = 100000												
TVS	500	500	Till Converge	70.27	6.16	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	1	70.27	6.16	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	5	344.26	28.89	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	10	680.12	48.41	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	127.92	9.35	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	1	127.92	9.35	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	5	635.11	46.23	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	1266.57	94.32	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	160.84	45.59	0.01	0.05	1.00	0.00	0.08	0.27	
	500	1000	1	63.31	4.11	0.01	0.03	1.00	0.00	0.04	0.20	
	500	1000	5	316.52	20.79	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	10	633.90	37.48	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	Till Converge	272.04	68.80	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	1	119.85	7.15	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	5	599.73	35.98	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	10	1192.89	68.52	0.00	0.02	1.00	0.00	0.02	0.14	

Name	Indicator	Mean	Sd	Max	Min	Skewness
mail indicator	1	0.50	NA	NA	NA	NA
largest sale amount	0	169.02	286.77	7999.99	-3999.99	4.63
count of product categories that make up 20% or more of total sales	0	2.15	0.37	4.00	2.00	2.10
number of months since first esp or first esp return	0	30.14	16.05	60.00	2.00	0.17
number of months since most recent esp purchase or return	0	23.00	14.22	60.00	2.00	0.60
day of first purchase: weekend day	1	0.37	NA	NA	NA	NA
day of first purchase: weekday day	1	0.63	NA	NA	NA	NA
total number of sales in previous 12 months	0	5.09	4.76	189.00	2.00	5.79
total number of sales in previous 24 months	0	5.95	6.16	270.00	2.00	6.23
total number of sales in previous 36 months	0	6.53	7.10	344.00	2.00	6.44
total number of large ticket items in previous 12 months	0	2.37	0.94	21.00	2.00	6.95
total number of large ticket items in previous 24 months	0	2.50	1.08	32.00	2.00	5.79
total number of large ticket items in previous 36 months	0	2.58	1.24	46.00	2.00	6.94
total number of large ticket items in previous 60 months	0	2.80	1.47	50.00	-1.00	5.37
total number of medium ticket items in previous 12 months	0	3.06	1.92	46.00	2.00	4.62
total number of medium ticket items in previous 24 months	0	3.43	2.49	81.00	2.00	5.10
total number of medium ticket items in previous 36 months	0	3.71	2.90	124.00	2.00	5.48
total number of medium ticket items in previous 60 months	0	4.36	3.68	198.00	2.00	6.39
total number of small ticket items in previous 12 months	0	4.49	7.83	507.00	2.00	34.98
total number of small ticket items in previous 24 months	0	5.14	10.18	667.00	2.00	29.59
total number of small ticket items in previous 36 months	0	5.54	10.73	667.00	2.00	25.12
total number of small ticket items in previous 60 months	0	6.55	12.73	673.00	2.00	20.36
total sales amount in previous 12 months	0	524.90	766.12	18380.40	-437.80	4.31
total sales amount in previous 24 months	0	650.24	935.70	33664.26	-250.01	4.36
count of unique categories in previous 12 months	0	2.94	1.28	12.00	2.00	1.78
count of unique categories in previous 24 months	0	3.15	1.47	12.00	2.00	1.62
count of unique class numbers in previous 12 months	0	4.13	2.84	55.00	2.00	3.00
count of unique class numbers in previous 24 months	0	4.74	3.58	60.00	2.00	3.00
percent gift cards category sales of total sales	0	0.09	0.13	1.03	0.00	3.22

Table 13: Forest Setup with  $n = 10\,000$ , BART and DART are implemented using **Prob** (median probability model) rule or **Avg Split** (truncating the importance measure at 1);  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham
TVS	500	500	Till Converge	52.80	12.24	0.00	0.02	1.00	0.00	0.02	0.14
	500	500	1	8.33	1.21	0.00	0.00	0.96	0.09	0.18	0.44
	500	500	5	40.29	5.31	0.00	0.00	1.00	0.00	0.00	0.00
	500	500	10	79.77	10.26	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	Till Converge	88.68	11.37	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	1	14.79	1.95	0.00	0.00	0.98	0.05	0.08	0.27
	1000	500	5	73.30	9.15	0.00	0.00	1.00	0.00	0.00	0.00
	1000	500	10	145.98	18.12	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	Till Converge	91.11	23.10	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	1	6.42	1.01	0.03	0.09	0.69	0.19	1.68	1.00
	500	1000	5	33.02	5.05	0.00	0.00	1.00	0.00	0.00	0.00
	500	1000	10	66.82	9.69	0.00	0.02	1.00	0.00	0.02	0.14
	1000	1000	Till Converge	152.94	33.50	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	1	11.15	1.61	0.02	0.05	0.83	0.15	0.94	0.77
	1000	1000	5	60.73	8.66	0.00	0.00	1.00	0.00	0.00	0.00
	1000	1000	10	122.70	16.98	0.00	0.02	1.00	0.00	0.02	0.14
	D	Avg Split / Prob									
DART	10	Avg Split		509.13	65.73	0.13	0.13	0.93	0.10	1.14	1.14
	10	Prob		509.13	65.73	0.14	0.14	0.93	0.10	1.22	1.17
	50	Avg Split		1132.98	190.56	0.16	0.16	1.00	0.00	1.18	1.34
	50	Prob		1132.98	190.56	0.32	0.16	1.00	0.00	2.78	1.80
	200	Avg Split		4028.27	931.10	0.59	0.09	1.00	0.00	7.76	2.92
	200	Prob		4028.27	931.10	0.68	0.07	1.00	0.00	11.18	3.35
BART	10	Avg Split		1099.59	270.16	0.34	0.16	1.00	0.00	3.08	1.91
	10	Prob		1099.59	270.16	0.68	0.05	1.00	0.00	11.14	2.60
	50	Avg Split		1857.85	280.43	0.47	0.15	1.00	0.00	5.08	2.30
	50	Prob		1857.85	280.43	0.82	0.03	1.00	0.00	23.26	3.86
	200	Avg Split		5620.33	847.79	0.83	0.03	1.00	0.00	25.50	4.81
	200	Prob		5620.33	847.79	0.91	0.01	1.00	0.00	53.72	6.32
SSLASSO				1.26	0.16	0.00	0.00	1.00	0.00	0.00	0.00
Alpha				5.03	1.08	0.11	0.13	1.00	0.00	0.78	1.02

Name	Indicator	Mean	Sd	Max	Min	Skewness
total number of weekend items in previous 12 months	0	4.15	5.18	403.00	2.00	40.58
total number of weekend items in previous 24 months	0	4.62	6.76	504.00	2.00	34.99
total christmas sales amount in previous 12 months	0	379.85	560.04	9877.93	-660.00	4.33
total christmas sales amount in previous 24 months	0	430.10	611.41	10500.09	-660.00	4.05
total christmas items in previous 12 months	0	4.13	6.63	506.00	2.00	44.49
total christmas items in previous 24 months	0	4.46	7.03	506.00	2.00	41.25
total amount of back to school sales in previous 12 months	0	396.37	619.21	10159.37	-150.00	4.23
total amount of back to school sales in previous 24 months	0	416.13	623.76	10159.37	-485.02	3.93
total amount of graduation sales in previous 12 months	0	376.62	564.66	13670.70	-200.00	5.34
total amount of graduation sales in previous 24 months	0	405.84	585.14	13678.65	-252.00	4.33
total spring sales amount in previous 12 months	0	381.35	567.06	13190.30	-308.90	4.63
total spring sales amount in previous 24 months	0	421.00	612.91	13190.30	-340.00	4.31
total summer sales amount in previous 12 months	0	407.91	623.00	13205.62	-300.00	4.51
total summer sales amount in previous 24 months	0	439.29	643.85	17671.37	-300.00	4.23
total autumn sales amount in previous 12 months	0	401.56	616.92	10650.45	-437.80	4.12
total autumn sales amount in previous 24 months	0	447.43	663.93	11819.31	-372.00	4.05
total winter sales amount in previous 24 months	0	453.60	645.40	13921.45	-189.99	4.02
total spring items in previous 12 months	0	4.02	4.72	325.00	2.00	30.25
total spring items in previous 24 months	0	4.35	5.95	400.00	2.00	28.17
total summer items in previous 12 months	0	4.44	4.79	362.00	2.00	32.61
total summer items in previous 24 months	0	4.69	7.63	504.00	2.00	38.59
total autumn items in previous 12 months	0	4.20	7.47	501.00	2.00	41.44
total autumn items in previous 24 months	0	4.46	7.51	501.00	2.00	42.06
total winter items in previous 12 months	0	4.12	5.76	506.00	2.00	48.15
total winter items in previous 24 months	0	4.54	6.97	506.00	2.00	38.14
total count of back to school items in previous 12 months	0	4.29	5.38	362.00	2.00	38.67
total count of back to school items in previous 24 months	0	4.41	7.12	502.00	2.00	36.16
total count of graduation items in previous 12 months	0	4.15	3.83	190.00	2.00	14.61

Table 14: Forest Setup with  $n = 50\,000$  and  $n = 100\,000$ ;  $s$  is the batch size,  $r$  is the number of rounds and  $M$  is the number of internal MCMC iterations in TVS.

$n = 50\,000$												
Method	M	s	r	Mean Time	SD Time	Mean FDR	SD FDR	Mean Power	SD Power	Mean Ham	SD Ham	
TVS	500	500	Till Converge	90.28	13.28	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	1	45.60	6.80	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	5	224.06	32.44	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	10	446.61	63.34	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	163.70	22.66	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	1	82.49	11.65	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	5	408.11	55.52	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	812.39	111.83	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	117.99	23.19	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	1	37.73	6.62	0.00	0.02	0.99	0.04	0.06	0.24	
	500	1000	5	189.66	30.05	0.00	0.02	1.00	0.00	0.02	0.14	
	500	1000	10	377.06	60.06	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	Till Converge	211.24	31.96	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	1	68.27	11.64	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	5	341.68	54.73	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	10	676.40	105.33	0.00	0.02	1.00	0.00	0.02	0.14	
$n = 100\,000$												
TVS	500	500	Till Converge	81.54	11.43	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	1	81.54	11.43	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	5	398.59	49.39	0.00	0.00	1.00	0.00	0.00	0.00	
	500	500	10	796.94	98.24	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	Till Converge	146.05	17.39	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	1	146.05	17.39	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	5	718.56	79.50	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	500	10	1457.97	130.28	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	Till Converge	142.28	20.80	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	1	69.61	8.27	0.00	0.02	1.00	0.00	0.02	0.14	
	500	1000	5	348.10	37.10	0.00	0.00	1.00	0.00	0.00	0.00	
	500	1000	10	692.50	72.61	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	Till Converge	256.28	40.84	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	1	125.82	14.09	0.00	0.02	1.00	0.00	0.02	0.14	
	1000	1000	5	622.97	59.21	0.00	0.00	1.00	0.00	0.00	0.00	
	1000	1000	10	1251.07	133.65	0.00	0.00	1.00	0.00	0.00	0.00	

## References

- Agrawal, S. and N. Goyal (2012). Analysis of Thompson sampling for the multi-armed bandit problem. In *Conference on Learning Theory*.
- Barber, R. F., E. J. Candès, et al. (2015). Controlling the false discovery rate via knockoffs. *The Annals of Statistics* 43(5), 2055–2085.
- Jeřábek, E. (2004). Dual weak pigeonhole principle, boolean complexity, and derandomization. *Annals of Pure and Applied Logic* 129(1-3), 1–37.
- Komiyama, J., J. Honda, and H. Nakagawa (2015). Optimal regret analysis of thompson sampling in stochastic multi-armed bandit problem with multiple plays. In *International Conference on Machine Learning*.
- Linero, A. R. (2018). Bayesian regression trees for high-dimensional prediction and variable selection. *Journal of the American Statistical Association* 113(522), 626–636.

HIV Virus Life Cycle	Drug Class	Mean Log DS	Number of Mutations	Number of Samples
PI	APV	0.75	201	767
	ATV	1.59	147	328
	IDV	1.33	206	825
	LPV	1.74	184	515
	NFV	2.00	207	842
	RTV	1.72	205	793
	SQV	1.22	206	824
NRTI	X3TC	3.10	283	629
	ABC	1.14	283	623
	AZT	1.55	283	626
	D4T	0.43	281	625
	DDI	0.43	283	628
	TDF	0.22	215	351
NNRTI	DLV	0.98	305	730
	EFV	1.08	312	732
	NVP	1.80	313	744

Table 15: Basic summary statistics of the HIV dataset. DS refers to the decrease in susceptibility of the drug once the mutations has occurred.

Wang, S. and W. Chen (2018). Thompson sampling for combinatorial semi-bandits. In *International Conference on Machine Learning*, pp. 5114–5122.