

Explaining Fast Improvement in Online Imitation Learning

Xinyan Yan¹

Byron Boots²

Ching-An Cheng³

¹Georgia Tech

² University of Washington

³Microsoft Research

Abstract

Online imitation learning (IL) is an algorithmic framework that leverages interactions with expert policies for efficient policy optimization. Here policies are optimized by performing online learning on a sequence of loss functions that encourage the learner to mimic expert actions, and if the online learning has no regret, the agent can provably learn an expert-like policy. Online IL has demonstrated empirical successes in many applications and interestingly, its policy improvement speed observed in practice is usually much faster than existing theory suggests. In this work, we provide an explanation of this phenomenon. Let ξ denote the policy class bias and assume the online IL loss functions are convex, smooth, and non-negative. We prove that, after N rounds of online IL with stochastic feedback, the policy improves in $\tilde{O}(1/N + \sqrt{\xi/N})$ in both expectation and high probability. In other words, we show that adopting a sufficiently expressive policy class in online IL has two benefits: both the policy improvement speed increases and the performance bias decreases.

1 INTRODUCTION

Imitation learning (IL) is a framework for improving the sample efficiency of policy optimization in sequential decision making. Unlike reinforcement learning (RL) algorithms that optimize policies purely by trial-and-error, IL leverages *expert policies* in the training time to provide extra feedback signals to aid the policy search (e.g., in the form of supervised learning losses). These expert policies can represent human demonstrators or resource-intensive engineered solutions which achieve non-trivial performance in the problem domain. By following the guidance of an expert policy,

the learner can avoid blindly exploring the problem space and focus on promising directions that lead to expert-like behaviors, so the learning becomes sample efficient.

Online IL, pioneered by Ross et al. [2011], is one of the algorithms that exploit such expert policies. Given access to interact with an expert policy, online IL reduces policy optimization into no-regret online learning [Hazan et al., 2016] for which effective algorithms have been developed. The main idea of online IL is to design an *online learning problem*¹ of which 1) the decision set is identified with the policy class in the original policy optimization problem; and 2) the online loss functions are set to encourage the learner to take expert-like actions under its own state distribution, which resemble a *sequence of supervised learning problems*. When these two conditions are met, the reduction follows: the regret rate and the minimum cumulative loss witnessed in the online learning problem determine respectively the *learning speed* and the *performance bias* in the original policy optimization problem.

Since the seminal work by Ross et al. [2011] was published, significant progress has been made in both theory and practice. It is shown that, for certain problems, online IL can learn the optimal policy exponentially faster than any RL algorithm when the expert policy is optimal [Sun et al., 2017]. Furthermore, online IL has been validated on physical robot control tasks [Ross et al., 2013, Pan et al., 2018]. Beyond typical IL scenarios, online IL has also been applied to design algorithms for system identification [Venkatraman et al., 2014], model-based RL [Ross and Bagnell, 2012], structured prediction [Ross and Bagnell, 2014, Chang et al., 2015, Sun et al., 2017], and combinatorial search [Song et al., 2018]. Here we collectively call these algorithms *online IL*, since they adopt the same reduction idea and mainly differ in the way the expert policy is defined.

Despite the success of online IL, there is a mismatch be-

¹The online decision in the iterative process of online learning should not be confused with the decisions made at each time step in sequential decision making.

tween provable theoretical guarantees and the learning phenomenon observed in practice. Because of the design constraint imposed on the online losses mentioned above, the online losses used in the online IL reduction are not fully adversarial, but generated by samples of a sequence of probability distributions that vary slowly as the learner updates its policy [Cheng and Boots., 2018]. This structure makes the performance guarantee given by the classic adversary-style analysis of the regret rate taken by Ross et al. [2011] overly conservative, and motivates a deeper study on theoretical underpinnings of online IL [Cheng and Boots., 2018, Cheng et al., 2019b,a, Lee et al., 2019].

In this work, we are interested in explaining the fast policy improvement of online IL that is observed in practice but not captured by existing theory. When the online loss functions are convex and Lipschitz, typical analyses of regret and martingales [Ross et al., 2011, Cesa-Bianchi et al., 2004] suggest an on-average convergence rate in $O(1/\sqrt{N})$ after N rounds. However, empirically, online IL algorithms learn much faster; e.g., the online IL algorithm DAgger [Ross et al., 2011] learned to mimic a model predictive control policy for autonomous off-road driving in only three rounds in [Pan et al., 2018]. Although the convergence rate improves to $\tilde{O}(1/N)$ when the online losses are strongly convex [Cheng and Boots., 2018], this condition can be difficult to satisfy especially when the policy class is large, such as a linear function class built on high-dimensional features. The empirical effectiveness and sample efficiency of online IL demand alternative explanations.

In this work, we bring a new perspective on the efficacy of online IL: even when learning from convex (but not strongly convex) sampled online losses, the learner in online IL can actually achieve a $\tilde{O}(1/N)$ -like rate, because the consistency that the expert to imitate is fixed across different rounds provides a stability effect to learning. Formally, we prove a new bias-dependent convergence rate for online IL that is adaptive to the performance of the best policy in the policy class on the sequence of sampled losses. Interestingly, this new rate shows that an online IL algorithm can learn faster as this performance bias becomes smaller. In other words, adopting a sufficiently expressive policy class in online IL has two benefits: as the policy class becomes *reasonably* but not overly rich, both the *learning speed* increases and the *performance bias* decreases.

Concretely, suppose that the losses in online IL are convex, smooth, and non-negative, which, e.g., includes learning linear policies with quadratic losses as commonly used in continuous control problems. Let ξ denote the policy class bias, which measures the performance of the best policy in the policy class on the sequence of imitation losses. We give a convergence rate in $\tilde{O}(1/N + \sqrt{\xi/N})$ both in expectation and in high probability for online IL algorithms using stochastic feedback. This new result shows a transition from the faster rate of $\tilde{O}(1/N)$ to the usual rate of $\tilde{O}(1/\sqrt{N})$ as

the policy class bias ξ increases.

This type of bias-dependent or optimistic convergence rate has been studied in typical machine learning settings, e.g., statistical learning [Srebro et al., 2010, Theorem 1], stochastic convex optimization [Zhang et al., 2017, Liu et al., 2018], and online learning [Srebro et al., 2010, Theorem 2], [Orabona, 2019, Theorem 4.21]. In fact, our new rate in expectation for online IL can be treated, from a technical viewpoint, as a direct consequence of the bias-dependent bound in the online learning literature. However, deriving such a new rate also in *high probability* requires extra technicalities, because the losses in online IL mix non-stationarity and stochasticity together; indeed, previous analyses tackle only one of these two properties and a straightforward combination does not lead to the fast rate desired here (cf. Section 3.3). To prove the desired fast high-probability bound, we propose a new regret decomposition technique for analyzing online IL and leverage a recent martingale concentration result based on path-wise statistics [Rakhlin and Sridharan, 2015, Theorem 3].

We conclude by corroborating the new theoretical findings with experimental results of online IL. The detailed proofs for this paper can be found in the Appendix.

2 BACKGROUND: ONLINE IL

2.1 POLICY OPTIMIZATION

The objective of policy optimization is to find a high-performance policy in a policy class Π for sequential decision making problems. Typically, it models the world as a Markov decision process (MDP), defined by an initial state distribution, transition dynamics, and an instantaneous state-action cost function [Puterman, 2014]. This MDP is often assumed to be unknown to the learning agent; therefore the learning algorithm for policy optimization needs to perform systematic exploration in order to discover good policies in Π . Concretely, let us consider a policy class Π that has a one-to-one mapping to a parameter space Θ , and let π_θ denote the policy associated with the parameter $\theta \in \Theta$. That is, $\Pi = \{\pi_\theta : \theta \in \Theta\}$. The goal of policy optimization is to find a policy $\pi_\theta \in \Pi$ that minimizes the expected cost,

$$J(\pi) := \mathbb{E}_{s \sim d_{\pi_\theta}} \mathbb{E}_{a \sim \pi_\theta} [c(s, a)], \quad (1)$$

where s and a are the state and the action, respectively, c is the instantaneous cost function and d_{π_θ} denotes the *average state distribution* over the problem horizon induced by executing policy π_θ starting from a state sampled from the initial state distribution. The problem formulation in (1) applies to various settings of problem horizon and discount rate, where the main difference is how the average state distribution is defined; e.g., for a discounted problem, d_{π_θ} is defined by a geometric mean, whereas d_{π_θ} is the stationary state distribution for average infinite-horizon problems.

2.2 ONLINE IL ALGORITHMS

Online imitation learning (IL) is a policy optimization technique that leverages interactive experts to efficiently find good policies. It devises a sequence of online loss functions l_n such that *no regret* and *small policy class bias* imply good policy performance in the original sequential decision problem.

Concretely, let π_e be an interactive expert policy. Instead of minimizing (1) directly, online IL minimizes a surrogate objective that upper bounds the performance difference between the policy π_θ and the expert π_e :

$$J(\pi_\theta) - J(\pi_e) \leq O\left(\underbrace{\mathbb{E}_{s \sim d_{\pi_\theta}} \mathbb{E}_{a \sim \pi_\theta} [D_{\pi_e}(s, a)]}_{\text{surrogate objective}}\right), \quad (2)$$

where the function $D_{\pi_e}(s, a)$ represents how similar an action a is to the action taken by expert policy π_e at state s , measured by statistical distances (e.g., Wasserstein distance and KL divergence) or their upper bounds [Ross et al., 2011, Ross and Bagnell, 2014, Sun et al., 2017].

Although the surrogate objective in (2) resembles (1) (i.e., by replacing $D_{\pi_e}(s, a)$ with $c(s, a)$), the surrogate objective has an additional critical property that its range is normalized [Cheng and Boots., 2018]: regardless of the definition of the cost function c of the original sequential decision problem, if the policy class Π has enough capacity to contain the expert policy π_e , there is a policy $\pi_\theta \in \Pi$ such that, for *all* states,

$$\mathbb{E}_{a \sim \pi_\theta} [D_{\pi_e}(s, a)] = 0. \quad (3)$$

Under the realizability assumption (3), online IL can minimize the surrogate function in (2) by solving an online learning problem: Let parametric space Θ be the decision set (i.e., the policy class) in online learning; it defines the online loss function in round n as

$$l_n(\theta) = \mathbb{E}_{s \sim d_{\pi_{\theta_n}}} \mathbb{E}_{a \sim \pi_\theta} [D_{\pi_e}(s, a)], \quad (4)$$

where $\theta_n \in \Theta$ is the online decision made by the online algorithm in round n .

The main benefit of this indirect iterative approach is that, compared with the surrogate function (2), the average state distribution $d_{\pi_{\theta_n}}$ in the online loss function (4) is not considered as a function of the policy parameter θ , making the online loss function (4) the objective function of a supervised learning problem whose sampled gradient is less noisy than that of the surrogate problem in (2). Because of the realizability assumption (3), the influence of the policy parameter on the change of the average state distribution can be ignored here, and the average regret with respect to the online loss functions in (4) alone [Ross et al., 2011] can upper bound the surrogate function in (2).

Algorithm 1: Online Imitation Learning (IL)

Input: Initial policy π_{θ_1} and online algorithm $\mathcal{A}$

Output: The best policy in the sequence of policies $\{\pi_{\theta_n}\}_{n=1}^N$

- 1 Initialize $\mathcal{A}$ with the initial policy π_{θ_1}
 - 2 **for** n **from** 1 **to** N **do**
 - 3 Design the online loss function l_n based on π_{θ_n}
 - 4 Execute π_{θ_n} in the MDP to gather samples
 - 5 Use the samples to build an estimate $\hat{l}_n$ of l_n such that for all θ , $\mathbb{E}[\hat{l}_n(\theta)] = l_n(\theta)$
 - 6 Pass the functional feedback $\hat{l}_n$ to $\mathcal{A}$ and use the return of $\mathcal{A}$ to update policy to $\pi_{\theta_{n+1}}$
-

When the expert policy π_e is only *nearly realizable* by the policy class Π (that is, (3) can only be satisfied up to a certain error), optimizing the policy with this online learning reduction would suffer from an extra performance bias due to using a limited policy class, as we will later discuss in Section 2.3.

Summary Online IL can be viewed as a meta algorithm shown in Algorithm 1, where we take into account that in practice the MDP is unknown and therefore the online loss function l_n needs to be further approximated by finite samples as $\hat{l}_n$, such that $\forall \theta \in \Theta$, $\mathbb{E}[\hat{l}_n(\theta)] = l_n(\theta)$. Given an expert policy, it selects a surrogate function to satisfy conditions similar to (2) and (3) (or their approximations). Then a no-regret online learning algorithm $\mathcal{A}$ is used to optimize the policy with respect to the sampled online loss functions $\hat{l}_n$, generating a sequence of policies $\{\pi_{\theta_n}\}_{n=1}^N$. By this reduction, performance guarantees can be obtained for the best policy in this sequence.

Online IL in General Before proceeding we note that by following the online IL design protocol above, Algorithm 1 can be instantiated beyond the typical IL setup. By properly choosing the *definition* of expert policies, the online IL reduction can be used to efficiently solve model-based RL and system identification where the samples of the MDP transition dynamics are treated as experts demonstrations [Ross and Bagnell, 2012, Venkatraman et al., 2014], and structured prediction where expert state-action value functions measure how good an action is in the surrogate function in (2) [Ross and Bagnell, 2014, Sun et al., 2017]. Similar reduction ideas are also used in recent RL algorithms [Agarwal et al., 2019, Abbasi-Yadkori et al., 2019].

2.3 GUARANTEES OF ONLINE IL

Now that we have reviewed the algorithmic aspects of online IL, we give a brief tutorial of the theoretical foundation of online IL and the known convergence results, which show exactly how regret and policy class bias are related to the

performance in the original policy optimization problem.

To this end, let us formally define 1) the regret and 2) the policy class bias. For a sequence of online loss functions $\{f_n\}_{n=1}^N$ and decisions $\{\theta_n\}_{n=1}^N$ in an online learning problem, we define the regret as

$$\text{Regret}(f_n) = \sum f_n(\theta_n) - \min_{\theta \in \Theta} \sum f_n(\theta). \quad (5)$$

Note that, for brevity, the range in $\sum_{n=1}^N$ is omitted in (5) and we will continue to do so below as long as the range is clear from the context. In addition to the regret, we define two problem-dependent biases of the decision set Θ (the equivalence of the policy class Π).

Definition 1 (Problem-dependent biases). For the sampled loss functions $\{\hat{l}_n\}_{n=1}^N$ experienced by running Algorithm 1, we define $\hat{\varepsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum \hat{l}_n(\theta)$ and $\varepsilon = \frac{1}{N} \min_{\theta \in \Theta} \sum l_n(\theta)$, where for all n and θ , $l_n(\theta) = \mathbb{E}[\hat{l}_n(\theta)]$.

A typical online IL analysis uses the regret and the policy class biases ε and $\hat{\varepsilon}$ to decompose the cumulative loss $\sum l_n(\theta_n)$ to provide policy performance guarantees. Specifically, define $\theta^* \in \arg \min_{\theta \in \Theta} \sum l_n(\theta)$. By (5) and Definition 1, we can write

$$\sum l_n(\theta_n) = \text{Regret}(\hat{l}_n) + (\sum l_n(\theta_n) - \hat{l}_n(\theta_n)) + N\hat{\varepsilon} \quad (6)$$

$$\leq \text{Regret}(\hat{l}_n) + (\sum l_n(\theta_n) - \hat{l}_n(\theta_n)) + (\sum \hat{l}_n(\theta^*) - l_n(\theta^*)) + N\varepsilon \quad (7)$$

where, in both (6) and (7), the first term is the online learning regret, the middle term(s) are the generalization error(s), and the last term is the policy class bias.

Because the surrogate loss $l_n(\theta_n)$ in online IL provides an upper bound on the policy performance in the original sequential decision problem (see (2) and (4)), picking the best policy in a policy sequence $\{\pi_{\theta_n}\}_{n=1}^N$ with a small cumulative loss $\sum l_n(\theta_n)$ guarantees good performance.

In a nutshell, existing convergence results of online IL are applications of (6) and (7) with different upper bounds on the regret and the generalization errors [Ross et al., 2011, Ross and Bagnell, 2012, 2014, Sun et al., 2017]. For example, when the sampled loss functions $\hat{l}_n$ are bounded, the generalization error(s) (i.e., the middle term(s) in (6) and (7)) can be bounded by $\tilde{O}(\sqrt{N})$ with high probability by Azuma’s inequality (see [Cesa-Bianchi et al., 2004] or [Hazan et al., 2016, Chapter 9]). Together with an $O(\sqrt{N})$ bound on the regret (which is standard for online convex losses) [Hazan et al., 2016, McMahan, 2017], it implies that the average performance $\frac{1}{N} \sum l_n(\theta_n)$ and the best performance $\min_n l_n(\theta_n)$ converge to $\hat{\varepsilon}$ or ε at the speed of $\tilde{O}(1/\sqrt{N})$.

However, the rate above often does not explain the fast improvement of online IL observed in practice [Laskey et al., 2016, Sun et al., 2017, Pan et al., 2018, Cheng et al.,

2018], as we will also show experimentally in Section 5. While faster rates in $\tilde{O}(1/N)$ was shown for strongly convex loss functions [Ross et al., 2011, Cheng and Boots., 2018], the strong convexity assumption usually does not hold; for example, the common setting of learning with a policy class Π and squared losses can easily break the strong convexity assumption, when the state samples are not diverse enough or when the feature dimension is high. Thus, alternative explanations are needed.

3 NEW BIAS-DEPENDENT RATES

In this section, we present new policy convergence rates that are adaptive to the performance biases in Definition 1. The full proof of these theorems is provided in the Appendix.

3.1 SETUP AND ASSUMPTIONS

We suppose the parameter space of the policy class Θ is a closed convex subset of a Hilbert space $\mathcal{H}$ that is equipped with norm $\|\cdot\|$. Since $\|\cdot\|$ is not necessarily the norm induced by the inner product, we denote its dual norm by $\|\cdot\|_*$, which is defined as $\|x\|_* = \max_{\|y\|=1} \langle x, y \rangle$.

We define admissible algorithms to broaden the scope of online IL algorithms that our analysis covers.

Definition 2 (Admissible online algorithm). We say an online algorithm $\mathcal{A}$ is *admissible* for a parameter space Θ if there exists $R_{\mathcal{A}} \in [0, \infty)$ such that given any $\eta > 0$ and any sequence of differentiable convex functions f_n , $\mathcal{A}$ can achieve $\text{Regret}(f_n) \leq \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq \frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2$, where θ_n is the decision made by $\mathcal{A}$ in round n .

We assume that Algorithm 1 is realized by an admissible online learning algorithm $\mathcal{A}$. This assumption is satisfied by common online algorithms, such as mirror descent [Nemirovski et al., 2009] and Follow-The-Regularized-Leader [McMahan, 2017], where η in Definition 2 corresponds to a constant stepsize that is chosen before seeing the online losses, and $R_{\mathcal{A}}$ measures that size of the decision set Θ .

Finally, we formally define convex, smooth, and non-negative (CSN) functions; we will assume the online loss l_n in online IL and its sampled version $\hat{l}_n$ belong to this class.

Definition 3 (Convex, smooth, and non-negative (CSN) function). A function $f : \mathcal{H} \rightarrow \mathbb{R}$ is CSN if f on $\mathcal{X}$ is convex, β -smooth², and non-negative.

Several popular loss functions used in online IL (e.g., squared ℓ_2 -loss and KL-divergence) are indeed CSN (Defi-

²A function f is β -smooth if its gradient $\|\nabla f(x) - \nabla f(y)\|_* \leq \beta \|x - y\|$ for $x, y \in \mathcal{X}$.

inition 3) (see Section 4 for examples). If the losses are not smooth, several smoothing techniques in the optimization literature are available to smooth the losses locally, e.g., Nesterov’s smoothing [Nesterov, 2005], Moreau-Yosida regularization [Lemaréchal and Sagastizábal, 1997], and randomized smoothing [Duchi et al., 2012].

3.2 RATE IN EXPECTATION

Our first contribution is a non-symptotic bias-dependent convergence rate in expectation by analyzing the online regret and the generalization error in the decomposition in (6) individually. Firstly, under the assumption that sampled losses are CSN (Definition 3) and the online algorithm is admissible (Definition 2), the online regret can be bounded by extending the bias-dependent regret bound stated for mirror descent [Srebro et al., 2010, Theorem 2]. Secondly, because the generalization error is a martingale difference sequence, it vanishes in expectation.

Theorem 1. *In Algorithm 1, suppose $\hat{l}_n$ is CSN and $\mathcal{A}$ is admissible. Let $\hat{\varepsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum l_n(\theta)$ be the bias, and let $\hat{E}$ be an upper bound on $\hat{\varepsilon}$. Choose the stepsize η in $\mathcal{A}$ to be $\frac{1}{2(\beta + \sqrt{\beta^2 + \frac{1}{2}\beta N \hat{E} R_{\mathcal{A}}^2})}$. Then it holds that*

$$\mathbb{E} \left[\frac{1}{N} \sum l_n(\theta_n) - \hat{\varepsilon} \right] \leq \frac{8\beta R_{\mathcal{A}}^2}{N} + \sqrt{\frac{8\beta R_{\mathcal{A}}^2 \hat{E}}{N}} \quad (8)$$

The rate in (8) suggests that an online IL algorithm can learn faster as the policy class bias becomes smaller; this is reflected in the transition from the usual rate $O(1/\sqrt{N})$ to the faster rate $O(1/N)$ when the bias goes to zero. Notably, the rate in (8) does not depend on the dimensionality of $\mathcal{H}$ but only on $R_{\mathcal{A}}$, which one can roughly think of as the largest norm in Θ . Therefore, we can increase the dimension of the policy class to reduce the bias (e.g., by using reproducing kernels [Hofmann et al., 2008]) as long as the diameter of Θ measured by norm $\|\cdot\|$ (e.g., ℓ_2 -norm) stays controlled.

Although the proof of Theorem 1 is a straightforward extension of the existing bias-dependent regret bounds from online learning literature, Theorem 1 brings a new perspective of online IL, which better explains its fast improvement and suggests directions for designing new algorithms that learn faster. As shown in Theorem 1, the policy learning speed in online IL can be closely connected to the policy class biases in Definition 1 which have been used in the online IL literature as a measure of expressivity.

Importantly, unlike in adversarial online learning, the biases $\hat{\varepsilon}$ and ε in online IL is not arbitrarily large, but of constant sizes in most applications. For example, consider a popular application of online IL—learning-to-search by imitating a *deterministic* algorithmic expert π_e [Bhardwaj et al., 2017]. Here the goal is to learn a computationally efficient policy in place of the expert policy that relies on intensive

computation or information unavailable at test time (e.g., the expert can be a brute-force search algorithm). In each round of learning, a problem instance is drawn from a distribution of problems, and the learner would query for the expert’s advice for the state it visits in the sampled problem. If we consider a deterministic learner policy π_{θ_n} parameterized by $\theta_n \in \Theta$, the sampled online loss can be set as $\hat{l}_n(\theta_n) = (\pi_{\theta_n}(s_n) - \pi_e(s_n))^2$, where s_n is the sampled state visited by the learner in round n . In these problems, the stochasticity comes from sampling problem instances and the learner’s states. But when the expert policy is contained in the class of approximators, there is some $\theta^* \in \Theta$ such that $\hat{l}_n(\theta^*) = 0$ *simultaneously* for all n and all samples, i.e., $\varepsilon = \hat{\varepsilon} = 0$. Generally, one can show that ε and $\hat{\varepsilon}$ are at most the losses incurred by the expert policy plus some distance between the expert and the approximator class. Therefore, our results show that online IL in most useful cases roughly has a $O(1/N)$ rate.

Online IL with Adaptive Stepsizes In Theorem 1, the bias-dependent rate (8) holds when the stepsize of the admissible online learning algorithm $\mathcal{A}$ is appropriately tuned. While this seems to be a limitation of Theorem 1, one can show that the rate (8) still holds if the stepsizes are properly adapted online (e.g., using an AdaGrad rule [Duchi et al., 2011] $\eta_n = \frac{R_{\mathcal{A}}}{2\sqrt{\sum_{i=1}^n \|\nabla f_n(\theta_n)\|_*^2}}$) without knowing the constants $\beta, N, \hat{E}$. This is because an online algorithm with adaptive stepsizes can obtain almost the same regret guarantee as an algorithm that would know the optimal constant stepsize in advance. Furthermore, the high-probability bias-dependent rate in Theorem 2 that will be presented in Section 3.3 can also be extended to adaptive stepsizes. Please find details in Appendix D.

3.3 RATE IN HIGH PROBABILITY

Next we show that a similar *non-asymptotic*³ bias-dependent convergence rate to the rate (8) also holds in high probability.

Theorem 2. *Under the same assumptions and setup of Theorem 1, further assume that there is $G \in [0, \infty)$ such that, for any $\theta \in \Theta$, $\|\nabla \hat{l}_n(\theta)\|_* \leq G$. For any $\delta < 1/e$, with probability at least $1 - \delta$, the following holds*

$$\frac{1}{N} \sum l_n(\theta_n) - \varepsilon = O \left(\frac{C\beta R^2}{N} + \sqrt{\frac{C\beta R^2(\hat{E} + \varepsilon)}{N}} \right) \quad (9)$$

where $R_{\Theta} = \max_{\theta \in \Theta} \|\theta\|, R = \max(1, R_{\Theta}, R_{\mathcal{A}}), C = \log(1/\delta) \log(GRN)$.

We remark that the uniform bound G on the norm of the gradients only appears in logarithmic terms. Therefore, this

³For compactness, we use the big-O notation to hide the constants in the rate; the exact constants can be found in Appendix C.

rate stays reasonable when the loss functions have gradients whose norm grows with the size of Θ , such as the popular squared loss.

To prove Theorem 2, one may attempt to build on top of the proof of Theorem 1 by applying basic martingale concentration properties on the martingale difference sequences (MDSs) in (6), or devise a similar scheme for (7). But taking this direct approach will bring back the usual rate of $O(1/\sqrt{N})$. To the best of our knowledge, sharp concentration inequalities for the counterparts of MDS in other learning settings cannot be adapted here in a straightforward way. Srebro et al. [2010, Theorem 1] prove a fast rate for empirical risk minimizer (ERM) in statistical learning. However, their proof is based on local Rademacher complexities, which do not have obvious extension to non-stationary online losses. Zhang et al. [2017] extend the results of Srebro et al. [2010] to stochastic convex optimization, but the extension relies on an i.i.d. concentration lemma.⁴ Kakade and Tewari [2009] show fast converging excess risk of online convex programming algorithms when the loss function is Lipschitz and strongly convex; relaxing the strong convexity assumptions is the goal of this work.

Convexity Assumption Both Theorem 1 and Theorem 2 require that the sampled online losses $\hat{l}_n$ are convex. 1) On one hand, this convexity assumption appears to be restrictive, because our results cannot explain learning with generic neural networks. Nonetheless, expressive linear policy classes that meet the convexity assumption still include many useful cases (such as RKHS [Hofmann et al., 2008] and rich feature sets). Furthermore, convexity has been a central assumption in almost all online learning paradigms; we did not attempt to address this limitation in this work. 2) On the other hand, the convexity assumption relaxes the strong convexity assumption needed in the online IL literature [Ross et al., 2011, Cheng and Boots., 2018]. This relaxation is important when the number of samples is smaller than the number of policy parameters or when the samples are not diverse enough. In those cases, even if the expected losses l_n are strongly convex, the sampled losses $\hat{l}_n$ may not be strongly convex because the Hessian matrix is singular.

Related Work in Learning Similar bias-dependent or optimistic rates have been studied extensively in several more typical learning settings such as contextual bandits [Allen-Zhu et al., 2018], statistical learning [Panchenko et al., 2002, Srebro et al., 2010, Zhang et al., 2017, Liu et al., 2018], online learning with adversarial loss sequences [Srebro et al., 2010, Orabona et al., 2012], and online-to-batch conver-

sion [Littlestone, 1990, Cesa-Bianchi et al., 2004]. Table 1 summarizes these different learning setups. In contrast to bandit settings that focus on discrete actions or simplex geometry, online IL usually leads to online convex losses, a general compact convex decision set, and stochastic functional or gradient feedback. Compared to statistical and online learning, online IL concerns loss functions that are both stochastic and online; we can view statistical and online learning as special cases of online IL. The interactions between noises and non-stationarity make the analysis of online IL especially interesting.

Specialization to Stochastic Convex Optimization Because of the generality of the online IL, an online IL algorithm (Algorithm 1) running on a *stationary* loss function can serve as a one-pass learning algorithm for stochastic optimization; that is, we have $l_n = l$ for some l for all n . By specializing Theorem 1 and Theorem 2 to the stochastic optimization setting, we can recover the existing bounds in the stochastic optimization literature, i.e., Corollary 3 and Theorem 1 in [Srebro et al., 2010], respectively. These special cases can be derived in a straightforward manner due to the relationship between $\hat{\epsilon}$ and ϵ when the loss function is fixed (i.e., $l_n = l$): 1) $\mathbb{E}[\epsilon] = \mathbb{E}[\hat{\epsilon}]$, and 2) in high probability, $\hat{\epsilon} - \epsilon \leq O(\sqrt{1/N})$. However, we note that for general online IL problems, the sizes of $\hat{\epsilon}$ and ϵ are not comparable and $\mathbb{E}[\epsilon] \neq \mathbb{E}[\hat{\epsilon}]$.

3.4 PROOF SKETCH FOR THEOREM 2

We take a different decomposition of the cumulative loss to avoid the usual $O(1/\sqrt{N})$ rate originating from applying martingale analyses on the MDSs in (6) and (7). Here we construct two *new* MDSs in terms of the gradients: recall $\epsilon = \min_{\theta \in \Theta} \sum l_n(\theta)$ and let $\theta^* = \arg \min_{\theta \in \Theta} \sum l_n(\theta)$. Then by convexity of l_n , we can derive

$$\begin{aligned} & \sum l_n(\theta_n) - N\epsilon \\ & \leq \underbrace{\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle}_{\text{MDS}} - \\ & \quad \underbrace{\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta^* \rangle}_{\text{MDS}} + \text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle) \end{aligned} \quad (10)$$

Our proof is based on analyzing these three terms. For the MDSs in (10), we notice that, for smooth and non-negative functions, the squared norm of the gradients can be bounded by its function value.

Lemma 1 (Lemma 3.1 [Srebro et al., 2010]). *Suppose a function $f : \mathcal{H} \rightarrow \mathbb{R}$ is β -smooth and non-negative, then for any $x \in \mathcal{H}$, $\|\nabla f(x)\|_*^2 \leq 4\beta f(x)$.*

Lemma 1 enables us to properly control the second-order statistics of the MDSs in (10). By a recent vector-valued martingale concentration inequality that depends only on

⁴The i.i.d. concentration lemma further depends on a martingale concentration bound [Pinelis, 1994, Theorem 3.4], which relies on an almost-surely upper bound of the second-order statistics. In comparison, the martingale concentration we utilize in this work relies on second-order statistics that are defined on the sample path [Rakhlin and Sridharan, 2015, Theorem 3].

Table 1: Comparison of different learning settings. Info.: Information about the loss function available to the learning algorithm in each round. ERM: Empirical risk minimization. Partial FB: Partial feedback.

Setting	Info.	Stochastic	Non-stationary	Partial FB	Estimator	Excess loss to minimize
Online IL (this work)	$\hat{l}_n$	Yes	Yes	No	Online	$\sum l_n(\theta_n) - \min \sum l_n(\theta)$
Stochastic bandits	$\hat{l}(\theta_n)$	Yes	No	Yes	Online	$\sum l(\theta_n) - N \min l(\theta)$
Online learning	l_n	No	Yes	No	Online	$\sum l_n(\theta_n) - \min \sum l_n(\theta)$
Statistical learning	$\hat{l}$	Yes	No	No	ERM	$l(\theta_{\text{ERM}}) - \min l(\theta)$
Online-to-batch	$\hat{l}$	Yes	No	No	Online	$\sum l(\theta_n) - N \min l(\theta)$

second-order statistics [Rakhlin and Sridharan, 2015, Theorem 3], we obtain a self-bounding property for (10) to get fast concentration rate.

Besides analyzing the MDSs, we need to bound the regret to the linear functions defined by the gradients (the last term in (10)). Since this last term is linear, not CSN, the bias-dependent online regret in the proof of Theorem 1 does not apply. Nonetheless, because these linear functions are based on the gradients of CSN functions, we discover that their regret rate actually obeys the exact same rate as the regret to the CSN loss functions. This is notable because the regret to these linear functions upper bounds the regret to the CSN loss functions.

Combining the bounds on the MDSs and the regret, we obtain the rate in (9).

4 CASE STUDIES

We use two concrete instantiations of the online IL algorithm (Algorithm 1) to show how the new theoretical results in Section 3 improve the existing understanding of the policy improvement speed in these algorithms.

4.1 IMITATION LEARNING

The seminal work on online IL [Ross et al., 2011] has demonstrated successes in solving many real-world sequential decision making problems [Laskey et al., 2016, 2017, Pan et al., 2018]. When the action space is discrete, a popular design choice is to set $D_{\pi_e}(s, a)$ in (4) as the hinge loss [Ross et al., 2011]. For continuous domains, ℓ_1 -loss becomes a natural alternative for defining $D_{\pi_e}(s, a)$, which, e.g., is adopted by Pan et al. [2018] for autonomous driving. When the policy is linear in the parameters, one can verify that these loss functions are convex and non-negative, though not strongly convex. Therefore, existing theorems suggest only an $O(1/\sqrt{N})$ rate, which does not reflect the fast experimental rates [Ross et al., 2011, Pan et al., 2018].

Although our new theorems are not directly applicable to these non-smooth loss functions, they can be applied to a smoothed version of these non-negative convex loss func-

tions. For instance, applying the Huber approximation (an instantiation of Nesterov’s smoothing) [Nesterov, 2005] to “smooth the tip” of these ℓ_1 -like losses yields a globally smooth function with respect to the ℓ_2 -norm. As the smoothing mainly changes where the loss is close to zero, our new theorems suggest that, when the policy class is expressive enough, learning with these ℓ_1 -like losses would converge in a $\tilde{O}(1/N)$ rate before the policy gets very close to the expert policy during policy optimization.

4.2 INTERACTIVE SYSTEM ID FOR MODEL-BASED RL

Interactive system identification (ID) is a technique that interleaves data collection and dynamics model learning for robust model-based RL. Ross and Bagnell [2012] show that interactive system ID can be analyzed under the online IL framework, where the regret guarantee implies learning a dynamics model that mitigates the train-test distribution shift problem [Abbeel and Ng, 2005, Ross and Bagnell, 2012]. Let T and T_θ denote the true and the learned transition dynamics, respectively. A common online loss for interactive system ID is $l_n(\theta) = \mathbb{E}_{(s,a) \sim \frac{1}{2}d_{T_{\theta_n}} + \frac{1}{2}\nu} [D_{s,a}(T_\theta || T)]$, where $D_{s,a}(T_\theta || T)$ is some distance between T and T_θ under state s and action a , ν is the state-action distribution of an exploration policy, and $d_{T_{\theta_n}}$ is the state-action distribution induced by running an optimal policy with respect to the model T_{θ_n} . When the model class is expressive enough to contain the T , it holds $l_n(\theta) = 0$ for some $\theta \in \Theta$ (cf. (3)).

Suppose that the states and actions are continuous. A common choice for $D_{s,a}(T_\theta || T)$ in learning deterministic dynamics is the squared error $D_{s,a}(T_\theta || T) = \|T_\theta(s, a) - s'\|_2^2$ [Ross and Bagnell, 2012], where the s' is the next state in the true transition of T . If T_θ is linear in θ or belongs to a reproducing kernel Hilbert space, the sampled loss function $\hat{l}_n$ is CSN. Alternatively, when learning a probabilistic model, $D_{s,a}$ can be selected as the KL-divergence [Ross and Bagnell, 2012]; it is known that if T_θ belongs to the exponential family of distributions, the KL divergence, and hence $\hat{l}_n$, are smooth and convex [Wainwright and Jordan, 2008]. If the sample size is large enough, $\hat{l}_n$ becomes non-negative in high probability.

As these online losses are CSN, our theoretical results apply and suggest a convergence rate in $\tilde{O}(1/N)$. On the contrary, the finite sample analysis conducted in [Ross and Bagnell, 2012] uses the standard online-to-batch techniques [Cesa-Bianchi et al., 2004] and can only give a rate of $O(1/\sqrt{N})$. Our new results provide a better explanation to justify the fast policy improvement speed observed empirically, e.g., [Ross and Bagnell, 2012, Figure 2].

5 EXPERIMENTAL RESULTS

Although the main focus of this paper is the new theoretical insights, we conduct experiments to provide evidence that the fast policy improvement phenomenon indeed exists, as our theory predicts. We verify the change of the policy improvement rate due to policy class capacity by running an imitation learning experiment in a simulated CartPole balancing task. Details can be found in Appendix E.

MDP setup The goal of the CartPole task is to keep the pole upright by controlling the acceleration of the cart. The start state is a configuration with a small uniformly sampled offset from being static and vertical, and the dynamics is deterministic. In each time step, if the pole is maintained within a threshold from being upright, the learner receives an instantaneous reward of one; otherwise, the learner receives zero rewards and the episode terminates. This MDP has a 4-dimensional continuous state space and a 1-dimensional continuous action space.

Expert and learner policies We use a neural network expert policy (with one hidden layer of 64 units and tanh activation) which is trained using policy gradient with GAE [Schulman et al., 2015] and ADAM [Kingma and Ba, 2014]. We let the learner policy be another neural network that shares the same architecture with the expert policy. When learning only the output layer, we copy the weights of the hidden layer from the expert policy and randomly initialize the weights of the output layer; we can view the learner as a *linear* policy using the representation of the expert policy. When learning the full network, we randomly initialize all the weights and biases.

Online IL setup We emulate online IL with unbiased and biased policy classes. To define policy classes with different degrees of bias, we impose ℓ_2 -norm constraints of different sizes on the weights of the learner’s output layer. To define the unbiased policy class, we lift this ℓ_2 -norm constraint. We select $l_n(\theta) = \mathbb{E}_{s \sim d_{\pi_{\theta_n}}}[H_\mu(\pi_\theta(s) - \pi_e(s))]$ as the online loss in IL (see Section 2.2), where H_μ is the Huber function defined as $H_\mu(x) = \frac{1}{2}x^2$ for $|x| \leq \mu$ and $\mu|x| - \frac{1}{2}\mu^2$ for $|x| > \mu$. In the experiments, μ is set to 0.05; as a result, H_μ is linear when its function value is larger than 0.00125. In the setting of training only the output layer, because the learner’s policy is linear, this online loss is CSN

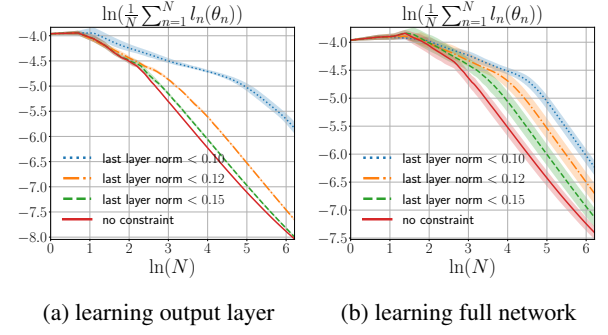


Figure 1: The convergence rate of online IL with different policy class biases, where the bias is defined as the ℓ_2 -norm constraint on the weights of the output layer. The curves are plotted using the median over 4 random seeds, and the shaded region represents 10% and 90% percentile.

(Definition 3) in the unknown weights of the learner. We use AdaGrad [McMahan and Streeter, 2010, Duchi et al., 2011] to optimize the learner policy with constant stepsize 0.01 and 500 ($\ln 500 \approx 6.2$) iterations.

Simulation results We compare the results in the unbiased and the biased settings, in terms of how the average loss $\frac{1}{N} \sum_{n=1}^N l_n(\theta_n)$ changes as the number of rounds N in online learning increases. We impose ℓ_2 -norm constraints of sizes $\{0.1, 0.12, 0.15\}$ on the weights of the output layer to simulate biased policy classes. For comparison, when training the output layer, the ℓ_2 -norm of the final policy trained without the constraint is about 0.18; when training the full network, it is about 0.23. The experimental results are depicted in Fig. 1. To better visualize the rate of improvement, we plot both the x- and y-axis in log scale, so that the slope of the curves directly represents the rate: if the slope is -1 , the rate is $O(1/N)$ and if the slope is $-\frac{1}{2}$ the rate is $O(1/\sqrt{N})$. In Fig. 1a, only the output layer of the learner policy is trained. In this setting, all the assumptions made in our theorems are satisfied. It can be seen that when using a larger norm constraint (i.e., smaller bias), the learner policy improvement becomes faster, moving towards $O(1/N)$. The curve with the constraint of 0.10 in Fig. 1a gets a rate slightly faster $O(1/\sqrt{N})$, likely because the Huber loss is strongly convex near zero. Interestingly, Fig. 1b shows that this phenomenon happens also in training the full network, which does not meet the assumption required in the theory.

6 CONCLUSION

In this paper, we provide an explanation of the fast learning speed of online IL by proving new expected and high-probability convergence rates that depend on the policy class capacity. However, our current results do not explain all the fast improvements of online IL observed in practice. The analyses here are based on the assumption of using convex

and smooth loss functions. This assumption would be violated, for example, with a deep neural network policy based on with ReLU activation; yet Pan et al. [2018] show fast empirical convergence rates of these networks in online IL. Nonetheless, we envision that the insights from this paper can provide a promising direction to better understanding the behaviors of online IL, and to suggest ways for designing new online IL algorithms that proactively leverage these self-bounding regret properties to achieve faster learning.

References

- Yasin Abbasi-Yadkori, Peter Bartlett, Kush Bhatia, Nevena Lazic, Csaba Szepesvari, and Gellért Weisz. Politex: Regret bounds for policy iteration using expert prediction. In *International Conference on Machine Learning*, pages 3692–3702. PMLR, 2019.
- Pieter Abbeel and Andrew Y Ng. Exploration and apprenticeship learning in reinforcement learning. In *Proceedings of the 22nd international conference on Machine learning*, pages 1–8, 2005.
- Alekh Agarwal, Sham M Kakade, Jason D Lee, and Gaurav Mahajan. On the theory of policy gradient methods: Optimality, approximation, and distribution shift. *arXiv preprint arXiv:1908.00261*, 2019.
- Zeyuan Allen-Zhu, Sébastien Bubeck, and Yuanzhi Li. Make the minority great again: First-order regret bound for contextual bandits. In *International Conference on Machine Learning*, pages 186–194. PMLR, 2018.
- Mohak Bhardwaj, Sanjiban Choudhury, and Sebastian Scherer. Learning heuristic search via imitation. In *Conference on Robot Learning*, pages 271–280. PMLR, 2017.
- Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. OpenAI Gym. *arXiv preprint arXiv:1606.01540*, 2016.
- Nicolo Cesa-Bianchi, Alex Conconi, and Claudio Gentile. On the generalization ability of on-line learning algorithms. *IEEE Transactions on Information Theory*, 50(9): 2050–2057, 2004.
- Kai-Wei Chang, Akshay Krishnamurthy, Alekh Agarwal, John Langford, and Hal Daumé III. Learning to search better than your teacher. 2015.
- Ching-An Cheng and Byron Boots. Convergence of value aggregation for imitation learning. In *Proceedings of the 21st International Conference on Artificial Intelligence and Statistics*, 2018.
- Ching-An Cheng, Xinyan Yan, Nolan Wagener, and Byron Boots. Fast policy learning through imitation and reinforcement. In *Proceedings of the 34th Conference on Uncertainty in Artificial Intelligence*, pages 845–855, 2018.
- Ching-An Cheng, Jonathan Lee, Ken Goldberg, and Byron Boots. Online learning with continuous variations: Dynamic regret and reductions. *arXiv preprint arXiv:1902.07286*, 2019a.
- Ching-An Cheng, Xinyan Yan, Evangelos Theodorou, and Byron Boots. Accelerating imitation learning with predictive models. In *Proceedings of the 22nd International Conference on Artificial Intelligence and Statistics*, 2019b.
- John Duchi, Elad Hazan, and Yoram Singer. Adaptive sub-gradient methods for online learning and stochastic optimization. *Journal of machine learning research*, 12(7), 2011.
- John C Duchi, Peter L Bartlett, and Martin J Wainwright. Randomized smoothing for stochastic optimization. *SIAM Journal on Optimization*, 22(2):674–701, 2012.
- Elad Hazan et al. Introduction to online convex optimization. *Foundations and Trends® in Optimization*, 2(3-4):157–325, 2016.
- Thomas Hofmann, Bernhard Schölkopf, and Alexander J Smola. Kernel methods in machine learning. *The annals of statistics*, pages 1171–1220, 2008.
- Sham M Kakade and Ambuj Tewari. On the generalization ability of online strongly convex programming algorithms. In *Advances in Neural Information Processing Systems*, pages 801–808, 2009.
- Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Michael Laskey, Jonathan Lee, Caleb Chuck, David Gealy, Wesley Hsieh, Florian T Pokorny, Anca D Dragan, and Ken Goldberg. Robot grasping in clutter: Using a hierarchy of supervisors for learning from demonstrations. In *2016 IEEE International Conference on Automation Science and Engineering (CASE)*, pages 827–834. IEEE, 2016.
- Michael Laskey, Jonathan Lee, Roy Fox, Anca Dragan, and Ken Goldberg. Dart: Noise injection for robust imitation learning. *arXiv preprint arXiv:1703.09327*, 2017.
- Jeongseok Lee, Michael X. Grey, Sehoon Ha, Tobias Kunz, Sumit Jain, Yuting Ye, Siddhartha S. Srinivasa, Mike Stilman, and C. Karen Liu. DART: Dynamic animation and robotics toolkit. *The Journal of Open Source Software*, 3 (22):500, feb 2018.

- Jonathan Lee, Ching-An Cheng, Ken Goldberg, and Byron Boots. Continuous online learning and new insights to online imitation learning. *arXiv preprint arXiv:1912.01261*, 2019.
- Claude Lemaréchal and Claudia Sagastizábal. Practical aspects of the moreau–yosida regularization: Theoretical preliminaries. *SIAM Journal on Optimization*, 7(2):367–385, 1997.
- Nicholas Littlestone. Mistake bounds and logarithmic linear-threshold learning algorithms. 1990.
- Mingrui Liu, Xiaoxuan Zhang, Lijun Zhang, Rong Jin, and Tianbao Yang. Fast rates of erm and stochastic approximation: Adaptive to error bound conditions. In *Advances in Neural Information Processing Systems*, pages 4678–4689, 2018.
- H Brendan McMahan. A survey of algorithms and analysis for adaptive online learning. *The Journal of Machine Learning Research*, 18(1):3117–3166, 2017.
- H Brendan McMahan and Matthew Streeter. Adaptive bound optimization for online convex optimization. *arXiv preprint arXiv:1002.4908*, 2010.
- Arkadi Nemirovski, Anatoli Juditsky, Guanghui Lan, and Alexander Shapiro. Robust stochastic approximation approach to stochastic programming. *SIAM Journal on optimization*, 19(4):1574–1609, 2009.
- Yu Nesterov. Smooth minimization of non-smooth functions. *Mathematical programming*, 103(1):127–152, 2005.
- Francesco Orabona. A modern introduction to online learning. *arXiv preprint arXiv:1912.13213*, 2019.
- Francesco Orabona, Nicolo Cesa-Bianchi, and Claudio Gentile. Beyond logarithmic bounds in online learning. In *Artificial Intelligence and Statistics*, pages 823–831, 2012.
- Yunpeng Pan, Ching-An Cheng, Kamil Saigol, Keuntak Lee, Xinyan Yan, Evangelos Theodorou, and Byron Boots. Agile autonomous driving using end-to-end deep imitation learning. In *Robotics: science and systems*, 2018.
- Dmitriy Panchenko et al. Some extensions of an inequality of vapnik and chervonenkis. *Electronic Communications in Probability*, 7:55–65, 2002.
- Iosif Pinelis. Optimum bounds for the distributions of martingales in banach spaces. *The Annals of Probability*, pages 1679–1706, 1994.
- Martin L Puterman. *Markov decision processes: discrete stochastic dynamic programming*. John Wiley & Sons, 2014.
- Alexander Rakhlin and Karthik Sridharan. On equivalence of martingale tail bounds and deterministic regret inequalities. *arXiv preprint arXiv:1510.03925*, 2015.
- Stephane Ross and J Andrew Bagnell. Agnostic system identification for model-based reinforcement learning. *arXiv preprint arXiv:1203.1007*, 2012.
- Stephane Ross and J Andrew Bagnell. Reinforcement and imitation learning via interactive no-regret learning. *arXiv preprint arXiv:1406.5979*, 2014.
- Stéphane Ross, Geoffrey Gordon, and Drew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, pages 627–635, 2011.
- Stéphane Ross, Narek Melik-Barkhudarov, Kumar Shaurya Shankar, Andreas Wendel, Debadeepta Dey, J Andrew Bagnell, and Martial Hebert. Learning monocular reactive uav control in cluttered natural environments. In *2013 IEEE international conference on robotics and automation*, pages 1765–1772. IEEE, 2013.
- John Schulman, Philipp Moritz, Sergey Levine, Michael Jordan, and Pieter Abbeel. High-dimensional continuous control using generalized advantage estimation. *arXiv preprint arXiv:1506.02438*, 2015.
- Jialin Song, Ravi Lanka, Albert Zhao, Aadyot Bhatnagar, Yisong Yue, and Masahiro Ono. Learning to search via retrospective imitation. *arXiv preprint arXiv:1804.00846*, 2018.
- Nathan Srebro, Karthik Sridharan, and Ambuj Tewari. Smoothness, low noise and fast rates. In *Advances in neural information processing systems*, pages 2199–2207, 2010.
- Wen Sun, Arun Venkatraman, Geoffrey J Gordon, Byron Boots, and J Andrew Bagnell. Deeply aggravated: Differentiable imitation learning for sequential prediction. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 3309–3318. JMLR.org, 2017.
- Marc Teboulle. A simplified view of first order methods for optimization. *Mathematical Programming*, 170(1): 67–96, 2018.
- Arun Venkatraman, Byron Boots, Martial Hebert, and J Andrew Bagnell. Data as demonstrator with applications to system identification. In *ALR Workshop, NIPS*, 2014.
- Martin J Wainwright and Michael I Jordan. Graphical models, exponential families, and variational inference. *Foundations and Trends® in Machine Learning*, 1(1-2):1–305, 2008.

Lijun Zhang, Tianbao Yang, and Rong Jin. Empirical risk minimization for stochastic convex optimization: $O(1/n)$ - and $o(1/n^2)$ -type of risk bounds. *arXiv preprint arXiv:1702.02030*, 2017.

Martin Zinkevich. Online convex programming and generalized infinitesimal gradient ascent. In *Proceedings of the 20th international conference on machine learning (icml-03)*, pages 928–936, 2003.

Appendix for Paper: Explaining Fast Improvement in Online Imitation Optimization

A PROOF OF TOOL LEMMAS

A.1 PROOF OF LEMMA 1

For completeness, we provide the proof for the basic inequality that upper bounds the norm of gradients by the function values, for smooth and nonnegative functions. This is essential for obtaining the self-bounding properties for proving Lemma 2 and Theorem 2 later on.

Lemma 1 (Lemma 3.1 [Srebro et al., 2010]). *Suppose a function $f : \mathcal{H} \rightarrow \mathbb{R}$ is β -smooth and non-negative, then for any $x \in \mathcal{H}$, $\|\nabla f(x)\|_*^2 \leq 4\beta f(x)$.*

Proof. Fix any $x \in \mathcal{H}$. And fix any $y \in \mathcal{H}$ satisfying $\|y - x\| \leq 1$. Let $g(u) = f(x + u(y - x))$ for any $u \in \mathbb{R}$. Fix any $u, v \in \mathbb{R}$,

$$\begin{aligned} |g'(v) - g'(u)| &= |\langle \nabla f(x + v(y - x)) - \nabla f(x + u(y - x)), y - x \rangle| \\ &\leq \|\nabla f(x + v(y - x)) - \nabla f(x + u(y - x))\|_* \|y - x\| \\ &\leq \beta |v - u| \|y - x\|^2 \\ &\leq \beta |v - u| \end{aligned}$$

Hence, g is β -smooth. By the mean-value theorem, for any $u, v \in \mathbb{R}$, there exists $w \in (u, v)$, such that $g(v) = g(u) + g'(w)(v - u)$. Hence

$$\begin{aligned} 0 &\leq g(v) = g(u) + g'(u)(v - u) + (g'(w) - g'(u))(v - u) \\ &\leq g(u) + g'(u)(v - u) + \beta |w - u| |v - u| \leq g(u) + g'(u)(v - u) + \beta (v - u)^2 \end{aligned}$$

Setting $v = u - \frac{g'(u)}{2\beta}$ yields that $|g'(u)| \leq \sqrt{4\beta g(u)}$. Therefore, we have

$$|g'(0)| = |\langle \nabla f(x), y - x \rangle| \leq \sqrt{4\beta g(0)} = \sqrt{4\beta f(x)}$$

Therefore, by the definition of dual-norm,

$$\|\nabla f(x)\|_* = \sup_{y \in \mathcal{B}, \|y - x\| \leq 1} \langle \nabla f(x), y - x \rangle = \sup_{y \in \mathcal{B}, \|y - x\| \leq 1} |\langle \nabla f(x), y - x \rangle| \leq \sqrt{4\beta f(x)}$$

where the second equality is due to the domain of $y - x$. □

It's worthy to note that f needs to be smooth and non-negative on the entire Hilbert space $\mathcal{H}$.

B PROOF OF THEOREM 1

Theorem 1. *In Algorithm 1, suppose $\hat{l}_n$ is CSN and $\mathcal{A}$ is admissible. Let $\hat{\epsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum \hat{l}_n(\theta)$ be the bias, and let $\hat{E}$ be an upper bound on $\hat{\epsilon}$. Choose the stepsize η in $\mathcal{A}$ to be $\frac{1}{2\left(\beta + \sqrt{\beta^2 + \frac{1}{2} \beta N \hat{E} R_{\mathcal{A}}^{-2}}\right)}$. Then it holds that*

$$\mathbb{E} \left[\frac{1}{N} \sum l_n(\theta_n) - \hat{\epsilon} \right] \leq \frac{8\beta R_{\mathcal{A}}^2}{N} + \sqrt{\frac{8\beta R_{\mathcal{A}}^2 \hat{E}}{N}} \quad (8)$$

The rate (8) follows from analyzing the regret and the generalization error in the decomposition in (6). First, under the assumption of CSN loss functions and admissible online algorithms, the online regret can be bounded by an extension of the bias-dependent regret that is stated for mirror descent in [Srebro et al., 2010, Theorem 2], whose average gives the rate in (8) (see Appendix B.1). Second, the generalization error in (6) vanishes in expectation because it is a martingale difference sequence (see Appendix B.2).

B.1 UPPER BOUND OF ONLINE REGRET

We show a bias-dependent regret of admissible online algorithms (Definition 2) with CSN functions (Definition 3) by extending Theorem 2 of [Srebro et al., 2010] as follows.

Lemma 2. Consider running an admissible online algorithm $\mathcal{A}$ on a sequence of CSN loss functions $\{f_n\}$. Let $\{\theta_n\}$ denote the online decisions made in each round, and let $\hat{\epsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum f_n(\theta)$ be the bias, and let $\hat{E}$ be such that $\hat{E} \geq \hat{\epsilon}$ almost surely. Choose η for $\mathcal{A}$ to be $\frac{1}{2\left(\beta + \sqrt{\beta^2 + \frac{\beta N \hat{E}}{2R_{\mathcal{A}}^2}}\right)}$. Then the following holds

$$\text{Regret}(f_n) \leq 8\beta R_{\mathcal{A}}^2 + \sqrt{8\beta R_{\mathcal{A}}^2 N \hat{E}}.$$

Proof. Because the online algorithm $\mathcal{A}$ is admissible, we have

$$\text{Regret}(f_n) \leq \frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 \quad (11)$$

Let $\lambda = \frac{1}{2\eta}$ and $r^2 = 2R_{\mathcal{A}}^2$, then

$$\frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 = \lambda r^2 + \sum \frac{1}{4\lambda} \|\nabla f_n(\theta_n)\|_*^2 \quad (12)$$

Using Lemma 1 yields a *self-bounding property* for $\text{Regret}(f_n)$:

$$\text{Regret}(f_n) \leq \lambda r^2 + \frac{\beta}{\lambda} \sum f_n(\theta_n) \leq \lambda r^2 + \frac{\beta}{\lambda} \text{Regret}(f_n) + \frac{\beta}{\lambda} N \hat{E} \quad (13)$$

By rearranging the terms, we have a bias-dependent upper bound

$$\text{Regret}(f_n) \leq \frac{\beta}{\lambda - \beta} N \hat{E} + \frac{\lambda^2}{\lambda - \beta} r^2 \quad (14)$$

The upper bound can be minimized by choosing an optimal λ . Setting the derivative of the right-hand side to zero, and computing the optimal λ ($\lambda > 0$) gives us

$$r^2 \lambda^2 - 2\beta r^2 \lambda - \beta N \hat{E} = 0, \quad \lambda > 0 \quad \text{and} \quad \lambda = \beta + \sqrt{\beta^2 + \frac{\beta N \hat{E}}{r^2}} \quad (15)$$

which implies that the optimal η is $\frac{1}{2\left(\beta + \sqrt{\beta^2 + \frac{\beta N \hat{E}}{2R_{\mathcal{A}}^2}}\right)}$. Since the optimal λ satisfies $\beta N \hat{E} = r^2 \lambda^2 - 2\beta r^2 \lambda$ implied from (15),

(14) can be simplified into:

$$\begin{aligned} \text{Regret}(f_n) &\leq \frac{1}{\lambda - \beta} \beta N \hat{E} + \frac{\lambda^2}{\lambda - \beta} r^2 = \frac{1}{\lambda - \beta} (r^2 \lambda^2 - 2\beta r^2 \lambda) + \frac{\lambda^2}{\lambda - \beta} r^2 \\ &= \frac{2\lambda^2 r^2 - 2\beta \lambda r^2}{\lambda - \beta} = 2\lambda r^2 \end{aligned} \quad (16)$$

Plugging in the optimal λ yields

$$\begin{aligned} \text{Regret}(f_n) &\leq 2\lambda r^2 = 2 \left(\beta + \sqrt{\beta^2 + \frac{\beta N \hat{E}}{r^2}} \right) r^2 \\ &= 2\beta r^2 + \sqrt{2\beta r^2} \sqrt{2\beta r^2 + 2N \hat{E}} \\ &\leq 4\beta r^2 + 2\sqrt{\beta r^2 N \hat{E}} \\ &= 8\beta R_{\mathcal{A}}^2 + \sqrt{8\beta R_{\mathcal{A}}^2 N \hat{E}} \end{aligned} \quad (17)$$

where the last inequality uses the basic inequality: $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$. $\square$

Notably, the admissibility defined in Definition 2 is satisfied by common online algorithms, such as mirror descent [Nemirovski et al., 2009] and Follow-The-Regularized-Leader [McMahan, 2017] under first-order or full-information feedback, where η in Definition 2 corresponds to a constant stepsize, and $R_{\mathcal{A}}$ measures the size of the decision set Θ . More concretely, assume that the loss functions $\{f_n\}$ are convex. Then for mirror descent, with constant stepsize η , i.e., $\theta_{n+1} = \arg \min_{\theta \in \Theta} f_n(\theta) + \frac{1}{\eta} D_h(\theta || \theta_n)$, where h is 1-strongly convex and D_h is the Bregman distance generated by h defined by $D_h(x||y) = h(x) - h(y) - \langle \nabla h(y), x - y \rangle$ [Teboulle, 2018], $R_{\mathcal{A}}^2$ can be set to $\max_{x,y \in \Theta} D_h(x||y)$. And for FTRL with constant stepsize η , i.e., $\theta_{n+1} = \arg \min_{\theta \in \Theta} \sum f_n(\theta) + \frac{1}{\eta} h(\theta)$, where h is 1-strongly convex and non-negative, $R_{\mathcal{A}}^2$ can be set to $\max_{\theta \in \Theta} h(\theta)$ [McMahan, 2017, Theorem 1].

B.2 THE GENERALIZATION ERROR VANISHES IN EXPECTATION

The generalization error in (6) vanishes in expectation because it is a martingale difference sequence.

Lemma 3. *For Algorithm 1, the following holds: $\mathbb{E}[\sum l_n(\theta_n) - \sum \hat{l}_n(\theta_n)] = 0$.*

Proof. We show this by working from the end of the sequence. For brevity, we use the symbol colon in the subscript to represent a set that includes the start and the end indices, e.g. $\hat{l}_{1:N-2}$ stands for $\{\hat{l}_1, \dots, \hat{l}_{N-2}\}$.

$$\begin{aligned} \mathbb{E}_{\hat{l}_{1:N}} \left[\sum_{t=1}^N l_n(\theta_n) \right] &= \mathbb{E}_{\hat{l}_{1:N-1}} \left[\sum_{t=1}^{N-1} l_n(\theta_n) + l_N(\theta_N) \right] \\ &= \mathbb{E}_{\hat{l}_{1:N-1}} \left[\sum_{t=1}^{N-1} l_n(\theta_n) + \mathbb{E}_{\hat{l}_N | \hat{l}_{1:N-1}} [\hat{l}_N(\theta_N)] \right] \\ &= \mathbb{E}_{\hat{l}_{1:N-2}} \left[\sum_{t=1}^{N-2} l_n(\theta_n) + l_{N-1}(\theta_{N-1}) + \mathbb{E}_{\hat{l}_{N-1:N} | \hat{l}_{1:N-2}} [\hat{l}_N(\theta_N)] \right] \\ &= \mathbb{E}_{\hat{l}_{1:N-2}} \left[\sum_{t=1}^{N-2} l_n(\theta_n) + \mathbb{E}_{\hat{l}_{N-1} | \hat{l}_{1:N-2}} [\hat{l}_{N-1}(\theta_{N-1})] + \mathbb{E}_{\hat{l}_{N-1:N} | \hat{l}_{1:N-2}} [\hat{l}_N(\theta_N)] \right] \\ &= \mathbb{E}_{\hat{l}_{1:N-2}} \left[\sum_{t=1}^{N-2} l_n(\theta_n) + \mathbb{E}_{\hat{l}_{N-1:N} | \hat{l}_{1:N-2}} \left[\sum_{t=N-1}^N \hat{l}_n(\theta_n) \right] \right] \end{aligned}$$

By applying the steps above repeatedly, the desired equality can be obtained. $\square$

B.3 PUTTING TOGETHER

Finally, plugging Lemma 2 and Lemma 3 into (6) yields (8).

C PROOF OF THEOREM 2

Theorem 2. *Under the same assumptions and setup of Theorem 1, further assume that there is $G \in [0, \infty)$ such that, for any $\theta \in \Theta$, $\|\nabla \hat{l}_n(\theta)\|_* \leq G$. For any $\delta < 1/e$, with probability at least $1 - \delta$, the following holds*

$$\frac{1}{N} \sum l_n(\theta_n) - \varepsilon = O \left(\frac{C\beta R^2}{N} + \sqrt{\frac{C\beta R^2(\hat{E} + \varepsilon)}{N}} \right) \quad (9)$$

where $R_{\Theta} = \max_{\theta \in \Theta} \|\theta\|$, $R = \max(1, R_{\Theta}, R_{\mathcal{A}})$, $C = \log(1/\delta) \log(GRN)$.

C.1 DECOMPOSITION

The key to avoid the slow rate due to the direct application of martingale concentration analyses on the MDSs in (6) and (7) is to take a different decomposition of the cumulative loss. Here we construct two *new* MDSs in terms of the gradients:

recall $\varepsilon = \min_{\theta \in \Theta} \sum l_n(\theta)$ and let $\theta^* = \arg \min_{\theta \in \Theta} \sum l_n(\theta)$. Then by convexity of l_n , we can derive

$$\begin{aligned}
& \sum l_n(\theta_n) - N\varepsilon \\
& \leq \sum \langle \nabla l_n(\theta_n), \theta_n - \theta^* \rangle \\
& = \sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n - \theta^* \rangle + \sum \langle \nabla \hat{l}_n(\theta_n), \theta_n - \theta^* \rangle \\
& \leq \underbrace{\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle}_{\text{MDS}} - \underbrace{\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta^* \rangle}_{\text{MDS}} + \text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle)
\end{aligned} \tag{18}$$

Our proof is based on analyzing these three terms. The two MDSs are analyzed in Appendix C.2 and the regret is analyzed in Appendix C.3.

C.2 UPPER BOUND OF THE MARTINGALE CONCENTRATION

For the MDSs in (18), we notice that, for smooth and non-negative functions, the squared norm of the gradient can be bounded by the corresponding function value through Lemma 1. This enables us to properly control the second-order statistics of the MDSs in (18). By a recent vector-valued martingale concentration inequality that depends only on the second-order statistics [Rakhlin and Sridharan, 2015], we obtain a self-bounding property for (18) to get a fast concentration rate. The martingale concentration inequality is stated in the following lemma.

Lemma 4 (Theorem 3 [Rakhlin and Sridharan, 2015]). *Let $\mathcal{H}$ be a Hilbert space with norm $\|\cdot\|$ whose dual is $\|\cdot\|_*$. Let $\{z_t\}$ be a $\mathcal{H}$ -valued martingale difference sequence with respect to $\{y_t\}$, i.e., $\mathbb{E}_{z_t|y_1, \dots, y_{t-1}}[z_t] = 0$, and let h be a 1-strongly convex function with respect to norm $\|\cdot\|$ and let $B^2 = \sup_{x, y \in \mathcal{H}, \|x\|=1, \|y\|=1} D_h(x|y)$. Then for $\delta \leq 1/e$, with probability at least $1 - \delta$, the following holds*

$$\left\| \sum z_t \right\|_* \leq 2B\sqrt{V} + \sqrt{2\log(1/\delta)} \sqrt{1 + 1/2\log(2V + 2W + 1)} \sqrt{2V + 2W + 1}$$

where $V = \sum \|z_t\|_*^2$ and $W = \sum \mathbb{E}_{z_t|y_1, \dots, y_{t-1}} \|z_t\|_*^2$.

In order to apply Lemma 4 to the MDSs in (18), the key is to properly upper bound the statistics V and W in Lemma 4 for these MDSs.

C.2.1 Upper Bound of the Concetration for MDS $\langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle$

Suppose that the decision set Θ is inside a ball centered at the origin in $\mathcal{H}$ with radius R_Θ .

Assumption 1. There exists $R_\Theta \in [0, \infty)$, such that $\max_{\theta \in \Theta} \|\theta\| \leq R_\Theta$.

Then by the definition of V and W in Lemma 4, and the definitions of the two problem-dependent policy class biases ε and $\hat{\varepsilon}$ (see Definition 1), one can obtain

$$\begin{aligned}
V &= \sum |\langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle|^2 \\
&\leq \sum R_\Theta^2 \|\nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)\|_*^2 && \text{Assumption 1} \\
&\leq \sum R_\Theta^2 (2\|\nabla l_n(\theta_n)\|_*^2 + 2\|\nabla \hat{l}_n(\theta_n)\|_*^2) && \text{triangle inequality} \\
&\leq \sum R_\Theta^2 (8\beta l_n(\theta_n) + 8\beta \hat{l}_n(\theta_n)) && \text{Lemma 1} \\
&= 8\beta R_\Theta^2 (\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\varepsilon + N\hat{\varepsilon}) && \text{Definition 1}
\end{aligned} \tag{19}$$

$$\begin{aligned}
&= 8\beta R_\Theta^2 (\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\varepsilon + N\hat{\varepsilon}) && \text{Definition 1}
\end{aligned} \tag{20}$$

Similarly for W , we have

$$\begin{aligned}
W &= \sum \mathbb{E}_{\hat{l}_n|\theta_n} [|\langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle|^2] \\
&\leq \sum R_{\Theta}^2 \mathbb{E}_{\hat{l}_n|\theta_n} [\|\nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)\|_*^2] && \text{Assumption 1} \\
&\leq \sum R_{\Theta}^2 \left(2\|\nabla l_n(\theta_n)\|_*^2 + 2\mathbb{E}_{\hat{l}_n|\theta_n} [\|\nabla \hat{l}_n(\theta_n)\|_*^2] \right) && \text{triangle inequality} \tag{21}
\end{aligned}$$

$$\begin{aligned}
&\leq \sum R_{\Theta}^2 \left(8\beta l_n(\theta_n) + 8\mathbb{E}_{\hat{l}_n|\theta_n} [\beta \hat{l}_n(\theta_n)] \right) && \text{Lemma 1} \\
&= \sum R_{\Theta}^2 (8\beta l_n(\theta_n) + 8\beta l_n(\theta_n)) \\
&= 16\beta R_{\Theta}^2 (\text{Regret}(l_n) + N\epsilon) && \text{Definition 1} \tag{22}
\end{aligned}$$

Therefore,

$$V + W \leq 24\beta R_{\Theta}^2 (\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\epsilon + N\hat{\epsilon}) \tag{23}$$

Further suppose that the gradient of the sampled loss can be uniformly bounded:

Assumption 2. For any loss sequence $\{\hat{l}_n\}$ that can be experienced by Algorithm 1, suppose that there is $G \in [0, \infty)$ such that, for any $\theta \in \Theta$, $\|\nabla \hat{l}_n(\theta)\|_* \leq G$.

Then due to (23), $V \leq 4G^2 R_{\Theta}^2 N$ and $W \leq 4G^2 R_{\Theta}^2 N$. Now we are ready to invoke Lemma 4 by letting the Hilbert space $\mathcal{H}$ in Lemma 4 be $\mathbb{R}$, and denoting the corresponding B in Lemma 4 by $B_{\mathbb{R}}$. Then, for $\delta > 1/e$, with probability at least $1 - \delta$, the following holds

$$\begin{aligned}
&|\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta_n \rangle| \\
&\leq 2B_{\mathbb{R}} \sqrt{8\beta R_{\Theta}^2} \sqrt{\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\epsilon + N\hat{\epsilon} +} \\
&\quad \sqrt{96\beta R_{\Theta}^2 \log(1/\delta)} \sqrt{1 + 1/2 \log(16G^2 R_{\Theta}^2 N + 1)} \sqrt{\text{Regret}(l_n) + N\epsilon + \text{Regret}(\hat{l}_n) + N\hat{\epsilon} + 1/(48\beta R_{\Theta}^2)} \tag{24}
\end{aligned}$$

C.2.2 Upper Bound of the Concetration for MDS $\nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)$

To bound $\|\sum \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)\|_*$ that appears in

$$\sum \langle \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n), \theta^* \rangle \leq R_{\Theta} \|\sum \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)\|_* \tag{25}$$

We use Lemma 4 again in a similar way of deriving (24), except that this time the MDS $\nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)$ is vector-valued. Akin to showing (20) and (22), the statistics V can be bounded as

$$V \leq \sum (2\|\nabla l_n(\theta_n)\|_*^2 + 2\|\nabla \hat{l}_n(\theta_n)\|_*^2) \tag{26}$$

$$\leq 8\beta (\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\epsilon + N\hat{\epsilon}) \tag{27}$$

and similarly for W :

$$W \leq \sum \left(2\|\nabla l_n(\theta_n)\|_*^2 + 2\mathbb{E}_{\hat{l}_n|\theta_n} [\|\nabla \hat{l}_n(\theta_n)\|_*^2] \right) \tag{28}$$

$$\leq 16\beta (\text{Regret}(l_n) + N\epsilon) \tag{29}$$

Therefore,

$$V + W \leq 24\beta (\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\epsilon + N\hat{\epsilon}) \tag{30}$$

Furthermore, by Assumption 2, it can be shown from (26) and (28) that $V \leq 4G^2 N$ and $W \leq 4G^2 N$. To invoke Lemma 4, let $\mathcal{H}$ in Lemma 4 be $\mathcal{H}$, and denote the corresponding B in Lemma 4 by $B_{\mathcal{H}}$. Then, for $\delta < 1/e$, with probability at least $1 - \delta$, the following holds

$$\begin{aligned}
&\|\sum \nabla l_n(\theta_n) - \nabla \hat{l}_n(\theta_n)\|_* \\
&\leq 2B_{\mathcal{H}} \sqrt{8\beta} \sqrt{\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\epsilon + N\hat{\epsilon} +} \\
&\quad \sqrt{96\beta \log(1/\delta)} \sqrt{1 + 1/2 \log(16G^2 N + 1)} \sqrt{\text{Regret}(l_n) + N\epsilon + \text{Regret}(\hat{l}_n) + N\hat{\epsilon} + 1/(48\beta)} \tag{31}
\end{aligned}$$

C.3 UPPER BOUND OF THE REGRET

Besides analyzing the MDSs, we need to bound the regret to the linear functions defined by the gradients (the last term in (18)). Since this last term is linear, not CSN, the bias-dependent online regret bound in the proof of Theorem 1 does not apply. Nonetheless, because these linear functions are based on the gradients of CSN functions, we discover that their regret rate actually obeys the exact same rate as the regret to the CSN loss functions. This is notable because the regret to these linear functions upper bounds the regret to the CSN loss functions.

Lemma 5. *Under the same assumptions and setup in Lemma 2,*

$$\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq 8\beta R_{\mathcal{A}}^2 + \sqrt{8\beta R_{\mathcal{A}}^2 N \hat{E}}. \quad (32)$$

Proof. It suffices to show a self-bounding property for $\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle)$ as (13). Once this is established, the rest resembles how (17) follows from (13) through algebraic manipulations. As in Lemma 2, define $\lambda = \frac{1}{2\eta}$ and $r^2 = 2R_{\mathcal{A}}^2$. Due to the property of admissible online algorithms, one can obtain

$$\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq \frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 = \lambda r^2 + \sum \frac{1}{4\lambda} \|\nabla f_n(\theta_n)\|_*^2 \quad (33)$$

To proceed, as in Lemma 2, let $\hat{\varepsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum \hat{l}_n(\theta)$ be the bias, and let $\hat{E}$ be such that $\hat{E} \geq \hat{\varepsilon}$ almost surely. Using Lemma 1 and the admissibility of online algorithm $\mathcal{A}$ yields a self-bounding property for $\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle)$:

$$\begin{aligned} \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) &\leq \lambda r^2 + \frac{\beta}{\lambda} \sum f_n(\theta_n) \\ &\leq \lambda r^2 + \frac{\beta}{\lambda} \text{Regret}(f_n) + \frac{\beta}{\lambda} N \hat{E} \\ &\leq \lambda r^2 + \frac{\beta}{\lambda} \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) + \frac{\beta}{\lambda} N \hat{E} \end{aligned}$$

This self-bounding property is exactly like what we have seen in the self-bounding property for $\text{Regret}(f_n)$. After rearranging and computing the optimal λ (which coincides with the optimal λ in Lemma 2), (32) follows. $\square$

Lemma 5 provides a bias-dependent regret to the linear functions defined by the gradients when the (stepsize) constant η is set optimally in the online algorithm $\mathcal{A}$ (used in Algorithm 1). Interestingly, the optimal η that achieves the bias-dependent regret coincides with the one for achieving a bias-dependent regret to CSN functions. Therefore, a bias-dependent bound for $\text{Regret}(\hat{l}_n)$ and $\text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle)$ can be achieved simultaneously.

C.4 PUTTING THINGS TOGETHER

We now have all the pieces to prove Theorem 2. Plugging (24), (25), and (31) into the decomposition (18), we have, for $\delta < 1/e$, with probability at least $1 - 2\delta$

$$\begin{aligned} &\text{Regret}(l_n) \\ &\leq 2B_{\mathbb{R}} \sqrt{8\beta R_{\Theta}^2} \sqrt{\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\varepsilon + N\hat{\varepsilon}} \\ &\quad + \sqrt{96\beta R_{\Theta}^2 \log(1/\delta)} \sqrt{1 + 1/2 \log(16G^2 R_{\Theta}^2 N + 1)} \sqrt{\text{Regret}(l_n) + N\varepsilon + \text{Regret}(\hat{l}_n) + N\hat{\varepsilon} + 1/(48\beta R_{\Theta}^2)} \\ &\quad + 2B_{\mathcal{H}} \sqrt{8\beta R_{\Theta}^2} \sqrt{\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + N\varepsilon + N\hat{\varepsilon}} \\ &\quad + \sqrt{96\beta \log(1/\delta)} \sqrt{1 + 1/2 \log(16G^2 N + 1)} \sqrt{\text{Regret}(l_n) + N\varepsilon + \text{Regret}(\hat{l}_n) + N\hat{\varepsilon} + 1/(48\beta)} \\ &\quad + \text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle) \end{aligned}$$

To simplify it, we denote

$$\begin{aligned} A_1 &= 8 \max(B_{\mathbb{R}}, B_{\mathcal{H}}) \sqrt{2\beta R_{\Theta}^2}, \\ A_2 &= 8 \sqrt{6\beta R_{\Theta}^2 \log(1/\delta)} \sqrt{1 + 1/2 \log(16G^2 \max(1, R_{\Theta}^2) N + 1)}, \\ \tilde{R} &= \min(1, R_{\Theta}) \end{aligned}$$

Plugging them into the above upper bound on $\text{Regret}(l_n)$ and using the basic inequality $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$ yield

$$\begin{aligned} \text{Regret}(l_n) &\leq (A_1 + A_2) \sqrt{\text{Regret}(l_n) + \text{Regret}(\hat{l}_n) + (A_1 + A_2) \sqrt{N\varepsilon + N\hat{\varepsilon}}} \\ &\quad + \frac{A_2}{\sqrt{48\beta\tilde{R}^2}} + \text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle) \end{aligned}$$

To further simplify, using the basic inequality $\sqrt{ab} \leq (a+b)/2$ yields

$$\begin{aligned} \text{Regret}(l_n) &\leq \frac{\text{Regret}(l_n)}{2} + \frac{\text{Regret}(\hat{l}_n)}{2} + (A_1 + A_2) \sqrt{N\varepsilon + N\hat{\varepsilon}} \\ &\quad + \frac{(A_1 + A_2)^2}{2} + \frac{A_2}{\sqrt{48\beta\tilde{R}^2}} + \text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle) \end{aligned}$$

Rearranging terms and invoking the bias-dependent rate in Lemma 2 and Lemma 5 give

$$\begin{aligned} \text{Regret}(l_n) &\leq \text{Regret}(\hat{l}_n) + 2(A_1 + A_2) \sqrt{N\varepsilon + N\hat{\varepsilon}} + (A_1 + A_2)^2 + \frac{A_2}{\sqrt{12\beta\tilde{R}^2}} + 2\text{Regret}(\langle \nabla \hat{l}_n(\theta_n), \cdot \rangle) \\ &\leq 2(A_1 + A_2) \sqrt{N\varepsilon + N\hat{\varepsilon}} + 6\sqrt{2\beta R_{\mathcal{A}}^2 N\hat{\varepsilon}} + (A_1 + A_2)^2 + \frac{A_2}{\sqrt{12\beta\tilde{R}^2}} + 24\beta R_{\mathcal{A}}^2 \end{aligned} \quad (34)$$

Finally, to derive a big- O bound, denote

$$R = \max(1, R_{\Theta}, R_{\mathcal{A}}), \quad C = \log(1/\delta) \log(GRN)$$

then one can obtain the rate *in terms of* N in big- O notation, while keeping $\tilde{R}$, R , $B_{\mathbb{R}}$, $B_{\mathcal{H}}$, $\log(1/\delta)$, G , ε , and $\hat{E}$ as multipliers:

$$\text{Regret}(l_n) = O\left(C\beta R^2 + \sqrt{C\beta R^2 N(\hat{E} + \varepsilon)}\right)$$

Therefore

$$\frac{1}{N} \sum l_n(\theta_n) - \varepsilon = O\left(\frac{C\beta R^2}{N} + \sqrt{\frac{C\beta R^2(\hat{E} + \varepsilon)}{N}}\right)$$

D ONLINE IL WITH ADAPTIVE STEPSIZES

In Appendix B and Appendix C, we proved new bias-dependent rates in expectation (Theorem 1) and in high-probability (Theorem 2). However, these rates hold only provided that the stepsize of the online algorithm $\mathcal{A}$ in Algorithm 1 is constant and properly tuned; this requires knowing in advance the smoothness factor β , an upper bound of the bias $\hat{\varepsilon}$, and the number of rounds N . Therefore, these theorems are not directly applicable to practical online IL algorithms that update the stepsize adaptively without knowing the constants beforehand.

Fortunately, Theorem 1 and Theorem 2 can be adapted to online IL algorithms that utilize online algorithms with adaptive stepsizes in a straightforward manner, which we shall show next. The key insight is that online algorithms with adaptive stepsizes obtain almost the same guarantee as they would have known the optimal constant stepsize in advance. For example, Orabona [2019, Theorem 4.14] shows that for Online Subgradient Descent [Zinkevich, 2003], the difference between the guarantees of using the optimal constant stepsize and the guarantee of using adaptive stepsizes $\eta_n = \frac{\sqrt{2D}}{2\sqrt{\sum_{i=1}^n \|g_i\|_2^2}}$ is only a factor of $\sqrt{2}$.

Lemma 6 (Theorem 4.14 [Orabona, 2019]). *Let $V \subseteq \mathbb{R}^d$ a closed non-empty convex set with diameter D , i.e., $\max_{x,y \in V} \|x - y\|_2 \leq D$. Let $f_1, \dots, f_N$ be an arbitrary sequence of non-negative convex functions $f_n : \mathbb{R}^d \rightarrow (-\infty, +\infty]$ differentiable in open sets containing V for $t = 1, \dots, T$. Pick any $x_1 \in V$ and stepsize $\eta_n = \frac{\sqrt{2D}}{2\sqrt{\sum_{i=1}^n \|\nabla f_i(x_i)\|_2^2}}$, $n = 1, \dots, N$. Then the following regret bound holds for online subgradient descent:*

$$\text{Regret}(f_n) \leq \sqrt{2} \min_{\eta > 0} \left(\frac{D^2}{2\eta} + \frac{\eta}{2} \sum_{n=1}^T \|\nabla f_n(x_n)\|_2^2 \right) \quad (35)$$

Inspired by this insight, we propose a more general definition of admissible online algorithms (cf. Definition 2) and a notion of proper stepsizes:

Definition 4 (General admissible online algorithm). We say an online algorithm $\mathcal{A}$ is *admissible* on a parameter space Θ , if there exists $R_{\mathcal{A}} \in [0, \infty)$ such that given any sequence of differentiable convex functions f_n and stepsizes η_n , $\mathcal{A}$ can achieve $\text{Regret}(f_n) \leq \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq \frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{1}{2} \sum \eta_n \|\nabla f_n(\theta_n)\|_*^2$, where θ_n is the decision made by $\mathcal{A}$ in round n .

The admissible online algorithms that we discussed in the last paragraph of Appendix B.1 also belong to this category of general admissible algorithms.

Definition 5 (Proper stepsizes). A stepsize adaptation rule is *proper* if there exists $K \in (0, \infty)$ such that for any admissible online algorithm $\mathcal{A}$ (Definition 4) with the stepsize η_n chosen according to the rule based on the information till round n can achieve $\text{Regret}(f_n) \leq \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq K \min_{\eta > 0} \left(\frac{1}{\eta} R_{\mathcal{A}}^2 + \frac{1}{2} \sum \eta \|\nabla f_n(\theta_n)\|_*^2 \right)$.

With the general definition of admissible online algorithms (Definition 4) and the definition of proper stepsizes (Definition 5), we can now extend the bias-dependent regret (Lemma 2) which assumes optimal constant stepsize to adaptive online algorithms with proper stepsizes. This lemma will be the foundation of extending Theorem 1 and Theorem 2.

Lemma 7. Consider running an admissible online algorithm $\mathcal{A}$ on a sequence of CSN loss functions $\{f_n\}$ with adaptive stepsizes that are proper. Let $\{\theta_n\}$ denote the online decisions made in each round, and let $\hat{\epsilon} = \frac{1}{N} \min_{\theta \in \Theta} \sum f_n(\theta)$ be the bias, and let $\hat{E}$ be such that $\hat{E} \geq \hat{\epsilon}$ almost surely. Then the following holds

$$\text{Regret}(f_n) \leq 8K^2\beta R_{\mathcal{A}}^2 + \sqrt{8K^2\beta R_{\mathcal{A}}^2 N \hat{E}}.$$

Proof. Because the online algorithm $\mathcal{A}$ is admissible and the stepsizes are proper, we have, for any $\eta > 0$

$$\text{Regret}(f_n) \leq \frac{K}{\eta} R_{\mathcal{A}}^2 + \frac{K\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 \quad (36)$$

Let $\lambda = \frac{1}{2\eta}$ and $r^2 = 2R_{\mathcal{A}}^2$, then

$$\frac{K}{\eta} R_{\mathcal{A}}^2 + \frac{K\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 = K\lambda r^2 + \sum \frac{K}{4\lambda} \|\nabla f_n(\theta_n)\|_*^2 \quad (37)$$

Using Lemma 1 yields a *self-bounding property* for $\text{Regret}(f_n)$:

$$\text{Regret}(f_n) \leq K\lambda r^2 + \frac{K\beta}{\lambda} \sum f_n(\theta_n) \leq K\lambda r^2 + \frac{K\beta}{\lambda} \text{Regret}(f_n) + \frac{K\beta}{\lambda} N\hat{E} \quad (38)$$

Let $\hat{\beta} = K\beta$ and $\hat{r}^2 = Kr^2$, and by rearranging the terms, we have a bias-dependent upper bound (cf. (14)) that for any $\eta > 0$,

$$\text{Regret}(f_n) \leq \frac{\hat{\beta}}{\lambda - \hat{\beta}} N\hat{E} + \frac{\lambda^2}{\lambda - \hat{\beta}} \hat{r}^2 \quad (39)$$

The upper bound can be minimized by choosing an optimal λ . Setting the derivative of the right-hand side to zero, and computing the optimal λ ($\lambda > 0$) gives us

$$\hat{r}^2 \lambda^2 - 2\hat{\beta} \hat{r}^2 \lambda - \hat{\beta} N\hat{E} = 0, \quad \lambda > 0 \quad \text{and} \quad \lambda = \hat{\beta} + \sqrt{\hat{\beta}^2 + \frac{\hat{\beta} N\hat{E}}{\hat{r}^2}} \quad (40)$$

which implies that the optimal η is $\frac{1}{2\left(\hat{\beta} + \sqrt{\hat{\beta}^2 + \frac{\hat{\beta} N\hat{E}}{2R_{\mathcal{A}}^2}}\right)}$. Because (39) holds for any η , it holds for the optimal η too. Next, we

simplify (39). Since the optimal λ satisfies the equality $\hat{\beta} N\hat{E} = \hat{r}^2 \lambda^2 - 2\hat{\beta} \hat{r}^2 \lambda$ implied from (40), (39) can be written as

$$\begin{aligned} \text{Regret}(f_n) &\leq \frac{1}{\lambda - \hat{\beta}} \hat{\beta} N\hat{E} + \frac{\lambda^2}{\lambda - \hat{\beta}} \hat{r}^2 = \frac{1}{\lambda - \hat{\beta}} (\hat{r}^2 \lambda^2 - 2\hat{\beta} \hat{r}^2 \lambda) + \frac{\lambda^2}{\lambda - \hat{\beta}} \hat{r}^2 \\ &= \frac{2\lambda^2 \hat{r}^2 - 2\hat{\beta} \lambda \hat{r}^2}{\lambda - \hat{\beta}} = 2\lambda \hat{r}^2 \end{aligned} \quad (41)$$

Plugging in the optimal λ yields

$$\begin{aligned}
\text{Regret}(f_n) &\leq 2\lambda \hat{r}^2 = 2 \left(\hat{\beta} + \sqrt{\hat{\beta}^2 + \frac{\hat{\beta} N \hat{E}}{\hat{r}^2}} \right) \hat{r}^2 \\
&= 2\hat{\beta} \hat{r}^2 + \sqrt{2\hat{\beta} \hat{r}^2} \sqrt{2\hat{\beta} \hat{r}^2 + 2N\hat{E}} \\
&\leq 4\hat{\beta} \hat{r}^2 + 2\sqrt{\hat{\beta} \hat{r}^2 N \hat{E}} \\
&= 8K^2 \beta R_{\mathcal{A}}^2 + \sqrt{8K^2 \beta R_{\mathcal{A}}^2 N \hat{E}}
\end{aligned} \tag{42}$$

where the last inequality uses the basic inequality: $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$. $\square$

Provided the bias-dependent regret Lemma 7 (cf. Lemma 2), a bias-dependent rate in expectation for online IL with an additional constant K due to the adaptive stepsizes (cf. Theorem 1) follows directly, because Lemma 3 still holds even if the stepsizes of the online algorithm in Algorithm 1 become adaptive. In order to extend Theorem 2 to admissible online algorithm with adaptive stepsizes, we first need to derive a bias-dependent regret to the linear functions defined by the gradients (cf. Lemma 5) based on the proof of Lemma 7.

Lemma 8. *Under the same assumptions and setup in Lemma 7,*

$$\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq 8K^2 \beta R_{\mathcal{A}}^2 + \sqrt{8K^2 \beta R_{\mathcal{A}}^2 N \hat{E}}. \tag{43}$$

Proof. It suffices to show a self-bounding property for $\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle)$ as (38). Once this is established, the rest resembles how (42) follows from (38) through algebraic manipulations. As in Lemma 7, define $\lambda = \frac{1}{2\eta}$ and $r^2 = 2R_{\mathcal{A}}^2$. Due to the property of admissible online algorithms, one can obtain, for any η

$$\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) \leq \frac{K}{\eta} R_{\mathcal{A}}^2 + \frac{K\eta}{2} \sum \|\nabla f_n(\theta_n)\|_*^2 = K\lambda r^2 + \sum \frac{K}{4\lambda} \|\nabla f_n(\theta_n)\|_*^2 \tag{44}$$

To proceed, as in Lemma 2, let $\hat{e} = \frac{1}{N} \min_{\theta \in \Theta} \sum \hat{l}_n(\theta)$ be the bias, and let $\hat{E}$ be such that $\hat{E} \geq \hat{e}$ almost surely. Using Lemma 1 and the admissibility of online algorithm $\mathcal{A}$ yields a self-bounding property for $\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle)$:

$$\begin{aligned}
\text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) &\leq K\lambda r^2 + \frac{K\beta}{\lambda} \sum f_n(\theta_n) \\
&\leq K\lambda r^2 + \frac{K\beta}{\lambda} \text{Regret}(f_n) + \frac{K\beta}{\lambda} N\hat{E} \\
&\leq K\lambda r^2 + \frac{K\beta}{\lambda} \text{Regret}(\langle \nabla f_n(\theta_n), \cdot \rangle) + \frac{K\beta}{\lambda} N\hat{E}
\end{aligned}$$

This self-bounding property is exactly like what we have seen in the self-bounding property for $\text{Regret}(f_n)$. After rearranging and computing the optimal λ (which coincides with the optimal λ in Lemma 2), (43) follows. $\square$

Given the bias-dependent rates in online learning (Lemma 7 and Lemma 8), a high-probability bias-dependent rate for online IL with an additional constant K due to adaptive stepsizes (cf. Theorem 2) can be derived in the same way as the proof of Theorem 2, except that Lemma 7 and Lemma 8 will be invoked in (34) in place of Lemma 2 and Lemma 5.

Interestingly, Orabona [2019, Theorem 4.21] provides a bias-dependent regret for Online Subgradient Descent with adaptive stepsizes $\eta_n = \frac{\sqrt{2D}}{2\sqrt{\sum_{i=1}^n \|g_i\|_2^2}}$ (cf. Lemma 7). Although that regret bound would help more directly prove Theorem 1 in the adaptive stepsize setting, but it does not directly imply a bias-dependent regret to the linear functions defined by the gradients (cf. Lemma 8)

E EXPERIMENT DETAILS

Although the main focus of this paper is the new theoretical insights, we conduct experiments to provide evidence that the fast policy improvement phenomena indeed exist, as our theory predicts. We verify the change of the policy improvement rate due to policy class capacity by running an online IL experiment in the CartPole balancing task in OpenAI Gym [Brockman et al., 2016] with DART physics engine [Lee et al., 2018].

E.1 MDP SETUP

The goal of the CartPole balancing task is to keep the pole upright by controlling the acceleration of the cart. This MDP has a 4-dimensional continuous state space (the position and the velocity of the cart and the pole), and 1-dimensional continuous action space (the acceleration of the cart). The initial state is a configuration with a small uniformly sampled offset from being static and vertical, and the dynamics is deterministic. This task has a maximum horizon of 1000. In each time step, if the pole is maintained within a threshold from being upright, the learner receives an instantaneous reward of one; otherwise, the learner receives zero reward and the episode terminates. Therefore, the maximum sum of rewards for an episode is 1000.

E.2 EXPERT POLICY REPRESENTATION AND TRAINING

To simulate the online IL task, we consider a neural network expert policy (with one hidden layer of 64 units and tanh activation), and the inputs to the neural network is normalized using a moving average over the samples. The expert policy is trained using a model-free policy gradient method (ADAM [Kingma and Ba, 2014] with GAE [Schulman et al., 2015]). And the value function used by GAE is represented by a neural network with two hidden layers of 128 units and tanh activation. To compute the policy gradient during training, additional Gaussian noise (with zero mean and a learnable variance that does not depend on the state) is added to the actions, and the gradient is computed through log likelihood ratio. After 100 rounds of training, the expert policy can consistently achieve the maximum sum of rewards both with and without the additional Gaussian noise. After the expert policy is trained, during online IL, Gaussian noise is not added in order to reduce the variance in the experiments.

E.3 LEARNER POLICY REPRESENTATION

We let the learner policy be another neural network that has exactly the same architecture as the expert policy with no Gaussian noise added. In the setting of only training the output layer, we copy the weights for the hidden layer and the input normalizer from those of the expert policy and randomly initialize the weights of the output layer. During training, only the weights of the learner’s output layer were updated. In this way, we can view the learner as a *linear* policy using the representation of the expert policy. In the setting of training the full network, we still copy the input normalizer from that of the expert policy but we randomly initialize all the variables in the network, i.e., weights and biases of the hidden and output layers. During training, all of these variables were updated.

E.4 ONLINE IL SETUP

Policy class We conduct online IL with unbiased and biased policy classes. One one hand, we define the unbiased class as all the policies satisfying the representation in Appendix E.3. On the other hand, we define the biased policy classes by imposing an additional ℓ_2 -norm constraint with different sizes on the learner’s weights in the output layer so that the learner cannot perfectly mimic the expert policy. More concretely, in the experiments, the ℓ_2 -norm constraint has sizes $\{0.1, 0.12, 0.15\}$. This set of constraints was chosen based on the observation that the ℓ_2 -norm of the final policy trained without the constraint is about 0.18 when training the output layer only and about 0.23 when training the full network.

Loss functions We select $l_n(\theta) = \mathbb{E}_{s \sim d_{\pi_{\theta_n}}} [H_\mu(\pi_\theta(s) - \pi_e(s))]$ as the online IL loss (see Section 2.2), where H_μ is the Huber function defined as $H_\mu(x) = \frac{1}{2}x^2$ for $|x| \leq \mu$ and $\mu|x| - \frac{1}{2}\mu^2$ for $|x| > \mu$. In the experiments, μ is set to 0.05; as a result, H_μ is linear when its function value is larger than 0.00125. Because the learner’s policy is linear, this online loss is CSN in the unknown weights of the learner.

Policy update rule We choose AdaGrad [McMahan and Streeter, 2010, Duchi et al., 2011] as the online algorithm in Algorithm 1; AdaGrad is a first-order mirror descent algorithm and well matches the assumptions made in our theorems (Appendix D). When the ℓ_2 -norm constraint is imposed, an additional projection step is taken after taking a gradient step using AdaGrad. The final algorithm is a special case of the DAgger algorithm [Ross et al., 2011] (called DAggered in [Cheng et al., 2018]) with only first-order information and continuous actions [Cheng et al., 2018]. In the experiments, the stepsize is set to 0.01. In each round, for updating the learner policy, 1000 samples, i.e., state and expert action pairs, are gathered, and for computing the loss $l_n(\theta_n)$, more samples (5000 samples) are used due to the randomness in the initial state of the MDP. The total number of iterations is 500 for both the training output layer and the training full network experiments. Due to the randomness in the initial state of the MDP and the initialization of the policy, we averaged the results over 4 random seeds.

Hyperparameter tuning The hyperparameters are tuned in a very coarse manner. We eliminated the ones that are obviously not proper. Here are the hyperparameters we have tried. The stepsize in online IL: 0.1, 0.01, 0.001. The Huber function parameter μ : 0.05.