

Adversarial Attacks against Neural Networks in Audio Domain: Exploiting Principal Components

Ken Alparslan§
Department of Computer Science
Conestoga College
 Waterloo, ON, CA
 kalparslan6724@conestogac.on.ca

Yigit Alparslan§
Department of Computer Science
Drexel University
 Philadelphia, PA, US
 ya332@drexel.edu

Dr. Matthew Burlick
Department of Computer Science
Drexel University
 Philadelphia, PA, US
 mjb528@drexel.edu

Abstract—Adversarial attacks are inputs that are similar to original inputs but altered on purpose. Speech-to-text neural networks that are widely used today are prone to misclassify adversarial attacks [1], [2], [3]. In this study, first, we investigate the presence of targeted adversarial attacks [4], [11] by altering wave forms from Common Voice data set. We craft adversarial wave forms via Connectionist Temporal Classification Loss Function [13], [14], [15] and attack DeepSpeech [12]—speech-to-text neural network implemented by Mozilla. We achieve 100% adversarial success rate (zero successful classification by DeepSpeech) on all 25 adversarial wave forms that we crafted. Second, we investigate the use of PCA as a defense mechanism against adversarial attacks. We reduce dimensionality by applying PCA to these 25 attacks that we created and test them against DeepSpeech. We observe zero successful classification by DeepSpeech, which suggests PCA is not a good defense mechanism in audio domain. Finally, instead of using PCA as a defense mechanism, we use PCA this time to craft adversarial inputs under a black-box setting with minimal adversarial knowledge. With no knowledge regarding the model, parameters, or weights, we craft adversarial attacks by applying PCA to samples from Common Voice data set, and achieve 100% adversarial success under black-box setting again when tested against DeepSpeech. We also experiment with different percentage of components necessary to result in a classification during attacking process. In all cases, adversary becomes successful.

Index Terms—Audio attacks, DeepSpeech, Adversarial Attacks, Speech-to-Text Neural Network, Connectionist Temporal Classification, Recurrent Neural Networks

I. INTRODUCTION

Numerous recent studies have demonstrated how Deep Neural Network (DNN) classifiers can be fooled by adversarial examples [1], [2], [3], [4], [5] in which an attacker adds perturbations to an original sample, causing the classifier to misclassify the sample [6]. Adversarial attacks that render DNNs vulnerable in real life represent a serious threat, given the consequences of improperly functioning autonomous vehicles, malware filters, bio-metric authentication systems or surveillance systems [7], [8], [9]. Social network companies, crime-fighting organizations, law enforcement, and various commercial interests may wish to be able to use image classification and speech-to-text transcription tools with defensive mechanisms that are robust to adversarial attacks [2], [11], [29] in order to reduce these attacks' effectiveness. Wide usage

of DNNs makes the problem of creating robust and secure DNNs even more important in safety-critical applications. We are interested in exploring whether there are any particular characteristics of audio recognition which seem to make adversarial attacks successful in this area. Current attacks that have been studied were primarily in the image domain [4], [5], [6], [7], such as those of Carlini [2] and Papernot et al [17]. Such attacks have been studied as proof-of-concepts, where adversarial attackers are assumed to have full knowledge of the classifier (e.g. model, architecture, model weights, parameters, training and testing data sets). The strongest attack in the literature at the time of writing this article is Carlini's attack [11] based on the L_2 norm, and it is a white-box attack requiring full knowledge of the model. Much of this research has been interested in developing the most effective attacks possible, to be used as standards against which to test the robustness of classifier RNNs [2]. With less knowledge of the classifier model, the effectiveness of the attack decreases. There is also interest in crafting attacks that assume minimal knowledge of the adversary—that is, attacks under black-box setting—regarding the classifier model, since in most real world applications the adversary does not have access to the classifier's parameters unless the adversary is an insider.

We are inspired by work on image domain [2], [3], [4], [5], [6] and investigate the audio domain in this paper. We use Common Voice Data set, which is widely used as a standard audio data set in the literature [11]. Being a widely used data set, it provides a common ground for different research labs all around the world. We use 25 samples from Common Voice to create our adversarial attacks. We also use DeepSpeech, a state-of-the-art speech-to-text transcription neural network implemented by Mozilla [12] to test our attacks. In the literature, one can see that Recurrent Neural Networks are often used for audio transcription/decoding systems [13], [14], [15]. RNNs are effective to map an audio signal to a sequence of probability distributions over individual characters. DeepSpeech, for example, is a recurrent neural network that uses Long Short-Term Memory (LSTM) Neural Network Architectures. Connectionist Temporal Classification (CTC) [13] is a method of training a sequence-to-sequence neural network when the alignment between the input and output sequences is not known. DeepSpeech uses CTC because the

§These co-first authors contributed equally.

inputs are an audio sample of a person speaking, and the unaligned transcribed sentences, where the exact position of each word in the audio sample is not known. In order to study neural networks in the audio recognition field, we focus on creating adversarial attacks that are crafted under white-box setting, as well as black box setting. For white-box approached attacks [11], we represent audio as a N-dimensional vector x . Each element x_i is a signed 16-bit value sampled at 16KHz. Targeted attacks are crafted as follows: One second of given waveform is split into 50 frames. Input domain consists of single frames and the output domain consists of characters in the a-z space. RNN (in our case, we have a hook to the DeepSpeech's language decoder, and RNN) takes a sequence of N frames and returns a probability distribution over the output domain for each frame. While CTC maps every frame to a probability distribution over the characters, this does not directly give a probability distribution over all phrases. The probability of a phrase is defined as a function of the probability of each character. For in-depth analysis, we refer the reader to [25]. Carlini et al [11] gives two short definitions. A *sequence* Π reduces to a shortened sequence p if starting with Π and making the following two operations (in order) yields p :

- 1) Remove all sequentially duplicated tokens.
- 2) Remove all e tokens

For example, the sequence a a b e e b reduces to a b. Π is an alignment of p with respect to target labels y if

- 1) Π reduces to p ,
- 2) the length of p is equal to the length of y .

Carlini et al [11] defines the probability of alignment p under y as the product of the likelihoods of each of its elements:

$$Pr(\Pi|y) = \prod_i y_{\pi_i}^i \quad (1)$$

The probability of a given phrase p under the distribution $y = f(x)$ becomes

$$Pr(p|y) = \sum_{\pi \in \Pi(p,y)} Pr(\pi|y) = \sum_{\pi \in \Pi(p,y)} \prod_i y_{\pi_i}^i \quad (2)$$

As is usually done, the loss function used to train the network is the negative log likelihood of the desired phrase:

$$CTC - Loss(f(x), p) = -\log Pr(p|f(x)) \quad (3)$$

Carlini et al [11] gives the following definition to decode a vector y to a phrase p , such that it best aligns to y .

$$C(x) = \operatorname{argmax}_{\pi} Pr(p|f(x)) \quad (4)$$

The search space is non-trivial. Current literature suggests some optimization algorithm and use of dynamic programming to help find the phrase p [11]. In our study, it is approximated via Beam Search Decoding. Beam Search Decoding simultaneously evaluates the likelihood of multiple alignments π and then chooses the most likely phrase p under these alignments. We refer the reader to [13] for a complete algorithm description.

We were able to craft adversarial attacks against Common Voice data set which achieved 100% misclassification rate against the classifier when tested against DeepSpeech. The perturbed audio files produced by this attack, while altered, were still clearly identifiable to a human. Even visually, the wave forms are nearly indistinguishable as it can be seen in Figure 2 and 3

II. RELATED WORK

Previously, adversarial examples have focused largely on domain of images, and face detection as it can be seen in [26], [27] and [28]. In the discrete domain, text classification is also studied [19]. However, adversarial attacks in audio recognition domain remains relatively new.

- 1) Goodfellow et al, (2013) highlighted adversarial examples as a ubiquitous threat to different neural network models [10]
- 2) Papernot et al, (2016) showed the limitations of deep neural networks in image recognition [20]
- 3) Adrian et al, (2018) showed that adversarial training can be used as a defense against attacks in image domain [21]
- 4) Carlini et al, (2018) crafted targeted audio adversarial attacks [11]
- 5) Yakura et al, (2019) demonstrated the possibility of an over-the-air audio attacks [22].

We are inspired by the previous work, where adversarial were attacking image classifiers in [1], [2], [3], [4], [5], [6], [7]. By investigating adversarial attacks in audio domain, and looking at different ways of crafting attacks, we hope our research may help to advance the study of adversarial attacks on RNNs and defensive mechanisms to counteract them, particularly in the audio recognition domain.

III. PROBLEM STATEMENT

In this study, we are tackling the following problems:

- (i) How can we produce strong adversarial examples in audio domain, i.e., transferable adversarial examples that fool a model with high confidence while requiring only a small perturbation?
- (ii) How can we train a model to be robust so that there are no audio adversarial examples, or at least so that an adversary cannot find them easily?

To answer these questions, we investigate creating audio adversarial attacks, and explore evaluating robustness of a neural network on following aspects:

- 1) Presence/Robustness of white-box and black-box adversarial attacks (Can we embed a sentence into a song? Can we force DeepSpeech to transcribe a sentence to some other sentence that we want? Can we reduce number of frequency components so that difference is subtle enough for a human to not recognize, but big enough for DeepSpeech to transcribe it poorly without any adversarial knowledge regarding model weight, parameters, and architecture?)
- 2) Use of PCA to craft adversarial attacks under black-box setting with minimal adversary knowledge regarding the

model (Can we use PCA to alter the audio and result in misclassification by the RNN?)

- 3) Use of PCA as a defense mechanism (Can we use PCA to smooth out the adversarial noise, and recover the original content?)

We have the following basic approach in this study.

- 1) Use PCA to craft adversarial attacks in audio under black-box setting with minimal adversarial knowledge
- 2) Use CTC loss function, gradient descent, on a Long short-term memory architecture (LSTM) to craft adversarial attacks in audio under white-box setting with full adversarial knowledge.
- 3) Apply attacks to DeepSpeech and compare results.
- 4) Use PCA as a defense mechanism to smooth out the adversarial noise in order to see if robustness is improved against adversarial attacks

When we are creating *targeted* attacks, we assume that the adversary has complete access to a neural network, including the architecture and all parameters, and can use this in a white-box manner. This is a conservative assumption. There have been various attempts [15], [2], [20], [42], [39] at constructing defenses that increase the robustness of a neural network, defined as a measure of how easy it is to find adversarial examples that are close to their original input. To come up with the strongest attacking algorithm, full adversarial knowledge was assumed in most of the cases. However, in real world, one might find that it is not the case most of the time. A malicious input might not know for instance, how Amazon Alexa was trained to pass some evil hidden voice commands. Another example might be ambient noise added to the input. In the ambient noise case, the input is not altered on purpose. The input happens to be adversarial because of the accidental noise in the environment/channel. In that case, the noise should not result in misclassification if the underlying RNN is robust against noise. For this reason, we also study adversarial attacks that are crafted under black box setting with minimal adversarial knowledge. To craft those attacks, we apply PCA to reduce dimensionality of the audio signal. In our case, dimensions are frequency components that makes up the audio signal after taking the Fast Fourier Transform (FFT). We usually pick a high sampling rate for the FFT to avoid aliasing such as 16000 Hz. Later, we reconstruct the audio so that we only keep some percentage of the original information. (mainly 10%, 35%, 65%, 80%, 95%). Since input length is different for each case, we can't fix the number of components that are used to reconstruct the original signal. Instead we fix the percentage of reconstructed information (that is, how much of the content is retained after reconstruction). For 25 of the samples from Common Voice data set, we apply PCA where we keep 10%, 35%, 60%, 90% of the components after reconstruction. Applying PCA to an audio signal that is under 5 seconds takes about 2-3 seconds. Entire process is completed over the course of 3-4 hours.

We create adversarial attacks and investigate the differences by plotting the magnitude (loudness) with respect to time. We

also plot the power with respect to frequencies. Essentially, we look for differences in time domain as well as frequency domain. We use magnitude of the components (in decibel (dB)) as a metric to keep track of how much distortion is added. We also calculate the normalized edit distance to quantify how similar two strings are (First string being the original text, second string being the output of DeepSpeech). Normalized edit distance is defined as the number of steps to convert one string to another where each action can only be 'insertion, deletion, substitution'. This helps us keep track of the success of targeted adversarial attacks when tested against DeepSpeech. Figure 1 shows the magnitude of one of the samples over time. When we create an adversarial attack by adding adversarial noise to it, we see that magnitude plot of the waveform has less number of spikes, and more smooth silhouette. This might be explained by the fact that we always remove frequencies from the given input whilst creating adversarial attacks. One can also think of it as 'adding silence'. For this reason, our distortion metric in dB is always negative, since the loudness of the adversarial input will be less than that of the original waveform we started with. Because the perturbation introduced is quieter than the original signal, the distortion is a negative number, where smaller values indicate quieter distortions.

$$dBx(\delta) = dB(\delta) - dB(x)$$

We also use a similarity index to indicate the sequences' similarity as a float in the range [0, 1].

$$\text{Similarity} = 2.0 * M / T$$

where T is the total number of elements in both sequences, and M is the number of matches. Note that this is 1.0 if the sequences are identical, and 0.0 if they have nothing in common.

IV. DATA

We use 'Common Voice' data set to craft our adversarial examples, which is widely used as a standard audio data set in the literature. Being a common data set, it provides a ground for different research labs all around the world. We use 25 samples from Common Voice to create our adversarial attacks. We also use DeepSpeech, a state-of-the-art speech-to-text transcription neural network implemented by Mozilla to test our attacks.

V. RESULTS & OBSERVATIONS

Quick Summary for results are as follows:

- 1) White-box targeted attacks result in 100% adversarial success (DeepSpeech can fails to transcribe the original input and transcribes the targeted sentence instead). So, all 25 targeted attacks result in misclassification when tested against DeepSpeech.
- 2) We can successfully embed voice in music. DeepSpeech transcribes Bach Cello Suite No:1 as "evil" for instance
- 3) We can successfully target silence, that is humans can hear the sentence, but DeepSpeech can't

- 4) PCA fails to smooth out adversarial noise.
- 5) PCA succeeds as a way of creating black-box attacks. We were able to reconstruct 25 samples from Common Voice Data set, by keeping 95% of the frequency components, while achieving 100% adversarial success rate. When we kept 10% of the frequencies, we also achieve 100% adversarial success rate, but the input sentence sounds very corrupted to ear.
- 6) In the case of 95% reconstruction, we achieve average similarity ratio of 87.85% percent and normalized edit distance of 9, whereas in the case of 10% reconstruction, we achieve average similarity ratio of 27.42%, and normalized edit distance of 46. We encourage the user to refer to I for intermediate PCA Reconstruction percentages. We also encourage the user to listen to crafted attacks here.
- 7) We can successfully embed voice in music. This means an audio that sounds as a song to a human being might contain hidden voice commands.
- 8) Targeting a long text when the input audio is short becomes very computationally expensive, whereas targeting a short text such as "evil" when the input audio is long and is rich in frequencies.
- 9) Average distortion among adversarial attacks is 28.8232 dB (absolute value is taken), which is equivalent of ambient noise in a recording.

A. Black-Box Attacks

Black-Box attacks are not targeted. They are weaker but their advantage is that they don't have to have full adversarial knowledge regarding the model. We can use PCA as a way of crafting adversarial attacks. In figure 3, the input file says "why should one halt on the way?". There is no targeted text. We apply PCA, and reconstruct the audio based on the 35 out of 45 frequency components (just for this sample, 95% refer to first 35 components since input length and frequency components are never fixed in speech) so that 95% of the information is stored. DeepSpeech's output, which is defined as the transcribed text, is altered but still very close to the original. DeepSpeech's output string has a Normalized Edit Distance of 9 to the original, which means it would take 9-unit step actions to convert one string to another. Original audio and the adversarial audio are in this case of 87.85% similarity.

In figure 4, the input file says "why should one halt on the way?". There is no targeted text. We apply PCA, and reconstruct the audio based on the 35 out of 45 frequency components so that 10% of the information is stored. transcribed text is very much altered, and DeepSpeech performs very poorly, and fails to recognize it. DeepSpeech's output string has a Normalized Edit Distance of 46, which means it would take 46-unit step actions to convert one string to other. Original audio and the adversarial audio are in this case of 27.39% similarity. We repeat this step for 25 samples of the Common Voice data set. We average the similarities, and normalized edit distances over 25 inputs, while experimenting with different percentages of the original content that is

retained during PCA reconstruction. Mainly, we experiment with 10%, 35%, 65%, 80%, and 95% of the original frequency components during reconstruction phase of PCA. We name these untargeted adversarial attacks under black-box approach '10%, 35%, 65%, 80%, and 95% attacks' to make writing easier.

B. White-Box attacks

We notice that creating an adversarial gets much more difficult if the targeted text is long. Every extra character in the target requires an increase in, therefore for a longer text, amount of required distortion increases. (In our case adding more adversarial noise). However, conversely, we observe that the longer the initial source phrase is, the easier it is to make it target a given transcription. We attribute this to the fact that we always remove frequencies from the original sample. Starting with an input rich in frequencies essentially takes less duration, and computational resources.

Over 25 targeted adversarial attacks that were crafted had a mean distortion of 28.8232 dB, which is roughly equivalent of ambient noise. This validates the work of Nicholas Carlini et al [11].

We lay out three approaches to study targeted attacks. First approach is to make the sentence get transcribed as "evil" (as a proof-of-concept that hidden evil voice commands can be embedded in voice. Also, longer targets are harder, so "evil" word works perfectly since it takes less time to minimize the CTC loss function). Second approach is to embed voice in music. We achieve that by embedding voice into Bach's Cello Suit No^o 1. Third approach is to target silence, where we hide speech by adding adversarial noise that causes DeepSpeech to transcribe nothing.

We look for the time vs magnitude plots, time vs frequency, as well as frequency vs power plots to keep track of our perturbation. Sample plots can be seen in Figure 1, 2, and 3.

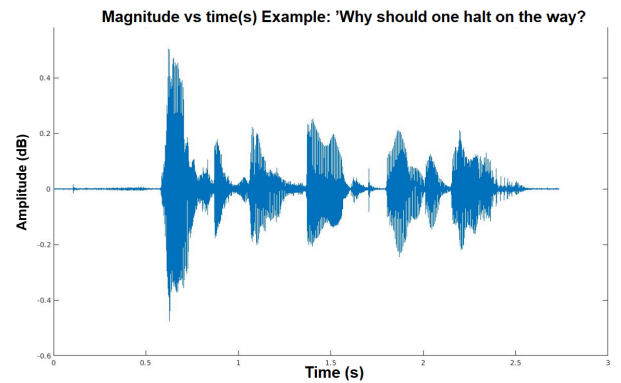


Fig. 1. Magnitude vs time(s) Example: 'Why should one halt on the way?'

C. Evaluation

As it can be seen in Figure 2 and 3 that original and adversarial wave forms are almost visually indistinguishable when plotted in time as well as frequency domain. When we

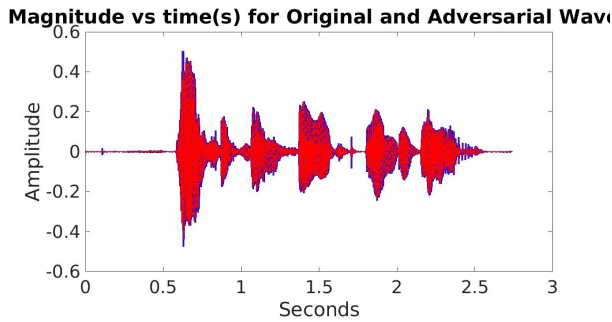


Fig. 2. Magnitude vs time(s) for Original and Targeted Adversarial Waves/ When we calculate the percent MSE between two wave forms normalized with respect to the original waveform, we see 99% similarity between wave forms.

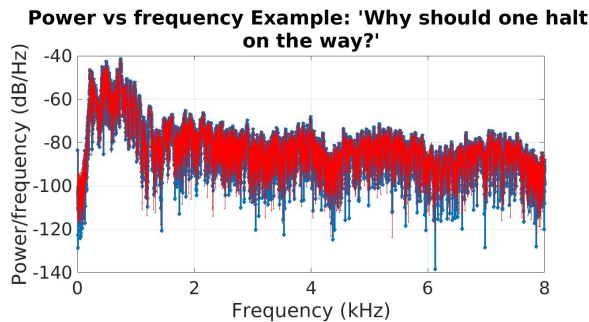


Fig. 3. Power vs frequency Example: Why should one halt on the way? Red is the power spectrum of the original wave form, and blue is the power spectrum of the adversarial wave form that was crafted under white-box approach.

crafted 25 adversarial samples taken from Common Voice Data set, we achieve 100% adversarial success. DeepSpeech fails to transcribe the original speech in all of them. In all the cases, the targeted sentence is chosen to be "evil". Target is chosen to be relatively a short sentence (i.e only a word in this case) because it allows us to generate more samples in shorter amount of time.

Figure 5, and Figure 6 give insight to use of PCA as a way of crafting adversarial attack. Figure 5 shows the primary principal component of the sample "It seemed safe and tranquil." Most of the edges, and noisy spikes are eliminated

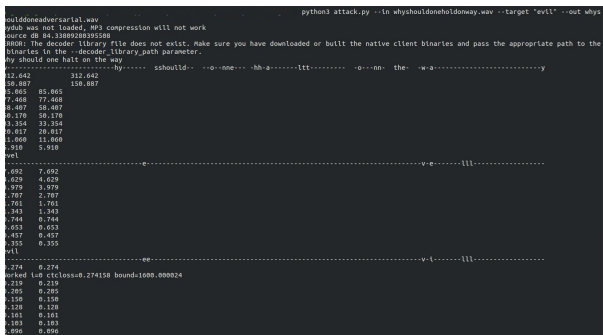


Fig. 4. Example of attacking process. In this example, the input file says "why should one halt on the way?". The targeted text is "evil".

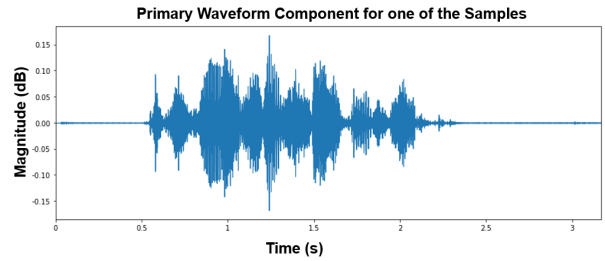


Fig. 5. Primary principal component of the waveform "It seemed safe and tranquil"

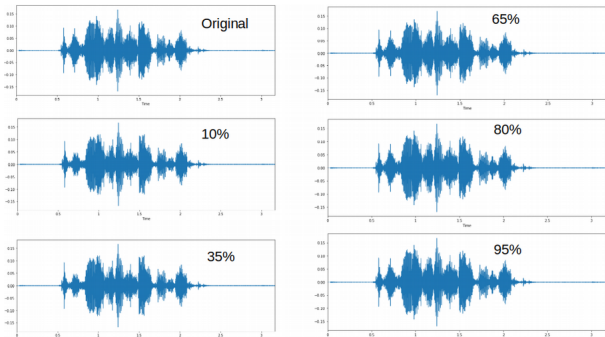


Fig. 6. Comparing PCAs in frequency domain with different percentage of content retained. From top left to bottom right, we show the magnitude versus time (s) plot of the original signal as well as when PCA is applied so that we have 10%, 35%, 65%, 80%, 95% of the original content reconstructed, respectively.

compared to the original signal in Top left corner of Figure 6 with label "Original".

Figure 8 shows a list of DeepSpeech outputs for the adversarial inputs crafted with PCA 10% reconstruction to make it easier for the reader to comprehend our work. Output texts by DeepSpeech are very poor. This shows that our black-box attacks were successful against DeepSpeech when we used PCA.

Table I shows the percentages of frequency components that are used to reconstruct original audio signal. High percentage

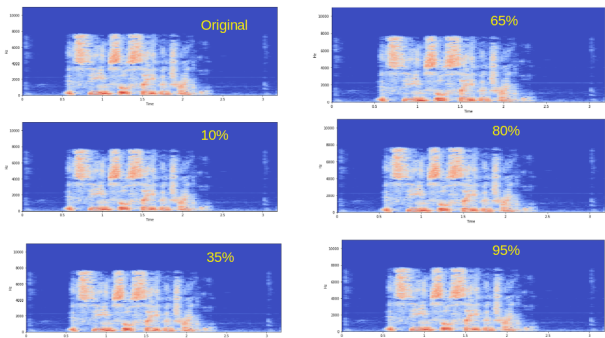


Fig. 7. Comparing PCAs in frequency domain with different percentage of content retained. From top left to bottom right, we show the frequency versus time (s) plot of the original signal as well as when PCA is applied so that we have 10%, 35%, 65%, 80%, 95% of the original content reconstructed, respectively.

Original	Pcact 10%
but finally the merchant appeared and asked the boy to shear four sheep	mhm for po o for e the to
i just got rid of one crowd	mm ten the goo oe herea put e dapien
every search begins with beginner's luck	tad be the bin te wind fat
you can't be the wind the wind said	moe mo yo a an on e left nomer with
he had surprised himself with the thought	then then the ibent of good but this ment
he was going to miss the place and all the good things he had learned	for mhm o moment an tho fromble spro te port
an huge hole had been made by the impact of the projectile	m hm hm no i m or od
most meteorites are more or less rounded	in ton i now mon tises te marfonton
it's candle now on long distance from washington	the av good back i be etered
he could always go back to being a shepherd	but boy won't tom a worn on popet below
the boy went to his room and packed his belongings	he no abot
do you know what	yeeave at te tey found the pi that ev o er ted noven te the
they went in to drink the tea which was served in beautiful crystal glasses	s was a the
this is for you	of none of edesses of the was ser so a foses
they were men of the desert and they were fearful of sorcerers	that opel wep wold in behand me wald with on the ou form
their faces were hidden behind blue veils with only their eyes showing	but wot loks o lof te gon fot
it seemed so safe and tranquil	i le gun to toimen
aren't you going to tell me	ther te boy caught
that's true the boy thought	yeeave at te tey found the pi that ev o er ted noven te the tigte felt
we're refugees from the tribal wars and we need money the other figure said	m one of e convedelin the giver co up i own life
during one of these conversations the driver told of his own life	hm pan offer pro mat on bovement to ge ana
hm the party also to announce his engagement to joanna	o ente fomp had come apor the gran cotin nut put the bigo botoman
he remembered something his grandfather had once told him that butterflies were a good omen	a head han nod lanpe be le fate
i heard a faint movement under my feet	hm pan offer pro mat on bovement to ge ana
he stood irresolute for a moment and then scrambled out of the pit	

Fig. 8. A snapshot of the transcribed outputs given by DeepSpeech when we only kept 10% of the frequencies. DeepSpeech transcribes the adversarial inputs very poorly.

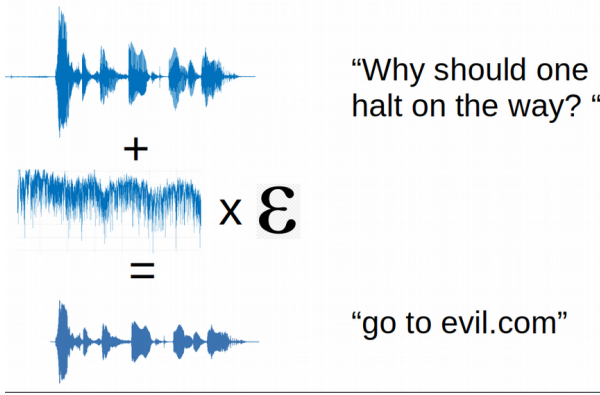


Fig. 9. White-Box attacks are targeted. They are stronger but they have to have full adversarial knowledge. We can target any sentence given any arbitrary waveform with this approach. This also includes embedding voice in music, or silencing voice in a waveform. . Adversarial noise is added to the original input. In this example, the input file says "why should one halt on the way?". The targeted text is "go to evil.com".

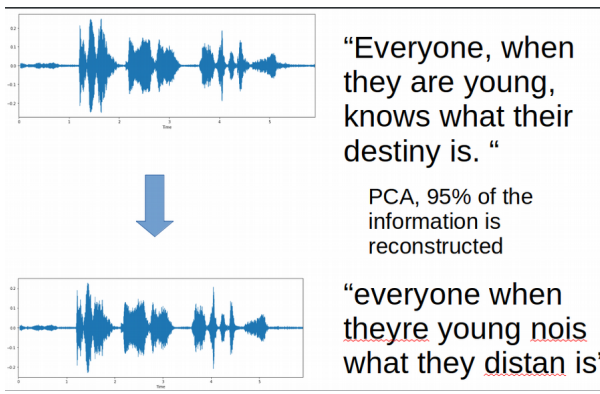


Fig. 10. Black-box attacks are not targeted. They are weaker, but they don't have to have full adversarial knowledge. The input file says, "why should one halt on the way?". There is no targeted text. We apply PCA so that reconstructed adversarial input has 95% of the original frequency components. DeepSpeech's output string has a Normalized Edit Distance of 9 to the original text. The original audio and the adversarial audio are of 87.85% similarity. DeepSpeech fails to fully transcribe this adversarial attack.

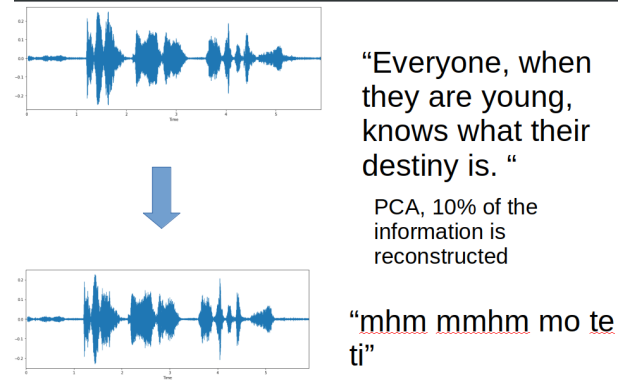


Fig. 11. In this example, the input file says "why should one halt on the way?". There is no targeted text. We apply PCA so that reconstructed adversarial input only has 10% of the original frequency components. DeepSpeech's output string has a very poor Normalized Edit Distance of 46 to the original text. Original audio and the adversarial audio are of 27.39% similarity. DeepSpeech fails to transcribe this adversarial attack.

means most of the frequency components were kept, and reconstruction is almost perfect. Low percentage means only few of the frequency components were kept, and we lose most of the original information. Information in this context is the frequency components that make up the signal. Since the speech duration and the number of frequency components in an input are not fixed, we can *NOT* hard code a number for the frequency components to be used during reconstruction (i.e we can not say 'pick 3 most primary components, 4 most primary components etc.') because we don't know the number of frequency components during speech. Speech is a continuous signal unlike images, which are a discrete signal. Instead of fixing a certain number for the primary components during PCA, we experiment with different percentage of information retain compared to the original signal, with n primary components, n being calculated based on the percentage given the input signal. (ratio of frequency components in the audio used to reconstruct the original versus all frequency components defines the percentage of the information retain in this context) 'Similarity' column in Table I is an index that indicates how close two signals are as described in Basic Approach section. 'Normalized Edit Distance' [23] is the number of steps necessary to convert one string to another, where actions are deletion, substitution, insertion. Higher number of actions means low similarity.

Info. retained(%)	Similarity (%)	Norm. Edit Distance
10	27.472	46
35	37.472	33
65	42.216	22
80	73.932	14
95	87.850	9

TABLE I
ALL OF THE DATA IS ALSO SHOWN IN FIGURE 12 AND 13.

DeepSpeech performs significantly poorly in the '10% Reconstruction' case with an average of 27% similarity index.

For the 95% case, DeepSpeech doesn't perform as poorly as the 10% case, but it still fails to fully transcribe the speech.

One has to note that a human can easily tell that the audio signal has been altered during 10% case. So, during a real-world adversary attack scenario, use of '95% Reconstruction' case would make more sense for the adversary since both attacks result in transcription failure, but 95% is much similar to the original audio. So, it gets harder to detect it. We encourage reader to listen to adversarial attacks created during this study.¹

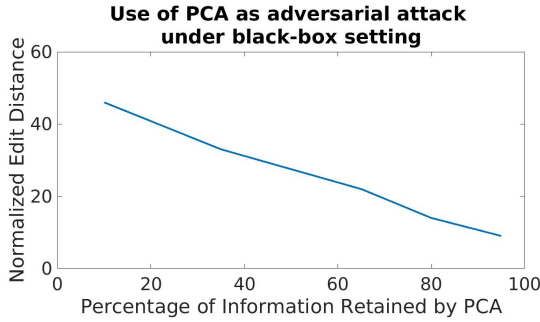


Fig. 12. Average similarity distance when PCA is applied to all 25 adversarial examples with respect to percentage of components used to craft the adversarial effect during PCA.

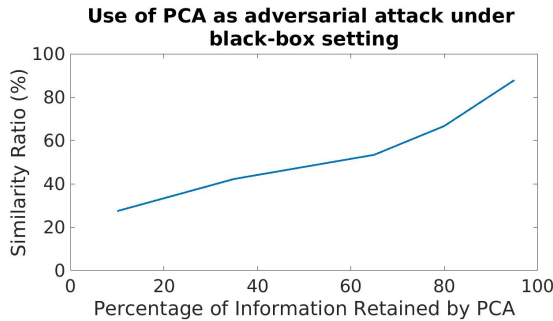


Fig. 13. Average similarity distance when PCA is applied to all 25 adversarial examples with respect to percentage of components used to craft the adversarial effect during PCA

Generating a single adversarial example requires approximately three-four hours of compute time on a local hardware(Intel(R) Core(TM)2 Duo CPU E8400 @ 3.00GHz 2000 with 2 CPU cores and 6144 KB cache size-No GPU). At most, two attacks can be crafted simultaneously. Lack of GPU is definitely a major problem whilst training Machine Learning Models.

VI. DISCUSSION & CONCLUDING REMARKS

In this study, we studied applying principal components for generating adversarial attacks as well as using them to look for defense mechanisms in audio domain against adversarial attacks. We study the adversarial attacks under white-box and

black-box settings. White-box targeted attacks result in 100% adversarial success (DeepSpeech can fails to transcribe the original input and transcribes the targeted sentence instead). So, all 25 targeted attacks result in misclassification when tested against DeepSpeech. We can successfully embed voice in music. DeepSpeech transcribes Bach Cello Suite No:1 as "evil" for instance. We can successfully target silence, that is humans can hear the sentence, but DeepSpeech can't. Additionally, PCA succeeds as a way of creating black-box attacks. We were able to reconstruct 25 samples from Common Voice Data set, by keeping 95% of the frequency components, while achieving 100% adversarial success rate (that is, zero successful classification by DeepSpeech). When we kept 10% of the frequencies, we also achieve 100% adversarial success rate, but the input sentence sounds very corrupted to human ear. In the case of 95% reconstruction, we achieve average similarity ratio of 87.85% percent and normalized edit distance of 9, whereas in the case of 10% reconstruction, we achieve average similarity ratio of 27.42%, and normalized edit distance of 46.

VII. FUTURE WORK

Adversarial attacks in audio domain is a relatively new field. We tried to investigate white-box and black-box approached attacks and their strengths/weaknesses in audio domain. We also tried to study one defense mechanism, that is use of PCA to smooth out the adversarial noise. Future work would include to study the effect of transferability. Adversarial attacks that result in misclassification might not do so when tested against a different model. We still don't know what criteria/set of conditions dictates whether a given adversarial input will be adversary for all other models. The concept of universal adversarial attacks is still being studied [24].

DeepSpeech implemented by Mozilla currently serves as a benchmark in literature because of its significant accuracy (6% word error rate over a corpus of 240 million words) [12]. Inputs that are adversary for DeepSpeech are *de facto* expected to be adversary for other models. So, we are not too much worried that we couldn't complete the transferability studies although we still admit that it would be a worthwhile to complete transferability studies in the future had we had more time.

Another point that might be worthwhile to consider is the possibility of adversarial training. Goodfellow et al showed that adversarial training can help increase accuracy [5] in image recognition domain. Such investigation would require more data, but it would be worthwhile to see the effect of altered wave forms in the training data set to achieve a more robust neural network. Overall, we hope our research may help to advance the study of adversarial attacks on RNNs and defensive mechanisms to counteract them in the audio recognition domain.

¹https://www.dropbox.com/sh/0e9m4an694lkv6w/AACggV86yaopxKF_WVt8iTXNa?dl=0

REFERENCES

- [1] Nicholas Carlini and David Wagner. Defensive distillation is not robust to adversarial examples. arXiv preprint arXiv:1607.04311, 2016.
- [2] Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. arXiv preprint arXiv:1608.04644, 2016.
- [3] Nicholas Carlini and David Wagner. Adversarial examples are not easily detected: Bypassing ten detection methods. arXiv preprint arXiv:1705.07263, 2017.
- [4] Alhussein Fawzi, Omar Fawzi, and Pascal Frossard. Analysis of classifiers' robustness to adversarial perturbations. arXiv preprint arXiv:1502.02590, 2015.
- [5] Ian J. Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. arXiv preprint arXiv:1412.6572, 2014.
- [6] Shixiang Gu and Luca Rigazio. Towards deep neural network architectures robust to adversarial examples. arXiv preprint arXiv:1412.5068, 2014.
- [7] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, pages 770–778, 2016.
- [8] Warren He, James Wei, Xinyun Chen, Nicholas Carlini, and Dawn Song. Adversarial example defenses: Ensembles of weak defenses are not strong. arXiv preprint arXiv:1706.04701, 2017.
- [9] B. Biggio, I. Corona, D. Maiorca, B. Nelson, N. Srndi c, P. Laskov, G. Giacinto, and F. Roli. Evasion attacks against machine learning at test time. In Joint European Conference on Machine Learning and Knowledge Discovery in Databases, pages 387–402. Springer, 2013.
- [10] C. Szegedy, W. Zaremba, I. Sutskever, J. Bruna, D. Erhan, I. Goodfellow, and R. Fergus. Intriguing properties of neural networks. ICLR, 2013.
- [11] Nicholas Carlini and David Wagner. Audio Adversarial Examples: Targeted Attacks on Speech-to-Text, Deep Learning and Security Workshop, 2018
- [12] Mozilla. Project deepspeech. <https://github.com/mozilla/DeepSpeech>, 2017.
- [13] A. Graves, S. Fernandez, F. Gomez, and J. Schmidhuber, "Connectionist Temporal Classification: Labelling Unsegmented Sequence Data with Recurrent Neural Networks," in ICML, Pittsburgh, USA, 2006
- [14] A. Graves, Supervised sequence labelling with recurrent neural networks, vol. 385, Springer, 2012
- [15] A. Graves, "Sequence transduction with recurrent neural networks," in ICML Representation Learning Workshop, 2012.
- [16] S. Hochreiter and J. Schmidhuber, "Long Short-Term Memory," Neural Computation, vol. 9, no. 8, pp. 1735-1780, 1997.
- [17] N. Papernot, P. McDaniel, and I. Goodfellow. Transferability in machine learning: from phenomena to black-box attacks using adversarial samples. arXiv preprint arXiv:1605.07277, 2016
- [18] A. Graves, S. Fernandez, F. Gomez, and J. Schmidhuber. Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. In Proceedings of the 23rd international conference on Machine learning, pages 369–376. ACM, 2006.
- [19] R. Jia and P. Liang. Adversarial examples for evaluating reading comprehension systems. arXiv preprint arXiv:1707.07328, 2017
- [20] N. Papernot, P. McDaniel, X. Wu, S. Jha, and A. Swami. Distillation as a defense to adversarial perturbations against deep neural networks. IEEE Symposium on Security and Privacy, 2016
- [21] Madry, Aleksander, Makelov, Aleksandar, Schmidt, Ludwig, Tsipras, Dimitris, and Vladu, Adrian. Towards deep learning models resistant to adversarial attacks. International Conference on Learning Representations, 2018
- [22] Hiromu Yakura, Jun Sakuma. Robust Audio Adversarial Example for a Physical Attack. In arXiv:1810.11793, 2018
- [23] A. Marzal, E. Videl, "Computation of Normalized Edit Distance and Applications", IEEE Transaction on Pattern Analysis and Machine Intelligence, vol. PAMI-15, no. 9, pp. 926-932, 1993
- [24] Moosavi-Dezfooli, Seyed-Mohsen et al. "Universal Adversarial Perturbations." 2017 IEEE Conference on Computer Vision and Pattern Recognition, 2017, 86-94
- [25] A. Hannun. Sequence modeling with ctc. Distill, 2017. doi: 10.23915/distill.00008. <https://distill.pub/2017/ctc>
- [26] Alparslan, Y., Alparslan, K., Keim-Shenk, J., Khade, S., and Greenstadt, R., "Adversarial Attacks on Convolutional Neural Networks in Facial Recognition Domain", arXiv e-prints, 2020.
- [27] Alparslan, K., Alparslan, Y., and Burlick, M., "Towards Evaluating Driver Fatigue with Robust Deep Learning Models", arXiv e-prints, 2020.
- [28] Alparslan, Y., Alparslan, K., Kshetry, M., and Kratz, L., "Towards Evaluating Gaussian Blurring in Perceptual Hashing as a Facial Image Filter", arXiv e-prints, 2020.
- [29] Alparslan, Y., Panagiotou, I., Livengood, W., Kane, R., and Cohen, A., "Perfecting the Crime Machine", arXiv e-prints, 2020.