

Almost exact recovery in noisy semi-supervised learning

Konstantin Avrachenkov^{*1} and Maximilien Dreveton^{†2}

¹Inria Sophia Antipolis, France

²École Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Abstract

Graph-based semi-supervised learning methods combine the graph structure and labeled data to classify unlabeled data. In this work, we study the effect of a noisy oracle on classification. In particular, we derive the Maximum A Posteriori (MAP) estimator for clustering a Degree Corrected Stochastic Block Model (DC-SBM) when a noisy oracle reveals a fraction of the labels. We then propose an algorithm derived from a continuous relaxation of the MAP, and we establish its consistency. Numerical experiments show that our approach achieves promising performance on synthetic and real data sets, even in the case of very noisy labeled data.

Keywords: graph clustering, semi-supervised learning, graph-based method, degree corrected stochastic block model, noisy data.

AMS subject classifications: 62F12, 62H30, 68T10

1 Introduction

Semi-supervised learning (SSL) aims at achieving superior learning performance by combining unlabeled and labeled data. Since typically the amount of unlabeled data is large compared to the amount of labeled data, SSL methods are relevant when the performance of unsupervised learning is low, or when the cost of getting a large amount of labeled data for supervised learning is too high. Unfortunately, many standard SSL methods have been shown to not efficiently use the unlabeled data, leading to unsatisfactory or unstable performances [10, Chapter 4], [8, 11]. Moreover, the presence of noise in the labeled data can further degrade the performance. In practice, the noise can come from a tired or non-diligent expert carrying out the labeling task or even from adversarial data corruption.

In this paper, we investigate the problem of graph clustering, where one aims to group the nodes of a graph into different classes. Our working model is the two-class Degree Corrected Stochastic Block Model (DC-SBM), with side information on some node's community assignment given by a noisy oracle. The DC-SBM was introduced in [16] to account for degree heterogeneity as well as for block structure. We let n be the number of nodes. Each node $i \in [n]$ is given a community label $Z_i \in \{-1, 1\}$ chosen uniformly at random and a parameter $\theta_i > 0$. Given $Z = (Z_1, \dots, Z_n)$ and $\theta = (\theta_1, \dots, \theta_n)$, an undirected edge is added between nodes i and j with probability $\min(1, \theta_i \theta_j p_{\text{in}})$, if $Z_i = Z_j$, and with probability $\min(1, \theta_i \theta_j p_{\text{out}})$, otherwise. This model reduces to the standard Stochastic Block Model (SBM) [1], if $\theta_i = 1$ for every node i . The unsupervised clustering problem consists of inferring the latent community structure Z given

^{*}k.avrachenkov@inria.fr

[†]maximilien.dreveton@gmail.com

one observation of a DC-SBM graph. We make the problem semi-supervised by introducing a noisy oracle. For every node, this oracle reveals the correct community label with probability η_1 , a wrong community label with probability η_0 , and reveals nothing with probability $1 - \eta_1 - \eta_0$.

We first derive the Maximum A Posteriori (MAP) estimator for SSL-clustering in a DC-SBM graph given the *a priori* information induced by a noisy oracle and graph structure. We note that despite its simplicity, this result did not appear previously in the literature, neither for a perfect oracle nor for SBM. In particular, we show that the MAP is the solution of a minimization problem that involves a trade-off between three factors: a cut-based term (as in the unsupervised scenario), a regularization term (penalizing solutions with unbalanced clusters), and a loss term (penalizing predictions that differ from the oracle information).

As solving the MAP estimator is NP-hard, we propose a continuous relaxation and derive an SSL version of a spectral method based on the adjacency matrix. We establish a bound on the ratio of misclassified nodes for this continuous relaxation, and we show that this ratio goes to zero under the hypothesis that the average degree diverges and an almost perfect oracle (see Corollary 3.2 for a rigorous statement). As a result, the proposed SSL method guarantees almost exact recovery (recovering all but $o(n)$ labels when n goes to infinity) even when a part of the side information is incorrect. We note that even though we work with the case of two clusters, most of our results are extendable to the setting of more than two clusters at the expense of more cumbersome notations.

One can make several parallels between our continuous relaxation and state-of-the-art techniques. Indeed, SSL-clustering often relies on minimization frameworks (see [5] for an overview). The idea of minimizing a well-chosen energy function was proposed in [28], under the constraint of keeping the labeled nodes' predictions equal to the oracle labels. As we will see in the numerical section, this hard constraint is unsuitable if the oracle reveals false information. Consequently, [7] introduced an additional loss term in the energy function to allow the prediction to differ from the oracle information. We recover this loss term with an additional theoretical justification, as it comes from a relaxation of the MAP.

Moreover, the regularization term is necessary to prevent the solution from being flat, and making classification relying on second-order fluctuations. This phenomenon was previously observed by [21] in the limit of an infinite amount of unlabeled data, as well as by [19] in the large dimension limit. The regularization term here consists of subtracting a constant term from all the entries of the adjacency matrix. It resembles previous regularization techniques, like the centering of the adjacency matrix proposed in [20]. However, contrary to [20], we study a noisy framework without assuming a large-dimension asymptotic regime. Moreover, we solve exactly the relaxed minimization problem instead of giving a heuristic with an extra parameter.

It was shown in [23] that even with a perfect oracle revealing a constant fraction of the labels, the phase transition phenomena for exact recovery in SBM (recovering all the correct labels with high probability) remains unchanged. Thus for the exact recovery problem, one could discard all the side information and simply use unsupervised algorithms when the number of data points goes to infinity. Of course, wasting potentially valuable information is not entirely satisfactory. Thus, in the present work, we consider the case of almost exact recovery and an oracle with noisy information.

The paper is structured as follows. We introduce the model and main notations in Section 2, along with the derivation of the MAP estimator (Section 2.2). A continuous relaxation of the MAP is presented in Section 3 as well as the guarantee of its convergence to the true community structure (Subsection 3.2). We postpone some proofs to the Appendix and leave in the main text only those we consider important to the material exposition. We conclude the paper with numerical results (Section 4), emphasizing the effect of the noise on the clustering accuracy. In particular, we outperform state of the art graph-based SSL methods in a difficult regime (few label points or large noise).

Lastly, the present paper is a follow-up work on [3]. However, there are very important developments. In [3] we have only established almost exact recovery on SBM for Label Spreading [27] heuristic algorithm with a linear number of labeled nodes (see [3, Assumption 3]). In the present work, we extend the analysis to DC-SBM, we investigate the effect of noisy labeled data, and we allow a potentially sub-linear number of labeled nodes. We also add experiments with real and synthetic data that illustrate our theoretical results.

2 MAP estimator in a noisy semi-supervised setting

2.1 Problem formulation and notations

A homogeneous *degree corrected stochastic block model* (DC-SBM) is parametrized by the number of nodes n , two class-affinity parameters $p_{\text{in}}, p_{\text{out}}$, and a pair (θ, Z) where $\theta \in \mathbf{R}^n$ is a vector of intrinsic connection intensities and $Z \in \{-1, 1\}^n$ is the community labeling vector. Given $(p_{\text{in}}, p_{\text{out}}, \theta, Z)$, the graph adjacency matrix $A = (a_{ij})$ is generated as

$$A_{ij} = A_{ji} \sim \begin{cases} \text{Ber}(\theta_i \theta_j p_{\text{in}}), & \text{if } Z_i = Z_j, \\ \text{Ber}(\theta_i \theta_j p_{\text{out}}), & \text{otherwise,} \end{cases} \quad (1)$$

for $i \neq j$, and $A_{ii} = 0$. We assume throughout the paper that $Z_i \sim \text{Uni}(\{-1, 1\})$, and that the entries of θ are independent random variables satisfying $\theta_i \in [\theta_{\min}, \theta_{\max}]$ with $\mathbb{E}\theta_i = 1, \theta_{\min} > 0$, and $\theta_{\max}^2 \max(p_{\text{in}}, p_{\text{out}}) \leq 1$. In particular, when all the θ_i 's are equal to one, the model reduces to the Stochastic Block Model (SBM):

$$A_{ij} = A_{ji} \sim \begin{cases} \text{Ber}(p_{\text{in}}), & \text{if } Z_i = Z_j, \\ \text{Ber}(p_{\text{out}}), & \text{otherwise.} \end{cases} \quad (2)$$

In addition to the observation of the graph adjacency matrix A , an oracle gives us extra information about the cluster assignment of some nodes. This can be represented as a vector $s \in \{0, -1, 1\}^n$, whose entries s_i are independent and distributed as follows:

$$s_i = \begin{cases} Z_i, & \text{with probability } \eta_1, \\ -Z_i, & \text{with probability } \eta_0, \\ 0, & \text{otherwise.} \end{cases} \quad (3)$$

In words, the oracle (3) reveals the correct cluster assignment of node i with probability η_1 and gives a false cluster assignment with probability η_0 . It reveals nothing with probability $1 - \eta_1 - \eta_0$. The quantity $\mathbb{P}(s_i \neq Z_i \mid s_i \neq 0)$ is the rate of mistakes of the oracle (*i.e.*, the probability that the oracle reveals a false information given that it reveals something), and is equal to $\eta_0/(\eta_1 + \eta_0)$. The oracle is informative if this quantity is less than $1/2$, which is equivalent to $\eta_1 > \eta_0$. In the following, we will always assume that the oracle is informative.

Assumption 2.1. The oracle is informative, that is, $\eta_1 > \eta_0$.

Given the observation of A and s , the goal of clustering is to recover the community labeling vector Z . For an estimator $\hat{Z} \in \{-1, 1\}^n$ of Z , the relative error is defined as the proportion of misclustered nodes

$$L(\hat{Z}, Z) = \frac{1}{n} \sum_{i=1}^n 1(\hat{Z}_i \neq Z_i). \quad (4)$$

Note that, unlike unsupervised clustering, we do not take a minimum over the permutations of the predicted labels since we should be able to learn the correct community labels from the informative oracle.

Notations Given an oracle s , we let ℓ be the set of labeled nodes, that is $\ell := \{i \in V : s_i \neq 0\}$, and denote \mathcal{P} the diagonal matrix with entries $(\mathcal{P})_{ii} = 1$, if $i \in \ell$, and $(\mathcal{P})_{ii} = 0$, otherwise.

The notation I_n stands for the identity matrix of size $n \times n$, and 1_n (resp., 0_n) is the vector of size $n \times 1$ of all ones (resp., of all zeros).

For any matrix $A = (a_{ij})_{i \in [n], j \in [m]}$ and two sets $S \subset [n]$, $T \subset [m]$, we denote $A_{S,T} = (a_{ij})_{i \in S, j \in T}$ the matrix obtained from A by keeping elements, whose row indices are in S and column indices are in T . We denote by $\|x\|$ the Euclidean norm of a vector x and by $\|A\|$ the spectral norm of a matrix $A \in \mathbf{R}^{n \times m}$. Finally, $A \odot B$ refers to the entry-wise matrix product between two matrices A and B of the same size.

2.2 MAP estimator of semi-supervised recovery in DC-SBM

Given a realization of a DC-SBM graph adjacency matrix A and the oracle information s , the Maximum A Posteriori (MAP) estimator is defined as

$$\hat{Z}^{\text{MAP}} = \arg \max_{z \in \{-1,1\}^n} \mathbb{P}(z | A, s). \quad (5)$$

This estimator is known to be optimal (in the sense that if it fails then any other estimator would also fail, see e.g., [15]) for the exact recovery of all the community labels. Theorem 2.2 provides an expression of the MAP.

Theorem 2.2. *Let G be a graph drawn from DC-SBM as defined in (1) and s be the oracle information as defined in (3). Denote $M = (F_1 - F_0) \odot A + F_0$, where $F_0 = (f_{ij}^{(0)})$ and $F_1 = (f_{ij}^{(1)})$ such that $f_{ij}^{(a)} = \log \frac{\mathbb{P}(A_{ij}=a | z_i=z_j)}{\mathbb{P}(A_{ij}=a | z_i \neq z_j)}$ for $a \in \{0,1\}$. The MAP estimator defined in (5) is given by*

$$\hat{Z}^{\text{MAP}} = \arg \min_{z \in \{-1,1\}^n} \left(z^T M z + \log \left(\frac{\eta_1}{\eta_0} \right) \|\mathcal{P}z - s\|^2 \right). \quad (6)$$

For a perfect oracle ($\eta_0 = 0$) this reduces to

$$\hat{Z}^{\text{MAP}} = \arg \min_{\substack{z \in \{-1,1\}^n \\ z_\ell = s_\ell}} z^T M z. \quad (7)$$

The proof of Theorem 2.2 is standard and postponed to Appendix A. We note that, despite being *a priori* standard, this result did not appear previously in the literature (neither for the standard SBM nor for the perfect oracle).

The minimization problem (6) consists of a trade-off between minimizing a quadratic function $z^T M z$ and a penalty term. This trade-off reads as follows: for each labelled node such that the prediction contradicts the oracle, a penalty $\log \left(\frac{\eta_1}{\eta_0} \right) > 0$ is added. In particular, when the oracle is uninformative, that is $\eta_1 = \eta_0$, then this term is null, and Expression (6) reduces to the MAP for unsupervised clustering.

The following Corollary 2.3, whose proof is in Appendix A, provides the expression of the MAP estimator for a standard SBM.

Corollary 2.3. *The MAP estimator for semi-supervised clustering on SBM graph with $p_{\text{in}} > p_{\text{out}}$ and with an oracle s defined in (3) is given by*

$$\hat{Z}^{\text{MAP}} = \arg \min_{z \in \{-1,1\}^n} \left(-z^T \left(A - \tau 1_n 1_n^T \right) z + \lambda \|\mathcal{P}z - s\|_2^2 \right), \quad (8)$$

where $\tau = \frac{\log\left(\frac{1-p_{\text{out}}}{1-p_{\text{in}}}\right)}{\log\left(\frac{p_{\text{in}}(1-p_{\text{out}})}{p_{\text{out}}(1-p_{\text{in}})}\right)}$ and $\lambda = \frac{\log\left(\frac{\eta_1}{\eta_0}\right)}{\log\left(\frac{p_{\text{in}}(1-p_{\text{out}})}{p_{\text{out}}(1-p_{\text{in}})}\right)}$. For the perfect oracle, this reduces to

$$\hat{Z}^{\text{MAP}} = \arg \min_{\substack{z \in \{-1,1\}^n \\ z_\ell = s_\ell}} z^T \left(-A + \tau 1_n 1_n^T \right) z. \quad (9)$$

3 Almost exact recovery using a continuous relaxation

As finding the MAP estimate is NP-hard [24], we perform a continuous relaxation (Section 3.1). We then give an upper bound on the number of misclustered nodes in Section 3.2.

3.1 Continuous relaxation of the MAP

For the sake of simplicity, we focus on the MAP for SBM, *i.e.*, minimization problem (8). We perform a continuous relaxation mirroring what is commonly done for spectral methods [22], namely

$$\hat{X} = \arg \min_{\substack{x \in \mathbf{R}^n \\ \sum_i \kappa_i x_i^2 = \sum_i \kappa_i}} \left(-x^T A_\tau x + \lambda (s - \mathcal{P}x)^T (s - \mathcal{P}x) \right), \quad (10)$$

where $A_\tau = A - \tau 1_n 1_n^T$ and $\kappa = (\kappa_1, \dots, \kappa_n)$ is a vector of positive entries. For the simplicity of the derivations, we choose to constrain x on the hyper-sphere $\|x\|^2 = n$ by letting $\kappa_i = 1$, but other choices would lead to a similar analysis. In particular, in the numerical Section 4 we will compare this choice with a degree-normalization approach ($\kappa_i = d_i$).

We further note that for the perfect oracle the corresponding relaxation of (9) is

$$\hat{X} = \arg \min_{\substack{x \in \mathbf{R}^n \\ x_\ell = s_\ell \\ \|x\|^2 = n}} \left(-x^T A_\tau x \right). \quad (11)$$

Given the classification vector $\hat{X} \in \mathbf{R}^n$, node i is classified into cluster $\hat{Z}_i \in \{-1, 1\}$ such that

$$\hat{Z}_i = \begin{cases} 1, & \text{if } \hat{X}_i > 0, \\ -1, & \text{otherwise.} \end{cases} \quad (12)$$

Let us solve the minimization problem (10). By letting $\gamma \in \mathbf{R}$ be the Lagrange multiplier associated with the constraint $\|x\|^2 = n$, the Lagrangian of the optimization problem (10) is

$$-x^T A_\tau x + \lambda (s - \mathcal{P}x)^T (s - \mathcal{P}x) - \gamma (x^T x - n).$$

This leads to the *constrained* linear system

$$\begin{cases} (-A_\tau + \lambda \mathcal{P} - \gamma I_n) x &= \lambda s, \\ x^T x &= n, \end{cases} \quad (13)$$

whose unknowns are γ and x .

While [20] let γ to be a hyper-parameter (hence the norm constraint $x^T x = n$ is no longer verified), the exact optimal value of γ can be found explicitly following [13]. Firstly, we note that if (γ_1, x_1) and (γ_2, x_2) are solutions of the system (13), then

$$\mathcal{C}(x_1) - \mathcal{C}(x_2) = \frac{\gamma_1 - \gamma_2}{2} \|x_1 - x_2\|^2,$$

where $\mathcal{C}(x) = -x^T A_\tau x + \lambda(s - \mathcal{P}x)^T(s - \mathcal{P}x)$ is the cost function minimized in (10). Hence, among the solution pairs (γ, x) of the system (13), the solution of the minimization problem (10) is the vector x associated with the smallest γ .

Secondly, the eigenvalue decomposition of $-A_\tau + \lambda\mathcal{P}$ reads as

$$-A_\tau + \lambda\mathcal{P} = Q\Delta Q^T,$$

where $\Delta = \text{diag}(\delta_1, \dots, \delta_n)$ with $\delta_1 \leq \dots \leq \delta_n$ and $Q^T Q = I_n$. Therefore, after the change of variables $u = Q^T x$ and $b = \lambda Q^T s$, the system (13) is transformed to

$$\begin{cases} \Delta u &= \gamma u + b, \\ u^T u &= n. \end{cases}$$

Thus, the solution \hat{X} of the optimization problem (10) verifies

$$(-A_\tau + \lambda\mathcal{P} - \gamma_* I_n) \hat{X} = \lambda s, \quad (14)$$

where γ_* is the smallest solution of the *explicit secular equation* [13]

$$\sum_{i=1}^n \left(\frac{b_i}{\delta_i - \gamma} \right)^2 - n = 0. \quad (15)$$

We summarize this in Algorithm 3.1. Note that for the sake of generality we let λ and τ be hyperparameters of the algorithm. If the model parameters are known, we can use the expressions of λ and τ derived in Corollary 2.3. The choice of λ and τ is further discussed in Section 4.

Algorithm 3.1 Semi-supervised learning with regularized adjacency matrix.

Input: Adjacency matrix A , oracle information s , parameters τ and λ .

Procedure:

Let γ_* be the smallest solution of Equation (15).

Compute \hat{X} as the solution of Equation (14).

for $i = 1 \dots n$ **do**

$\hat{Z}_i = \text{sign}(\hat{X}_i)$.

end for

return \hat{Z} .

3.2 Ratio of misclustered nodes

This section gives bounds on the number of unlabeled nodes misclassified by Algorithm 3.1. We then specialize the results for some particular cases.

Theorem 3.1. *Consider a DC-SBM with a noisy oracle as defined in (1),(3). Let $\bar{d} = \frac{n}{2}(p_{\text{in}} + p_{\text{out}})$ and $\bar{\alpha} = \frac{n}{2}(p_{\text{in}} - p_{\text{out}})$. Suppose that $\tau > p_{\text{out}}$, and let \hat{Z} be the output of Algorithm 3.1. Then, the proportion of misclustered unlabeled nodes verifies*

$$L(\hat{Z}_u, Z_u) \leq C \left(\frac{p_{\text{in}} + p_{\text{out}}}{p_{\text{in}} - p_{\text{out}}} \right)^2 \left(\frac{\bar{\alpha} + \lambda}{\lambda} \right)^2 \frac{1}{(\eta_1 + \eta_0)(\eta_1 - \eta_0)^2 \bar{d}}.$$

The core of the proof relies on the concentration of the adjacency matrix towards its expectation. This result, as presented in [17], holds under loose assumptions: it is valid for any random graph whose edges are independent of each other. To use this result for $\bar{d} = o(\log n)$, one need

to replace the matrix A_τ by $A'_\tau = A' - \tau 1_n 1_n^T$, where A' is the adjacency matrix of the graph obtained after reducing the weights on the edges incident to the high degree vertices. We refer to [17, Section 1.4] for more details. This extra technical step is not necessary when $\bar{d} = \Omega(\log n)$. Moreover, concentration also occurs if we replace the adjacency matrix by the normalized Laplacian in Equation (14). In that case, we obtain a generalization of the Label Spreading algorithm [27], [10, Chapter 11].

In the following, the mean-field graph refers to the weighted graph formed by the expected adjacency matrix of a DC-SBM graph. Moreover, we assume without loss of generality that the first $\frac{n}{2}$ nodes are in the first cluster and the last $\frac{n}{2}$ are in the second cluster. Therefore, $\mathbb{E}A = ZBZ^T$ with $B = \begin{pmatrix} p_{\text{in}} & p_{\text{out}} \\ p_{\text{out}} & p_{\text{in}} \end{pmatrix}$ and $Z = \begin{pmatrix} 1_{n/2} & 0_{n/2} \\ 0_{n/2} & 1_{n/2} \end{pmatrix}$. In particular, the coefficients θ_i disappear because $\mathbb{E}\theta_i = 1$. We consider the setting where diagonal elements of $\mathbb{E}A$ are not zeros. This accounts for modifying the definition of DC-SBM, where we can have self-loops with probability p_{in} . Nonetheless, we could set the diagonal elements of $\mathbb{E}A$ to zeros and our results would still hold at the expense of cumbersome expressions. Note that the matrix $\mathbb{E}A$ has two non-zero eigenvalues: $\bar{d} = n \frac{p_{\text{in}} + p_{\text{out}}}{2}$ and $\bar{\alpha} = n \frac{p_{\text{in}} - p_{\text{out}}}{2}$.

Proof of Theorem 3.1. We prove the statement in three steps. We first show that the solution \hat{X} of the constrained linear system (13) is concentrated around the solution \bar{x} of the same system for the mean-field model. Then, we compute \bar{x} and show that we can retrieve the correct cluster assignment from it. We finally conclude with the derivation of the bound.

(i) Similarly to [4] and [3], let us rewrite equation (14) as a perturbation of a system of linear equations corresponding to the mean-field solution. We thus have

$$(\mathbb{E}\tilde{\mathcal{L}} + \Delta\tilde{\mathcal{L}})(\bar{x} + \Delta x) = \lambda s,$$

where $\tilde{\mathcal{L}} = -A_\tau + \lambda \mathcal{P} - \gamma_* I_n$, $\Delta x := \hat{X} - \bar{x}$ and $\Delta\tilde{\mathcal{L}} := \tilde{\mathcal{L}} - \mathbb{E}\tilde{\mathcal{L}}$.

We recall that a perturbation of a system of linear equations $(A + \Delta A)(x + \Delta x) = b$ leads to the following sensitivity inequality (see e.g., [14, Section 5.8]):

$$\frac{\|\Delta x\|}{\|x\|} \leq \kappa(A) \frac{\|\Delta A\|}{\|A\|},$$

where $\|\cdot\|$ is the operator norm associated to a vector norm $\|\cdot\|$ (we use the same notations for simplicity) and $\kappa(A) := \|A^{-1}\| \cdot \|A\|$ is the condition number. In our case, the above inequality can be rewritten as follows:

$$\frac{\|\hat{X} - \bar{x}\|}{\|\bar{x}\|} \leq \left\| (\mathbb{E}\tilde{\mathcal{L}})^{-1} \right\| \cdot \|\Delta\tilde{\mathcal{L}}\|, \quad (16)$$

employing the Euclidean vector norm and spectral operator norm. The spectral study of $\mathbb{E}\tilde{\mathcal{L}}$ (see Corollary B.3 in Appendix B.1) gives:

$$\left\| (\mathbb{E}\tilde{\mathcal{L}})^{-1} \right\| = \frac{1}{\min \{ |\lambda| : \lambda \in \text{Sp}(\mathbb{E}\tilde{\mathcal{L}}) \}} = \frac{1}{-t_2^+ - \bar{\gamma}_*},$$

where t_2^+ is defined in Corollary B.3 in Appendix B.1 and $\bar{\gamma}_*$ is the solution of Equation (15) for the mean-field model. Lemma B.4 in Appendix B.2 leads to

$$\left\| (\mathbb{E}\tilde{\mathcal{L}})^{-1} \right\| \leq \frac{1}{\lambda + \bar{\alpha}}. \quad (17)$$

The last ingredient needed is the concentration of the adjacency matrix around its expectation. We have

$$\|\tilde{\mathcal{L}} - \mathbb{E}\tilde{\mathcal{L}}\| \leq \|(\gamma_* - \bar{\gamma}_*) I_n\| + \|A - \mathbb{E} A\| \leq |\gamma_* - \bar{\gamma}_*| + \|A - \mathbb{E} A\|.$$

Proposition B.5 in Appendix B.3 shows that

$$|\gamma_* - \bar{\gamma}_*| \leq \left(1 + \frac{27(\bar{\alpha} + \lambda)^3}{\sqrt{2}\sqrt{\eta_1 + \eta_0}(\eta_1 - \eta_0)\bar{\alpha}^2\lambda}\right) \sqrt{\bar{d}}.$$

Moreover, when $d = \Omega(\log n)$, it is shown in [12] that $\|A - \mathbb{E} A\| = O(\sqrt{\bar{d}})$. If $\bar{d} = o(\log n)$, the same result holds with a proper pre-processing on A , and we refer the reader to [17] for more details. To keep notations short, we will omit this extra step in the proof. Using this concentration bound, we have

$$\begin{aligned} \|\tilde{\mathcal{L}} - \mathbb{E}\tilde{\mathcal{L}}\| &\leq \left(C' + \frac{27(\bar{\alpha} + \lambda)^3}{\sqrt{2}\sqrt{\eta_1 + \eta_0}(\eta_1 - \eta_0)\bar{\alpha}^2\lambda}\right) \sqrt{\bar{d}} \\ &\leq \left(C' + \frac{27}{\sqrt{2}}\right) \frac{(\lambda + \bar{\alpha})^3}{\bar{\alpha}^2\lambda} \frac{\sqrt{\bar{d}}}{\sqrt{\eta_1 + \eta_0}(\eta_1 - \eta_0)}. \end{aligned}$$

for some constant C' . Let $C = C' + \frac{27}{\sqrt{2}}$. By combining the above with inequality (17), the inequality (16) becomes

$$\frac{\|\hat{X} - \bar{x}\|}{\|\bar{x}\|} \leq C \frac{(\lambda + \bar{\alpha})^2}{\bar{\alpha}^2\lambda} \frac{\sqrt{\bar{d}}}{\sqrt{\eta_1 + \eta_0}(\eta_1 - \eta_0)}. \quad (18)$$

(ii) Node i in the mean-field model is correctly classified by decision rule (12) if the sign of \bar{x}_i equals the sign of Z_i . Corollary C.2 in Appendix C shows that this is indeed the case for the unlabeled nodes.

(iii) Finally, for an unlabeled node i to be correctly classified, the node's value \hat{X}_i should be close enough to its mean-field value \bar{x}_i . In particular, the part (ii) shows that if $|\hat{X}_i - \bar{x}_i|$ is smaller than some non-vanishing constant β , then an unlabeled node i will be correctly classified. An unlabeled node i is said to be β -bad if $|\hat{X}_i - \bar{x}_i| > \beta$. We denote by S_β the set of β -bad nodes. The nodes that are not β -bad are a.s. correctly classified, and thus $L(\hat{Z}_u, Z_u) \leq \frac{|S_\beta|}{n}$.

From $\|\hat{X} - \bar{x}\|^2 \geq \sum_{i \in S_\beta} |\hat{X}_i - \bar{x}_i|^2$, it follows that $\|\hat{X} - \bar{x}\|^2 \geq |S_\beta| \times \beta^2$. Thus, using inequality (18) and the norm constraint $\|\bar{x}\|^2 = n$, we have

$$|S_\beta| \leq \frac{1}{\beta^2} \left(\frac{C}{\eta_1 - \eta_0} \frac{\bar{\alpha} + \lambda}{\bar{\alpha}\lambda} \sqrt{\bar{d}} \right)^2 n,$$

for some constant C . We end the proof by noticing that $\frac{\bar{d}}{\alpha} = \frac{p_{\text{in}} + p_{\text{out}}}{p_{\text{in}} - p_{\text{out}}}$. \square

Corollary 3.2 (Almost exact recovery in the diverging degree regime). *Consider a DC-SBM such that $\bar{d} \gg 1$, $\frac{p_{\text{in}} + p_{\text{out}}}{p_{\text{in}} - p_{\text{out}}} = O(1)$, and $\sqrt{\eta_0 + \eta_1}(\eta_1 - \eta_0) \gg \frac{1}{\sqrt{\bar{d}}}$. Suppose that $\tau > p_{\text{out}}$ and $\lambda \gtrsim \bar{\alpha}$. Then, Algorithm 3.1 correctly classifies almost all the unlabeled nodes.*

Proof. With the corollary's assumptions $(\eta_1 - \eta_0)^2 \bar{d} \rightarrow +\infty$ and $\frac{\bar{\alpha} + \lambda}{\bar{\alpha}} = O(1)$, by Theorem 3.1 the fraction of misclustered nodes is of the order $o(1)$. \square

The quantity $(\eta_1 - \eta_0)n$ is the expected difference between the number of nodes correctly labeled and the number of nodes wrongly labeled by the oracle. In particular, Corollary 3.2 allows for a sub-linear number of labeled nodes since η_0 and η_1 can go to zero.

Corollary 3.3 (Detection in the constant degree regime). *Consider a DC-SBM such that $p_{\text{in}} = \frac{c_{\text{in}}}{n}$ and $p_{\text{out}} = \frac{c_{\text{out}}}{n}$ where $c_{\text{in}}, c_{\text{out}}$ are constants. Suppose that $\sqrt{\eta_0 + \eta_1}(\eta_1 - \eta_0)$ is a non-zero constant, and let $\tau > 2p_{\text{out}}$ and $\lambda \gtrsim 1$. Then, for $\frac{(c_{\text{in}} - c_{\text{out}})^2}{c_{\text{in}} + c_{\text{out}}}$ bigger than some constant, w.h.p. Algorithm 3.1 performs better than a random guess.*

Proof. According to Theorem 3.1, the fraction of misclustered nodes is smaller than $\frac{1}{2}$ when $\frac{(c_{\text{in}} - c_{\text{out}})^2}{c_{\text{in}} + c_{\text{out}}}$ is larger than $\frac{2C}{(\eta_1 - \eta_0)^2} \left(\frac{\bar{\alpha} + \lambda}{\lambda} \right)^2$, which is lower bounded by a constant. \square

The quantity $\frac{(c_{\text{in}} - c_{\text{out}})^2}{c_{\text{in}} + c_{\text{out}}}$ can be interpreted as the signal-to-noise ratio. It is unfortunate that Corollary 3.3 does not allow us to control the constant in the statement of the corollary. This constant comes from concentration of the adjacency matrix. Similar remarks were made in [17] for the analysis of spectral clustering in the constant degree regime for SBM graph.

4 Numerical experiments

This section presents numerical experiments both on simulated data sets generated from DC-SBMs and on real networks. In particular, we discuss the impact of the oracle mistakes (defined by the ratio $\frac{\eta_0}{\eta_0 + \eta_1}$) on the performance of the algorithms. The code for the numerical experiments is available on github at <https://github.com/mdreveton/ssl-sbm>.

4.1 Synthetic data sets

Choice of λ and τ Let us denote by σ_1 and σ_2 the largest and second largest eigenvalues of A . We choose $\tau = \frac{4}{n}(\sigma_1 + \sigma_2)$ and $\lambda = \frac{\log \frac{\eta_1}{\eta_0}}{\log \frac{\sigma_1 + \sigma_2}{\sigma_1 - \sigma_2}}$, if $\eta_0 \neq 0$, and $\lambda = \frac{\log(n\eta_1)}{\log \frac{\sigma_1 + \sigma_2}{\sigma_1 - \sigma_2}}$, otherwise. The heuristic for this choice is as follows. For a SBM graph, we have $\sigma_1 \approx \frac{n}{2}(p_{\text{in}} + p_{\text{out}})$ and $\sigma_2 \approx \frac{n}{2}(p_{\text{in}} - p_{\text{out}})$, hence $\frac{4}{n}(\sigma_1 + \sigma_2) = 2p_{\text{in}} > p_{\text{out}}$, and τ verifies the condition of Theorem 3.1. For λ , we have $\frac{\log \frac{\eta_1}{\eta_0}}{\log \frac{\sigma_1 + \sigma_2}{\sigma_1 - \sigma_2}} \approx \frac{\log \frac{\eta_1}{\eta_0}}{\log \frac{p_{\text{in}}}{p_{\text{out}}}}$, which is indeed close to the expression of λ derived in Corollary 2.3 if $p_{\text{in}}, p_{\text{out}} = o(1)$.

Choice of relaxation We first compare the choice of the constraint in the continuous relaxation (10). Specifically, we compare the choice $\sum_i x_i^2 = n$ (we refer to it as *standard relaxation*) versus $\sum_i d_i x_i^2 = 2|E|$ (we refer to it as *degree-normalized relaxation*). This leads to two versions of Algorithm 3.1, whose cost obtained on SBM graph with a noisy oracle is presented in Figure 1. In particular, we observe that the normalized choice leads to a smaller cost. Therefore, in the following we will only consider the version of Algorithm 3.1 solving the relaxed problem (10) with constraint $\sum_i d_i x_i^2 = 2|E|$ instead of $\sum_i x_i^2 = n$, as it gives better numerical results.

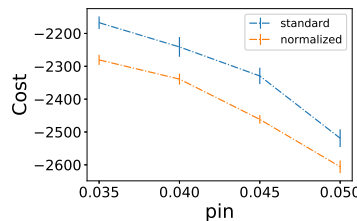


Figure 1: Cost in Algorithm 3.1 with the standard and normalized versions of the constraint, on 50 realizations of SBM with $n = 500$, $p_{\text{out}} = 0.03$ and 50 labeled nodes with 10% noise.

Experiments on synthetic graphs We first consider clustering on DC-SBM. We set $n = 2000$, $p_{\text{in}} = 0.04$ and $p_{\text{out}} = 0.02$. We consider three scenarios.

- In Figure 2a we consider a standard SBM ($\theta_i = 1$ for all i);
- In Figure 2b we generate θ_i according to $|\mathcal{N}(0, \sigma^2)| + 1 - \sigma\sqrt{2/\pi}$ where $|\mathcal{N}(0, \sigma^2)|$ denotes the absolute value of a normal random variable with mean 0 and variance σ^2 . We take $\sigma = 0.25$. Note that this definition enforces $\mathbb{E}\theta_i = 1$.
- In Figure 2c we generate θ_i from Pareto distribution with density function $f(x) = \frac{am^a}{x^{a+1}}1(x \geq m)$ with $a = 3$ and $m = 2/3$ (chosen such that $\mathbb{E}\theta_i = 1$).

We compare the performance of Algorithm 3.1 with that of the algorithm of [20] (referred to as *Centered similarities*) and the *Poisson learning* algorithm described in [9]. We choose these two algorithms as reference since they perform very well on real data sets and were both designed to avoid flat solutions. Results are shown in Figure 2. We observe that when the oracle noise is low, the performance of Algorithm 3.1 is comparable to *Centered similarities*. But, when the noise becomes non-negligible, the performance of *Centered similarities* deteriorates, while the accuracy of Algorithm 3.1 remains high. We notice that *Poisson learning* gives poor result on synthetic data sets.

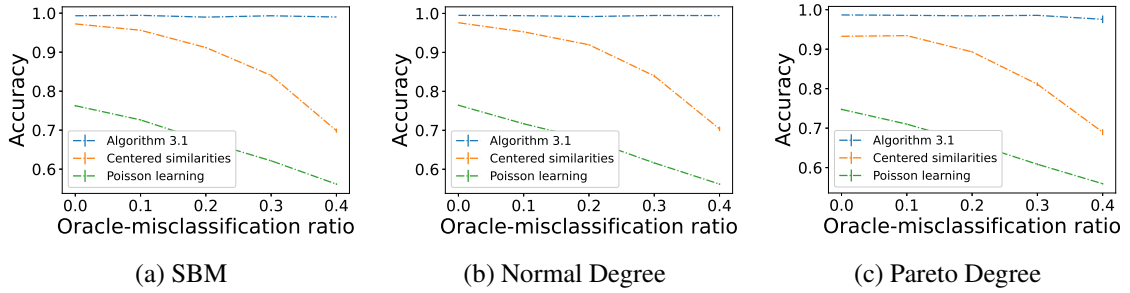


Figure 2: Average accuracy obtained by different semi-supervised clustering methods on DC-SBM graphs, with $n = 2000$, $p_{\text{in}} = 0.04$ and $p_{\text{out}} = 0.02$ with different distributions for θ . The number of labeled nodes is equal to 40. Accuracies are computed on the unlabeled nodes, and are averaged over 100 realisations; the error bars show the standard error.

4.2 Experiments on real data

We next use actual real data to show that even if real networks are not generated by the degree corrected stochastic block model, Algorithm 3.1 still performs well.

MNIST As a real-life example, we perform simulations on the standard MNIST data set [18]. As preprocessing, we select 1000 images corresponding to two digits and compute the k -nearest-neighbors graph (we take $k = 8$) with Gaussian weights $w_{ij} = \exp(-\|x_i - x_j\|^2/s_i^2)$ where x_i represents the data for image i and s_i is the average distance between x_i and its K -nearest neighbors. Accuracy for different digit pairs is given in Figure 3. While the performance of *Poisson learning* is excellent, it can suffer from the oracle noise. On the other hand, the accuracy of Algorithm 3.1 remains unchanged.

To further highlight the influence of the noise, we plot in Figure 4 the accuracy obtained by the three algorithms on the unlabeled nodes, the correctly labeled nodes, and the wrongly labeled nodes. We observe that the hard constraint $X_\ell = s_\ell$ imposed by *Centered similarities* forces that the correctly labeled nodes to be correctly classified, while the wrongly labeled nodes are not

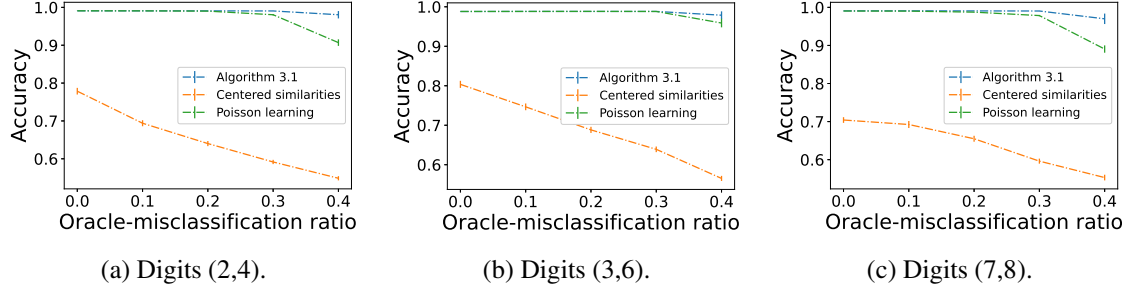


Figure 3: Average accuracy obtained on a subset of the MNIST data set by different semi-supervised algorithms as a function of the oracle-misclassification ratio, when the number of labeled nodes is equal to 10. Accuracy is averaged over 100 random realizations, and the error bars show the standard error.

classified much better than a random guess. In an extremely noisy setting, this heavily penalizes the unlabeled nodes’ accuracy. On the contrary, Algorithm 3.1 allows for a smoother recovery: the unlabeled, correctly labeled, and wrongly labeled nodes have roughly the same classification accuracy. While some correctly labeled nodes are misclassified, many wrongly labeled nodes become correctly classified, and the unlabeled nodes are better recovered. Finally, *Poisson learning* shows a performance somewhere in between these two extreme cases: its accuracy on the unlabeled nodes is excellent, but it fails at correctly classifying the erroneously labeled nodes.

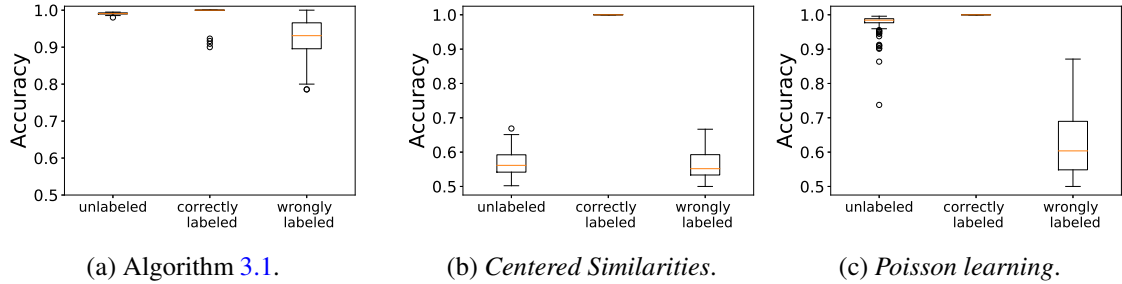


Figure 4: Average accuracy obtained on the unlabeled, correctly labeled, and wrongly labeled nodes by the oracle. Simulations are done on the 1000 digits (2,4). The noisy oracle correctly classifies 24 nodes and misclassifies 16 nodes, and the boxplots show 100 realizations.

Common benchmark networks Finally, we perform simulations on three benchmark networks: *Political Blogs*, *LiveJournal* and *DBLP*. These networks are commonly used for graph clustering, since the “ground truth” clusters are known. For *LiveJournal* and *DBLP*, we consider only the two largest clusters. The dimension of the data sets is given in Table 1 and the performances of semi-supervised algorithms in Figure 5. We observe that Algorithm 3.1 and *Poisson learning* outperform *Centered similarities* and can still achieve good accuracy even in the presence of noise in labeled data.

Data set	n_1	n_2	$ E $
<i>Political Blogs</i> [2]	636	586	16,717
<i>LiveJournal</i> [25]	1426	1340	24,138
<i>DBLP</i> [25]	7373	5953	34,281

Table 1: Parameters of the real data sets. n_1 (resp., n_2) corresponds to the size of the first (resp., second) cluster, and $|E|$ is the number of edges of the network.

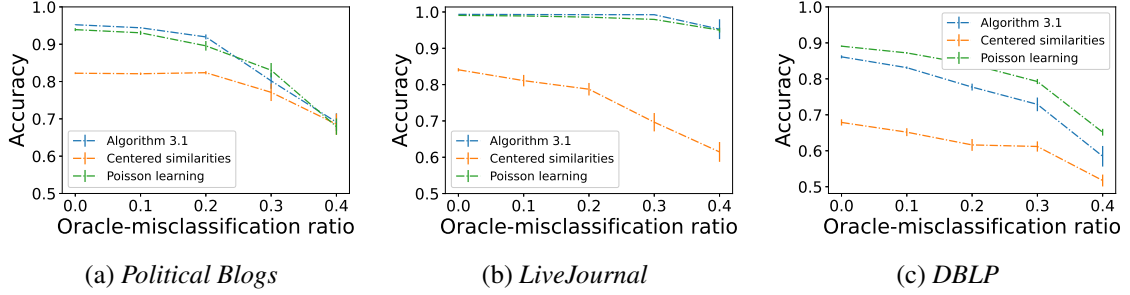


Figure 5: Average accuracy obtained on real networks by different semi-supervised algorithms as a function of the oracle-misclassification ratio. The number of labeled nodes is 30 for *Political Blogs* and *LiveJournal*, and 100 for *DBLP*. Accuracy is averaged over 50 random realizations, and the error bars show the standard error.

A Derivation of the MAP

Proof of Theorem 2.2. Bayes' formula gives $\mathbb{P}(z | A, s) \propto \mathbb{P}(A | z, s) \mathbb{P}(z | s)$, where the proportionality symbol hides $\mathbb{P}(A | s)$ -term independent of z .

The likelihood term can be rewritten as follows:

$$\mathbb{P}(A | z, s) = \mathbb{P}(A | z) \propto \prod_{\substack{i < j \\ z_i = z_j}} \left(\frac{p_{\text{in}}}{p_{\text{out}}} \frac{1 - \theta_i \theta_j p_{\text{out}}}{1 - \theta_i \theta_j p_{\text{in}}} \right)^{a_{ij}} \left(\frac{1 - \theta_i \theta_j p_{\text{in}}}{1 - \theta_i \theta_j p_{\text{out}}} \right),$$

where the proportionality hides a constant $C = \prod_{i < j} \left(\frac{\theta_i \theta_j p_{\text{out}}}{1 - \theta_i \theta_j p_{\text{out}}} \right)^{a_{ij}} (1 - \theta_i \theta_j p_{\text{out}})$ independent of z . Hence,

$$\begin{aligned} \log \mathbb{P}(A | z, s) &= \log C + \frac{1}{2} \sum_{i,j} 1(z_i \neq z_j) \left((f_{ij}^{(1)} - f_{ij}^{(0)}) a_{ij} + f_{ij}^{(0)} \right) \\ &= \log C + \frac{1}{2} \sum_{i,j=1}^n \frac{1 - z_i z_j}{2} \left((f_{ij}^{(1)} - f_{ij}^{(0)}) a_{ij} + f_{ij}^{(0)} \right) \\ &= \log C' - \frac{1}{4} x^T M x. \end{aligned} \tag{19}$$

for some constant C' and $M = (F_1 - F_0) \odot A + F_0$.

The oracle information, given by the term $\mathbb{P}(z | s)$, is equal to

$$\begin{aligned}
\mathbb{P}(z | s) &= \prod_{i=1}^n \frac{\mathbb{P}(s_i | z_i)}{\mathbb{P}(s_i)} \mathbb{P}(z_i) \\
&= \left(\frac{\eta_1}{\eta_1 + \eta_0} \right)^{|\{i \in \ell : z_i = s_i\}|} \left(\frac{\eta_0}{\eta_1 + \eta_0} \right)^{|\{i \in \ell : z_i \neq s_i\}|} \left(\frac{1}{2} \right)^n \\
&= \left(\frac{\eta_0}{\eta_1} \right)^{|\{i \in \ell : z_i \neq s_i\}|} \left(\frac{\eta_1}{\eta_1 + \eta_0} \right)^{|\ell|} \left(\frac{1}{2} \right)^n,
\end{aligned} \tag{20}$$

where we used $|\{i \in \ell : z_i = s_i\}| + |\{i \in \ell : z_i \neq s_i\}| = |\ell|$ in the last line. Noticing that

$$|\{i \in \ell : z_i \neq s_i\}| = \frac{1}{4} \sum_{i=1}^n ((\mathcal{P}z)_i - s_i)^2 = \frac{1}{4} (\mathcal{P}z - s)^T (\mathcal{P}z - s),$$

yields

$$\log \mathbb{P}(z | s) = -\frac{1}{4} \log \left(\frac{\eta_1}{\eta_0} \right) \cdot \|\mathcal{P}z - s\|^2 + C', \tag{21}$$

where C' is a term independent of z .

If $\eta_0 \neq 0$, the combination of Equations (19) and (21) with Bayes' formula gives Expression (6). If $\eta_0 = 0$, then from Equation (20) the term $\mathbb{P}(z | s)$ is non-zero (and constant) if and only if $z_i = s_i$ for every labeled node $i \in [\ell]$, and we obtain Expression (7). \square

Proof of Corollary 2.3. The proof follows from Theorem 2.2 and the fact that $f_{ij}^{(0)} = \log \frac{1-p_{\text{in}}}{1-p_{\text{out}}}$ and $f_{ij}^{(1)} = \log \frac{p_{\text{in}}}{p_{\text{out}}}$. \square

B Lemmas related to mean-field solution of the secular equation

B.1 Spectral study of a perturbed rank-2 matrix

Lemma B.1 (Matrix determinant lemma). *Suppose $A \in \mathbf{R}^n$ is invertible, and let U, V be two n by m matrices. Then $\det(A + UV^T) = \det A \det(I_m + V^T A^{-1} U)$.*

Proof. We take the determinant of $\begin{pmatrix} A & -U \\ V^T & I \end{pmatrix} = \begin{pmatrix} A & 0 \\ V^T & I \end{pmatrix} \cdot \begin{pmatrix} I & -A^{-1}U \\ 0 & I + V^T A^{-1}U \end{pmatrix}$ and $\det \begin{pmatrix} A & -U \\ V^T & I \end{pmatrix} = \det I \det(A + UV^T)$ by the Schur complement formula [14, Section 0.8.5]. \square

Proposition B.2. *Let $M = ZBZ^T$, where $B = \begin{pmatrix} a & b \\ b & a \end{pmatrix}$ is a 2×2 matrix, and $Z = \begin{pmatrix} 1_{n/2} & 0_{n/2} \\ 0_{n/2} & 1_{n/2} \end{pmatrix}$ is an $n \times 2$ matrix. Let m be an even number. We denote by $P_{\mathcal{L}}$ the $n \times n$ diagonal matrix whose first $\frac{m}{2}$ and last $\frac{m}{2}$ diagonal elements are ones, all other elements being zeros. Then, $\det(tI_n + \lambda P_{\mathcal{L}} - M) = t^{n-m-2}(t + \lambda)^{m-2}(t - t_1^+)(t - t_1^-)(t - t_2^+)(t - t_2^-)$ with*

$$\begin{aligned}
t_1^\pm &= \frac{1}{2} \left(\frac{n}{2}(a+b) - \lambda \pm \sqrt{\left(\lambda + \frac{n}{2}(a+b) \right)^2 - 2(a+b)\lambda m} \right), \\
t_2^\pm &= \frac{1}{2} \left(\frac{n}{2}(a-b) - \lambda \pm \sqrt{\left(\lambda + \frac{n}{2}(a-b) \right)^2 - 2(a-b)\lambda m} \right).
\end{aligned}$$

Proof. For now, assume that $t \neq -\lambda$ and $t \neq 0$. Then, $tI_n + \lambda P_{\mathcal{L}}$ is invertible, and by Lemma B.1,

$$\begin{aligned} \det(tI_n + \lambda P_{\mathcal{L}} - M) &= \det(tI_n + \lambda P_{\mathcal{L}}) \det(I_2 + Z^T(tI_n + \lambda P_{\mathcal{L}})^{-1}(-ZB)) \\ &= (t + \lambda)^m t^{n-m} \det(I_2 - Z^T(tI_n + \lambda P_{\mathcal{L}})^{-1}ZB). \end{aligned} \quad (22)$$

Moreover,

$$(tI_n + \lambda P_{\mathcal{L}})^{-1} = \frac{1}{t}(I_n - P_{\mathcal{L}}) + \frac{1}{t + \lambda}P_{\mathcal{L}} = \frac{1}{t}I_n - \frac{\lambda}{t(t + \lambda)}P_{\mathcal{L}}.$$

Therefore, we can write

$$Z^T(tI_n + \lambda P_{\mathcal{L}})^{-1}ZB = \frac{1}{t}Z^TZB - \frac{\lambda}{t(t + \lambda)}Z^TP_{\mathcal{L}}ZB = \frac{1}{t}\frac{n}{2}B - \frac{\lambda}{t(t + \lambda)}\frac{m}{2}B = xB,$$

where $x := \frac{n}{2} \frac{1}{t(t + \lambda)} \left(t + \lambda \left(1 - \frac{m}{n} \right) \right)$. Thus, a direct computation of the determinant gives

$$\det(I_2 - Z^T(tI_n + \lambda P_{\mathcal{L}})^{-1}ZB) = (1 - x(a + b))(1 - x(a - b)).$$

Going back to equation (22), we can write

$$\det(tI_n + \lambda P_{\mathcal{L}} - M) = (t + \lambda)^{m-2} t^{n-m-2} P_1(t) P_2(t), \quad (23)$$

with $P_1(t) = t(t + \lambda) - \frac{n}{2}(a + b)(t + \lambda(1 - \frac{m}{n}))$ and $P_2(t) = t(t + \lambda) - \frac{n}{2}(a - b)(t + \lambda(1 - \frac{m}{n}))$. Since $t \in \mathbf{R} \mapsto \det(tI_n + \lambda P_{\mathcal{L}} - M)$ is continuous (even analytic), expression (23) is also valid for $t = 0$ and $t = -\lambda$ [6]. We end the proof by observing that

$$P_1(t) = (t - t_1^+)(t - t_1^-) \quad \text{and} \quad P_2(t) = (t - t_2^+)(t - t_2^-),$$

where t_1^\pm and t_2^\pm are defined in the proposition's statement. \square

Corollary B.3. *Let A be the adjacency matrix of a DC-SBM with $p_{\text{in}} > p_{\text{out}} > 0$, and s be the oracle information. Let $\lambda, \tau > 0$, and $\bar{d}_\tau = \frac{n}{2}(p_{\text{in}} + p_{\text{out}}) - n\tau$, $\bar{\alpha} = \frac{n}{2}(p_{\text{in}} - p_{\text{out}})$. Let $A_\tau := A - \tau 1_n 1_n^T$ and $P_{\mathcal{L}}$ be the diagonal matrix whose element $(P_{\mathcal{L}})_{ii}$ is 1 if $s_i \neq 0$, and 0 otherwise. Then, the spectrum of $\mathbb{E}\tilde{\mathcal{L}} = -\mathbb{E}A_\tau + \lambda P_{\mathcal{L}} - \gamma I_n$ is $\{-\gamma - t_1^\pm; -\gamma - t_2^\pm; -\gamma; -\gamma + \lambda; 0\}$, where*

$$\begin{aligned} t_1^\pm &= \frac{1}{2} \left(\bar{d}_\tau - \lambda \pm \sqrt{(\lambda + \bar{d}_\tau)^2 - 4\bar{d}_\tau \lambda (\eta_1 + \eta_0)} \right), \\ t_2^\pm &= \frac{1}{2} \left(\bar{\alpha} - \lambda \pm \sqrt{(\lambda + \bar{\alpha})^2 - 4\bar{\alpha} \lambda (\eta_1 + \eta_0)} \right). \end{aligned}$$

Proof. Let $M = \begin{pmatrix} p_{\text{in}} - \tau & p_{\text{out}} - \tau \\ p_{\text{out}} - \tau & p_{\text{in}} - \tau \end{pmatrix}$ and $Z = \begin{pmatrix} 1_{n/2} & 0_{n/2} \\ 0_{n/2} & 1_{n/2} \end{pmatrix}$. Then, we notice that $\mathbb{E}A_\tau = ZMZ^T$ and we can apply Proposition B.2 to compute the characteristic polynomial of $\mathbb{E}\tilde{\mathcal{L}}$. For $x \in \mathbf{R}$, $\det(\mathbb{E}\tilde{\mathcal{L}} - xI_n) = \det((-\gamma - x)I_n - \mathbb{E}A_\tau + \lambda P_{\mathcal{L}})$, whose roots are $-\gamma - t_1^\pm$, $-\gamma - t_2^\pm$, $-\gamma$, and $-\gamma + \lambda$. \square

B.2 Estimation of $\bar{\gamma}_*$

Lemma B.4. *Let $\bar{\gamma}_*$ be the solution of Equation (15) for the mean-field model. Then,*

$$-\bar{\alpha}(1 - 2\eta_0) \leq \bar{\gamma}_* \leq -\bar{\alpha}.$$

Proof. For $\lambda \geq 0$, we denote by $(\bar{x}_\lambda, \bar{\gamma}_*(\lambda))$ the solution of the system (13) on a mean-field DC-SBM. The proof is in two steps. First, let us show that $\bar{\gamma}_*(0) = -\bar{\alpha}$ and $\bar{\gamma}_*(\infty) = -\bar{\alpha}(1 - 2\eta_0)$. For $\lambda = 0$, the constrained linear system (13) reduces to an eigenvector problem, and hence $\bar{\gamma}_*(0)$ equals $-\alpha$, the smallest eigenvalue of $-\mathbb{E}A_\tau$. Moreover, when $\lambda = \infty$, the hard constraint $x_\ell = \bar{s}_\ell$ is enforced, and the system (13) becomes

$$\begin{cases} (-\mathbb{E}A_\tau - \bar{\gamma}_*(\infty)I_n)_{uu}\bar{x}_u &= (\mathbb{E}A_\tau)_{u\ell}\bar{s}_\ell \\ \bar{x}_u^T \bar{x}_u &= n(1 - \eta_0 - \eta_1) \end{cases}$$

and we verify by hand that $\bar{\gamma}_*(\infty) = -\bar{\alpha}(1 - 2\eta_0)$ together with $\bar{x}_u = Z_u$ is indeed the solution.

Second, if we let $C_\lambda(x) = -x^T \mathbb{E}A_\tau x + \lambda(\bar{s} - \mathcal{P}x)^T(\bar{s} - \mathcal{P}x)$ be the cost function minimized in (10), then from equation (13) we have $\bar{\gamma}_*(\lambda_1) - \bar{\gamma}_*(\lambda_2) = C_{\lambda_1}(\bar{x}_1) - C_{\lambda_2}(\bar{x}_2) + \lambda_1 \bar{x}_1^T \bar{s} - \lambda_2 \bar{x}_2^T \bar{s}$. Since $\lambda \mapsto C_\lambda(x)$ is increasing, then $\lambda_1 \leq \lambda_2$ implies $C_{\lambda_1}(\bar{x}_1) \leq C_{\lambda_2}(\bar{x}_2)$. Since $\bar{x}_\lambda^T \bar{s} \geq 0$ (if it was not the case, then $C_\lambda(-\bar{x}_\lambda) \leq C_\lambda(\bar{x}_\lambda)$, and hence $\bar{x}_\lambda \neq \arg \min_{x \in \mathbb{R}^n} C_\lambda(x)$), we can conclude that $\bar{\gamma}_*(0) \leq \bar{\gamma}_*(\lambda)$ and that $\bar{\gamma}_*(\lambda) \leq \bar{\gamma}_*(\infty)$. \square

B.3 Concentration of γ_*

Proposition B.5. *Let γ_* and $\bar{\gamma}_*$ be the solutions of Equation (13) for a DC-SBM and the mean-field DC-SBM, respectively. Then*

$$|\gamma_* - \bar{\gamma}_*| \leq \left(1 + \frac{27(\bar{\alpha} + \lambda)^3}{\sqrt{2}\sqrt{\eta_1 + \eta_0}(\eta_1 - \eta_0)\bar{\alpha}^2\lambda}\right) \sqrt{\bar{d}}.$$

Proof. The gradient with respect to $(\bar{\delta}_1, \dots, \bar{\delta}_n, \bar{b}_1, \dots, \bar{b}_n, \gamma)$ of the left-hand-side of Equation (15) is equal to

$$2 \sum_{i=1}^n \frac{\bar{b}_i}{\bar{\delta}_i - \bar{\gamma}} \left[\frac{\Delta b_i}{\bar{\delta}_i - \bar{\gamma}_*} - \frac{\bar{b}_i \Delta \delta_i}{(\bar{\delta}_i - \bar{\gamma}_*)^2} + \frac{\bar{b}_i \Delta \gamma}{(\bar{\delta}_i - \bar{\gamma}_*)^2} \right].$$

Thus, we have

$$\Delta \gamma \sum_{i=1}^n \frac{\bar{b}_i^2}{(\bar{\delta}_i - \bar{\gamma}_*)^3} = \sum_{i=1}^n \frac{\bar{b}_i^2}{(\bar{\delta}_i - \bar{\gamma}_*)^3} \Delta \delta_i - \sum_{i=1}^n \frac{\bar{b}_i}{(\bar{\delta}_i - \bar{\gamma}_*)^2} \Delta b_i + o(\Delta \delta_i, \Delta b_i).$$

Firstly, we see that for all $i \in [n]$, $\Delta \delta_i = |\delta_i - \bar{\delta}_i| \leq \|A - \mathbb{E}A\| \leq \bar{d}$ by the concentration of the adjacency matrix of a DC-SBM graph. Therefore, using this fact and $\bar{\gamma}_* \leq \bar{\delta}_1 \leq \bar{\delta}_2 \leq \dots \leq \bar{\delta}_n$,

$$\begin{aligned} \Delta \gamma = |\gamma_* - \bar{\gamma}_*| &\leq \max_i |\delta_i - \bar{\delta}_i| + \frac{\max_i \frac{1}{(\bar{\delta}_i - \bar{\gamma}_*)^2} \sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i|}{\min_i \frac{1}{(\bar{\delta}_i - \bar{\gamma}_*)^3} \sum_i \bar{b}_i^2} \\ &\leq \sqrt{\bar{d}} + \frac{\max_i (\bar{\delta}_i - \bar{\gamma}_*)^3 \sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i|}{\min_i (\bar{\delta}_i - \bar{\gamma}_*)^2 \sum_i \bar{b}_i^2}. \end{aligned}$$

We notice that $\min_i |\bar{\delta}_i - \bar{\gamma}_*| = \bar{\delta}_1 - \bar{\gamma}_*$. By using Lemma B.4 and the expression of $\bar{\delta}_1$ given in Corollary B.3, we have

$$\min_i |\bar{\delta}_i - \bar{\gamma}_*| \geq \bar{\alpha} + \lambda.$$

Similarly, $\max_i |\bar{\delta}_i - \bar{\gamma}_*| = \bar{\delta}_n - \bar{\gamma}_* = \bar{\delta}_n - \bar{\delta}_1 + \bar{\delta}_1 - \bar{\gamma}_*$. Corollary B.3 implies $\bar{\delta}_n = \lambda$ and $\bar{\delta}_1 = \frac{1}{2} \left(\lambda - \bar{\alpha} - \sqrt{(\lambda + \bar{\alpha})^2 - 4\bar{\alpha}\lambda(\eta_0 + \eta_1)} \right)$, thus $\bar{\delta}_n - \bar{\delta}_1 \leq \bar{\alpha} + \lambda$. Hence, using Lemma B.4,

$$\max_i |\bar{\delta}_i - \bar{\gamma}_*| \leq \frac{3}{2} (\bar{\alpha} + \lambda).$$

Therefore, we have

$$|\gamma_* - \bar{\gamma}_*| \leq \sqrt{d} + \frac{27}{8} (\bar{\alpha} + \lambda) \cdot \frac{\sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i|}{\sum_i \bar{b}_i^2}. \quad (24)$$

The term $\frac{\sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i|}{\sum_i \bar{b}_i^2}$ can be bounded as follow. Let $\mathcal{I} = \{i \in [n] : \bar{b}_i \neq 0\}$. Then

$$\sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i| \leq \max_{i \in \mathcal{I}} |b_i - \bar{b}_i| \cdot \sum_{i \in \mathcal{I}} |\bar{b}_i|.$$

Combining the Cauchy-Schwarz inequality

$$|b_i - \bar{b}_i| = \lambda \left| (Q_{\cdot i} - \bar{Q}_{\cdot i})^T \bar{s} \right| \leq \lambda \|Q_{\cdot i} - \bar{Q}_{\cdot i}\|_2 \cdot \|\bar{s}\|,$$

with the Davis-Kahan theorem [26]

$$\|Q_{\cdot i} - \bar{Q}_{\cdot i}\|_2 \leq \frac{2^{3/2} \|A - \mathbb{E}A\|}{\min \{\bar{\delta}_i - \bar{\delta}_{i-1}, \bar{\delta}_{i+1} - \bar{\delta}_i\}},$$

$\|\bar{s}\| = \sqrt{(\eta_0 + \eta_1)n}$, and the concentration of A towards $\mathbb{E}A$, yields

$$\max_{i \in \mathcal{I}} |b_i - \bar{b}_i| \leq \frac{\lambda \sqrt{(\eta_0 + \eta_1)n}}{\min_{i \in \mathcal{I}} \{\bar{\delta}_i - \bar{\delta}_{i-1}, \bar{\delta}_{i+1} - \bar{\delta}_i\}} \cdot 2^{3/2} \sqrt{d}.$$

Using Lemma B.6, we see that $\mathcal{I} = \{i \in [n] : \delta_i \notin \{0, t_1^-\}\}$. Combining it with Corollary B.3, gives

$$\begin{aligned} \min_{i \in \mathcal{I}} \{\bar{\delta}_i - \bar{\delta}_{i-1}, \bar{\delta}_{i+1} - \bar{\delta}_i\} &= \lambda + t_2^+ \\ &= \frac{\alpha + \lambda}{2} \left(1 - \sqrt{1 - 4 \frac{\alpha \lambda}{(\alpha + \lambda)^2} (\eta_0 + \eta_1)} \right) \\ &\geq \frac{\alpha \lambda}{\alpha + \lambda} (\eta_0 + \eta_1), \end{aligned}$$

where we used $\sqrt{1-x} \leq 1 - x/2$. Therefore,

$$\sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i| \leq 2^{3/2} \sqrt{\frac{n\bar{d}}{\eta_0 + \eta_1}} \cdot \frac{\alpha + \lambda}{\alpha} \cdot \sum_i |\bar{b}_i|.$$

By noticing that $\sum_i \bar{b}_i^2 \geq \left(\sum_i |\bar{b}_i| \right)^2 \geq |\bar{b}_1| \cdot \sum_i |\bar{b}_i| \geq \sqrt{n} \frac{\eta_1 - \eta_0}{2} \frac{\bar{\alpha} \lambda}{\lambda + \bar{\alpha}} \sum_i |\bar{b}_i|$ where we used $\bar{b}_1 \geq \sqrt{n} \frac{\eta_1 - \eta_0}{2} \frac{\bar{\alpha} \lambda}{\lambda + \bar{\alpha}}$ (Lemma B.6), we have

$$\frac{\sum_i |\bar{b}_i| \cdot |b_i - \bar{b}_i|}{\sum_i \bar{b}_i^2} \leq \frac{2^{5/2}}{(\eta_1 - \eta_0) \sqrt{\eta_1 + \eta_0}} \frac{(\alpha + \lambda)^2}{\alpha^2 \lambda} \sqrt{d}.$$

Going back to inequality (24), implies that $|\gamma_* - \bar{\gamma}_*| \leq \left(1 + \frac{27(\bar{\alpha} + \lambda)^3}{\sqrt{2} \sqrt{\eta_1 + \eta_0} (\eta_1 - \eta_0) \bar{\alpha}^2 \lambda} \right) \sqrt{d}$. \square

Lemma B.6. Let $-\mathbb{E}A_\tau + \lambda\mathcal{P} = \bar{Q}\bar{\Delta}\bar{Q}^T$, where $\bar{\Delta} = \text{diag}(\bar{\delta}_1, \dots, \bar{\delta}_n)$ and $\bar{Q}^T\bar{Q} = I_n$. Denote $\bar{b} = \lambda\bar{Q}^T s$. We have $\bar{b}_1 \geq \sqrt{n} \frac{\lambda(\eta_1 - \eta_0)}{2} \frac{\bar{\alpha}}{\lambda + \bar{\alpha}}$. Moreover, $\bar{b}_i = 0$ if $\bar{\delta}_i = 0$ or if $\bar{\delta}_i = -t_1^-$.

Proof. First, from Corollary B.3, $\bar{\delta}_1 = -t_2^+ = -\frac{1}{2} \left(\bar{\alpha} - \lambda + \sqrt{(\lambda + \bar{\alpha})^2 - 4\bar{\alpha}\lambda(\eta_1 + \eta_0)} \right)$. By symmetry, the i -th component of the first eigenvector $\bar{Q}_{\cdot 1}$ (associated with $\bar{\delta}_1$) is equal to

$$\begin{cases} v_1 Z_i & \text{if } i \in [\ell], \\ v_0 Z_i & \text{if } i \notin [\ell], \end{cases}$$

where v_1 and v_0 are to be determined. Thus, the equation $(-\mathbb{E}A_\tau + \lambda\mathcal{P}) \bar{Q}_{\cdot 1} = \bar{\delta}_1 \bar{Q}_{\cdot 1}$ leads to

$$\begin{cases} \bar{\alpha}((\eta_1 + \eta_0)v_1 + (1 - \eta_1 - \eta_0)v_0) & = -t_2^+ v_0 \\ \bar{\alpha}((\eta_1 + \eta_0)v_1 + (1 - \eta_1 - \eta_0)v_0) + \lambda v_1 & = -t_2^+ v_1, \end{cases}$$

which, given the norm constraint $\|v\|_2 = 1$, yields

$$\begin{cases} v_1 & = \frac{1}{\sqrt{n}} \frac{t_2^+}{\sqrt{(\eta_1 + \eta_0)(t_2^+)^2 + (1 - \eta_1 - \eta_0)(t_2^+ + \lambda)^2}}, \\ v_0 & = \frac{1}{\sqrt{n}} \frac{t_2^+ + \lambda}{\sqrt{(\eta_1 + \eta_0)(t_2^+)^2 + (1 - \eta_1 - \eta_0)(t_2^+ + \lambda)^2}}. \end{cases}$$

Since $\bar{b}_1 = \lambda v^T \bar{s} = \lambda(\eta_1 - \eta_0)nv_1$, we have

$$\frac{\bar{b}_1}{\sqrt{n}} = \lambda(\eta_1 - \eta_0) \frac{t_2^+}{\sqrt{(\eta_1 + \eta_0)(t_2^+)^2 + (1 - \eta_1 - \eta_0)(t_2^+ + \lambda)^2}}.$$

The proof ends by noticing that $t_2^+ \geq \frac{\bar{\alpha}}{2}$ and $t_2^+ \leq \bar{\alpha}$. Indeed,

$$\begin{aligned} \frac{\bar{b}_1}{\sqrt{n}} &\geq \lambda(\eta_1 - \eta_0) \frac{\bar{\alpha}}{2\sqrt{(\eta_1 + \eta_0)\bar{\alpha}^2 + (1 - \eta_1 - \eta_0)(\bar{\alpha} + \lambda)^2}} \\ &\geq \frac{\lambda(\eta_1 - \eta_0)}{2} \frac{\bar{\alpha}}{(\bar{\alpha} + \lambda) \sqrt{(\eta_1 + \eta_0) \left(\frac{\bar{\alpha}}{\bar{\alpha} + \lambda} \right)^2 + 1 - \eta_1 - \eta_0}} \\ &\geq \frac{\lambda(\eta_1 - \eta_0)}{2} \frac{\bar{\alpha}}{\lambda + \bar{\alpha}}. \end{aligned}$$

This proves the first claim of the lemma.

Similarly, by symmetry the i -th component of the eigenvector v' associated with $-t_1^-$ equals v'_ℓ if $i \in \ell$, and v'_u otherwise, and therefore $(v')^T s = 0$.

Finally, let $I_0 := \{i \in [n] : \bar{\delta}_i = 0\}$. By Corollary B.3, we have $|I_0| = n(1 - \eta_1 - \eta_0) - 2$. Since 0 is also eigenvalue of order $n(1 - \eta_0 - \eta_1) - 2$ of the extracted sub-matrix $(-\mathbb{E}A_\tau + \lambda\mathcal{P})_{u,u} = (-\mathbb{E}A_\tau)_{u,u}$, we have for all $k \in I_0$, $\bar{Q}_{ik} = 0$ for every $i \in [n]$. Therefore, for $k \in I_0$, $b_k = \lambda\bar{Q}_{\cdot k}^T s = 0$. \square

C Mean-field solution

In this section, we calculate the solution \bar{x} to the mean-field model and deduce from it the conditions to recover the clusters.

Proposition C.1. Suppose that $\tau > p_{\text{out}}$. Then the solution of Equation (14) on the mean-field DC-SBM is the vector \bar{x} whose element \bar{x}_i is given by

$$\bar{x}_i = \begin{cases} C(-1 + (\eta_1 - \eta_0)\bar{\alpha}B)Z_i, & \text{if } i \in \ell \text{ and } s_i \neq Z_i, \\ C(1 + (\eta_1 - \eta_0)\bar{\alpha}B)Z_i, & \text{if } i \in \ell \text{ and } s_i = Z_i, \\ \frac{-\bar{\alpha}C}{\bar{\alpha}(1-\eta_1-\eta_0)+\bar{\gamma}_*}(\eta_1 - \eta_0)(1 + (\eta_1 + \eta_0)\bar{\alpha}B)Z_i, & \text{if } i \notin \ell, \end{cases}$$

where $\bar{\alpha} = \frac{n}{2}(p_{\text{in}} - p_{\text{out}})$, $B = \frac{\bar{\alpha}\bar{\gamma}_*}{\lambda\bar{\alpha}(1-\eta_1-\eta_0)+\bar{\gamma}_*(\lambda-\bar{\alpha}-\bar{\gamma}_*)}$ and $C = \frac{\lambda}{\lambda-\bar{\gamma}_*}$.

Proof. Let \bar{x} be a solution of Equation (14). By symmetry, we have

$$\bar{x}_i = \begin{cases} x_t Z_i, & \text{if } i \in [\ell] \text{ and } \bar{s}_i = Z_i, \\ x_f Z_i, & \text{if } i \in [\ell] \text{ and } \bar{s}_i = -Z_i, \\ x_0 Z_i, & \text{if } i \notin [\ell], \end{cases}$$

where x_t , x_f and x_0 are unknowns to be determined. Since for every $i \in [n]$

$$(\mathbb{E}A_\tau \bar{x})_i = \bar{\alpha}(x_0(1 - \eta_1 - \eta_0) + x_t\eta_1 + x_f\eta_0),$$

the linear system composed of the equations $((-\mathbb{E}A_\tau + \lambda\mathcal{P} - \bar{\gamma}_*I_n)\bar{x})_i = \lambda s_i$ for all $i \in [n]$ leads to the system

$$\begin{cases} -\bar{\alpha}((1 - \eta_1 - \eta_0)x_0 + x_t\eta_1 + x_f\eta_0) - \bar{\gamma}_*x_0 & = 0, \\ -\bar{\alpha}((1 - \eta_1 - \eta_0)x_0 + x_t\eta_1 + x_f\eta_0) - \bar{\gamma}_*x_t + \lambda x_t & = \lambda, \\ -\bar{\alpha}((1 - \eta_1 - \eta_0)x_0 + x_t\eta_1 + x_f\eta_0) - \bar{\gamma}_*x_f + \lambda x_f & = -\lambda. \end{cases}$$

The rows of the latter system correspond to a node unlabeled by the oracle, correctly labeled and falsely labeled, respectively. This system can be rewritten as follows:

$$\begin{cases} x_0 & = \frac{-\bar{\alpha}}{\bar{\alpha}(1-\eta_1-\eta_0)+\bar{\gamma}_*}(\eta_1 x_t + \eta_0 x_f), \\ \bar{\gamma}_*x_0 + x_t(\lambda - \bar{\gamma}_*) & = \lambda, \\ \bar{\gamma}_*x_0 + x_f(\lambda - \bar{\gamma}_*) & = -\lambda. \end{cases}$$

In particular, we have $x_t - x_f = \frac{2\lambda}{\lambda - \bar{\gamma}_*}$. By subsequently eliminating x_0 and x_t in the equation $\bar{\gamma}_*x_0 + x_f(\lambda - \bar{\gamma}_*) = -\lambda$, we find

$$\begin{aligned} x_f &= \frac{\lambda}{\lambda - \bar{\gamma}_*} \left(-1 + \frac{\bar{\alpha}\bar{\gamma}_*(\eta_1 - \eta_0)}{\lambda\bar{\alpha}(1 - \eta_1 - \eta_0) + \lambda\bar{\gamma}_* - \bar{\gamma}_*(\bar{\alpha} + \bar{\gamma}_*)} \right), \\ x_t &= \frac{\lambda}{\lambda - \bar{\gamma}_*} \left(1 + \frac{\bar{\alpha}\bar{\gamma}_*(\eta_1 - \eta_0)}{\lambda\bar{\alpha}(1 - \eta_1 - \eta_0) + \lambda\bar{\gamma}_* - \bar{\gamma}_*(\bar{\alpha} + \bar{\gamma}_*)} \right), \end{aligned}$$

and finally

$$x_0 = \frac{-\bar{\alpha}}{\bar{\alpha}(1 - \eta_1 - \eta_0) + \bar{\gamma}_*} \cdot \frac{\lambda}{\lambda - \bar{\gamma}_*} \left(1 + \frac{\bar{\alpha}\bar{\gamma}_*(\eta_1 + \eta_0)}{\lambda\bar{\alpha}(1 - \eta_1 - \eta_0) + \lambda\bar{\gamma}_* - \bar{\gamma}_*(\bar{\alpha} + \bar{\gamma}_*)} \right).$$

□

Corollary C.2. Suppose that $\tau > p_{\text{out}}$. Then $\text{sign}(\bar{x}_i) = \text{sign}(Z_i)$ if

- node i is not labeled by the oracle;
- node i is correctly labeled by the oracle;
- node i is mislabeled by the oracle and $\lambda < (1 - 2\eta_0)\bar{\alpha}\frac{\eta_1 - \eta_0}{\eta_1 + \eta_0}$.

Proof. A node i is correctly classified by decision rule (12) if the sign of \bar{x}_i is equal to the sign of Z_i . Using Lemma B.4 in Appendix B.2, we have $-\bar{\alpha} \leq \bar{\gamma}_* \leq -\bar{\alpha}(1 - 2\eta_0)$. Therefore, the quantities B and C in Proposition C.1 verify $C \geq 0$ and $\frac{1-2\eta_0}{\lambda(\eta_0+\eta_1)} \leq B \leq \frac{1}{\lambda(\eta_0+\eta_1)}$. The statement then follows from the expression of \bar{x}_i computed in Proposition C.1. □

Funding statement This research has been done within the project of Inria - Nokia Bell Labs “Distributed Learning and Control for Network Analysis”.

Data availability statement Data can be found for instance at Stanford Large Network Dataset Collection <https://snap.stanford.edu/data/> and the code is available on github <https://github.com/mdreveton/ssl-sbm>.

References

- [1] Emmanuel Abbe. Community detection and stochastic block models: Recent developments. *The Journal of Machine Learning Research*, 18(1):6446–6531, 2017.
- [2] Lada A Adamic and Natalie Glance. The political blogosphere and the 2004 us election: divided they blog. In *Proceedings of the 3rd international workshop on Link discovery*, pages 36–43, 2005.
- [3] Konstantin Avrachenkov and Maximilien Dreveton. Almost exact recovery in label spreading. In *International Workshop on Algorithms and Models for the Web-Graph*, pages 30–43. Springer, 2019.
- [4] Konstantin Avrachenkov, Arun Kadavankandy, and Nelly Litvak. Mean field analysis of personalized PageRank with implications for local graph clustering. *Journal of Statistical Physics*, 173(3-4):895–916, 2018.
- [5] Konstantin Avrachenkov, Alexey Mishenin, Paulo Gonçalves, and Marina Sokol. Generalized optimization framework for graph-based semi-supervised learning. In *Proceedings of the 2012 SIAM International Conference on Data Mining*, pages 966–974. SIAM, 2012.
- [6] Konstantin E Avrachenkov, Jerzy A Filar, and Phil G Howlett. *Analytic Perturbation Theory and its Applications*. SIAM, 2013.
- [7] Mikhail Belkin, Irina Matveeva, and Partha Niyogi. Regularization and semi-supervised learning on large graphs. In *International Conference on Computational Learning Theory*, pages 624–638. Springer, 2004.
- [8] Shai Ben-David, Tyler Lu, and Dávid Pál. Does unlabeled data provably help? Worst-case analysis of the sample complexity of semi-supervised learning. In *Conference on Learning Theory*, 2008.
- [9] Jeff Calder, Brendan Cook, Matthew Thorpe, and Dejan Slepcev. Poisson learning: Graph based semi-supervised learning at very low label rates. In *International Conference on Machine Learning*, pages 1306–1316. PMLR, 2020.
- [10] Olivier Chapelle, Bernhard Schölkopf, and Alexander Zien. *Semi-Supervised Learning*. Adaptive computation and machine learning. MIT Press, 2006.
- [11] Fabio Gagliardi Cozman, Ira Cohen, and M Cirelo. Unlabeled data can degrade classification performance of generative classifiers. In *Proceedings of Flairs-02*, pages 327–331, 2002.
- [12] Uriel Feige and Eran Ofek. Spectral techniques applied to sparse random graphs. *Random Structures & Algorithms*, 27(2):251–275, 2005.
- [13] Walter Gander, Gene H Golub, and Urs Von Matt. A constrained eigenvalue problem. *Linear Algebra and its Applications*, 114:815–839, 1989.

- [14] Roger A. Horn and Charles R. Johnson. *Matrix Analysis*. Cambridge University Press, 2012.
- [15] Yukito Iba. The Nishimori line and Bayesian statistics. *Journal of Physics A: Mathematical and General*, 32(21):3875–3888, jan 1999.
- [16] Brian Karrer and Mark EJ Newman. Stochastic blockmodels and community structure in networks. *Physical review E*, 83(1):016107, 2011.
- [17] Can M. Le, Elizaveta Levina, and Roman Vershynin. Concentration and regularization of random graphs. *Random Structures & Algorithms*, 51(3):538–561, 2017.
- [18] Yann LeCun, Corinna Cortes, and Christopher JC Burges. The mnist database of handwritten digits.
- [19] Xiaoyi Mai and Romain Couillet. A random matrix analysis and improvement of semi-supervised learning for large dimensional data. *Journal of Machine Learning Research*, 19(1):3074–3100, 2018.
- [20] Xiaoyi Mai and Romain Couillet. Consistent semi-supervised graph regularization for high dimensional data. *Journal of Machine Learning Research*, 22(94):1–48, 2021.
- [21] Boaz Nadler, Nathan Srebro, and Xueyuan Zhou. Semi-supervised learning with the graph Laplacian: The limit of infinite unlabelled data. In *Advances in neural information processing systems*, volume 22, pages 1330–1338, 2009.
- [22] Mark EJ Newman. Spectral methods for community detection and graph partitioning. *Physical Review E*, 88(4):042822, 2013.
- [23] Hussein Saad and Aria Nosratinia. Community detection with side information: Exact recovery under the stochastic block model. *IEEE Journal of Selected Topics in Signal Processing*, 12(5):944–958, 2018.
- [24] Dorothea Wagner and Frank Wagner. Between min cut and graph bisection. In *International Symposium on Mathematical Foundations of Computer Science*, pages 744–750. Springer, 1993.
- [25] Jaewon Yang and Jure Leskovec. Defining and evaluating network communities based on ground-truth. *Knowledge and Information Systems*, 42(1):181–213, 2015.
- [26] Yi Yu, Tengyao Wang, and Richard J Samworth. A useful variant of the Davis–Kahan theorem for statisticians. *Biometrika*, 102(2):315–323, 2015.
- [27] Dengyong Zhou, Olivier Bousquet, Thomas N. Lal, Jason Weston, and Bernhard Schölkopf. Learning with local and global consistency. In *Advances in neural information processing systems*, pages 321–328, 2004.
- [28] Xiaojin Zhu, Zoubin Ghahramani, and John D. Lafferty. Semi-supervised learning using Gaussian fields and harmonic functions. In *Proceedings of the 20th International Conference on Machine Learning*, pages 912–919, 2003.