

The optimality of syntactic dependency distances

Ramon Ferrer-i-Cancho^{1,*}, Carlos Gómez-Rodríguez^{2,†}, Juan Luis Esteban^{3,‡} and Lluís Alemany-Puig^{1,§}

¹*Complexity and Quantitative Linguistics Lab*

LARCA Research Group

Departament de Ciències de la Computació

Universitat Politècnica de Catalunya

Campus Nord, Edifici Omega

Jordi Girona Salgado 1-3

08034 Barcelona, Catalonia, Spain

²*Universidade da Coruña, CITIC*

FASTPARSE Lab, LyS Research Group

Departamento de Ciencias de la Computación y Tecnologías de la Información

Facultade de Informática, Elviña,

15071, A Coruña, Spain and

³*Departament de Ciències de la Computació*

Universitat Politècnica de Catalunya (UPC)

Campus Nord, Edifici Omega

Jordi Girona Salgado 1-3

08034 Barcelona, Catalonia, Spain.

(Dated: October 27, 2020)

It is often stated that human languages, as other biological systems, are shaped by cost-cutting pressures but, to what extent? Attempts to quantify the degree of optimality of languages by means of an optimality score have been scarce and focused mostly on English. Here we recast the problem of the optimality of the word order of a sentence as an optimization problem on a spatial network where the vertices are words, arcs indicate syntactic dependencies and the space is defined by the linear order of the words in the sentence. We introduce a new score to quantify the cognitive pressure to reduce the distance between linked words in a sentence. The analysis of sentences from 93 languages representing 19 linguistic families reveals that half of languages are optimized to a 70% or more. The score indicates that distances are not significantly reduced in a few languages and confirms two theoretical predictions, i.e. that longer sentences are more optimized and that distances are more likely to be longer than expected by chance in short sentences. We present a new hierarchical ranking of languages by their degree of optimization. The statistical advantages of the new score call for a reevaluation of the evolution of dependency distance over time in languages as well as the relationship between dependency distance and linguistic competence. Finally, the principles behind the design of the score can be extended to develop more powerful normalizations of topological distances or physical distances in more dimensions.

CONTENTS

		Anti dependency distance minimization effects in short sequences	7
I. Introduction	2	The ranking of languages based on their degree of optimality	7
II. Optimality scores	3		
A new optimality score	5		
Summary	6	IV. Discussion	10
III. Results	6	Question 1. Are there universal optimization principles in languages? Or, are there languages showing no optimization at all?	10
The optimality of syntactic dependency distances	6	Question 2. What is the degree of optimization of languages?	11
The significance of syntactic dependency distances	7	Question 3. What are the most and the least optimized languages of the world? Can we define a ranking of languages?	12
Syntactic dependency distance versus sentence length	7	Question 4. Under what conditions is optimization stronger?	12
		Question 5. Why do languages deviate from optimality?	13
		Question 6. What are the best optimality scores for cross-linguistic research?	13
		Additional remarks	13
		Future work	13

* rferrericancho@cs.upc.edu; <http://www.cs.upc.edu/~rferrericancho/>

† carlos.gomez@udc.es; <http://www.grupolys.org/~cgomezr/>

‡ esteban@cs.upc.edu; <https://www.cs.upc.edu/~esteban/>

§ lluis.alemany.puig@upc.edu ; <https://cqlab.upc.edu/people/lalemany/>

V. Materials and methods	14
Acknowledgments	14
A. The mathematics of optimality scores	15
1. The new optimality score	15
a. The maximum value of Ω	15
b. A lower bound of Ω	15
c. The minimum Ω up to some tree size and an ansatz	16
2. Constancy under minimum linear arrangement of the optimality scores	18
3. Stability under the null hypothesis (random linear arrangements)	19
4. Boundedness under maximum linear arrangement	20
5. Invariance under linear transformation	20
B. Materials	21
C. Methods	22
1. Statistical tests	22
2. Multiple comparisons	22
3. Hasse diagram	24
4. Minimum sentence length	24
D. Results	25
References	30

I. INTRODUCTION

Optimization has shed light on many features of biological systems [1–3]. Some examples are the genetic code [4, 5], neural structures [6–8], metabolic networks [9, 10] and animal behavior [1, 11]. Understanding why these systems deviate from optimality is a fundamental research problem [3]. In the domain of human communication, it has been argued that languages are shaped by cost-cutting pressures [12–14] but evaluations of the degree of optimality of languages have been rather scarce and limited to a few Indo-European languages in most of the cases [15–19]. Six fundamental questions for a research program on language efficiency are:

1. Are there universal optimization principles in languages? Or, are there languages showing no optimization at all?
2. What is the degree of optimization of languages?
3. What are the most and the least optimized languages of the world?
4. Under what conditions is optimization stronger?
5. Why do languages deviate from optimality?
6. What are the best optimality scores for cross-linguistic research?

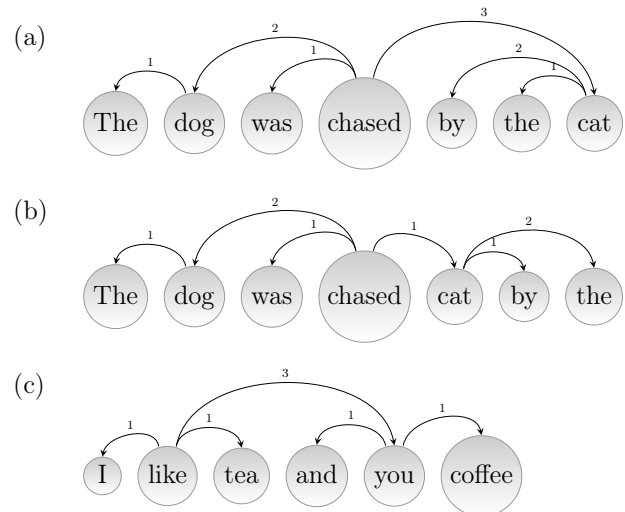


FIG. 1. Examples of syntactic dependency structures. Edges go from a head word to a dependent word [25, 26]. Here edge labels indicate dependency distances (in words). Link direction is irrelevant for calculating edge distance. D , the true sum of dependency distances, is compared against two baselines assuming that the network is fixed: D_{min} , the minimum value of D and, D_{rla} , the average value of D over all linear arrangements. Ω is the new optimality score. (a) A sentence with $n = 7$, $D = 10$, $D_{rla} = 16$, $D_{min} = 8$, and $\Omega = 3/4$. Borrowed from Example 1 in <https://universaldependencies.org/introduction.html>. (b) An "ungrammatical" reordering of the sentence in (a) giving $D = D_{min} = 8$ and $\Omega = 1$. (c) A sentence where $n = 6$, $D = D_{min} = 7$, $D_{rla} = 35/3$, and $\Omega = 1$. Borrowed from Example 12 in <https://universaldependencies.org/overview/specific-syntax.html>.

Here we approach these questions from the perspective of the word order of a sentence, one of the main components of the complexity of human languages [20, 21]. As word order optimization is a multiconstraint satisfaction problem [22–24], we focus on one of its dimensions, namely the distance between syntactically related words in a sentence. We introduce a new optimality score Ω and investigate its theoretical and empirical properties.

The problem of word order in sentences goes beyond human language: the syntactic structure of a sentence is actually a particular case of spatial or geographical network, a network where vertices are embedded into a space [27, 28]. That structure can be represented as a network, typically a directed tree, where vertices are words and links indicate syntactic dependencies between words (Fig. 1) [25, 26]. The space has one dimension, defined by the linear order of the elements of the sentence as in Fig. 1.

Popular examples of spatial networks in two dimensions are subway networks or road networks [27]. Edge distance or edge length, defined as the distance between the two linked vertices, is biased towards low values in syntactic dependency networks [29, 30] and other spa-

tial networks [31, 32]. Indeed, the probability that two connected words are at a certain distance decays with distance [16], as in networks of individuals connecting with cell phones [33] or real neural networks [32]. In syntactic dependency networks, the distance between vertices is typically measured in words (consecutive words are at distance 1, words separated by just one word are at distance 2, and so on) and the distance of an edge is defined as the distance between the two words that are syntactically related [29] (Fig. 1). Since the discovery that dependency distances are smaller than expected by a shuffling of the words of a sentence [16], edge distances have been shown to be significantly small in real syntactic dependency networks from many languages with the help of random baselines of varying complexity [34–40]. These findings provide direct support for a principle of dependency distance minimization (DDm) [16] that would stem from a general principle of distance minimization in languages (Dm) [41]. Other instances of Dm would be swap distance minimization in word order [42] or topological distance minimization [43]. DDm predicts the scarcity of crossings between syntactic dependencies in languages [44, 45]. Such pressure to reduce dependency distances is believed to originate from decay of activation and increased chances of interference as the distance between syntactically connected words increases [29, 30]. Thus D , the sum of the dependency lengths of a sentence (Fig. 1), is a measure of cognitive cost.

Although dependency distances are significantly small, they are not minimum [16–18, 34, 36, 37, 39, 40]. Assuming that the network is constant, D cannot be smaller than D_{min} , the minimum value of D achievable by rearranging the words of that sentence while keeping the dependencies between them (Fig. 1). This baseline led to the first optimality score for dependency distances [16, 17, 19],

$$\Gamma = \frac{D}{D_{min}}, \quad (1)$$

i.e. a measure of dependency distance in units of D_{min} . For fully optimized sentences, $\Gamma = 1$. Γ was found to exceed 1.2 on average for sufficiently long sentences in Romanian [16]. The finding that Γ tended to be higher in longer sentences was interpreted as less evidence of DDm in longer sentences [16]. However, we will show how this interpretation is misleading.

The fact that actual dependencies are not minimum has also been confirmed with more restrictive baselines where only projective linearizations of the sentence are allowed [17, 18, 34, 36, 37, 39]. These results indicate that D is greater than D_{min} for sufficiently large sentences but no quantitative measurement of the degree of optimality has been made. As in many biological problems [3], a crucial question is: if DDm is a fundamental principle of languages, why are real languages not reaching the theoretical minimum sum of dependency lengths? (Question 5). Here we aim to provide a coherent answer to this question.

In this article, we present Ω , a new measure of the degree of optimality of syntactic dependency lengths, that takes a value of 1 when distances are minimized, negative values when distances are maximized, and is expected to be zero in shuffled sentences. We explain its advantages over Γ and other scores (Question 6). We use Ω to investigate DDm in a sample of 93 languages from 19 families, 40 more languages than in the most recent large-scale study [40]. We find massive evidence that Ω is significantly large with respect to shuffled sentences (Question 1). We rank languages by Ω , identifying highly and less optimized languages (Question 3). We also find that languages are optimized to a 70% on average (Question 2) and confirm two predictions of a mathematical theory of word order [46, 47]. First, we support the prediction that pressure to minimize dependency lengths is larger for longer sentences, in particular, we find that Ω tends to grow with sentence length (Question 4). Second, we support the prediction that DDm is more likely to be surpassed by other word order principles in short sequences, i.e. negative and significantly small values of Ω are found in sentences of 3 or 4 words (Question 5).

II. OPTIMALITY SCORES

The syntactic structure of a sentence is two-fold: a network, i.e. a tree, and a linear arrangement of the vertices that is defined by the ordering of the words of the sentence (Fig. 1). We aim to investigate optimality scores that measure the extent to which D has been optimized, assuming that the network remains constant and the linear arrangement can vary. The simplest score would consist of using D itself, but D is uninformative unless a baseline or reference is taken into account. Two baselines have been considered for D : D_{min} and D_{rla} , namely the minimum and the average of D over the $n!$ different linear arrangements of a given sentence of n words [16]. D_{min} is the solution of the minimum linear arrangement problem of computer science on a tree [48, 49]. A uniformly random linear arrangement (rla) is a linear arrangement chosen randomly in such a way that every possible arrangement has the same probability, namely $1/n!$. Such random arrangements are our random baseline and our null hypothesis. Fig. 1 shows a sentence where $D > D_{min}$ and a sentence where $D = D_{min}$, while $D < D_{rla}$ in both cases.

D_{rla} is a shorthand for $\mathbb{E}_{rla}[D]$, the expected value of D in a uniformly random linear arrangement of a certain tree. It is well-known that [16, 50]

$$D_{rla} = \frac{1}{3}(n^2 - 1). \quad (2)$$

To estimate the optimality of a sentence, at some point one has to choose between D and its variants. One is the average D over the $n-1$ edges of a tree, i.e. $\bar{d} = D/(n-1)$ [16]. Another one is Hudson’s D_0 [51–53], that measures the distance between two linked words as the number of

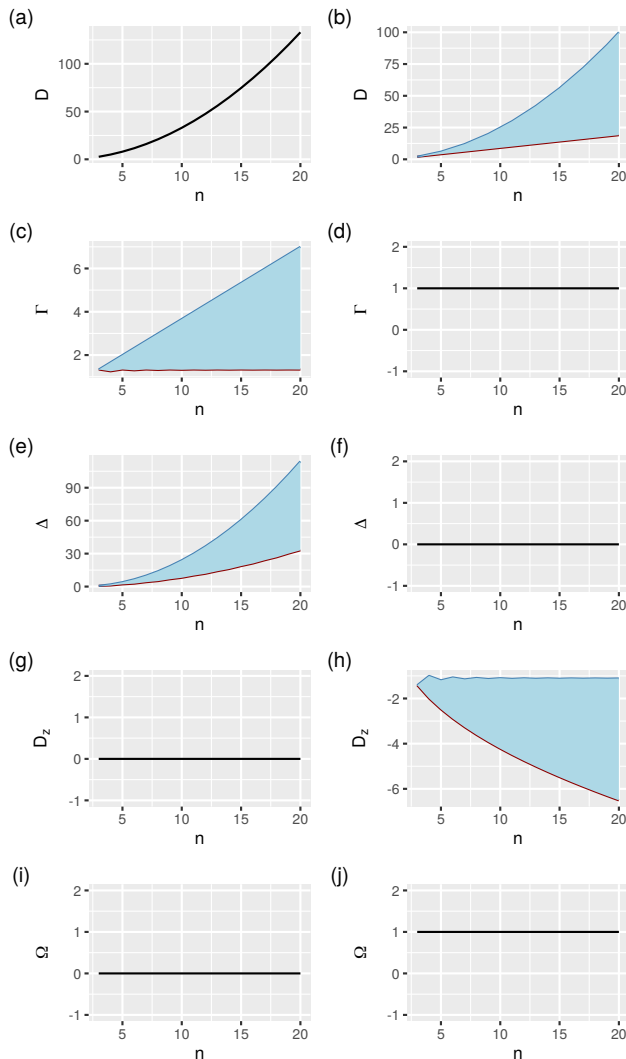


FIG. 2. The theoretical properties of each optimality score as a function of n , the number of words of the sentence (one distinct score each row). Left: the expected value of the score under the null hypothesis. Right: the value of the score in a minimum linear arrangement. The light blue areas in between curves indicate the interval of variation of the score for a given n . (a), (b) for D . (c), (d) for Γ . (e), (f) for Δ . (g), (h) for D_z . (i), (j) for Ω .

intervening words (then consecutive words are at distance 0 and not at distance 1 as in D). For this reason, one has $D_0 = D - (n - 1)$. We are interested in optimality scores whose values do not depend on the choice of one of these possibilities.

To estimate the optimality of a language, one has to aggregate the scores from sentences of a treebank, namely a collection of syntactic dependency trees. The scores can be aggregated by taking their mean. We use $\langle X \rangle$ to refer to the average value of some score X in some treebank. Using \bar{d} to assess the degree of optimality of a language is problematic because sentence length and the kind of

tree usually varies in a real treebank. D_{rla} is a moving baseline because it increases as the number of words in the sentence increases (Eq. 2 and Fig. 2 A). D_{min} is also a moving baseline not only because it depends on n but also on the kind of tree (Fig. 2 B): for a tree of size n , the range of variation of D_{min} satisfies [54, 55]

$$D_{min}^{linear} = n - 1 \leq D_{min} \leq D_{min}^{star} = \left\lfloor \frac{n^2}{4} \right\rfloor \leq D_{rla}, \quad (3)$$

where D_{min}^{linear} and D_{min}^{star} are the values of D_{min} for a linear and a star tree, respectively. For these reasons, interpreting when an ensemble of sentences are fully optimized by means of \bar{d} , even when the sentence lengths are the same, is not straightforward. The values of D should be normalized somehow prior to aggregating them. Similar arguments can be made for \bar{d} and D_0 . The problem of D and its simple variants is that they are neither constant under a minimum linear arrangement (Fig. 2 B) nor stable under the null hypothesis (Fig. 2 A).

We aim to explore new scores for individual sentences that reduce the problems of existing measures when producing a global optimality score by aggregating their values in a treebank. Some existing scores will be reviewed and a new score will be presented with the help of Fig. 2 (see Appendix A for further mathematical details and the formulae behind the curves in that figure).

The oldest score, Γ (Eq. 1), satisfies $\Gamma \geq 1$ [56]. A recent optimality score, defined as [18]

$$\Delta = D - D_{min}, \quad (4)$$

satisfies $\Delta \geq 0$. One has $\Delta = 0$ and $\Gamma = 1$ only in a fully optimized sentence [56]. Therefore these scores satisfy constancy under minimum linear arrangement: regardless of n or the kind of tree, $\Delta = 0$ and $\Gamma = 1$ when the linear arrangement is optimal (Fig. 2 D and Fig. 2 F). However, neither Γ nor Δ are stable under random linear arrangement: their expected value depends on n or the kind of tree (Figs. 2 C and E). Therefore, knowing how far D is from D_{rla} (the random baseline) based on $\langle \Gamma \rangle$ or $\langle \Delta \rangle$ is not straightforward.

An attractive possibility is D_z , a z -score of D , that has been introduced recently and that is defined as [57]

$$D_z = \frac{D - D_{rla}}{\sigma_{rla}[D]}, \quad (5)$$

where $\sigma_{rla}[D]$ is the standard deviation of D in uniformly random linear arrangements of a tree. z -scoring is a common technique to find hidden patterns in heterogeneous data [58–60]. D_z is a function of n and $\langle k^2 \rangle$, the 2nd moment of vertex degrees about zero [57], and thus may allow one to control better for the effect of tree size n and the distribution of vertex degrees. Interestingly, D_z is stable under the null hypothesis, namely its expected value in that situation is zero (Fig. 2 G) but it is not constant under minimum linear arrangement (Fig. 2 H).










$n = 3$ $D_{min} = 2$ $D_{rla} = 8/3$		
$\Omega = -\frac{1}{2}$		$D = 3$
$\Omega = 1$		$D = 2$
$n = 4$ $D_{rla} = 5$		
	linear $D_{min} = 3$	star $D_{min} = 4$
$\Omega = -1$		
$\Omega = -\frac{1}{2}$		
$\Omega = 0$		
$\Omega = \frac{1}{2}$		
$\Omega = 1$		

FIG. 3. All the possible values of Ω that can be obtained for sentences of lengths $n = 3$ and $n = 4$. Edge lengths (in words) are shown on top of each edge. For $n = 3$, the only possible trees are linear trees and star trees simultaneously. For $n = 4$, the only possible trees are either linear or star. For every tree and every possible value of Ω , a linear arrangement achieving is shown.

A new optimality score

We introduce a new optimality score Ω that exhibits constancy under minimum linear arrangement, taking a constant value of 1 (Fig. 2 J) and stability under random linear arrangement, having an expected value of 0 (Fig. 2 I). We define Ω as

$$\Omega = \frac{D_{rla} - D}{D_{rla} - D_{min}}. \quad (6)$$

In the syntactic dependency trees in Fig. 1, $\Omega = 3/4$ for (a) whereas $\Omega = 1$ both for the “ungrammatical” reordering in (b) and the other sentence in (c). Fig. 3 shows all the values that Ω can take for small trees along with examples of linear arrangements that achieve each of these values. It is easy to see that the presentation covers all the possible values checking the corresponding figures in [47].

Ω also satisfies the following three properties. First, when interpreted as a function of the random variable D , Ω is invariant under linear transformation, namely, $\Omega[aD + b] = \Omega[D]$, where a and b are constants. Thus, Ω satisfies invariance under proportional scaling, i.e. $\Omega[aD] = \Omega[D]$, and invariance under translation, i.e. $\Omega[D + b] = \Omega[D]$ (Appendix A). D_z is invariant under linear transformation whereas Δ and Γ are not (Appendix A). Δ satisfies invariance under translation but not under proportional scaling. Thus Δ would give different values if D were replaced by \bar{d} to control for the natural growth of D as n increases. Finally, Γ satisfies invariance under proportional scaling but not under translation.

Second, while D , D_0 , \bar{d} , Γ and Δ take positive values, D_z and Ω are signed. Ω takes positive values when $D < D_{rla}$ and negative values when $D > D_{rla}$, namely when D is above the random baseline, as illustrated in Fig. 3 for small trees. This sign is of great importance for a theory of word order: it is crucial to detect when DDM is surpassed by other word order principles [46, 47, 61]. Such a detection by means of Δ or Γ is more difficult because D_{rla} depends on n as we have seen.

Third, Ω is bounded under maximum linear arrangement. As n increases, the maximum values of D , Δ and Γ and D_z diverge (Appendix A). In contrast, $-c \leq \Omega$ where c is a constant that satisfies $1.89 \leq c \leq 5$. We conjecture that $c = 2$ (Appendix A).

Ω is analogous to the Pearson correlation coefficient. First, Ω is invariant under linear transformation as the Pearson correlation coefficients and similar correlation metrics [62]. Second, Pearson r and Ω are zero under the null hypothesis. Third, r and Ω (Eq. 6) are normalized differences between a sample average value and the expectation under some null model. In $\Omega[\bar{d}]$, the sample average is \bar{d} and the expectation under the null hypothesis is $D_{rla}/(n-1)$. However, $0 \leq r \leq 1$ while $-c \leq \Omega \leq 1$. The second and the third properties are shared with Newman’s modularity Q [63].

Invariance under linear transformation is a fundamental property for research on dependency distance: it implies that Ω yields the same value if D is replaced by

- D_0 , where $a = 0$ and $b = -(n - 1)$ (translation).
- \bar{d} , where $a = 1/(n - 1)$ and $b = 0$ [16] (proportional scaling).
- Δ , where $a = 0$ and $b = -(n - 1)$ (translation).
- D_z , where $a = 1/\sigma_{rla}[D]$ and $b = -D_{rla}/\sigma_{rla}[D]$.

Crucially, such invariance under linear transformation implies that the estimates of the optimality of a language based on Ω remain unaltered if D is replaced by some linear transformation of D . For instance, if D is replaced by D_0 when controlling for the different conventions when defining dependency distance, the degree of optimality of Chinese based on $\langle \Omega \rangle$ remains unchanged while that based on $\langle \Gamma \rangle$ is likely to change. Similarly, if D is replaced by \bar{d} to control for the natural growth of D as sentence length increases, the degree of optimality of Chinese based on $\langle \Omega \rangle$ remains unchanged again while that based on $\langle \Delta \rangle$ is likely to change. Furthermore, linear transformations, when applied to scores that do not satisfy invariance under linear transformation, may alter the power of the statistical tests used to answer research questions (e.g., Questions 1 and 4).

Summary

Table I reviews the properties of all the optimality scores. Ω is the only score that incorporates the minimum and the random baseline (D_{rla} and D_{min}). For these reasons, Ω is a dual optimality score, Δ , Γ and D_z are singular optimality scores (Δ , Γ only incorporate the minimum baseline, D_{min} ; D_z only incorporates the random baseline, D_{rla}) while D and its linear transformations (e.g., D_0) are not proper optimality scores (they do not incorporate any baseline).

We are aware of another score [64]

$$NDD = \left| \log \frac{\bar{d}}{\sqrt{\pi^r n}} \right|,$$

where π^r is the position of the root of the syntactic dependency structure in the linear arrangement ($1 \leq \pi^r \leq n$). NDD was designed with two main aims in mind: reducing the dependence of D on sentence length n , an aim shared with \bar{d} , as well as serving as a measure of syntactic complexity [64]. In contrast, the primary goal of the scores reviewed in Table I is to measure the degree of optimization of languages based on DDm. Furthermore, the complexity of the formula in the definition of NDD turns the mathematical analysis particularly complex. Crucially, it suffers the same limitations of D and its linear transformations (Table I; Appendix A).

III. RESULTS

We investigate Ω in 93 languages from 19 families. The input for the analyses is organized into datasets. A dataset results from the combination of a collection of sentences from different languages and some annotation criteria to define the syntactic dependency structure of sentences (Table II). The UD and the SUD datasets contain 92 distinct languages. The Prague and the Stanford datasets contain 30 distinct languages. We control for

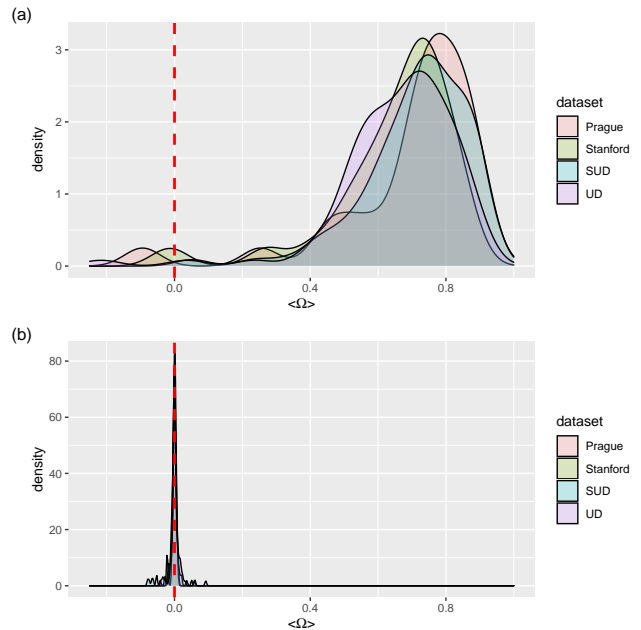


FIG. 4. The probability density of $\langle \Omega \rangle$, the average Ω in the sentences of a language, for languages in different datasets. The vertical dashed line indicates the expected value under the null hypothesis. A. Original sentences. B. Shuffled sentences.

the bias towards Indo-European languages (51 languages) and for vertical transmission by grouping languages according to their linguistic family. Languages from the same family are not statistically independent since the features we observe may originate from a common ancestor [65].

For a given language, we analyze $\langle \Omega \rangle$, the average value of Ω over all sentences from a certain dataset. The sign of $\langle \Omega \rangle$ is indicative of the kind of constraint on dependency distance. If $\langle \Omega \rangle > 0$ and $\langle \Omega \rangle$ is significantly large, then this is evidence of the action of DDm. If $\langle \Omega \rangle < 0$ and $\langle \Omega \rangle$ is significantly small, then this is evidence of anti-DDm effects [47]. Significance is determined with respect to (randomly) shuffled sentences.

The optimality of syntactic dependency distances

Under the null hypothesis of a uniformly random linear arrangement, the probability distribution of $\langle \Omega \rangle$ should be centered at zero (as expected by the stability under linear arrangement property of Ω). In contrast, the probability density of $\langle \Omega \rangle$ across languages is skewed towards positive values peaking at about 0.7 (Fig. 4). After shuffling the words of every sentence, the probability density peaks at zero as expected.

We define the percentage of optimization as $100 \cdot \Omega$. Notice that such percentage can be negative. In each dataset, languages are optimized at least to a 65% on

TABLE I. Comparison of the properties of each dependency distance score.

Properties	D_0, D, \bar{d}, NDD	Γ	Δ	D_z	Ω
Sign	+	+	+	\pm	\pm
Minimum baseline		✓	✓	✓	✓
Random baseline					✓
Constancy under minimum linear arrangement		✓	✓		✓
Stability under random linear arrangement				✓	✓
Invariance under translation			✓	✓	✓
Invariance under proportional change of scale		✓		✓	✓
Invariance under linear transformation				✓	✓
Bounded under maximum linear arrangement					✓

TABLE II. The annotation criteria (rows) and the collection (column) of each dataset. See Appendix B for further details on the collections and the annotation criteria.

	Universal Dependencies	HamleDT	Parallel Universal Dependencies
Universal Dependencies	UD		PUD
Surface-syntactic Universal Dependencies	SUD		PSUD
Universal Stanford Dependencies		Stanford	
Prague Dependencies		Prague	

average when all languages are considered (Table III). In addition, the median indicates that half of languages are optimized to a 71% at least. The statistics are strongly influenced by the abundance of Indo-European languages in the datasets: 51 out of 92 languages in UD/SUD and 21 out of 30 in Prague/Stanford (Table III). High values of $\langle \Omega \rangle$ are found in other families (the average $\langle \Omega \rangle$ is greater than 50% in the majority of families). All the values of $\langle \Omega \rangle$ are positive except in a few cases: a Pama-Nyungan language (Warlpiri) for UD (but not SUD) and a Dravidian language (Telugu) for Stanford and Prague.

The significance of syntactic dependency distances

$\langle \Omega \rangle$ is significantly large in the overwhelming majority of languages: there are two exceptions in UD (Telugu and Warlpiri), no exception in SUD and one exception (Telugu) in Prague and Stanford (Table IV). Interestingly, we did not find any language with a significantly small $\langle \Omega \rangle$ although $\langle \Omega \rangle < 0$ in a few languages as reported above.

Syntactic dependency distance versus sentence length

Here we investigate $\langle \Omega \rangle (n)$, the average value of Ω in sentences of length n of a given language. In sufficiently long real sentences, $D < D_{rta}$ on average [16, 38, 66], and thus $0 < \langle \Omega \rangle (n)$ is expected. Accordingly, $\langle \Omega \rangle (n)$ is higher in longer sentences (Fig. 5). For sufficiently small n (e.g., $n \in \{3, 4\}$), negative values of $\langle \Omega \rangle (n)$ are found in some languages. Indeed, the correlation between $\langle \Omega \rangle (n)$ and n is significantly large in the overwhelming majority of languages (Table V). Such a global tendency suggests

that DDM may turn out to not be the dominating principle in short sequences.

Anti dependency distance minimization effects in short sequences

In some languages, $\langle \Omega \rangle (n)$ is significantly small in sentences of length $n = 3$ or $n = 4$ (Table VI). In UD, 12 languages for $n = 3$ and 3 with $n = 4$. Interestingly, the effect disappears completely for $n > 4$ consistently with previous research on DDM [67]. It is unlikely that the results are due to a common descent [65]: $\langle \Omega \rangle (n)$ is significantly small in languages from distinct families and the finding does not cover the whole family provided that the family is represented by more than one language *a priori* (see Appendix B for the composition of each linguistic family). For instance, in UD with $n = 3$, the 12 languages concerned are 9 Indo-European languages out of 51, one Austronesian language out of 2 (Tagalog), one Dravidian language out of 2 (Telugu) and one isolate (Japanese).

The ranking of languages based on their degree of optimality

What are the most and the least optimized languages? It is possible to sort the languages in a dataset by $\langle \Omega \rangle$ to obtain a ranking of languages according to dependency distance, e.g. from $\langle \Omega \rangle = 0.9$ down to $\langle \Omega \rangle = -0.22$ in UD. Such an ordering is problematic for various reasons. First, it may depend on the dataset used [68, 69]. Second, there is a problem of homogeneity or comparability, namely the source of the sentences for each language is

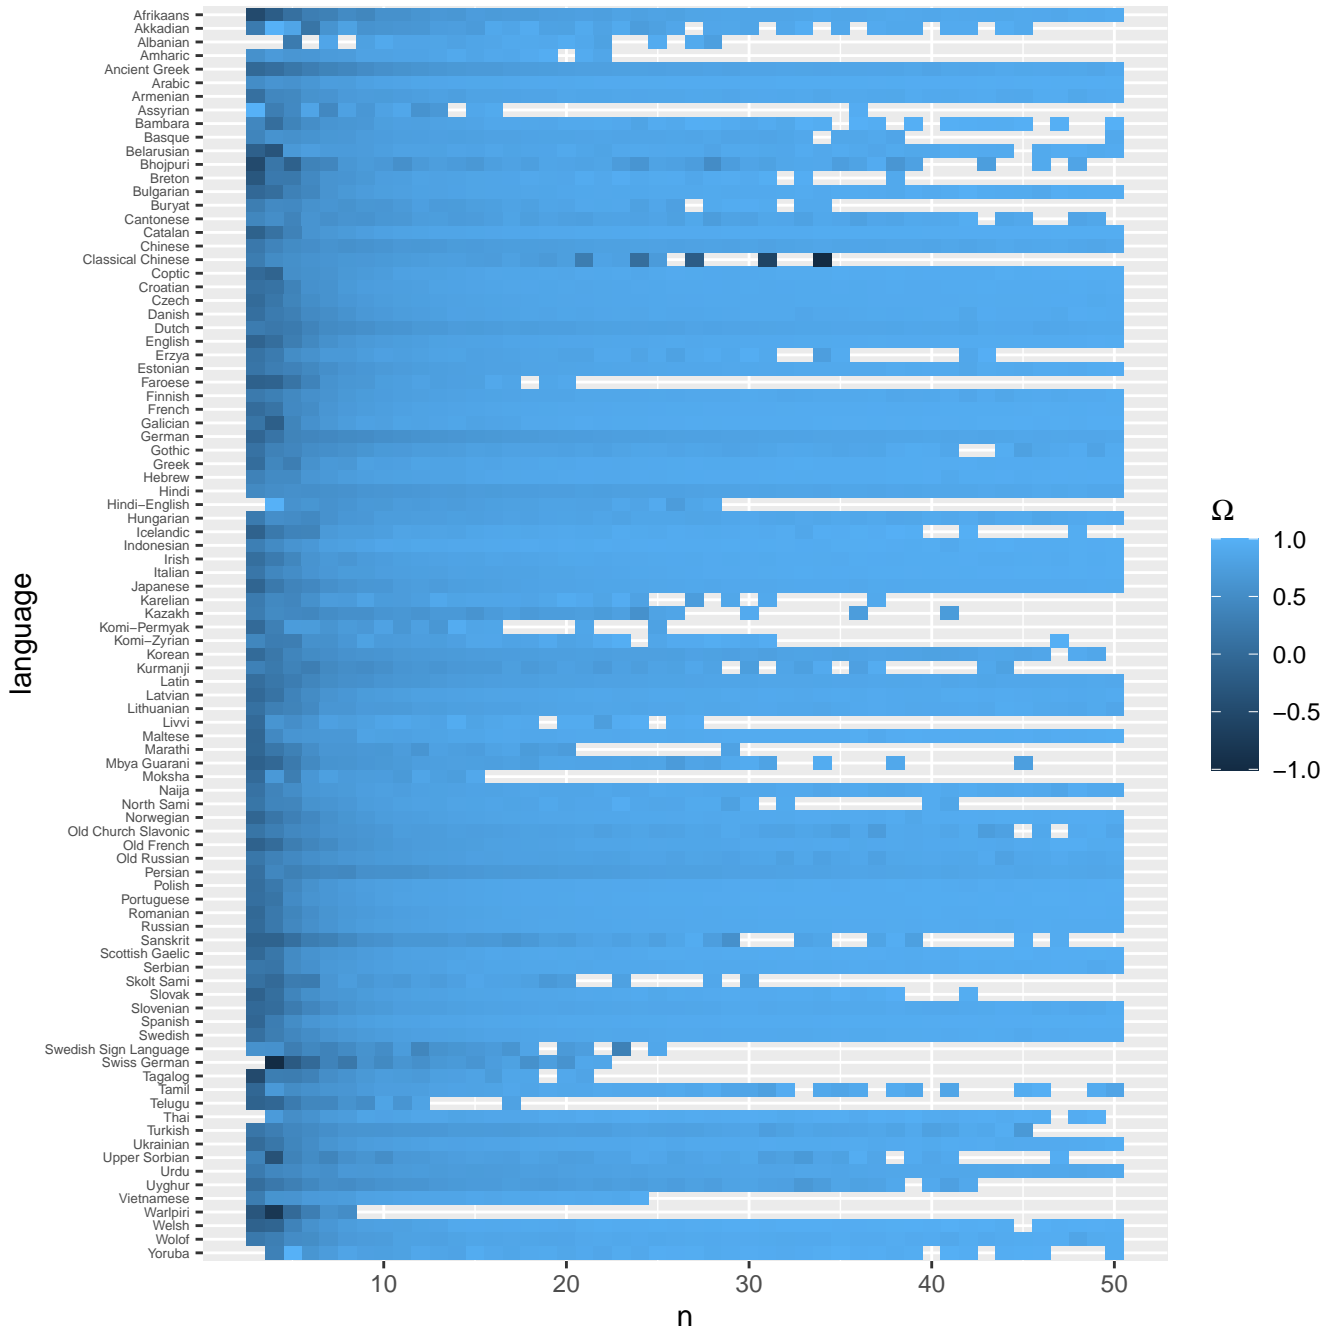


FIG. 5. $\langle \Omega \rangle (n)$, the average value of Ω in sentences of length n of a language in UD for $3 \leq n \leq 50$. Sentences longer than 50 words are excluded to ease visualization.

not homogeneous (in one language the source may be newspaper articles while in another language it could be literary works). Such a lack of homogeneity may distort the ordering. $\langle \Omega \rangle$ is an aggregate measure over sentences of varying length and we have seen that $\langle \Omega \rangle (n)$ depends on sentence length (Fig. 5 and Table V) in such a way that Ω can be negative in short sentences. It is well-known that the distribution of sentence length as well as other quantitative features depend on modality

or genre [70]. Accordingly, modality and genre influence dependency distances [71]. A widely adopted solution in quantitative linguistics for these two problems is the use of parallel corpora, namely, collections of sentences that have the same content, often obtained by translation from one language to the remainder of languages in the sample. Figure 6 shows a first approximation to the ranking of languages using the Parallel Universal Dependencies corpus (PUD), that contains some sentences of a sub-

TABLE III. Summary of the statistical properties of $\langle\Omega\rangle$ by dataset and language family. *All* indicates all the languages of the dataset, regardless of their family.

Dataset	Family	Langs.	Min	Mean	Median	Max	
UD	All	92	-0.22	0.66	0.7	0.9	
	Indo-European	51	0.24	0.68	0.7	0.9	
	Uralic	11	0.54	0.63	0.62	0.77	
	Afro-Asiatic	7	0.63	0.78	0.79	0.89	
	Altaic	3	0.49	0.5	0.5	0.51	
	Sino-Tibetan	3	0.51	0.62	0.62	0.72	
	Austronesian	2	0.4	0.63	0.63	0.86	
	Dravidian	2	0.04	0.39	0.39	0.75	
	Niger-Congo	2	0.79	0.83	0.83	0.87	
	Austro-Asiatic	1	0.79	0.79	0.79	0.79	
	Basque	1	0.71	0.71	0.71	0.71	
	Japanese	1	0.73	0.73	0.73	0.73	
	Korean	1	0.6	0.6	0.6	0.6	
	Mande	1	0.66	0.66	0.66	0.66	
	Mongolic	1	0.59	0.59	0.59	0.59	
	Other	1	0.69	0.69	0.69	0.69	
	Pama-Nyungan	1	-0.22	-0.22	-0.22	-0.22	
	Sign Language	1	0.51	0.51	0.51	0.51	
	Tai-Kadai	1	0.88	0.88	0.88	0.88	
	Tupian	1	0.57	0.57	0.57	0.57	
	SUD	All	92	0.05	0.71	0.74	0.91
		Indo-European	51	0.24	0.74	0.77	0.91
		Uralic	11	0.61	0.7	0.71	0.79
		Afro-Asiatic	7	0.53	0.77	0.86	0.9
Altaic		3	0.42	0.44	0.43	0.48	
Sino-Tibetan		3	0.59	0.66	0.65	0.74	
Austronesian		2	0.52	0.7	0.7	0.88	
Dravidian		2	0.05	0.37	0.37	0.7	
Niger-Congo		2	0.83	0.87	0.87	0.91	
Austro-Asiatic		1	0.82	0.82	0.82	0.82	
Basque		1	0.66	0.66	0.66	0.66	
Japanese		1	0.73	0.73	0.73	0.73	
Korean		1	0.56	0.56	0.56	0.56	
Mande		1	0.74	0.74	0.74	0.74	
Mongolic		1	0.55	0.55	0.55	0.55	
Other		1	0.8	0.8	0.8	0.8	
Pama-Nyungan		1	0.42	0.42	0.42	0.42	
Sign Language		1	0.72	0.72	0.72	0.72	
Tai-Kadai		1	0.89	0.89	0.89	0.89	
Tupian		1	0.61	0.61	0.61	0.61	
Stanford		All	30	-0.01	0.65	0.71	0.86
		Indo-European	21	0.27	0.68	0.71	0.86
		Uralic	3	0.6	0.67	0.71	0.72
		Dravidian	2	-0.01	0.37	0.37	0.75
	Afro-Asiatic	1	0.84	0.84	0.84	0.84	
	Altaic	1	0.52	0.52	0.52	0.52	
	Basque	1	0.74	0.74	0.74	0.74	
	Japanese	1	0.4	0.4	0.4	0.4	
	Prague	All	30	-0.09	0.7	0.77	0.9
		Indo-European	21	0.25	0.72	0.77	0.9
		Uralic	3	0.56	0.69	0.71	0.78
		Dravidian	2	-0.09	0.34	0.34	0.78
Afro-Asiatic		1	0.88	0.88	0.88	0.88	
Altaic		1	0.6	0.6	0.6	0.6	
Basque		1	0.77	0.77	0.77	0.77	
Japanese		1	0.73	0.73	0.73	0.73	

TABLE IV. The significance of $\langle\Omega\rangle$. l_0 is the number of languages available from the dataset, f_H is the number of languages where $\langle\Omega\rangle$ is significantly *large* after applying Holm’s correction to the languages counted in l_0 , and Exceptions is the number of the languages counted in l_0 where $\langle\Omega\rangle$ is not significantly *large*. The number attached to the language name indicates the corrected p -value.

Dataset	l_0	f_H	Exceptions	Family	Languages
UD	92	90	2	Dravidian (1)	Telugu ^{0.1}
				Pama-Nyungan (1)	Warlpiri ¹
SUD	92	92	—	—	—
Prague	30	29	1	Dravidian (1)	Telugu ¹
Stanford	30	29	1	Dravidian (1)	Telugu ^{0.7}

TABLE V. The significance of the Kendall τ correlation between $\langle\Omega\rangle(n)$ and sentence length n . l_0 is the number of languages available from the dataset, f_H is the number of languages where the correlation is significantly *large* after applying Holm’s correction to the languages counted in l_0 , and Exc. (Exceptions) is the number of the languages counted in l_0 where the correlation is not significantly *large*. The number attached to the language name indicates the corrected p -value.

Dataset	l_0	f_H	Exc.	Family	Languages
UD	92	88	4	Afro-Asiatic (1)	Assyrian ^{0.1}
				Indo-European (1)	Albanian ^{0.1}
				Pama-Nyungan (1)	Warlpiri ^{0.1}
				Sino-Tibetan (1)	Classical Chinese ^{0.2}
SUD	92	89	3	Indo-European (1)	Albanian ^{0.1}
				Pama-Nyungan (1)	Warlpiri ^{0.4}
				Uralic (1)	Komi-Permyak ^{0.1}
Prague	30	30	—	—	—
Stanford	30	30	—	—	—

set of languages from the UD collection (Appendix B). Assuming that the ordering is total, the most optimized language would be Thai with $\langle\Omega\rangle = 0.88$ and the least optimized language would be Turkish with $\langle\Omega\rangle = 0.64$ (Figure 6). Interestingly, the Romance languages, i.e. French, Italian, Spanish and Portuguese, cluster in positions 2 to 7 (Fig. 6). However, the ordering in Figure 6 is not total. For instance, although the value of $\langle\Omega\rangle$ of Italian is greater than that of Arabic, Spanish, Portuguese, Indonesian and Japanese the difference is not significant (Appendix D). For that reason, we represent the partial order as a network where there is an arc from language x to language y whenever $\langle\Omega\rangle_x$ is significantly larger than $\langle\Omega\rangle_y$ after controlling for multiple comparisons. Figure 7 A shows the corresponding Hasse diagram, a compressed representation of the network that is obtained by applying transitive reduction to the original network [72] (Appendix C). If a language y can be reached from a language x following one or more arcs in the diagram then x is significantly more optimized than y . Based on that diagram, it cannot be concluded that Thai is the most optimized language, but rather that Thai is more

TABLE VI. Anti dependency distance minimization in short sentences (significantly low $\langle \Omega \rangle (n)$ for small n). n is the sentence length (in words). l_0 is the number of languages available from the dataset, and f_H is the number of languages where $\langle \Omega \rangle (n)$ is significantly *small* after applying Holm’s correction to the languages counted in l_0 . The number attached to the language name indicates the magnitude of the corrected p -value. It is obtained after rounding $-\log_{10}(p\text{-value})$ to leave just one decimal digit. Then the significance level $\alpha = 0.05$ gives 1.3.

n	Dataset	l_0	f_H	Family	Languages			
3	UD	87	12	Austronesian (1)	Tagalog ^{3.1}			
				Dravidian (1)	Telugu ^{1.8}			
				Indo-European (9)	Afrikaans ^{3.1} Bhojpuri ^{3.1} Breton ^{1.6} German ^{3.1}			
					English ^{3.1} Old French ^{3.1} Norwegian ^{2.5} Sanskrit ^{2.5}			
					Slovak ^{3.1}			
					Japanese ^{3.1}			
				SUD	87	4	Austronesian (1)	Tagalog ^{3.1}
					Indo-European (3)	Bhojpuri ^{3.1} Persian ^{2.6} Urdu ^{3.1}		
				Prague	30	3	Dravidian (1)	Telugu ^{3.5}
					Indo-European (2)	Hindi ^{3.5} Persian ^{3.5}		
				Stanford	30	5	Dravidian (1)	Telugu ^{3.5}
					Indo-European (3)	Czech ^{3.5} German ^{3.5} Slovak ^{3.5}		
	Japanese (1)	Japanese ^{3.5}						
4	UD	91	3	Indo-European (2)	Swiss German ³ Sanskrit ^{2.2}			
				Pama-Nyungan (1)	Warlpiri ^{2.3}			
				Indo-European (2)	Swiss German ³ Sanskrit ^{2.7}			
					Telugu ^{3.5}			
					Ancient Greek ² Persian ^{1.5}			
					—			
SUD	91	2	Indo-European (2)	Swiss German ³ Sanskrit ^{2.7}				
Prague	30	3	Dravidian (1)	Telugu ^{3.5}				
	Indo-European (2)	Ancient Greek ² Persian ^{1.5}						
Stanford	30	0	—	—				

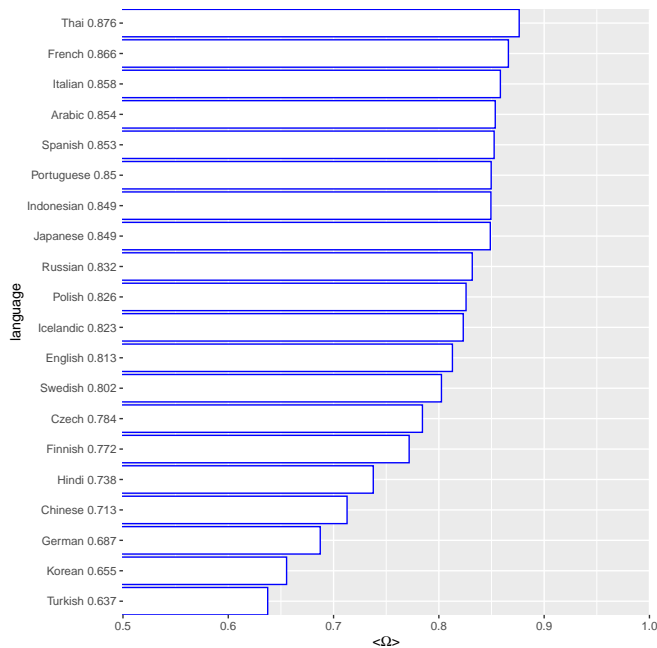


FIG. 6. The ordering of languages in PUD according to Ω . The number attached to each language indicates the value of $\langle \Omega \rangle$.

optimized than all the languages in the sample excluding Italian and French, totalling 17 languages. Similarly, it cannot be concluded that Turkish is the least optimized language but rather that all languages in the sample are

more optimized than Turkish with the only exception of Korean. PUD has allowed us to control for content (turning the source homogeneous). Our next step is to control for annotation style by means of PSUD, a variant of PUD where universal dependencies have been replaced with surface-syntactic universal dependencies [73]. Figure 7 B confirms that Korean and Turkish are among the least optimized languages (in Figure 7 A, German is not more optimized than Korean) but shows that Thai is more optimized only with respect to 11 languages.

IV. DISCUSSION

Question 1. Are there universal optimization principles in languages? Or, are there languages showing no optimization at all?

Here we have added 40 languages to the broadest previous study of DDm in languages [35, 39, 40]. In our analysis based on Ω , we have found that dependency distances are not significantly small in only 2 languages: Telugu and Warlpiri (Table IV). In contrast, previously existing optimality scores only indicate that dependency distances are not significantly small in Warlpiri (Appendix D), suggesting that Ω has a slightly greater capacity to detect exceptions than other scores. Exceptions have been previously reported but using different methods [40]. This suggests that conclusions on whether a language has been optimized or not may depend, at least, on the score used, or on the distribution of sentence lengths

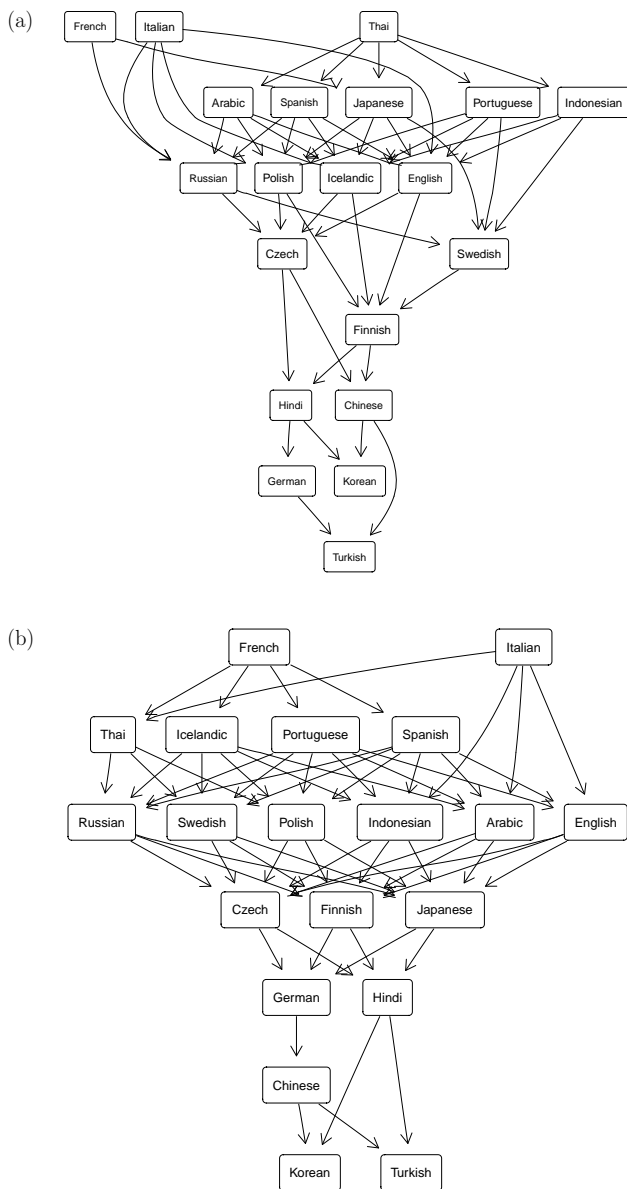


FIG. 7. A Hasse diagram where an arrow pointing from one language to another indicates that the former is significantly more optimized than the latter according to Ω . (a) PUD. (b) PSUD.

[38]. The latter is not a mere statistical issue (controlling for sentence length): we have shown that Ω is significantly small in short sequences of these two languages (Table VI), strongly suggesting that DDm is surpassed by other word order principles in short sentences [47]. However, all these issues should be the subject of future research.

The languages where $\langle \Omega \rangle$ is not significantly large (Table IV) could be interpreted as challenging the universality of DDm. However, such interpretation should be examined in light of two observations. First, we should distinguish between principles and their manifestations

[13, 22]. The fact that a principle does not manifest, does not invalidate the universality of the principle [22]. DDm may be acting but counteracted by other word order principles, e.g., surprisal minimization [61]. This issue is developed further below. These considerations notwithstanding, the true number of exceptions could be larger but hidden by biases in the families in our dataset. Second, we cannot exclude the possibility that the cases where DDm does not surface are not due to genuine properties of the languages but rather a case of the comparability or homogeneity problem: e.g. a consequence of the annotation criteria beyond those specified in the dataset or biases in the sample of sentences forming the collection (for instance, the author or the genre), that hide the manifestation of DDm (this issue is also developed below).

Question 2. What is the degree of optimization of languages?

In two of the large-scale studies referred above [35, 39], the values of the plain score used did not reveal that the effects of DDm were too weak or missing. Our score has indicated negative values or values close to zero in some cases (Table III). However, we have found that the majority of languages are highly optimized. When evaluating the degree of optimization of languages, there is a trade-off between the breadth of the analysis and comparability. One of the broadest datasets, i.e. UD, allows one to conclude that half of languages are optimized to at least 70% but $\langle \Omega \rangle$ ranges between -0.22 and 0.9 (Table III). When controlling for annotation style using SUD, one finds that half of languages are optimized to at least 74% and languages with negative $\langle \Omega \rangle$ have disappeared. Although annotation style within a dataset is homogeneous *a priori*, the source texts are not. When reducing the comparability problem using PUD, one finds that the degree of optimality ranges between 64% and 88% (Fig. 6) but more than half of the languages available are Indo-European (only Arabic, Thai, Indonesian, Japanese, Finnish, Chinese, Korean and Turkish are not). We hope that our research stimulates the development of large parallel corpora where linguistic families are more balanced.

In his pioneering research, Hawkins concluded that the word order of English is 92% optimal [15]. Here we have used Ω , an optimality score based on D , showing that English is optimized to a 81% (according to PUD, Fig. 6) or 88% (according to PSUD, Appendix D) with respect to two baselines (the random baseline and the optimal baseline). These numbers must be taken with caution because other sources would give different percentages (70% according to UD, 80% according to SUD and Prague and 85% according to Stanford).

Ω could be one of the dimensions of new research on patterns in the distribution of languages in bidimensional maps of word order features [74].

Question 3. What are the most and the least optimized languages of the world? Can we define a ranking of languages?

We have provided a first approximation to the ranking of languages by dependency distances using a small but parallel sample of languages, finding that Romance languages are among the most optimized languages, while Korean and Turkish, two agglutinating languages [75], are among the least optimized languages (Fig. 6). Such ranking is heavily limited by the number of languages sampled and not indicative of the optimality of language in absolute terms because dependency distances are just one aspect of the optimality of word order [23, 24, 61] and, in turn, word order is not the only aspect that determines the degree of optimization of a language [13, 14, 76]. For instance, Turkish and Korean order the subject, verb and object in a cognitively natural order, i.e. SOV, differing from the default of Romance languages, i.e. SVO [77], and are endowed with complex morphology [75], a feature that can reduce the effort of the listener [78, 79] and may ease learning in native speakers [80, 81].

Furthermore, we cannot exclude the possibility that sentences in the PUD collection are affected by some bias in the original language or in the translator. Put differently, the parallel corpus may have diminished the homogeneity or comparability problem but not cleared it completely. Finally, the ranking relies on the unit of measurement: words. A more precise but far more complicated measurement could be made in syllables or phonemes [82]. Therefore, any statement or inference that one language is more (or less) optimized than another in the entire article must be understood as relying exclusively on Ω (even when Ω is not mentioned for the sake of brevity) and conditioned on the collection of sentences used and the unit of distance.

Notwithstanding the above considerations, our ranking outperforms previous ordering attempts. We have put forward a hierarchical ranking rather than a sequential ordering. A normalized measure of dependency distance as Ω has never been used [35, 37]. To our knowledge, the first attempt to rank languages by dependency distance is found in the pioneering research of H. Liu, who sorted 20 languages by mean dependency distance using non-parallel corpora and implicitly assuming that the order of languages was total in a mathematical sense [35, Figures 7-8]. We have found that English is more optimized than German in agreement with previous research using non-parallel corpora and D instead of Ω [37] (as well as in the pioneering research of [35]). The consensus in Fig. 7 goes much further indicating which languages are more likely

- To be less optimized than German: Turkish, that is the only language in the intersection between the set of languages that are less optimized than German in Fig. 7 (a), namely Turkish, with those that are less optimized than German in Fig. 7 (b), i.e.

Chinese, Turkish and Korean.

- To have an intermediate level of optimization between English and German: Czech and Finnish (the intersection between Czech, Finnish, Hindi from Fig. 7 (a) and Czech, Finnish and Japanese from Fig. 7 (b)).
- To be more optimized than English: Portuguese, Italian, French and Spanish, by similar arguments.

Furthermore, the diagram unveils a myriad of dominance relationships that have never been explored before, e.g., Russian is likely to be more optimized than Chinese or Korean based on Ω .

We hope that our research stimulates the development of parallel syntactic dependency treebanks comprising a sample of languages as large as possible.

Question 4. Under what conditions is optimization stronger?

From a theoretical standpoint, two predictions have been made: one is that pressure for DDm should be stronger in longer sentences, and the other is that DDm is more likely to be surpassed in short sequences by other principles [46, 47]. The second prediction is based on the first prediction and the fact that DDm is in conflict with other principles of word order [46, 47, 61]. If we focus on the optimal placement of a single head and its dependents, it turns out that the head must be put at the center according to DDm but it should be put at one of the ends according to the principle of surprisal minimization (Sm) or predictability maximization (PM): last to minimize the uncertainty about the head, or first to minimize the uncertainty about the dependents [61]. Interestingly, putting the head at one of the ends maximizes dependency lengths, i.e. the optimal placement of the head according to Sm/PM is the worst case for DDm [61].

Our analysis has corroborated these two predictions. As for the first prediction, the finding that Ω is higher in longer sentences (Fig. 5 and Table V), indicates that longer sentences are more optimized. Such a tendency defies a trivial explanation. In shuffled sentences (no DDm), Ω is expected to be 0 (recall the stability under random linear arrangement). As in the other (preexisting) scores lower values indicate higher optimization, the corresponding trend for the other scores would be a tendency of the score to reduce in longer sentences, but that was found in no score and no language except for D_z (Appendix D). This is consistent with the fact that, in real sentences, D , one of the components of Ω , as well as \bar{d} , tends to grow with sentence length [16, 36, 38, 39, 56]. The same tendency was found for Γ in Romanian [16] and for Δ in Latin and ancient Greek [18] (as for the latter notice that D_{min} was defined assuming projectivity). Our analyses confirm a tendency of all scores except Ω

and D_z to increase in longer sentences: in all languages concerning D and \bar{d} and Δ and in fraction of them for Γ (Appendix D). Thus, by evaluating optimality based on D , Δ or Γ , rather than with Ω , one could wrongly conclude that longer sentences are less optimized. Such disagreement with respect to Ω can be explained by the fact that these scores do not include the random baseline (Table I).

As for the second prediction, we found that Ω is significantly small in short sentences (sentences of length 3 or 4) for some languages, contradicting DDm (Table VI). Interestingly, we found more languages showing anti-DDm effects than in previous research [47, Table 3]: the number of languages where this happens grows in all cases (SUD had not been considered before). That could be explained by an increase in the number of languages in the UD dataset with respect to [47], but not in the Prague and Stanford datasets, whose number of languages remains the same. Therefore, Ω (in particular, $\langle \Omega \rangle (n)$) appears to have more statistical power to unveil anti-DDm effects than all the other scores (Appendix D) as well as the statistic used in previous research [47]. Finally, our findings clarify the discussion on the existence of anti-DDm effects in treebanks [67]: they do exist in sentences of length 3 or 4.

Question 5. Why do languages deviate from optimality?

A crucial question is: if dependency length minimization is a fundamental principle of languages, why are real languages not reaching the theoretical minimum sum of dependency lengths? The first answer stems from the arguments above: a conflict between DDm and other word order principles. Another possible answer is that language production is an inherently online and incremental process under severe memory limitations, in line with Christiansen and Chater’s now-or-never bottleneck [83]: real speakers produce sentences on the fly while algorithms to calculate minimum linear arrangements take whole sentences as input [49, 84].

Finally, from an evolutionary standpoint, deviations from optimality can originate for many reasons that are fuel for future research, e.g. stochasticity, insufficient time to reach the optimum or the existence of local maxima [3]. Furthermore, parts of a system with a smaller contribution to the cost function are expected to show a largest deviation from the optimum [3].

Question 6. What are the best optimality scores for cross-linguistic research?

In this article, we investigated mathematical properties of Ω and compared them against other scores. Our empirical analysis suggests that Ω may have a greater capacity to detect languages where DDm is weak or surpassed by

other word order principles (Question 1), unveil higher optimization in longer sentences (Question 4) and detect anti-DDm effects in short sequences (Question 4). Further theoretical and empirical research should be carried out in relation to alternative scores.

Additional remarks

Our findings have implications for the debate on the proper syntactic annotation [69, 73, 85]. In addition to confirming that dependency distances are shorter in SUD than in UD [69] (Table III), we have found that all languages (with no exception) are significantly optimized only when SUD is used (Table IV) and that SUD shows fewer languages with anti-DDm effects (Table VI), as expected by the direct influence of DDm in the annotation criteria of SUD [73]. Therefore, whether DDm is a universal (exceptionless) phenomenon on a global scale or the scope of anti-DDm effects may depend on the annotation criteria. Further research on the foundations of these criteria is necessary [86, 87].

Future work

We have investigated the optimality of languages synchronically, based on current data about them. One of the least optimized languages is Warlpiri, a non-configurational language [88]. The finding, though based on non-parallel data, suggests that Ω is able to quantify extreme cases of word order freedom [89] and thus could open new avenues for research in linguistics. Diacrony, namely the evolution of the optimality of a language over time, is one of the next challenges [90]. It has been shown that dependency distances have been reducing over time in English using a variant of Γ [17] and also using D and NDD [67]. Δ has unveiled a similar optimization process in Latin and Ancient Greek [18]. In contrast, dependency distances have been increasing over time in Chinese using a variant of \bar{d} [90, 91]. An intriguing question is whether all these conclusions will remain valid when revised using a dual optimality score such as Ω (Table I). The next frontier will be unveiling how DDm has shaped languages throughout phylogeny [92].

In addition to functioning as a measure of the degree of optimization of a language, Ω can also shed light on a critical question for clinical applications [93]: whether dependency distances reflect the linguistic competence of an individual speaker. Research on a potentially positive correlation between dependency distances and language proficiency in second language learners has led to inconsistent conclusions using mean dependency distances [94, 95]. Such inconsistencies may have originated from the limitations of the score that has been used. More solid and coherent conclusions may be reached using Ω .

Our theoretical research is relevant for network science in general. We have put forward a new way of normal-

izing physical distances. The analysis can be extended to arbitrary graphs or spaces with more dimensions, e.g. the 2-dimensional layouts of the popular transportation networks [27], and it may guide future research on the normalization of topological distances. It has been proposed that these distances should be normalized as [96]

$$\lambda' = \frac{L}{L_{min}}$$

$$\lambda'' = \frac{L}{L_{max} - L_{min}},$$

where L is the observed topological distance and L_{min} and L_{max} are the minimum and the maximum topological distance of a network with the same number of vertices and edges. Notice that λ' is the counterpart of Γ in topological distance and is thus a singular optimality score for not incorporating the random baseline. Interestingly, λ'' does not incorporate any random baseline but is defined over two baselines (L_{min} and L_{max}). Powerful normalizations of L may be developed following the mathematical structure of Ω , e.g., incorporating some random graph model [27, 97].

V. MATERIALS AND METHODS

Each dataset is a combination of a collection and an annotation style. See Appendix B for further details about them.

The analyses are restricted to $n \geq 3$ because a measure of optimality such as Ω is useful when D can vary given n (for $n = 1$, $D = 0$; for $n = 2$, $D = 1$). See Appendix A for further details and the implications of such a constraint.

The optimality score Ω is defined on two baselines: the random baseline (D_{rla}) and the optimal baseline (D_{min}). Both baselines are unrestricted in the sense that all shufflings are allowed (the $n!$ permutations have non-zero probability). Random and optimal baselines that assume projectivity or consistent branching, hence disallowing certain shufflings, have dominated research on DDm [34–37, 39, 40] and optimality scores [17, 18] for historical reasons. However, these linguistic constraints (e.g., projectivity) could be an epiphenomenon of DDm [44, 45, 98, 99] and thus could mask the effect of dependency distance minimization (DDm). Our concern is supported by the fact that planarity, a relaxation of projectivity, reduces the statistical power of a test of DDm [47]. From a theoretical standpoint, separating DDm from these additional linguistic constraints compromises the parsimony of word order theory [100].

The words of a sentence are shuffled replacing the linear arrangement of the sentence with a uniformly random linear arrangement using Durstenfeld’s algorithm [101].

The positive association between Ω and n is analyzed through a one-sided correlation test with Kendall’s τ as statistic. Kendall’s τ is chosen for its advantages over the traditional Pearson correlation: while Pearson correlation is a measure of linear association, Kendall’s τ

correlation is a measure of non-linear (but monotonic) association [102, 103]. For a certain language, the test is applied on the average value of Ω as a function of n , namely, an estimate of the conditional expectation of Ω given n , which is in direct correspondence with the heatmaps in Fig. 5. Without such preprocessing, the test would be sensitive to the distribution of sentence lengths, which is in turn dependent on features of the source texts such as genre and modality [70]. The same procedure is used for the association between other scores and n .

We use the significance level of 0.05. All statistical tests are one-sided. The Monte Carlo test explained in Appendix C is used to check if $\langle \Omega \rangle$ or $\langle \Omega \rangle(n)$ are significantly large (or is significantly small) with respect to the random baseline. A Monte Carlo test is also used to assess whether the values of $\langle \Omega \rangle$ of two languages differ significantly, a crucial step for the construction of the Hasse diagram. Monte Carlo tests are chosen to turn the tests non-parametric (assumption free) while maximizing statistical power. Appendix C explains how the Hasse diagram is built in detail, how the Holm correction is implemented and how the p -values from Monte Carlo tests are preprocessed before applying the Holm correction.

ACKNOWLEDGMENTS

This article is dedicated to the memory of G. Altmann (1931–2020). We are grateful to C. Bentz, N. Català, M. H. Christiansen, M. Gustison and A. Hernández-Fernández for helpful comments. RFC and LAP are supported by the grant TIN2017-89244-R from MINECO (Ministerio de Economía, Industria y Competitividad). RFC is also supported by the recognition 2017SGR-856 (MACDA) from AGAUR (Generalitat de Catalunya). LAP is also supported by Secretaria d’Universitats i Recerca de la Generalitat de Catalunya and the Social European Fund. CGR is supported by the European Research Council (ERC), under the European Union’s Horizon 2020 research and innovation programme (FAST-PARSE, grant agreement No 714150), the ANSWER-ASAP project (TIN2017-85160-C2-1-R) from MINECO, Xunta de Galicia (ED431C 2020/11 and an Oportunus program grant to complement ERC grants); the CITIC research center is funded by ERDF and Xunta de Galicia (ED431G 2019/01). JLE is funded by the grants TIN2016-76573-C2-1-P and PID2019-109137GB-C22 from MINECO.

R.F.C. designed research; R.F.C and C.G.R. wrote the paper; C.G.R. collected and preprocessed data; C.G.R. and R.F.C. analyzed the data; R.F.C, C.G.R and J.L.E developed the mathematical arguments; C.G.R., J.L.E. and L.A.P. wrote the core code; all authors verified the mathematical arguments.

Appendix A: The mathematics of optimality scores

1. The new optimality score

For a tree t of n vertices, our optimality metric is

$$\Omega^t = \frac{D_{rla} - D^t}{D_{rla} - D_{min}^t} \quad (\text{A1})$$

with $n \geq 3$ and D_{rla} defined as in Eq. 2.

a. The maximum value of Ω

Showing that $\Omega^t \leq 1$ for $n \geq 3$ is straightforward. By definition, $D_{min}^t \leq D^t$ and then

$$D_{rla} - D^t \leq D_{rla} - D_{min}^t.$$

Dividing both sides of the previous inequality by $D_{rla} - D_{min}^t$ and recalling that $D_{rla} \geq D_{min}^t$ [55],

$$\frac{D_{rla} - D^t}{D_{rla} - D_{min}^t} = \Omega^t \leq 1.$$

Therefore, Ω^t is constant under minimum linear arrangement.

b. A lower bound of Ω

D_{max}^t , the maximum value of D^t that a tree t can achieve over the $n!$ linear arrangements of its vertices, satisfies [56]

$$\begin{aligned} D_{max}^t &\leq D_{max}^{b-bistar} \\ &= \frac{1}{4} [3(n-1)^2 + 1 - n \bmod 2], \end{aligned} \quad (\text{A2})$$

where $D_{max}^{b-bistar}$ is the value of D_{max}^t of a balanced bistar (b -bistar) tree. The next theorem gives a lower bound of Ω^t as a function of the size of the tree that follows from Eq. A2.

Theorem 1. *Let Ω_{min}^t be the minimum value of Ω of a tree t over its $n!$ linear arrangements. Let α be the minimum of Ω_{min}^t over all trees of n vertices, i.e.*

$$\alpha = \min_{t \in \tau} \{ \Omega_{min}^t \},$$

where τ is the set of all unlabelled trees of n vertices. We have that

$$-\frac{5n - 8 - 5(n \bmod 2)}{n + 2 - n \bmod 2} \leq \alpha$$

and then $\Omega_{min}^t \geq -5$ for $n \geq 3$.

Proof. We have that

$$\Omega^t = \frac{D_{rla} - D^t}{D_{rla} - D_{min}^t}, \quad (\text{A3})$$

where D^t is the value of D in some linear arrangement of t . The fact that the denominator of Eq. A3 is positive for any linear arrangement ($D_{rla} - D_{min}^t \geq 0$ [55]) and that the numerator can be negative depending on the linear arrangement ($D_{rla} \leq D_{max}^t$ by the definition of D_{rla} and D_{max}^t), yields that

$$\Omega_{min}^t = \frac{D_{rla} - D_{max}^t}{D_{rla} - D_{min}^t} \leq 0, \quad (\text{A4})$$

where the numerator is negative and the denominator positive. Then we have that

$$\begin{aligned} \alpha &\geq \frac{\min_{t \in \tau} \{ D_{rla} - D_{max}^t \}}{\min_{t \in \tau} \{ D_{rla} - D_{min}^t \}} \\ &= \frac{D_{rla} - \max_{t \in \tau} \{ D_{max}^t \}}{D_{rla} - \max_{t \in \tau} \{ D_{min}^t \}} \\ &= \frac{D_{rla} - D_{max}^{b-bistar}}{D_{rla} - D_{min}^{star}} \\ &= Z_1 \end{aligned}$$

thanks to $D_{max}^t \leq D_{max}^{b-bistar}$ (Eq. A2) and $D_{min}^t \leq D_{min}^{star}$ [55]. Alternatively,

$$\begin{aligned} \alpha &\geq \min_{t \in \tau} \left\{ \frac{D_{rla}}{D_{rla} - D_{min}^t} \right\} - \max_{t \in \tau} \left\{ \frac{D_{max}^t}{D_{rla} - D_{min}^t} \right\} \\ &\geq \frac{D_{rla}}{\max_{t \in \tau} \{ D_{rla} - D_{min}^t \}} - \frac{\max_{t \in \tau} \{ D_{max}^t \}}{\min_{t \in \tau} \{ D_{rla} - D_{min}^t \}} \\ &= \frac{D_{rla}}{D_{rla} - \min_{t \in \tau} \{ D_{min}^t \}} - \frac{\max_{t \in \tau} \{ D_{max}^t \}}{D_{rla} - \max_{t \in \tau} \{ D_{min}^t \}} \\ &= \frac{D_{rla}}{D_{rla} - D_{min}^{linear}} - \frac{D_{max}^{b-bistar}}{D_{rla} - D_{min}^{star}} \\ &= Z_2 \end{aligned}$$

thanks to $D_{max}^t \leq D_{max}^{b-bistar}$ (Eq. A2) and $D_{min}^{linear} \leq D_{min}^{star}$ [55]. Combining both lower bounds of Ω^t ,

$$\begin{aligned} \alpha &\geq \max(Z_1, Z_2) \\ &= Z_1 \end{aligned}$$

because $D_{min}^{linear} \leq D_{min}^{star}$ implies $Z_2 \leq Z_1$.

On the one hand, Eq. 2 and Eq. A2, give

$$D_{rla} - D_{max}^{b-bistar} = \frac{1}{12} (-5n^2 + 18n - 16 + 3(n \bmod 2)).$$

On the other hand, Eq. 2 and [54, 55, 104]

$$D_{min}^{star} = \frac{1}{4} (n^2 - n \bmod 2), \quad (\text{A5})$$

give

$$D_{rla} - D_{min}^{star} = \frac{1}{12} [n^2 - 4 + 3(n \bmod 2)].$$

Then

$$Z_1 = \frac{-5n^2 + 18n - 16 + 3(n \bmod 2)}{n^2 - 4 + 3(n \bmod 2)},$$

namely

$$Z_1 = -\frac{5n - 8}{n + 2}$$

when n is even and

$$Z_1 = -\frac{5n - 13}{n + 1},$$

when n is odd. Finally,

$$Z_1 = -\frac{5n - 8 - 5(n \bmod 2)}{n + 2 - n \bmod 2}.$$

A simple analysis of the final expression of Z_1 indicates that $\Omega^t \geq -5$ for $n \geq 3$. \square

c. The minimum Ω up to some tree size and an ansatz

Figure 8 A shows the exact value of α as a function of n up to $n_{max} = 24$. α was calculated exactly using the algorithm explained below. In all cases, Ω_{min}^t was minimized by bistar trees. In addition, a bistar tree defines a class of trees that includes the balanced bistar tree and the star tree [56]. When $\Omega_{min}^t \leq 0$, the former tree minimizes the numerator of Ω_{min} and the latter minimizes its denominator (proof of theorem 1). These facts allow one to formulate the following ansatz: for any $n \geq 3$, Ω_{min}^t is minimized by bistar trees. Notice that, for certain values of n , the balanced bistar tree does not minimize Ω_{min}^t (Figure 8 A).

Applying this hypothesis, Figure 8 A shows the predicted value of α obtained assuming that Ω_{min}^t is also minimized by bistar trees for $n > n_{max}$. Such a prediction is

$$\alpha^{bistar} = \min_{t \in \tau^{bistar}} \{\Omega_{min}^t\}, \quad (\text{A6})$$

where τ^{bistar} are all the unlabelled bistar trees of n vertices.

Eq. A6 that can be expressed equivalently as

$$\alpha^{bistar} = \min_{\lfloor \frac{n}{2} \rfloor \leq k_1 \leq n-1} \left\{ \frac{D_{rta} - D_{max}^{bistar(k_1)}}{D_{rta} - D_{min}^{bistar(k_1)}} \right\},$$

where $bistar(k_1)$ is a bistar tree whose most connected vertex has degree k_1 . Then $D_{max}^{bistar(k_1)}$ and $D_{min}^{bistar(k_1)}$ can be calculated using formulae with two parameters, n and k_1 [56]. With this approach, it is easy to check numerically that (Fig. 8 B)

$$\lim_{n \rightarrow \infty} \alpha^{bistar} = -2$$

and

$$\alpha^{bistar} \leq \Omega_{min}^{linear},$$

where Ω_{min}^{linear} is the value of Ω_{min}^t of a linear tree. Ω_{min}^t is easy to calculate given the formulae for D_{min}^{linear} and D_{max}^{linear} in Table 1 of [56].

On the one hand, we have seen that $-5 \leq \Omega_{min}^t$. On the other hand, α is minimized at $n = 24$ when $n \leq 24$ (Figure 8 A). That point corresponds to a bistar tree with $D_{min} = 84$, $D_{max} = 396$ and $D_{rta} = 575/3$, hence $\Omega_{min}^t = -\frac{613}{323} \approx -1.89$ for that tree. This allows one to conclude that $-c \leq \Omega_{min}^t$, where c is some constant such that $\frac{613}{323} \leq c \leq 5$. We conjecture that $c = 2$.

For a given n , we calculated α exactly with the following algorithm:

1. Initialize α with α^{bistar} . The choice of α^{bistar} as the initial value to surpass is justified by the ansatz.
2. For each distinct unlabelled tree t that it is neither a bistar nor a linear tree

- (a) If t is a caterpillar, calculate D_{min}^t using the fast formulae in Table 1 of [56]; otherwise calculate D_{min}^t using Shiloach's algorithm [84, 105].
- (b) Calculate

$$\Omega_{lower}^t = \frac{D_{rta} - D_{max}^{b-bistar}}{D_{rta} - D_{min}^t},$$

which is a lower bound of Ω_{min}^t that is obtained replacing D_{max}^t by $D_{max}^{b-bistar}$ in Ω_{min}^t (equation A4).

- (c) If $\alpha \geq \Omega_{lower}^t$, namely if it is worth computing D_{max}^t to calculate Ω_{min}^t ,
 - i. Calculate D_{max}^t by brute force using a constraint model (described below).
 - ii. Calculate Ω_{min}^t (equation A4) applying the values of D_{min}^t and D_{max}^t that have been obtained in the preceding steps.
 - iii. Set α to $\min(\alpha, \Omega_{min}^t)$.

In step 2, the linear tree is excluded by the initial value of α and Eq. A1c. For step 2, we used an algorithm to generate all unlabelled trees in time proportional to the number of trees [106]. To calculate D_{max} in step 2(c)i, we used a constraint model with the following constraints:

- A linear arrangement and its reverse give the same D .
- Swapping the positions of leaves attached to the same internal vertex does not change D .
- Let π^v be the position of vertex v in a linear arrangement. Let us consider two leaves, l_i and l_j , attached to internal vertices v_i and v_j respectively. Then the positions of these two leaves cannot be

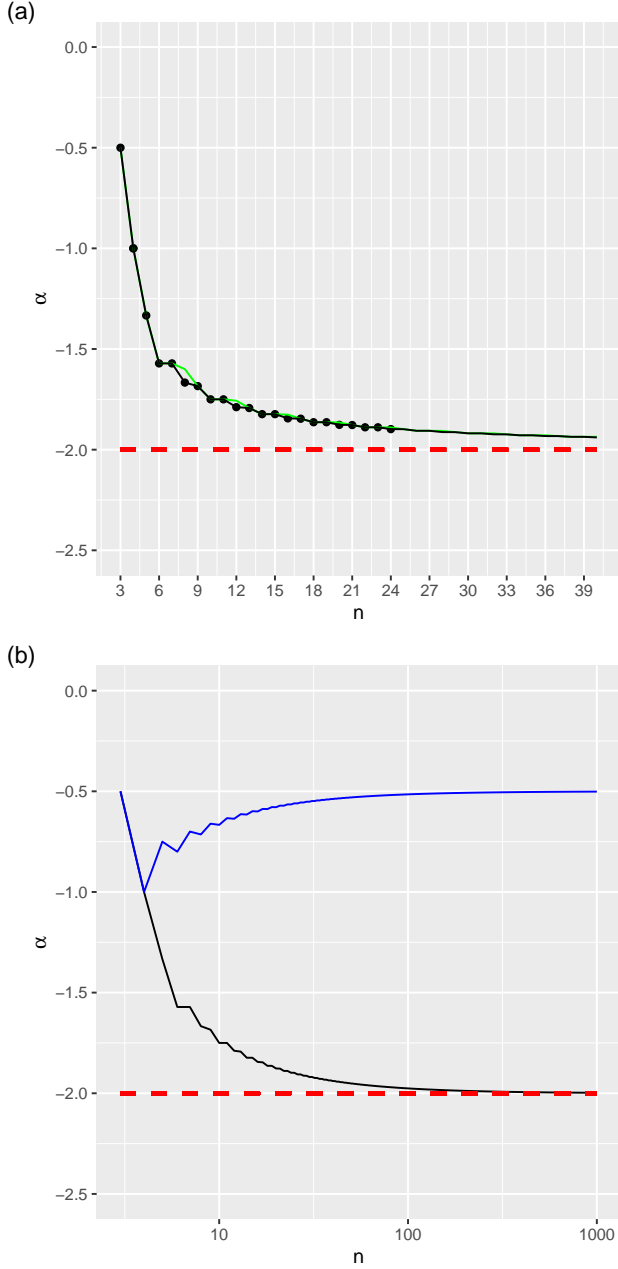


FIG. 8. The minimum value of Ω_{min}^t versus n , the number of vertices of the tree. (a) α , the true minimum (circles), and the ansatz, α^{bistar} based on the smallest Ω_{min}^t that a bistar tree can achieve (black solid line) matches α perfectly while $\Omega_{min}^{b-bistar}$ (green solid line) is above the ansatz for certain values of n . As a guide to the eye, the asymptotic lower bound of α^{bistar} (red dashed line) is also shown. (b) α^{bistar} (black solid line), Ω_{min}^{linear} (blue solid line) and the asymptotic lower bound (red dashed line).

swapped if the exchange does not increase the sum of their lengths, namely if

$$|\pi^{v_i} - \pi^{l_i}| + |\pi^{v_j} - \pi^{l_j}| \geq |\pi^{v_i} - \pi^{l_j}| + |\pi^{v_j} - \pi^{l_i}|.$$

• $D_{max} \geq D_{rla}$ by definition of D_{rla} and D_{max} [56].

Replacing the constraint $D_{max} \geq D_{rla}$ by $D_{max} \geq \binom{n}{2}$ [56] did not help to speed up the calculations. The constraints were expressed in the MiniZinc language [107, 108] and the corresponding model was solved for each relevant tree with the Chuffed solver [109].

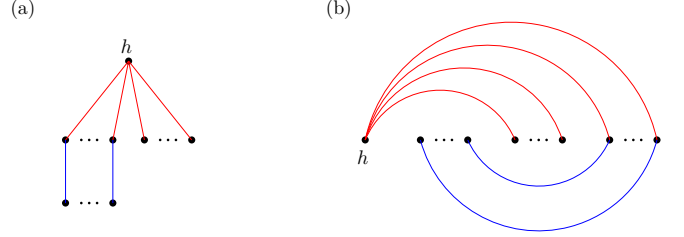


FIG. 9. a) A k -quasistar tree, that is the fusion of a star tree (edges in red) and a 1-regular tree (edges in blue). b) A maximum linear arrangement of a k -quasistar tree.

We found that the execution of the solver was excessively long when computing D_{max}^t when t was a k -quasistar (k -quasi) tree and thus we decided to cut computation costs by obtaining a fast formula for $D_{max}^{k-quasi}$. A k -quasistar tree of n vertices is a tree that results from merging two graphs, a star tree of $l + k$ edges and a 1-regular graph of k edges (a 1-regular graph is graph such that every vertex has degree 1). The k -quasistar is obtained by fusion of each of the k leaves of the star tree with one of the vertices of a distinct edge of the 1-regular graph (Fig. 9(a)). In such a k -quasistar, $n = 2k + l + 1$ with $k, l \geq 0$. Notice that such a tree is a generalization of a star tree ($k = 0$) and a quasistar tree ($k = 1$) [110]. The following theorem provides the fast formula that is necessary.

Theorem 2. For any k -quasistar tree of n vertices,

$$D_{max}^{k-quasi} = \frac{1}{2}(n - 1 - k)(3k + n).$$

Proof. A maximum linear arrangement of star tree is one where its hub is placed at one end of the arrangement and the other vertices are placed at the other end [56] as in Fig. 9(b). Such arrangement for a star tree of m edges on z positions yields [56]

$$D_{max}^{star}(m, z) = \frac{m(2z - m - 1)}{2}. \quad (A7)$$

To obtain a maximum arrangement for 1-regular graph of m edges over z positions, we take advantage of the fact that its edges are independent (no two edges share a vertex). At any time, one picks the farthest pair of positions available for every edge. First, positions $\{1, z\}$ produce the longest edge, positions $\{2, z - 1\}$ produce the second longest edge and so on as in 9(b). Such arrangement yields

$$D_{max}^{1-reg}(m, z) = \sum_{i=0}^{m-1} (z - 1 - 2i) = m(z - m). \quad (A8)$$

Our claim is that the linear arrangement in Fig. 9(b), henceforth $*$, is maximum. More precisely, we claim that $D_{max}^{k-quasi}$ matches

$$D_*^{k-quasi} = D_{max}^{star}(l+k, n) + D_{max}^{1-reg}(k, n-1)$$

with $n = 2k + l + 1$. The application of Eqs. A7 and A8 yields

$$D_*^{k-quasi} = \frac{1}{2}(n-1-k)(3k+n). \quad (\text{A9})$$

$$D_{**}^{star}(l+k, X) + D_{**}^{1-reg}(k, X) > D_{max}^{star}(l+k, n) + D_{max}^{1-reg}(k, n-1).$$

Rearranging the terms of the previous inequality and

$$0 \geq D_{**}^{star}(l+k, X) - D_{max}^{star}(l+k, n) > D_{max}^{1-reg}(k, n-1) - D_{**}^{1-reg}(k, X).$$

Therefore, $D_{**}^{1-reg}(k, X) > D_{max}^{1-reg}(k, n-1)$. This can only happen if the 1-regular graph is arranged over n positions in $**$, namely $D_{**}^{1-reg}(k, X) = D_{**}^{1-reg}(k, n)$ as in Fig. 10(b). This leads to the conclusion that both ends of the linear arrangement $**$ must be occupied by vertices of the 1-regular graph since $D_{**}^{1-reg}(k, n-1) > D_{max}^{1-reg}(k, n-1)$ is impossible. This restricts the arrangement of the star tree in $**$ by not allowing its hub to be placed at one of the ends of the linear arrangement, which implies $D_{**}^{star}(l+k, X) \leq D_{**}^{star}(l+k, n-1)$. To see it, notice that, in order to maximize $D_{**}^{star}(l+k, X)$ when the hub cannot be placed at the ends, the hub should be placed second (resp. penultimate) and none of its leaves should occupy the first (resp. last) position as in Fig. 10(a) or its symmetric. As a result of that, $D_{**}^{k-quasi} \leq U$, where

$$U = D_{max}^{star}(l+k, n-1) + D_{max}^{1-reg}(k, n).$$

Eqs. A7 and A8 give (recall that $n = 2k + l + 1$)

$$\begin{aligned} D_{max}^{star}(l+k, n-1) &= \frac{1}{2}(n-k-1)(k+n-2), \\ D_{max}^{1-reg}(k, n) &= k(n-k), \\ U &= \frac{1}{2}(n-k-1)(3k+n-2). \end{aligned} \quad (\text{A11})$$

Importantly, $U \leq D_*^{k-quasi}$ since $D_*^{k-quasi} - U = l \geq 0$ thanks to Eqs. A9 and A11, and thus $*$ is a maximum linear arrangement. \square

We prove, by contradiction, $D_{max}^{k-quasi} = D_*^{k-quasi}$. Suppose that there is some linear arrangement $**$ yielding a sum of distance $D_{**}^{k-quasi}$ such that $D_{**}^{k-quasi} > D_*^{k-quasi}$. We use X to indicate an undetermined argument of a function. Decomposing $D_{**}^{k-quasi}$ as

$$D_{**}^{k-quasi} = D_{**}^{star}(l+k, X) + D_{**}^{1-reg}(k, X), \quad (\text{A10})$$

we can then write

the fact that $D_{**}^{star}(l+k, X) \leq D_{max}^{star}(l+k, n)$, because $D_{max}^{star}(l+k, n)$ is already maximum, we obtain

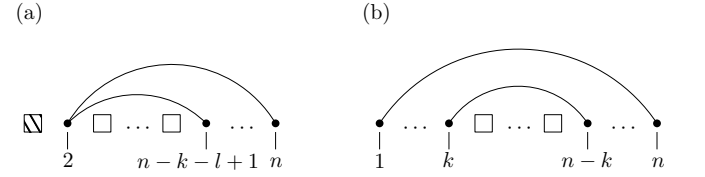


FIG. 10. Two maximum linear arrangements. Empty squares indicate empty positions, and dashed squares indicate forbidden positions in the arrangement. a) A maximum linear arrangement of a star tree of $k+l$ edges over $n-1$ positions. b) A maximum linear arrangement of a 1-regular tree of k edges over n positions.

2. Constancy under minimum linear arrangement of the optimality scores

Under minimum linear arrangement, $\Omega^t = \Gamma^t = 1$ and $\Delta^t = 0$ (see above for Ω^t and [56] for Γ^t and Δ^t). $D_{z,min}^t$, the value of D_z^t in a minimum linear arrangement satisfies

$$D_{z,min}^{linear} \leq D_{z,min} \leq D_{z,min}^{star}$$

and $D_{z,min}^{linear}$ diverges as n tends to infinity [56]. Formulae for $D_{z,min}^{linear}$ and $D_{z,min}^{star}$ are found in [56].

Let us recall the definition of the NDD score [64], i.e.

$$NDD = \left| \log \frac{\bar{d}}{\sqrt{\pi^r n}} \right|.$$

Recall $\bar{d} = D^t/(n-1)$. Under a minimum linear arrange-

ment, the NDD^t score [64] becomes

$$NDD_{min}^t = \left| \log \frac{D_{min}^t}{(n-1)\sqrt{\pi_{min}^r n}} \right|$$

and then NDD^t is not constant under linear arrangement due to π_{min}^r . The following counterexamples clarify it further. Consider a linear tree. Suppose that the root is the i -th vertex of the linear tree following a depth-first traversal from one of the leaves. Then $\pi_{min}^r = i$ or $\pi_{min}^r = n - i$ in a minimum linear arrangement. If the root is a leaf, then $\pi_{min}^r = 1$ or $\pi_{min}^r = n$. Therefore, NDD_{min}^{linear} is not constant. Consider a star tree. Suppose that the root is the hub. Then $\pi_{min}^r = 1$ or $\pi_{min}^r = n$ in a minimum linear arrangement. Suppose that the root is a leaf. Then $2 \leq \pi_{min}^r \leq n$ if the hub has been placed first or $1 \leq \pi_{min}^r \leq n - 1$ if the hub has been placed last. Therefore, NDD_{min}^{star} is not constant either.

3. Stability under the null hypothesis (random linear arrangements)

We define $\mathbb{E}_{rla}[\Omega^t]$ and $\mathbb{E}_{rla}[D_z^t]$ as the expected value of Ω^t and D_z^t in a uniformly random linear arrangement

of a given tree. D_z is stable under the null hypothesis because $\mathbb{E}_{rla}[D_z] = 0$ [56]. We will show that this is also the case for Ω^t . Recall that $D_{rla} = \mathbb{E}_{rla}[D]$. Given a tree, D_{min} and D_{rla} are constant. Hence

$$\begin{aligned} \mathbb{E}_{rla}[\Omega^t] &= \mathbb{E}_{rla} \left[\frac{D_{rla} - D^t}{D_{rla} - D_{min}^t} \right] \\ &= \frac{D_{rla} - \mathbb{E}_{rla}[D^t]}{D_{rla} - D_{min}^t} \\ &= 0. \end{aligned}$$

In contrast, neither Γ nor Δ are stable under the null hypothesis. Recall Eq. 2 and that [54, 55]

$$D_{min}^{linear} = n - 1 \leq D_{min}^t \leq D_{min}^{star} = \left\lfloor \frac{n^2}{4} \right\rfloor \leq D_{rla}. \quad (\text{A12})$$

The expected value of Γ^t in a uniformly random linear arrangement of a given tree is

$$\mathbb{E}_{rla}[\Gamma^t] = \frac{D_{rla}}{D_{min}}. \quad (\text{A13})$$

The application of Eq. 2 and Eq. A12 to Eq. A13 yields

$$\mathbb{E}_{rla}^{star}[\Gamma^t] = \frac{4}{3} \frac{n^2 - 1}{n^2 - n \bmod 2} \leq \mathbb{E}_{rla}[\Gamma^t] \leq \mathbb{E}_{rla}^{linear}[\Gamma^t] = \frac{n + 1}{3}.$$

for any tree of $n \geq 2$ vertices.

The application of Eq. 2 and Eq. A12 to Δ yields

$$\mathbb{E}_{rla}^{star}[\Delta^t] \leq \mathbb{E}_{rla}[\Delta^t] \leq \mathbb{E}_{rla}^{linear}[\Delta^t]$$

with

$$\begin{aligned} \mathbb{E}_{rla}^{linear}[\Delta^t] &= \frac{1}{3}(n-1)(n-2) \\ \mathbb{E}_{rla}^{star}[\Delta^t] &= \frac{1}{12}(n^2 - 4 + 3(n \bmod 2)). \end{aligned}$$

In the case of NDD , $\mathbb{E}_{rla}[NDD^t]$, crucial to determine if the metric is stable under the null hypothesis, is difficult to calculate because of the complexity of the formula of NDD : the absolute value, the logarithmic transformation, the square root in the denominator of the inner quotient, and the fact that the numerator and the denominator may not be independent. A possible approximation is

$$\mathbb{E}_{rla}[NDD^t] \approx |\log B|.$$

with

$$B = \frac{\mathbb{E}_{rla}[\bar{d}]}{\sqrt{\mathbb{E}_{rla}[\pi^r]n}}.$$

Knowing that $\mathbb{E}_{rla}[\pi^r] = n/2$ and

$$\begin{aligned} \mathbb{E}_{rla}[\bar{d}] &= \frac{\mathbb{E}_{rla}[D_{rla}]}{n-1} \\ &= \frac{n+1}{3} \end{aligned}$$

thanks to Eq. 2, one obtains

$$B = \frac{\sqrt{2}}{3} \left(1 + \frac{1}{n} \right).$$

Since $B \leq 1$ for $n \geq 1$, $|\log B| = -\log B$ and finally

$$\mathbb{E}_{rla}[NDD^t] \approx -\log \left[\frac{\sqrt{2}}{3} \left(1 + \frac{1}{n} \right) \right]. \quad (\text{A14})$$

Fig. 11 compares this approximation against the exact $\mathbb{E}_{rla}[NDD^t]$ for linear and star trees. Linear and star trees are chosen because they minimize and maximize the variance of D in uniformly random linear arrangements. Eq. A14 approximates the true expectation better for large n . Critically, Fig. 11 indicates that NDD is not stable under the null hypothesis: the expected NDD tends to shrink as n grows and, for a given n , its value depends on the kind of tree.

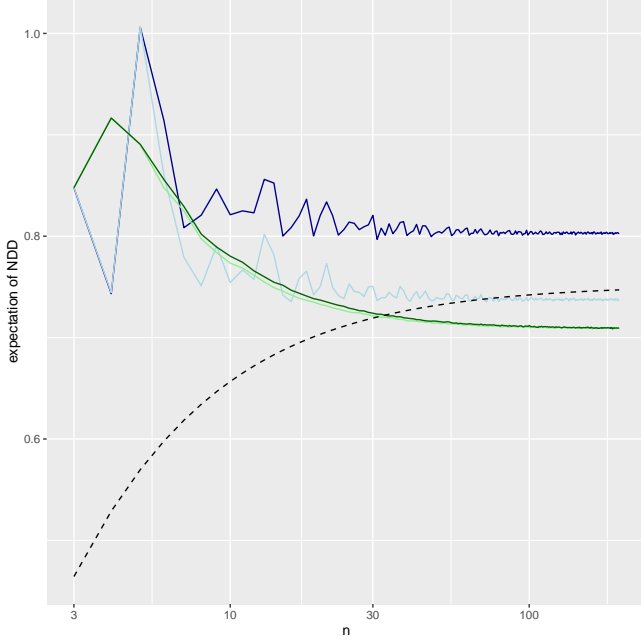


FIG. 11. $\mathbb{E}_{rta}[NDD^t]$ for star trees (blue) and linear trees (green) as a function of n estimated numerically. For reference, the curve for the approximated $\mathbb{E}_{rta}[NDD^t]$ is also shown (dashed line). For star trees, two curves are shown: tree rooted on a leaf (light blue) and a tree rooted on an inner vertex attached to a leaf (dark blue). For linear trees, two curves are shown: tree rooted on a leaf (light green) and a tree rooted on an inner vertex attached to a leaf (dark green). Numerical estimates are obtained generating 10^6 random linear arrangements for each n .

4. Boundedness under maximum linear arrangement

We have seen above that Ω_{min}^t is bounded below by a constant when n tends to infinity and thus Ω is bounded under maximum linear arrangement. In contrast, D_{max}^t diverges when n tends to infinity (Eq. A2) and then D^t is not bounded under maximum linear arrangement. The same happens to all other scores as explained in [56] except for NDD . Notice that the value of NDD under a maximum linear arrangement of a tree t is

$$NDD_{max}^t = \left| \log \frac{D_{max}^t}{(n-1)\sqrt{\pi_{min}^r n}} \right|.$$

It is easy to see that NDD_{max}^t is maximized by a balanced bistar tree rooted at one of the hubs that is placed in first position of the linear arrangement (and then $\pi_{min} = 1$), namely, Therefore,

$$NDD_{max}^t \leq \left| \log \frac{D_{max}^{b-bistar}}{(n-1)\sqrt{n}} \right|.$$

Hence, NDD^t is not bounded under maximum linear arrangement either.

5. Invariance under linear transformation

Both Ω^t and D_z^t are invariant under linear transformation. Let D be the sum of edge lengths of some tree t with n vertices. D_{rta} is a short hand for $\mathbb{E}_{rta}[D]$, the average value of D over all the linear arrangements of t . Similarly, D_{min} is a shorthand for the minimum value of D over all the linear arrangements (la) of t , i.e.

$$D_{min} = \min_{la}[D].$$

Let $aD + b$ be a linear function of D , where a and b are constants in the sense that their value does not depend on the linear arrangement for t . Interpreting Ω as a function of the random variable D in Eq. A1, one obtains that

$$\begin{aligned} \Omega[aD + b] &= \frac{\mathbb{E}_{rta}[aD + b] - aD - b}{\mathbb{E}_{rta}[aD + b] - \min_{la}[aD + b]} \\ &= \frac{a\mathbb{E}_{rta}[D] + b - aD - b}{a\mathbb{E}_{rta}[D] + b - \min_{la}[aD + b]} \\ &= \frac{a(D_{rta} - D)}{a(D_{rta} - D_{min})} \\ &= \Omega[D]. \end{aligned}$$

The same procedure for D_z yields

$$\begin{aligned} D_z[aD + b] &= \frac{aD + b - \mathbb{E}_{rta}[aD + b]}{\mathbb{V}_{rta}[aD + b]^{1/2}} \\ &= \frac{aD + b - a\mathbb{E}_{rta}[D] + b}{a\mathbb{V}_{rta}[D]^{1/2}} \\ &= \frac{a(D - \mathbb{E}_{rta}[D])}{a\mathbb{V}_{rta}[D]^{1/2}} \\ &= D_z[D] \end{aligned}$$

as expected for a z-score. In contrast, neither Δ nor Γ exhibit invariance under linear transformation. As for Δ ,

$$\begin{aligned} \Delta[aD + b] &= aD + b - \min_{la}[aD + b] \\ &= a(D - \min_{la}[D]) \\ &= a\Delta[D] \end{aligned} \tag{A15}$$

and $a = 1$ is required. However, it is easy to see that $\Delta(D + b) = \Delta(D)$, namely invariance under displacement, imposing $a = 1$ on Eq. A15. Δ lacks invariance under proportionate scaling, i.e. $\Delta(aD) \neq \Delta(D)$ (unless $a = 1$). As for Γ ,

$$\begin{aligned} \Gamma[aD + b] &= \frac{aD + b}{\min_{la}[aD + b]} \\ &= \frac{aD + b}{a\min_{la}[D] + b} \\ &= \frac{aD + b}{aD_{min} + b}. \end{aligned} \tag{A16}$$

The condition $\Gamma[aD + b] = \Gamma[D]$ is equivalent to $D_{min} = D$, indicating that Γ is not invariant under linear transformation. However, it is easy to see that $\Gamma[aD] = \Gamma[D]$,

namely invariance under proportionate scaling, imposing $b = 0$ on Eq. A16. It is also easy to see that Γ lacks invariance under displacement, i.e. $\Gamma[D+b] \neq \Gamma[D]$ (unless $b \neq 0$), imposing $a = 0$ on Eq. A16.

Regarding *NDD*, the fact that \bar{d} appears inside a logarithm and that π^r is square rooted, trivially implies that it lacks invariance under both displacement and proportionate scaling.

Appendix B: Materials

To investigate the optimality of dependency distances across a wide range of languages and language families we use several different collections of syntactic dependency treebanks that are available in different annotation criteria. A syntactic dependency treebank is an ensemble of sentences, each of them annotated with its corresponding syntactic dependency tree. Trees can be annotated using different annotation criteria, depending on the specific grammatical framework that is being used to represent syntax.

In particular, our collections of treebanks cover the following annotation criteria:

- Universal Stanford dependencies [111]. This grammatical framework is a revised version of the Stanford Dependencies for English [112], aiming to extend its applicability to languages beyond English. As mentioned in [112], Stanford dependencies are inspired on lexical-functional grammar [113]. They are designed to provide a simple description of the grammatical relations in a sentence that is easy to use in natural language processing (NLP) applications and can be understood even by people without linguistic expertise.
- Prague Dependencies [114] provide a different view of syntax, based on the functional generative description [115] of the Prague linguistic tradition [116]. The focus is more on providing an accurate and consistent linguistic theory than on simplicity for NLP applications. The differences with respect to the Stanford annotation are substantial, for example, in regard to the annotation of conjunctions and adpositions [117]. In very rough terms, Stanford Dependencies favor content words as heads, while Prague dependencies often annotate function words (like adpositions) as heads.
- Universal Dependencies (UD) [118]. This is an evolution of the Universal Stanford dependencies with the goal of further extending their cross-linguistic applicability, as the basis of an international cooperative project to create treebanks of the world’s languages. Thus, it shares the same principles as Universal Stanford Dependencies, but it has been refined across versions to better accommodate the specificities of diverse languages inside the common framework.
- Surface-Syntactic Universal Dependencies (SUD). The priority of UD is to maximize parallelism between languages, and for this purpose, it defines annotation criteria that enforce simple tree structures and follow the principle of favoring content words as heads, inherited from Stanford Dependencies (as the syntax of content words varies less than that of function words between languages). This is reasonable for applications like cross-lingual syntactic parsing, but arguably not the best choice for typological research on syntax, as it minimizes differences between languages. For this reason, SUD [73] is proposed as an alternative where dependency links are defined based on purely syntactic criteria, closer to the Meaning-Text Theory [26] or the Praguian linguistic tradition [116]. However, at the same time, SUD is designed to provide easy convertibility from UD, which earlier frameworks like the Prague dependencies lack.

The collections used are the following:

- Universal Dependencies (UD), version 2.6 [118]. This is the largest available collection of syntactic dependency treebanks, both in terms of number of languages and typological diversity. It features 163 treebanks from 92 different languages, belonging to 19 broad families (see Table VII). We use versions of these treebanks with two annotations: UD and SUD. The UD version can be downloaded freely [119]. The SUD version can be obtained from the UD version by applying a conversion script [120] or downloaded directly [121]. Both of them can be used under free licenses.
- Parallel Universal Dependencies (PUD), version 2.6 [122]. This is a subset of the UD treebanks that contains parallel annotations for 20 languages. Parallel means that all the treebanks contain the exact same sentences, in the same order, translated into each of the languages by professional translators. This is useful to control for variability due to the genre or content of the text, which can vary across different non-parallel treebanks. Since it is a subset of the UD treebanks, the annotation criteria are the same (i.e., there are versions annotated with UD and SUD), as are the download links.
- HamleDT, version 2.0 [123], is a collection of treebanks of 30 languages. All of these languages are present in the UD collection except one (Bengali) and thus this collection does not meaningfully extend the linguistic diversity of our study. However, its interest is in the annotation schemes. Each of the 30 treebanks in HamleDT comes with two versions, each annotated with a different set of annotation criteria: Universal Stanford dependencies and Prague Dependencies. As mentioned above, the former are a direct ancestor of UD, while the latter provide a different view of syntax, closer in

focus to SUD (but substantially different, as SUD had unique design constraints with respect to the original Prague dependencies, like being easily convertible from UD). Thus, using the HamleDT collection is a way to further extend the diversity of syntactic theories represented in our study, making our results more robust with respect to annotation criteria. The HamleDT 2.0 treebanks can be obtained online [124]. While not all of them are distributed under free licenses, for the purposes of reproducing our analysis it suffices to use a stripped version that does not include the words from the sentences (for copyright reasons), but still includes the bare tree structures. This version is distributed freely [125].

Table VII summarizes the languages and language families included in each of the collections of treebanks.

No dummy root nodes are added to the trees, as is often done for technical reasons in the NLP literature [126], since they do not correspond to actual words, do not take part in the linear arrangement of a sentence as they do not have a real position, and the edges originating from them would be a potential source of spurious anti-DDM effects. All the treebanks from the same language were merged to form a single treebank. Then, all of the treebanks underwent the following postprocessing for analysis: following common practice in statistical research on dependency trees [44], we removed punctuation, as well as tree nodes not corresponding to actual words, like the empty nodes in several UD corpora and null elements in the Bengali, Hindi and Telugu HamleDT treebanks. To ensure that the resulting structure is still a tree after the removal of these nodes, we applied the following transformation: nodes whose heads were deleted were reattached as dependents of their nearest non-deleted ancestor in the original tree. Finally, in our analyses we disregard trees with less than three nodes, as they have trivial statistical properties (a tree with one node has no dependencies, a tree with two nodes always has a single dependency with distance 1) and Ω is undefined for these trees.

Datasets are formed by combining a collection of treebanks and annotation criteria. The PUD and the PSUD collection are formed by combining the PUD collection with Universal Dependencies and Surface-Syntactic Universal Dependencies, respectively. Originally, these datasets have 1000 sentences per language. As the analyses are restricted to $n \geq 3$ (see below), some sentences such that $n < 3$ are lost after the postprocessing described above (Table VIII). Since we find that Ω tends to increase as n increases, $\langle \Omega \rangle$ may be more biased towards higher values in those languages that have lost more sentences. This may be problematic because the differences in $\langle \Omega \rangle$ between languages are often small (e.g. 16). To avoid this problem, the PUD and the PSUD are reparallelized, namely, all sentences that are not found in all the languages after the postprocessing are removed. As a result, all languages have 995 sentences and the loss of sentence is tiny (only 0.5% of sentences are lost).

Appendix C: Methods

1. Statistical tests

$\langle \Omega \rangle$ is the mean value of Ω over the sentences of a language L and $\langle \Omega \rangle (n)$ is the mean value of Ω over the sentences of length n (in words) of that language. We tested if $\langle \Omega \rangle$ is significantly large using a Monte Carlo procedure to estimate the p -value. In particular we use a permutation test that consists of

1. Precomputing the value of D_{min} for every sentence.
2. Setting F to 0.
3. Repeating T times
 - (a) Shuffling every sentence.
 - (b) Computing the new value of D for each sentence.
 - (c) Calculating $\langle \Omega \rangle_{rta}$, the new value of $\langle \Omega \rangle$.
 - (d) Updating F , that is the number of times that $\langle \Omega \rangle_{rta} \geq \langle \Omega \rangle$.
4. Estimating the p -value as F/T .

The same algorithm can be adapted to test if $\langle \Omega \rangle$ is significantly small by redefining F as the number of times that $\langle \Omega \rangle_{rta} \leq \langle \Omega \rangle$. The same kind of tests were used to assess if $\langle \Omega \rangle (n)$ is significantly large or significantly small.

2. Multiple comparisons

Given a series of unadjusted p -values $p_1, p_2, \dots, p_i, \dots, p_m$ sorted increasingly, i.e. $p_1 \leq p_2 \leq \dots \leq p_i \leq \dots \leq p_m$, Holm’s correction produces, for each p_i , an adjusted p -value q_i through [127, p. 32]

$$q_i = \min\{1, \max[p_i(m + 1 - i), q_{i-1}]\} \quad (C1)$$

with $q_0 = 0$. This correction does not assume independence between p -values [127] and is then suitable for dealing with p -values from distinct languages. Languages from the same family are not independent *a priori* due to vertical transmission [65] and our sample is biased towards Indo-European languages.

Here as well as in [47], Holm’s correction is applied over all the languages of the dataset, before languages are split into different families so as to not reduce the power of the correction. Note that there is a confounding statement in Tables 3 and 4 of [47, Table 3]: “after applying the Holm correction to the languages counted in f ” should be “after applying the Holm correction to the languages counted in l_0 ”.

Estimated p -values of 0 obtained with the Monte Carlo procedure are underestimations of the real p -value. For $p_i = 0$, Eq. C1 gives $q_i = p_i$. Then, if there are m_0

TABLE VII. The languages in every collection grouped by family. The counts attached to the collection names indicate the number of different families and the number of different languages. The counts attached to family names indicate the number of different languages.

Collection	Family	Languages
UD (19, 92)	Afro-Asiatic (7)	Akkadian, Amharic, Arabic, Assyrian, Coptic, Hebrew, Maltese
	Altaic (3)	Kazakh, Turkish, Uyghur
	Austro-Asiatic (1)	Vietnamese
	Austronesian (2)	Indonesian, Tagalog
	Basque (1)	Basque
	Dravidian (2)	Tamil, Telugu
	Indo-European (51)	Afrikaans, Albanian, Ancient Greek, Armenian, Belarusian, Bhojpuri, Breton, Bulgarian, Catalan, Croatian, Czech, Danish, Dutch, English, Faroese, French, Galician, German, Gothic, Greek, Hindi, Hindi-English, Icelandic, Irish, Italian, Kurmanji, Latin, Latvian, Lithuanian, Marathi, Norwegian, Old Church Slavonic, Old French, Old Russian, Persian, Polish, Portuguese, Romanian, Russian, Sanskrit, Scottish Gaelic, Serbian, Slovak, Slovenian, Spanish, Swedish, Swiss German, Ukrainian, Upper Sorbian, Urdu, Welsh
	Japanese (1)	Japanese
	Korean (1)	Korean
	Mande (1)	Bambara
	Mongolic (1)	Buryat
	Niger-Congo (2)	Wolof, Yoruba
	Other (1)	Naija
	Pama-Nyungan (1)	Warlpiri
	Sign Language (1)	Swedish Sign Language
	Sino-Tibetan (3)	Cantonese, Chinese, Classical Chinese
	Tai-Kadai (1)	Thai
	Tupian (1)	Mbya Guarani
	Uralic (11)	Erzya, Estonian, Finnish, Hungarian, Karelian, Komi-Permyak, Komi-Zyrian, Livvi, Moksha, North Sami, Skolt Sami
	PUD (9, 20)	Afro-Asiatic (1)
Altaic (1)		Turkish
Austronesian (1)		Indonesian
Indo-European (12)		Czech, English, French, German, Hindi, Icelandic, Italian, Polish, Portuguese, Russian, Spanish, Swedish
Japanese (1)		Japanese
Korean (1)		Korean
Sino-Tibetan (1)		Chinese
Tai-Kadai (1)		Thai
Uralic (1)		Finnish
HamleDT (7, 30)		Afro-Asiatic (1)
	Altaic (1)	Turkish
	Basque (1)	Basque
	Dravidian (2)	Tamil, Telugu
	Indo-European (21)	Ancient Greek, Bengali, Bulgarian, Catalan, Czech, Danish, Dutch, English, German, Greek, Hindi, Italian, Latin, Persian, Portuguese, Romanian, Russian, Slovak, Slovenian, Spanish, Swedish
	Japanese (1)	Japanese
	Uralic (3)	Estonian, Finnish, Hungarian

estimated p -values that are zero, $q_i = 0$ for each of them and then at least m_0 null hypotheses will be rejected (as $\alpha > 0$). To avoid this problem, we correct the zero p_i 's before applying Eq. C1. The correction relies on three facts about the Monte Carlo tests

- The estimated p -values are a number in $\{0\} \cup [1/T, 1]$ where T is the number of randomizations of the Monte Carlo test.

- Then the smallest possible non-zero p -value is $1/T$.
- If the estimated p -value is zero then the true p -value is likely to be smaller than $1/T$ for sufficiently large T .

Therefore, to prevent Holm's correction from rejecting too many hypotheses due to inaccurate estimation of the unadjusted p -value, p -values estimated as zero are replaced by $(1 - \epsilon)/T$ with $\epsilon = 0.01$. A value of $\epsilon > 0$

is needed so that *a priori* none of the replaced p -values collides with any of the existing non-zero p -values.

3. Hasse diagram

We define a relation between two languages x and y such that $x < y$ if $\langle \Omega \rangle_x < \langle \Omega \rangle_y$ and the difference is statistically significant. The difference is statistically significant if the p -value of a one-tailed Fisher randomization test does not exceed the significance level α after controlling for multiple comparisons using Holm’s correction. The PUD collection has $L = 20$ languages and then the correction is applied over an ensemble of $\binom{L}{2}$ p -values (each corresponding to a pair of languages $\{x, y\}$ such that $\langle \Omega \rangle_x < \langle \Omega \rangle_y$). Every p -value was estimated in three steps:

- The sets of values of Ω of x and y , namely X and Y were merged to produce a set Z .
- The p -value is the proportion of T random subsets of size $|Y|$ with a sum that is greater than that of Y . We used $T = 10^7$.
- If the p -value is zero it is replaced by $(1 - \epsilon)/T$ as explained above.

The relation defines a strict partial order on the PUD dataset: a relation that is irreflexive, transitive and asymmetric (or strictly antisymmetric) [128]. First, the relationship is by definition irreflexive ($x \leq x$ is impossible). Second, it is transitive, because whenever $x < y$ and $y < z$ then $x < z$ with the significance level used. Finally, it is asymmetric as a consequence of irreflexivity and transitivity [128]. The relationship can be represented as network where an arc $y \rightarrow x$ indicates $x < y$. A Hasse diagram is a drawing of the transitive reduction of a partially ordered set [129, pp.413-414]. The transitive reduction of the network can be computed with standard algorithms [130, 131]. When building this kind of diagrams, we control for multiple comparisons and check transitivity as indicated in previous research [132]. Figure 12 shows the misleading Hasse diagrams that would be obtained without Holm’s correction. We use the R package `hasseDiagram` [133] to perform the transitive reduction and generate the diagram.

4. Minimum sentence length

All the analyses are restricted to $n \geq 3$. When $n \in \{1, 2\}$, Ω is undefined because $D = D_{rta} = D_{min}$ and then $\Omega = 0/0$. The problem resembles that of C_i , the clustering coefficient of vertex i , that is also $0/0$ when k_i , the degree of i , satisfies $k_i < 2$ [134]. The average clustering of a graph can be defined as

$$C = \frac{1}{n} \sum_{i=1}^n C_i,$$

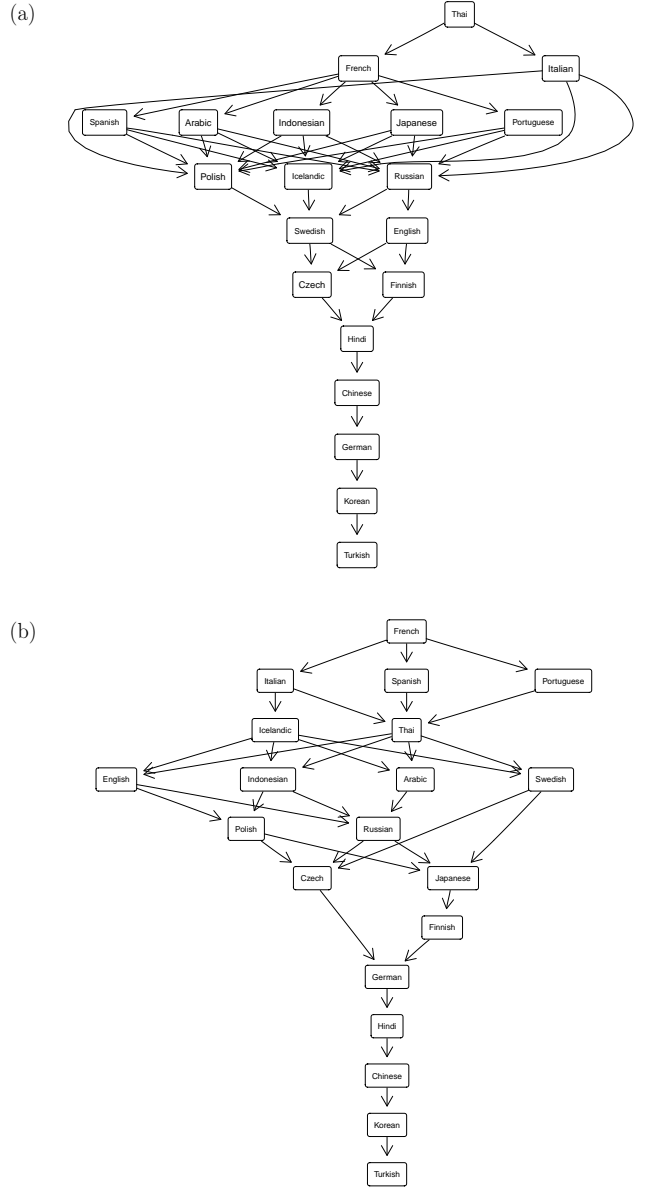


FIG. 12. A Hasse diagram where an arrow pointing from one language to another indicates that the former is significantly more optimized than the latter according to Ω . Here the correction for multiple comparisons has been omitted. (a) PUD. (b) PSUD.

where $C_i = \gamma$ is $k_i < 2$. $\gamma = 0$ is the common choice but $\gamma = 1$ has also been used [135]. [136] proposed a hybrid solution: $C_i = 0$ when for isolated vertices ($k_i = 0$) and $C_i = 1$ for leaves ($k_i = 1$). Let n_k be the number of vertices of degree k . Alternatively, one can define [134, 135]

$$C' = \frac{1}{n'} \sum_{k_i \geq 2} C_i,$$

where $n' = n - n_1 + n_2$ is the number of vertices where $k_i \geq 2$. One has that [134]

$$C' = \frac{1}{1 - \theta} C,$$

where θ is the fraction vertices where C_i gives 0/0, i.e. $\theta = 1 - n'/n$.

Let Ω_i and n_i be value of Ω and the sentence length of the i -th sentence from a sample of N sentences. Let N_n be the number of sentences of length n . Then

$$\langle \Omega \rangle = \frac{1}{N'} \sum_{n_i \geq 3} \Omega_i, \quad (\text{C2})$$

where $N' = N - N_1 - N_2$. Therefore, $\langle \Omega \rangle$ is the counterpart of C' , because $\langle \Omega \rangle$ is the average Ω restricted to sentence lengths where Ω is defined. The counterpart of C would be a variant of $\langle \Omega \rangle$ including sentences of length $n < 3$, i.e.

$$\langle \Omega \rangle_{n \geq 1} = \frac{1}{N} \left[N_1 \gamma_1 + N_2 \gamma_2 + \sum_{n_i \geq 3} \Omega_i \right], \quad (\text{C3})$$

where γ_ν is the value of Ω_i when $n_i = \nu$. Inserting

$$N' \langle \Omega \rangle = \sum_{n_i \geq 3} \Omega_i,$$

into Eq. C3 one obtains

$$\langle \Omega \rangle_{n \geq 1} = (1 - \theta) \langle \Omega \rangle + \frac{1}{N} (N_1 \gamma_1 + N_2 \gamma_2), \quad (\text{C4})$$

where

$$\theta = \frac{N_1 + N_2}{N}$$

is the proportion of sentences where $n_i < 3$. If $\gamma_1 = \gamma_2 = \gamma$,

$$\langle \Omega \rangle_{n \geq 1} = (1 - \theta) \langle \Omega \rangle + \theta \gamma. \quad (\text{C5})$$

Including sentences with $n < 3$ is a potential source of arbitrariness. Choosing the value of γ_1 and γ_2 is arbitrary. One could reasonably argue that $\gamma_1 = \gamma_2 = 1$ because $D = D_{min}$ when $n < 3$. But one could also argue that $\gamma_1 = \gamma_2 = 0$ because $D = D_{rla}$ when $n < 3$. Whether sentences with $n = 1$ should be included is another source of arbitrariness. One may argue that $\langle \Omega \rangle$ should not be replaced by $\langle \Omega \rangle_{n \geq 1}$ but rather by $\langle \Omega \rangle_{n \geq 2}$.

Having in mind such potential limitations, we aim to analyze the consequences of replacing $\langle \Omega \rangle$ by $\langle \Omega \rangle_{n \geq 1}$ (or $\langle \Omega \rangle_{n \geq 2}$). First, the replacement will not change the p -values of the test of significance of $\langle \Omega \rangle$ because $\langle \Omega \rangle_{n \geq 1}$ is a linear function of $\langle \Omega \rangle$ (Eq. C4) and both the intercept and the slope are constant (the shuffling of the sentences preserves the distribution of sentence lengths as well as the tree of every sentence). Therefore, the replacement

TABLE VIII. Summary of the statistics of θ , the proportion of sentences of length $n < 3$ of a language, in the different datasets: the number of languages in the dataset, the number of languages where $\theta > 0$ as well as the median, the average and the maximum value of θ . For each language, θ is computed after the postprocessing of the treebanks described above but before the reparallelization process of PUD and PSUD.

Dataset	Languages	$\theta > 0$	Median	Mean	Maximum
UD	92	86	0.02369	0.03441	0.15813
SUD	92	86	0.02369	0.03441	0.15813
Stanford	30	29	0.02923	0.05069	0.44851
Prague	30	29	0.03023	0.05141	0.44844
PUD	20	14	0.001	0.00105	0.003
PSUD	20	14	0.001	0.00105	0.003

will not alter the conclusions about the languages where $\langle \Omega \rangle$ is significantly large (or low), independently from the true values of N_1 and N_2 and also independently from the choice of the γ_1 and γ_2 . Second, the conclusions about the presence of anti-DDm effects will not change because $\langle \Omega \rangle(n)$ is not affected for $n \geq 3$ and $\langle \Omega \rangle(n)$ is constant for $n < 3$ ($\langle \Omega \rangle(n) = \gamma_n$ and then both the left and right p -values will be 1). Third, the replacement may change the value of the optimality score in languages where $N_1 + N_2 > 0$ (Eq. C4). Table VIII indicates that $\theta > 0$ in the vast majority of languages but θ is a small number. Then Eq. C5 indicates that the convention $\gamma_1 = \gamma_2 = 0$ or $\gamma_1 = \gamma_2 = 1$ would imply a little difference between $\langle \Omega \rangle$ and $\langle \Omega \rangle_{n \geq 1}$. Notice that the situation is totally different with respect to C versus C' because θ is large in real networks [134]. Third, a sensitive issue is the ranking of languages and the Hasse diagram, where differences in $\langle \Omega \rangle$ between languages are often small (e.g. 16). We believe that the decision of restricting the analyses to $n \geq 3$ with reparallelization (see above) is a reasonable choice because θ is particularly small in PUD and PSUD and the comparison of languages does not depend on the arbitrary decisions reviewed above.

Appendix D: Results

Figs. 13, 14 and 15 show the tendency of $\langle \Omega \rangle(n)$ to increase as sentence length increases in the SUD, Prague and Stanford datasets.

In Section III, we report that $\langle \Omega \rangle$ is significantly large in the overwhelming majority of languages. Table IX indicates that $\langle D \rangle$ is significantly small in all languages except one case: Warlpiri following the UD annotation criteria. The same conclusion is reached for $\langle \bar{d} \rangle$, $\langle \Delta \rangle$, $\langle \Gamma \rangle$ and $\langle D_z \rangle$ and thus the corresponding tables are omitted.

In Section III, we report that the correlation between $\langle \Omega \rangle(n)$ and n is significantly large (and thus positive) in the overwhelming majority of languages. As in the other (preexisting) scores a lower value indicates higher optimization, one would expect that the correlation between

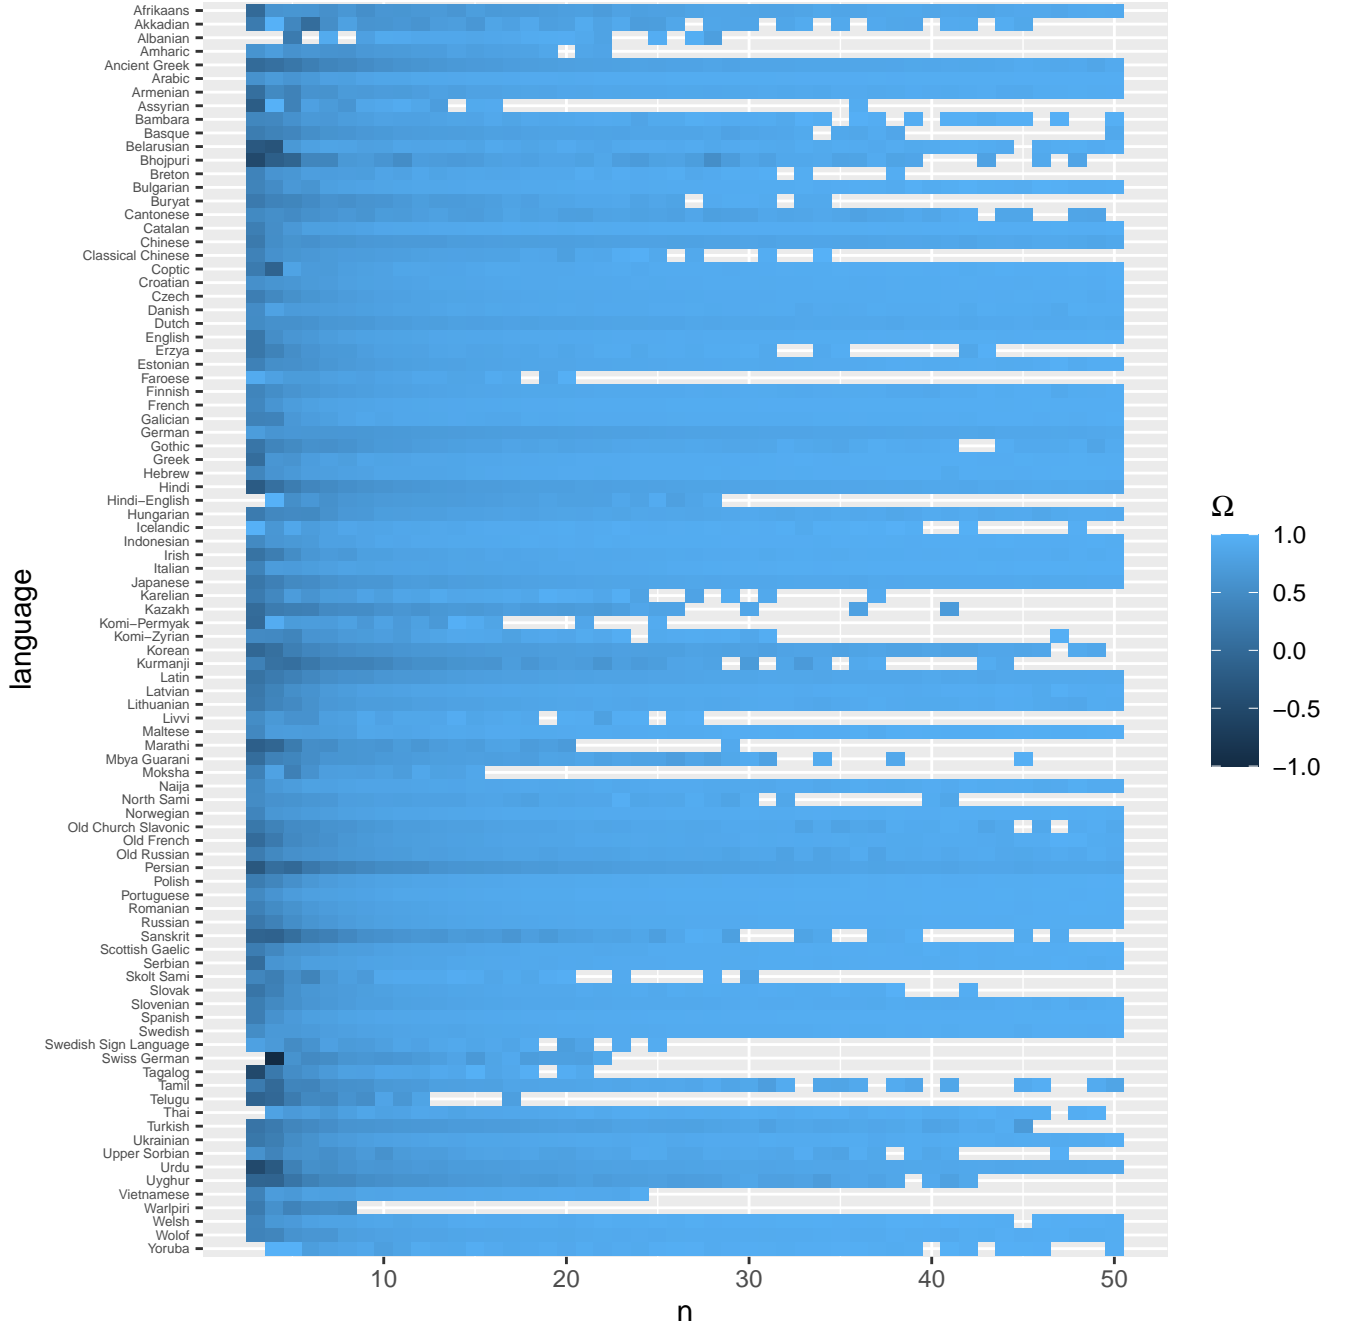


FIG. 13. $\langle \Omega \rangle (n)$, the average value of Ω in sentences of length n of a language in SUD for $3 \leq n \leq 50$. Sentences longer than 50 words are excluded to ease visualization.

TABLE IX. The significance of $\langle D \rangle$. l_0 is the number of languages available from the dataset, f_H is the number of languages where $\langle D \rangle$ is significantly *small* after applying Holm's correction to the languages counted in l_0 , and Exceptions is the number of the languages counted in l_0 where $\langle D \rangle$ is not significantly *small*. The number attached to the language name indicates the corrected p -value.

Dataset	l_0	f_H	Exceptions	Family	Languages
UD	92	91	1	Pama-Nyungan (1)	Warlpiri ^{0.2}
SUD	92	92	—	—	—
Prague	30	30	—	—	—
Stanford	30	30	—	—	—

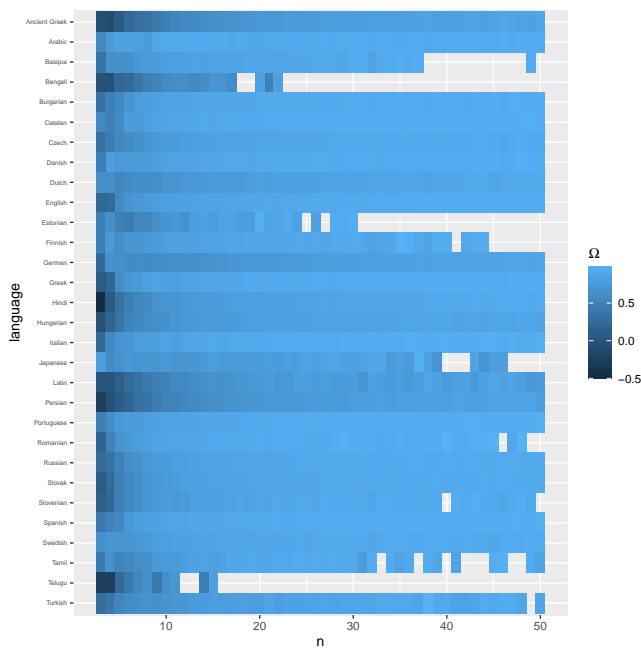


FIG. 14. The same as in Fig. 13 for the Prague dataset.

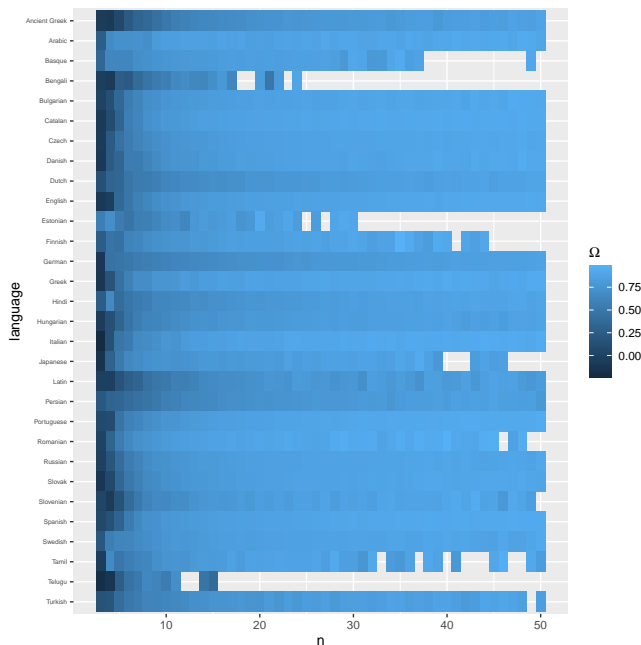
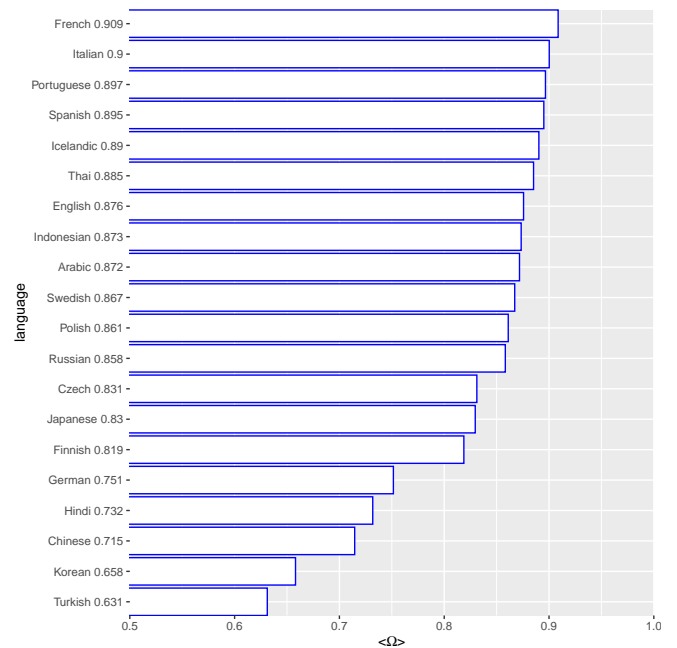


FIG. 15. The same as in Fig. 15 for the Stanford dataset.

each of the other scores and n was significantly small (and thus negative) for consistency with Ω . However, we find that only D_z meets that expectation. For D_z , correlations for all languages are significantly small (even after controlling for multiple comparisons). For the other pre-existing scores, the correlation between the score and n is never significantly small after controlling for multiple comparisons. Notice that $\langle D \rangle (n)$ and $\langle \bar{d} \rangle (n)$ are equiv-

FIG. 16. The ranking of languages in PSUD according to Ω . The number attached to each language indicates the value of $\langle \Omega \rangle$.

alent for testing the correlation with n : the Kendall τ correlation will be the same for both as $\bar{d} = D/(n-1)$.

From a complementary perspective, the correlation between n and $\langle D \rangle (n)$, $\langle \bar{d} \rangle (n)$, $\langle \Delta \rangle (n)$ is always significantly large (and thus positive) in all languages after controlling for multiple comparisons. In contrast, the positive correlation between n and $\langle \Gamma \rangle (n)$ is weaker (Table X). The correlation between n and $\langle D_z \rangle (n)$ is never significantly large as expected.

In Section III, we report that $\langle \Omega \rangle (n)$ is significantly small in certain languages when $n = 3$ or $n = 4$. Tables XI and XII indicate that $\langle D \rangle (n)$, $\langle \bar{d} \rangle (n)$, $\langle \Delta \rangle (n)$, $\langle \Gamma \rangle (n)$ and $\langle D_z \rangle (n)$ are consistently significantly large also in certain languages. *A priori*, $\langle D \rangle (n)$ and $\langle \bar{d} \rangle (n)$ are equivalent for testing significance (recall $\bar{d} = D/(n-1)$) and thus only $\langle D \rangle (n)$ is shown in the tables. In addition, the results for Δ and Γ are the same as those of D and thus not shown either.

Interestingly, the number of languages with evidence of anti-dependency distance effects based on Δ , Γ (Table XI) is smaller than that of D_z (Table XII) which is in turn smaller than that of Ω (Table VI). The results indicate that all the other scores have a lower capacity to detect anti-dependency distance minimization effects than Ω .

Fig. 16 shows the ranking of languages that would be obtained if universal dependencies were replaced by surface-syntactic universal dependencies [73] in PUD.

TABLE X. When the Kendall τ correlation between $\langle \Gamma \rangle (n)$ and sentence length n is significantly *large*. l_0 is the number of languages available from the collection, f_H , is the number of languages where the correlation is significantly *large* after applying Holm’s correction to the languages counted in l_0 , and Exceptions is the number of the languages counted in l_0 where the correlation is not significantly *large*. The number attached to the language name indicates the corrected p -value.

Collection	l_0	f_H	Exceptions	Family	Languages				
UD	92	62	30	Afro-Asiatic (3)	Assyrian ^{0.4} Akkadian ¹ Amharic ^{0.8}				
				Austronesian (1)	Tagalog ¹				
				Dravidian (1)	Telugu ¹				
				Indo-European (12)	Afrikaans ^{0.2} Albanian ^{0.8} Breton ¹ Welsh ¹ Faroese ¹ Gothic ¹ Ancient Greek ¹ Swiss German ¹ Upper Sorbian ^{0.2} Icelandic ¹ Sanskrit ^{0.4} Slovak ^{0.8}				
				Mande (1)	Bambara ¹				
				Mongolic (1)	Buryat ¹				
				Niger-Congo (1)	Yoruba ¹				
				Pama-Nyungan (1)	Warlpiri ¹				
				Sign Language (1)	Swedish Sign Language ^{0.1}				
				Tai-Kadai (1)	Thai ^{0.3}				
				Uralic (7)	Komi-Permyak ^{0.5} Komi-Zyrian ¹ Karelian ^{0.1} Moksha ^{0.8} Erzya ^{0.1} Livvi ¹ Skolt Sami ^{0.1}				
				SUD	92	54	38	Afro-Asiatic (2)	Assyrian ¹ Akkadian ¹
								Austronesian (1)	Tagalog ¹
								Dravidian (2)	Tamil ^{0.1} Telugu ¹
Indo-European (18)	Albanian ¹ Belarusian ^{0.2} Breton ¹ Czech ¹ Welsh ^{0.2} Faroese ^{0.5} Galician ^{0.2} Gothic ¹ Ancient Greek ¹ Swiss German ^{0.3} Upper Sorbian ^{0.7} Icelandic ^{0.6} Italian ¹ Kurmanji ¹ Persian ¹ Polish ^{0.1} Sanskrit ¹ Slovak ^{0.2}								
Mande (1)	Bambara ¹								
Mongolic (1)	Buryat ¹								
Niger-Congo (2)	Wolof ^{0.1} Yoruba ¹								
Pama-Nyungan (1)	Warlpiri ^{0.3}								
Sign Language (1)	Swedish Sign Language ¹								
Sino-Tibetan (1)	Classical Chinese ^{0.3}								
Tai-Kadai (1)	Thai ¹								
Uralic (7)	Komi-Permyak ¹ Komi-Zyrian ¹ Karelian ^{0.5} Moksha ^{0.7} Erzya ¹ Livvi ¹ Skolt Sami ¹								
Prague	30	28	2					Dravidian (1)	Telugu ^{0.2}
								Uralic (1)	Estonian ^{0.2}
Stanford	30	30	—	—	—				

TABLE XI. Anti dependency distance minimization in short sentences (significantly large $\langle D \rangle (n)$ for small n). n is the sentence length (in words). l_0 is the number of languages available from the dataset, and f_H , is the number of languages where $\langle D \rangle (n)$ is significantly small after applying Holm’s correction to the languages counted in l_0 . The number attached to the language name indicates the magnitude of the corrected p -value. It is obtained after rounding $-\log_{10}(p\text{-value})$ to leave just one decimal digit. Then the significance level $\alpha = 0.05$ gives 1.3.

n	Dataset	l_0	f_H	Family	Languages			
3	UD	87	9	Austronesian (1)	Tagalog ^{1.5}			
				Dravidian (1)	Telugu ^{1.6}			
				Indo-European (6)	German ^{3.1} English ^{3.1} Old French ^{3.1} Norwegian ^{2.5} Sanskrit ^{2.4} Slovak ^{3.1}			
				Japanese (1)	Japanese ^{3.1}			
				SUD	87	2	Austronesian (1)	Tagalog ^{1.5}
							Indo-European (1)	Persian ²
Prague	30	2	Dravidian (1)	Telugu ^{3.5}				
			Indo-European (1)	Persian ^{3.5}				
Stanford	30	5	Dravidian (1)	Telugu ^{3.5}				
			Indo-European (3)	Czech ^{3.5} German ^{3.5} Slovak ^{3.5}				
			Japanese (1)	Japanese ^{3.5}				
4	UD	91	1	Pama-Nyungan (1)	Warlpiri ^{1.9}			
	SUD	91	0	—	—			
	Prague	30	0	—	—			
	Stanford	30	0	—	—			

TABLE XII. Anti dependency distance in short sentences (significantly large $\langle D_z \rangle (n)$ for small n). The format is the same as in Table XI.

n	Dataset	l_0	f_H	Family	Languages
3	UD	87	10	Austronesian (1)	Tagalog ^{1.5}
				Dravidian (1)	Telugu ^{1.7}
				Indo-European (7)	Breton ^{1.4} German ^{3.1} English ^{3.1} Old French ^{3.1} Norwegian ^{2.6} Sanskrit ^{2.5}
					Slovak ^{3.1}
	SUD	87	2	Japanese (1)	Japanese ^{3.1}
				Austronesian (1)	Tagalog ^{1.5}
	Prague	30	2	Indo-European (1)	Persian ^{2.4}
				Dravidian (1)	Telugu ^{3.5}
	Stanford	30	5	Indo-European (1)	Persian ^{3.5}
				Dravidian (1)	Telugu ^{3.5}
Indo-European (3)				Czech ^{3.5} German ^{3.5} Slovak ^{3.5}	
Japanese (1)				Japanese ^{3.5}	
4	UD	91	1	Pama-Nyungan (1)	Warlpiri ^{1.9}
	SUD	91	0	—	—
	Prague	30	0	—	—
	Stanford	30	0	—	—

-
- [1] R. Alexander, *Optima for animals* (Princeton University Press, Princeton, NJ, 1996).
- [2] G. A. Parker and J. M. Smith, Optimality theory in evolutionary biology, *Nature* **348**, 27 (1990).
- [3] A. Pérez-Escudero, M. Rivera-Alba, and G. G. de Polavieja, Structure of deviations from optimality in biological systems, *Proceedings of the National Academy of Sciences* **106**, 20544 (2009), <https://www.pnas.org/content/106/48/20544.full.pdf>.
- [4] S. Itzkovitz and U. Alon, The genetic code is nearly optimal for allowing additional information within protein-coding sequences, *Genome Research* **17**, 405 (2007), <http://genome.cshlp.org/content/17/4/405.full.pdf+html>.
- [5] B. Kumar and S. Saini, Analysis of the optimality of the standard genetic code, *Mol. BioSyst.* **12**, 2642 (2016).
- [6] V. A. Klyachko and C. F. Stevens, Connectivity optimization and the positioning of cortical areas, *Proceedings of the National Academy of Sciences* **100**, 7937 (2003), <https://www.pnas.org/content/100/13/7937.full.pdf>.
- [7] B. L. Chen, D. H. Hall, and D. B. Chklovskii, Wiring optimization can relate neuronal structure and function, *Proceedings of the National Academy of Sciences* **103**, 4723 (2006), <https://www.pnas.org/content/103/12/4723.full.pdf>.
- [8] A. Pérez-Escudero and G. G. de Polavieja, Optimally wired subnetwork determines neuroanatomy of *Caenorhabditis elegans*, *Proceedings of the National Academy of Sciences* **104**, 17180 (2007), <https://www.pnas.org/content/104/43/17180.full.pdf>.
- [9] D. Segrè, D. Vitkup, and G. M. Church, Analysis of optimality in natural and perturbed metabolic networks, *Proceedings of the National Academy of Sciences* **99**, 15112 (2002), <https://www.pnas.org/content/99/23/15112.full.pdf>.
- [10] J. Berkhout, F. J. Bruggeman, and B. Teusink, Optimality principles in the regulation of metabolic networks, *Metabolites* **2**, 529 (2012), 24957646[pmid].
- [11] M. L. Gustison, S. Semple, R. Ferrer-i-Cancho, and T. Bergman, Gelada vocal sequences follow Menzerath’s linguistic law, *Proceedings of the National Academy of Sciences USA* **13**, E2750 (2016).
- [12] G. K. Zipf, *Human behaviour and the principle of least effort* (Addison-Wesley, Cambridge (MA), USA, 1949).
- [13] R. Ferrer-i-Cancho, Optimization models of natural communication, *Journal of Quantitative Linguistics* **25**, 207 (2018).
- [14] E. Gibson, R. Futrell, S. Piantadosi, I. Dautriche, K. Mahowald, L. Bergen, and R. Levy, How efficiency shapes human language, *Trends in Cognitive Science* **23**, 389 (2019).
- [15] J. A. Hawkins, Some issues in a performance theory of word order, in *Constituent order in the languages of Europe*, edited by A. Siewierska (Mouton de Gruyter, Berlin, 1998).
- [16] R. Ferrer-i-Cancho, Euclidean distance between syntactically linked words, *Physical Review E* **70**, 056135 (2004).
- [17] H. J. Tily, *The role of processing complexity in word order variation and change*, Ph.D. thesis, Stanford University (2010), chapter 3: Dependency lengths.
- [18] K. Gulordava and P. Merlo, Diachronic trends in word order freedom and dependency length in dependency-annotated corpora of Latin and ancient Greek, in *Proceedings of the Third International Conference on Dependency Linguistics (Depling 2015)* (Uppsala University, Uppsala, Sweden, 2015) pp. 121–130.
- [19] K. Gulordava and P. Merlo, Multi-lingual dependency parsing evaluation: a large-scale analysis of word order properties using artificial data, *Transactions of the Association for Computational Linguistics* **4**, 343 (2016).
- [20] A. Joshi, How much context-sensitivity is necessary for characterizing structural descriptions – tree adjoining grammars, in *Natural Language Processing: Psycholinguistic, Computational and Theoretical Perspectives*, edited by D. Dowty, L. Karttunen, and A. Zwicky (Cambridge University Press, 1985) pp. 206–250.
- [21] G. Fenk-Oczlon and A. Fenk, Complexity trade-offs between the subsystems of language, in *Language complexity: Typology, contact, change*, Studies in Language Companion Series, edited by M. Miestamo, K. Sinemäki, and F. Karlsson (John Benjamins Publishing Company, Amsterdam/Philadelphia, 2008) pp. 43–65.
- [22] R. Ferrer-i-Cancho, A. Hernández-Fernández, D. Lusseau, G. Agoramoorthy, M. J. Hsu, and S. Semple, Compression as a universal principle of animal behavior, *Cognitive Science* **37**, 1565 (2013).
- [23] D. Gildea and T. F. Jaeger, Language structure shaped by the brain: Human languages order information efficiently, For consideration in *Nature Human Behavior* (2020).
- [24] M. Hahn, D. Jurafsky, and R. Futrell, Universals of word order reflect optimization of grammars for efficient communication, *Proceedings of the National Academy of Sciences* **117**, 2347 (2020).
- [25] L. Tesnière, *Éléments de syntaxe structurale* (Klincksieck, Paris, 1959).
- [26] I. Mel’čuk, *Dependency Syntax: Theory and Practice* (State University of New York Press, Albany, NY, USA, 1988).
- [27] M. Barthélemy, Spatial networks, *Physics Reports* **499**, 1 (2011).
- [28] R. Cohen and S. Havlin, Distances in geographically embedded networks, in *Complex Networks. Structure, Robustness and Function* (Cambridge University Press, Cambridge, UK, 2010) Chap. Chapter 8, pp. 88–90.
- [29] H. Liu, C. Xu, and J. Liang, Dependency distance: A new perspective on syntactic patterns in natural languages, *Physics of Life Reviews* **21**, 171 (2017).
- [30] D. Temperley and D. Gildea, Minimizing syntactic dependency lengths: Typological/Cognitive universal?, *Annual Review of Linguistics* **4**, 67 (2018).
- [31] M. T. Gastner and M. Newman, The spatial structure of networks, *The European Physical Journal B - Condensed Matter and Complex Systems* **49**, 247 (2006).
- [32] M. Ercsey-Ravasz, N. T. Markov, C. Lamy, D. C. V. Essen, K. Knoblauch, Z. Toroczkai, and H. Kennedy, A predictive network model of cerebral cortical connectivity based on a distance rule, *Neuron* **80**, 184 (2013).
- [33] R. Lambiotte, V. D. Blondel, C. de Kerchove, E. Huens, C. Prieur, Z. Smoreda, and P. V. Dooren, Geographical dispersal of mobile communication networks, *Physica*

- A: Statistical Mechanics and its Applications **387**, 5317 (2008).
- [34] D. Gildea and D. Temperley, Optimizing grammars for minimum dependency length, in *Proceedings of the 45th Annual Meeting of the Association of Computational Linguistics* (Association for Computational Linguistics, Prague, Czech Republic, 2007) pp. 184–191.
- [35] H. Liu, Dependency distance as a metric of language comprehension difficulty, *Journal of Cognitive Science* **9**, 159 (2008).
- [36] Y. Albert Park and R. Levy, Minimal-length linearizations for mildly context-sensitive dependency trees, in *Proceedings of the 10th Annual Meeting of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT) conference* (Association for Computational Linguistics, Stroudsburg, PA, USA, 2009) pp. 335–343.
- [37] D. Gildea and D. Temperley, Do grammars minimize dependency length?, *Cognitive Science* **34**, 286 (2010).
- [38] R. Ferrer-i-Cancho and H. Liu, The risks of mixing dependency lengths from sequences of different length, *Glottometry* **5**, 143 (2014).
- [39] R. Futrell, K. Mahowald, and E. Gibson, Large-scale evidence of dependency length minimization in 37 languages, *Proceedings of the National Academy of Sciences* **112**, 10336 (2015).
- [40] R. Futrell, R. P. Levy, and E. Gibson, Dependency locality as an explanatory principle for word order, *Language* **96**, 371 (2020).
- [41] R. Ferrer-i-Cancho, Towards a theory of word order. comment on "dependency distance: A new perspective on syntactic patterns in natural language" by Haitao Liu et al., *Physics of Life Reviews* **21**, 218 (2017).
- [42] R. Ferrer-i-Cancho, Kauffman's adjacent possible in word order evolution, in *The evolution of language: proceedings of the 11th International Conference (EVOLANG11)* (2016).
- [43] R. Ferrer-i-Cancho and R. V. Solé, Optimization in complex networks, in *Statistical Mechanics of complex networks*, Lecture Notes in Physics, Vol. 625, edited by R. Pastor-Satorras, J. Rubí, and A. Díaz-Guilera (Springer, Berlin, 2003) pp. 114–125.
- [44] C. Gómez-Rodríguez and R. Ferrer-i-Cancho, Scarcity of crossing dependencies: A direct outcome of a specific constraint?, *Physical Review E* **96**, 062304 (2017).
- [45] C. Gómez-Rodríguez, M. Christiansen, and R. Ferrer-i-Cancho, Memory limitations are hidden in grammar, <https://arxiv.org/abs/1908.06629>, under review (2020).
- [46] R. Ferrer-i-Cancho, Why might SOV be initially preferred and then lost or recovered? A theoretical framework, in *The Evolution of Language - Proceedings of the 10th International Conference (EVOLANG10)*, edited by E. A. Cartmill, S. Roberts, H. Lyn, and H. Cornish (Wiley, Vienna, Austria, 2014) pp. 66–73, Evolution of Language Conference (Evolang 2014), April 14-17.
- [47] R. Ferrer-i-Cancho and C. Gómez-Rodríguez, Anti dependency length minimization in short sequences. a graph theoretic approach, *Journal of Quantitative Linguistics*, in press. doi: 10.1080/09296174.2019.1645547 (2019).
- [48] J. Díaz, J. Petit, and M. Serna, A survey of graph layout problems, *ACM Computing Surveys* **34**, 313 (2002).
- [49] F. R. K. Chung, On optimal linear arrangements of trees, *Comp. & Maths. with Appls.* **10**, 43 (1984).
- [50] P. Zörnig, The distribution of the distance between like elements in a sequence I., *Glottometrika* **6**, 1 (1984).
- [51] R. Hudson, Measuring syntactic difficulty, Unpublished paper (1995), <http://www.phon.ucl.ac.uk/home/dick/difficulty.htm>.
- [52] S. Hiranuma, Syntactic difficulty in English and Japanese: A textual study, *UCL Working Papers in Linguistics* **11**, 309 (1999).
- [53] E. Eppler, *The syntax of German-English code-switching*, Ph.D. thesis, University College, London (2004), unpublished PhD thesis.
- [54] M. A. Iordanskii, Minimal numberings of the vertices of trees, *Dokl. Akad. Nauk SSSR* **218**, 272 (1974).
- [55] J. L. Esteban, R. Ferrer-i-Cancho, and C. Gómez-Rodríguez, The scaling of the minimum sum of edge lengths in uniformly random trees, *Journal of Statistical Mechanics*, 063401.
- [56] R. Ferrer-i-Cancho, C. Gómez-Rodríguez, and J. L. Esteban, The variation of the sum of edge lengths in linear arrangements of trees, <http://arxiv.org/abs/2006.14069> (2020).
- [57] R. Ferrer-i-Cancho, The sum of edge lengths in random linear arrangements, *Journal of Statistical Mechanics*, 053401.
- [58] G. Cocho, J. Flores, C. Gershenson, C. Pineda, and S. Sánchez, Rank diversity of languages: Generic behavior in computational linguistics, *PLOS ONE* **10**, 1 (2015).
- [59] J. A. Morales, S. Sánchez, J. Flores, C. Pineda, C. Gershenson, G. Cocho, J. Zizumbo, R. F. Rodríguez, and G. Iñiguez, Generic temporal features of performance rankings in sports and games, *EPJ Data Science* **5**, 33 (2016).
- [60] B. L. Monroe, M. P. Colaresi, and K. M. Quinn, Fightin' words: Lexical feature selection and evaluation for identifying the content of political conflict, *Political Analysis* **16**, 372–403 (2017).
- [61] R. Ferrer-i-Cancho, The placement of the head that maximizes predictability. An information theoretic approach, *Glottometrics* **39**, 38 (2017).
- [62] M. H. DeGroot and M. J. Schervish, *Probability and statistics*, 3rd ed. (Wiley, Boston, 2002).
- [63] M. E. J. Newman, Modularity and community structure in networks, *Proceedings of the National Academy of Sciences of the United States of America* **103**, 8577 (2006).
- [64] L. Lei and M. Jockers, Normalized dependency distance: Proposing a new measure, *Journal of Quantitative Linguistics*, 1 (2018).
- [65] S. Roberts and J. Winters, Linguistic diversity and traffic accidents: Lessons from statistical studies of cultural traits, *PLOS ONE* **8**, 1 (2013).
- [66] J. Jiang and H. Liu, The effects of sentence length on dependency distance, dependency direction and the implications-based on a parallel English-Chinese dependency treebank, *Language Sciences* **50**, 93 (2015).
- [67] L. Lei and J. Wen, Is dependency distance experiencing a process of minimization? A diachronic study based on the State of the Union addresses, *Lingua* **239**, 102762 (2020).
- [68] M. Passarotti, How far is Stanford from Prague (and vice versa)? Comparing two dependency-based annotation schemes by network analysis, *L'Analisi linguistica*

- e letteraria **24**, 21 (2016).
- [69] T. Osborne and K. Gerdes, The status of function words in dependency grammar: A critique of Universal Dependencies (UD), *Glossa: A Journal of General Linguistics* **4**, 17 (2019).
- [70] K. Rudnicka, Variation of sentence length across time and genre: influence on the syntactic usage in English, in *Diachronic corpora, genre, and language change*, edited by R. J. Whitt (2018) pp. 219–240.
- [71] Y. Wang and H. Liu, The effects of genre on dependency distance and dependency direction, *Language Sciences* **59**, 135–147 (2017).
- [72] J. R. Clough, J. Gollings, T. V. Loach, and T. S. Evans, Transitive reduction of citation networks, *Journal of Complex Networks* **3**, 189 (2014), <https://academic.oup.com/comnet/article-pdf/3/2/189/1071092/cnu039.pdf>.
- [73] K. Gerdes, B. Guillaume, S. Kahane, and G. Perrier, SUD or surface-syntactic universal dependencies: An annotation scheme near-isomorphic to UD, in *Proceedings of the Second Workshop on Universal Dependencies (UDW 2018)* (Association for Computational Linguistics, Brussels, Belgium, 2018) pp. 66–74.
- [74] K. Gerdes, S. Kahane, and X. Chen, Typometrics: from implicational to quantitative universals in word order typology, *Glossa*, accepted (2020).
- [75] H.-S. Kim, The full-to-partial reduction in Korean and Turkish reduplication, *Linguistic Research* **26**, 121 (2009).
- [76] M. Fedzechkina, E. L. Newport, and T. F. Jaeger, Balancing effort and information transmission during language acquisition: Evidence from word order and case marking, *Cognitive Science* **41**, 416 (2017).
- [77] S. Goldin-Meadow, W. C. So, A. Özyürek, and C. Mylander, The natural order of events: how speakers of different languages represent events nonverbally, *Proceedings of the National Academy of Sciences* **105**, 9163 (2008).
- [78] M. Fedzechkina, T. F. Jaeger, and E. L. Newport, Language learners restructure their input to facilitate efficient communication, *Proceedings of the National Academy of Sciences* **109**, 17897 (2012).
- [79] I. Ros, M. Santesteban, K. Fukumura, and I. Laka, Aiming at shorter dependencies: the role of agreement morphology, *Language, Cognition and Neuroscience* **30**, 1156 (2015).
- [80] R. Dale and G. Lupyan, Understanding the origins of morphological diversity: the linguistic niche hypothesis, *Advances in Complex Systems* **15**, 1150017 (2012).
- [81] V. Kempe and P. J. Brooks, Linking adult second language learning and diachronic change: A cautionary note, *Frontiers in Psychology* **9**, 480 (2018).
- [82] R. Ferrer-i-Cancho, Reply to the commentary “Be careful when assuming the obvious”, by P. Alday, *Language Dynamics and Change* **5**, 147 (2015).
- [83] M. H. Christiansen and N. Chater, The now-or-never bottleneck: a fundamental constraint on language, *Behavioral and Brain Sciences* **39**, 1 (2016).
- [84] Y. Shiloach, A minimum linear arrangement algorithm for undirected trees, *SIAM J. Comput.* **8**, 15 (1979).
- [85] J. Yan and H. Liu, Which annotation scheme is more expedient to measure syntactic difficulty and cognitive demand?, in *Proceedings of the First Workshop on Quantitative Syntax (Quasy, SyntaxFest 2019)* (Association for Computational Linguistics, Paris, France, 2019) pp. 16–24.
- [86] R. Ferrer-i-Cancho and F. Reina, Quantifying the semantic contribution of particles, *Journal of Quantitative Linguistics* **9**, 35 (2002).
- [87] R. Futrell, P. Qian, E. Gibson, E. Fedorenko, and I. Blank, Syntactic dependencies correspond to word pairs with high mutual information, in *Proceedings of the Fifth International Conference on Dependency Linguistics (Depling, SyntaxFest 2019)* (Association for Computational Linguistics, Paris, France, 2019) pp. 3–13.
- [88] K. Hale, Warlpiri and the grammar of non-configurational languages, *Natural Language & Linguistic Theory* **1**, 5 (1983).
- [89] N. Evans and S. C. Levinson, The myth of language universals: language diversity and its importance for cognitive science, *Behavioral and Brain Sciences* **32**, 429 (2009).
- [90] B. Liu and X. Chen, Dependency distance in language evolution: Comment on “Dependency distance: A new perspective on syntactic patterns in natural languages” by Haitao Liu et al., *Physics of Life Reviews* **21**, 194 (2017).
- [91] B. Liu, *Research on Chinese diachronic evolution based on dependency treebanks*, Ph.D. thesis, Communication University of China (2013), in Chinese.
- [92] M. Dunn, S. J. Greenhill, S. C. Levinson, and R. D. Gray, Evolved structure of language shows lineage-specific trends in word-order universals, *Nature* **473**, 79 (2011).
- [93] A. S. Cohen and B. Elvevåg, Automated computerized analysis of speech in psychiatric disorders, *Current Opinion in Psychiatry* **27**, 203 (2014).
- [94] J. Ouyang and J. Jiang, Can the probability distribution of dependency distance measure language proficiency of second language learners?, *Journal of Quantitative Linguistics* **25**, 295 (2018).
- [95] S. Komori, M. Sugiura, and W. Li, Examining MDD and MHD as syntactic complexity measures with intermediate Japanese learner corpus data, in *Proceedings of the Fifth International Conference on Dependency Linguistics (Depling, SyntaxFest 2019)* (Association for Computational Linguistics, Paris, France, 2019) pp. 130–135.
- [96] G. Zamora-López and R. Brasseur, Sizing complex networks, *Communications Physics* **2**, 144 (2019).
- [97] M. E. J. Newman, *Networks. An introduction* (Oxford University Press, Oxford, 2010).
- [98] R. Ferrer-i-Cancho, The placement of the head that minimizes online memory. A complex systems approach, *Language Dynamics and Change* **5**, 114 (2015).
- [99] R. Ferrer-i-Cancho, Some word order biases from limited brain resources. A mathematical approach, *Advances in Complex Systems* **11**, 393 (2008).
- [100] R. Ferrer-i-Cancho and C. Gómez-Rodríguez, Liberating language research from dogmas of the 20th century., *Glottometrics* **33**, 33 (2016).
- [101] R. Durstenfeld, Algorithm 235: Random permutation, *Commun. ACM* **7**, 420 (1964).
- [102] J. D. Gibbons and S. Chakraborti, *Nonparametric statistical inference* (Chapman and Hall/CRC, Boca Raton, FL, 2010) 5th edition.
- [103] P. Embrechts, A. McNeil, and D. Straumann, Corre-

- lation and dependence in risk management: properties and pitfalls, in *Risk management: value at risk and beyond*, edited by M. A. H. Dempster (Cambridge University Press, Cambridge, 2002) pp. 176–223.
- [104] R. Ferrer-i-Cancho, Hubiness, length, crossings and their relationships in dependency trees, *Glottometrics* **25**, 1 (2013).
- [105] J. L. Esteban and R. Ferrer-i-Cancho, A correction on Shiloach’s algorithm for minimum linear arrangement of trees, *SIAM Journal of Computing* **46**, 1146 (2015).
- [106] R. A. Wright, B. Richmond, A. Odlyzko, and B. D. McKay, Constant time generation of free trees, *SIAM J. Comput.* **15**, 540 (1986).
- [107] N. Nethercote, P. Stuckey, R. Becket, S. Brand, G. Duck, and G. Tack, MiniZinc: Towards a standard CP modelling language, in *Proceedings of the 13th International Conference on Principles and Practice of Constraint Programming, volume 4741 of LNCS*, edited by C. Bessiere (Springer, 2007) p. 529–543.
- [108] P. J. Stuckey, T. Feydy, A. Schutt, G. Tack, and J. Fischer, The MiniZinc challenge 2008-2013, *AI Magazine* **35**, 55–60 (2014).
- [109] G. Chu, P. J. Stuckey, A. Schutt, T. Ehlers, G. Gange, and K. Francis, Chuffed, a lazy clause generation solver, <https://github.com/chuffed/chuffed> (2019), accessed: 06-28-2019.
- [110] R. Ferrer-i-Cancho, Non-crossing dependencies: least effort, not grammar, in *Towards a theoretical framework for analyzing complex linguistic networks*, edited by A. Mehler, A. Lücking, S. Banisch, P. Blanchard, and B. Job (Springer, Berlin, 2016) pp. 203–234.
- [111] M.-C. de Marneffe, T. Dozat, N. Silveira, K. Haverinen, F. Ginter, J. Nivre, and C. D. Manning, Universal Stanford dependencies: a cross-linguistic typology, in *Proceedings of the Ninth International Conference on Language Resources and Evaluation (LREC’14)*, edited by N. C. C. Chair, K. Choukri, T. Declerck, H. Loftsson, B. Maegaard, J. Mariani, A. Moreno, J. Odijk, and S. Piperidis (European Language Resources Association (ELRA), Reykjavik, Iceland, 2014) pp. 4585–4592.
- [112] M.-C. de Marneffe and C. D. Manning, The Stanford typed dependencies representation, in *COLING 2008: Proceedings of the workshop on Cross-Framework and Cross-Domain Parser Evaluation* (COLING 2008 Organizing Committee, 2008) pp. 1–8.
- [113] J. Bresnan, *Lexical-Functional Syntax* (Blackwell, Chichester, United Kingdom, 2000).
- [114] J. Hajič, J. Panevová, E. Hajičová, P. Sgall, P. Pajas, J. Štěpánek, J. Havelka, M. Mikulová, Z. Žabokrtský, M. Ševčíková-Razimová, and Z. Urešová, Prague dependency treebank 2.0, CDROM CAT: LDC2006T01, ISBN 1-58563-370-4. Linguistic Data Consortium (2006).
- [115] P. Sgall, *A functional approach to syntax in generative description of language* (Elsevier, 1969).
- [116] E. Hajicova, Prague school syntax and semantics, in *Concise History of the Language Sciences*, edited by E. Koerner and R. Asher (Pergamon, Amsterdam, 1995) pp. 253 – 262.
- [117] M. C. Passarotti, How far is Stanford from Prague (and vice versa)? Comparing two dependency-based annotation schemes by network analysis, *L’analisi Linguistica e Letteraria* **1**, 21 (2016).
- [118] D. Zeman, J. Nivre, M. Abrams, E. Ackermann, N. Aeppli, Ž. Agić, L. Ahrenberg, C. K. Ajede, G. Aleksandravičiūtė, L. Antonsen, *et al.*, Universal dependencies 2.6 (2020), LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University.
- [119] Universal Dependencies, <https://universaldependencies.org/> ().
- [120] The converter tool, <https://github.com/surfacesyntacticud/tools/tree/master/converter> ().
- [121] Surface Syntactic Universal Dependencies, <https://surfacesyntacticud.github.io/data/>.
- [122] D. Zeman, M. Popel, M. Straka, J. Hajič, J. Nivre, F. Ginter, J. Luotolahti, S. Pyysalo, S. Petrov, M. Potthast, *et al.*, CoNLL 2017 shared task: Multilingual parsing from raw text to universal dependencies, in *Proceedings of the CoNLL 2017 Shared Task: Multilingual Parsing from Raw Text to Universal Dependencies* (Association for Computational Linguistics, Vancouver, Canada, 2017) pp. 1–19.
- [123] R. Rosa, J. Mašek, D. Mareček, M. Popel, D. Zeman, and Z. Žabokrtský, HamleDT 2.0: Thirty dependency treebanks stanfordized, in *Proceedings of the Ninth International Conference on Language Resources and Evaluation (LREC’14)*, edited by N. C. C. Chair, K. Choukri, T. Declerck, H. Loftsson, B. Maegaard, J. Mariani, A. Moreno, J. Odijk, and S. Piperidis (European Language Resources Association (ELRA), Reykjavik, Iceland, 2014) pp. 2334–2341.
- [124] Languages and treebanks in HamleDT 2.0, <https://ufal.mff.cuni.cz/hamledt/hamledt-treebanks-20>.
- [125] Hamledt 2.0, <https://lindat.mff.cuni.cz/repository/xmlui/handle/11858/00-097C-0000-0023-9551-4?show=full>.
- [126] M. Ballesteros and J. Nivre, Going to the roots of dependency parsing., *Computational Linguistics* **39**, 5 (2013).
- [127] F. Bretz, T. Hothorn, and P. Westfall, *Multiple comparisons using R* (CRC Press, Boca Raton, 2011).
- [128] V. Flaška, J. Ježek, T. Kepka, and J. Kortelainen, Transitive closures of binary relations. i., *Acta Universitatis Carolinae. Mathematica et Physica* **48**, 55 (2007).
- [129] J. L. Gross, J. Yellen, and M. Anderson, *Graph Theory and Its Applications*, 3rd ed., Discrete Mathematics and Its Applications (Chapman & Hall/CRC, Boca Raton, 2018).
- [130] A. V. Aho, M. R. Garey, and J. D. Ullman, The transitive reduction of a directed graph, *SIAM Journal on Computing* **1**, 131 (1972).
- [131] H. T. Hsu, An algorithm for finding a minimal equivalent graph of a digraph, *J. ACM* **22**, 11–16 (1975).
- [132] M. Burda, paircompviz: Multiple comparison test visualization. R package version 1.26.0. (2020).
- [133] K. Ciomek, hasseDiagram. R package version 0.1.3. (2017).
- [134] M. Kaiser, Mean clustering coefficients: the role of isolated nodes and leafs on clustering measures for small-world networks, *New Journal of Physics* **10**, 083042 (2008).
- [135] U. Brandes and T. Erlebach, *Network Analysis* (Springer, Heidelberg, 2005).
- [136] D. Barmpoutis and R. M. Murray, Networks with the smallest average distance and the largest average clustering, <https://arxiv.org/abs/1007.4031> (2010).