

HMCNAS: NEURAL ARCHITECTURE SEARCH USING HIDDEN MARKOV CHAINS AND BAYESIAN OPTIMIZATION

Vasco Lopes, Lus A. Alexandre

NOVA LINCS

Universidade da Beira Interior, Portugal

{vasco.lopes, luis.alexandre}@ubi.pt

ABSTRACT

Neural Architecture Search has achieved state-of-the-art performance in a variety of tasks, out-performing human-designed networks. However, many assumptions, that require human definition, related with the problems being solved or the models generated are still needed: final model architectures, number of layers to be sampled, forced operations, small search spaces, which ultimately contributes to having models with higher performances at the cost of inducing bias into the system. In this paper, we propose HMCNAS, which is composed of two novel components: i) a method that leverages information about human-designed models to autonomously generate a complex search space, and ii) an Evolutionary Algorithm with Bayesian Optimization that is capable of generating competitive CNNs from scratch, without relying on human-defined parameters or small search spaces. The experimental results show that the proposed approach results in competitive architectures obtained in a very short time. HMCNAS provides a step towards generalizing NAS, by providing a way to create competitive models, without requiring any human knowledge about the specific task.

1 INTRODUCTION

The ever-growing success of Machine Learning (ML) applications created a demand for ML systems that can be used off-the-shelf without care for its inner components. This success is mostly attributed to Deep Learning algorithms, especially Neural Networks, which obtained state-of-the-art results in a variety of problems and have been used extensively with great success (LeCun et al., 2015; Schmidhuber, 2015). Deep learning architectures removed the need for extensive hand-crafted feature extraction and pre-processing steps (Goodfellow et al., 2016). However, applying a ML algorithm to a problem without being explicitly tailor-made for that specific problem, usually results in non-optimal performances, wherein some cases, the models will even yield poor performances. Moreover, designing tailor-made ML algorithms and high performant models can be a difficult task, as there are many design choices that are not independent of each another. This is especially true when talking about Deep Neural Networks, which have parameters associated with the training procedure, the architecture, optimization rules, layers combination and even how to mitigate problems such as overfitting and vanishing or exploding gradient (Pascanu et al., 2012; Srivastava et al., 2014), requiring years of expertise and increasingly demand for architecture engineering. Thus, the need for automating the design of Neural Networks become logical (Hutter et al., 2019).

Neural Architecture Search (NAS) is a subset of AutoML, that intends to automate architecture engineering (Elsken et al., 2019b). NAS methods have been successfully applied to image classification tasks (Cai et al., 2018b; Liu et al., 2019b; Zela et al., 2020), semantic segmentation (Liu et al., 2019a), object detection (Chen et al., 2019b), image generation (Gong et al., 2019; Gao et al., 2020), among others. However, even though NAS methods perform well on designing Convolutional Neural Networks (CNNS), they still encounter many problems: 1) the time taken for completing the whole process is in the order of days, and in some cases, months of GPU computing; 2) search spaces are designed by humans, which are usually small and contain complex operations that are comprised of multiple atomic operations, ultimately introducing bias and helping the generated ar-

chitectures to achieve better results; 3) the size, and regularly, the final architecture of the generated networks is specified by the users; and 4) the inference time of the generated methods is usually poor, due to the fact that generated methods grow both in breadth and depth.

To mitigate the problems mentioned above, in this work, we propose a NAS method that performs a macro-architecture search, without explicitly defining any outer-skeleton or initial architecture. Moreover, the proposed method can autonomously generate a search space, and at the same time, leverage information about human-designed networks, which were the result of years of expertize, practice and many trial-and-error experiments. To generate the search space, we use all the CNNs implemented in PyTorch, which tremendously increases the operations pool (search space) when compared to other NAS methods. Then, we generate a Hidden Markov Chain for each model and assign a Fitness to it, by evaluating the method using the validation set.

The search strategy uses Bayesian Optimization to generate networks, which are partially trained and then evaluated in the validation set, which sets their Fitness score. Evolutionary Strategies are also used to allow the system to evolve for several generations, based on the architectures generated in the previous generation. In the end, the best model (highest ranking fitness) is trained from scratch until convergence. The proposed method is capable of generating competitive networks in only a few GPU hours.

The main contributions of this work are:

- A novel NAS method, that designs complete architectures from scratch, without requiring human-defined parameters, restricting the number of layers, or specifically forcing an architecture shape or structure;
- A simple, yet effective Search Strategy coupled with Bayesian Optimization, that with only a few GPU hours can create, from scratch, competitive CNNs;
- A novel way of autonomously designing search spaces, by leveraging information about prior networks to create Hidden Markov Chains that contain information about layer transition and layer components.

The remainder of this work is structured as follows: Section 2, presents a background an related work study. Section 3 presents, in detail, the proposed method. Section 4 explains the experiments conducted and the setup. Section 5 provides a conclusion.

2 BACKGROUND AND RELATED WORK

NAS is a field of research that focuses on developing algorithms for automating the design of Neural Networks, which are widely used in the field of ML. NAS methods are composed of several components: i) the search space, which defines the pool of possible operations and ultimately, the type(s) of networks that can be designed; ii) the search strategy, that defines the approach that is used to explore the search space and generate architectures; and iii) the performance estimation strategy, which is responsible for evaluating the performance of the generated architectures. The architecture search can be done by performing either a micro or a macro-search. In micro-search, methods focus on creating cells or blocks that are replicated multiple times to comply with an outer-skeleton architecture, defined by humans, whereas, in macro-search, NAS methods try to evolve entire network architectures.

NAS was initially formulated as a Reinforcement Learning (RL) problem, where a controller was trained over-time to sample more efficient architectures (Zoph & Le, 2017). Although this was a novel and significant contribution, it required more than 60 years of computation to solve a particular task. In (Zoph et al., 2018), a cell-based search in a search space of 13 operations was performed to find reduction cells (reduce input size), and normal cells (perform operations). These cells were then stacked to form entire networks. The authors also found that the final architecture designed using CIFAR-10 (Krizhevsky et al., 2009), could be successfully transferred to ImageNet (Deng et al., 2009) by stacking more cells, achieving state-of-the-art results in both datasets. The downside was that this method took over 2000 days of computation to achieve good results.

The use of RL as a mechanism for performing NAS is a common approach. In (Baker et al., 2017), the authors use Q-learning to train the sampler agent. Using a similar approach, (Zhong et al., 2018)

performs NAS by sampling blocks of operations instead of cells, which can then be replicated to form networks. More recently, ENAS (Pham et al., 2018), using a controller to discover architectures by searching for an optimal subgraph within a large computational graph, showed that it was possible to use RL, requiring only a few computational days. DARTS, a gradient-based method, showed that by performing a continuous relaxation of the parameters, they could be optimized using a bi-level gradient optimization in a few GPU days (Liu et al., 2019b). This work was then improved using regularization mechanisms (Zela et al., 2020) and served as the basis for many others (Xie et al., 2018; Chen et al., 2019a; Cai et al., 2018b; Xu et al., 2020). Evolutionary-based NAS takes inspiration from biologic systems and is a promising NAS line of research, as it includes methods for evolving state-of-the-art architectures (Real et al., 2019), to hierarchically represent architectures and allow easier search (Liu et al., 2018).

More in-line with our work, are methods that perform macro-search, such as ENAS (Pham et al., 2018), which is an efficient approach to macro-search NAS. However, ENAS contains some drawbacks. First, the number of layers for the final architecture needs to be specified. Finally, the search space is composed of 6 operations: $\{3 * 3, 5 * 5\}$ convolutions, $\{3 * 3, 5 * 5\}$ depthwise-separable convolutions and max pooling and average pooling with a kernel size of $3 * 3$, at the same time forcing residual blocks, by sampling 2 previous layers to serve as input to the next one, not allowing for true search and introducing bias. On the other hand, NAS (Zoph & Le, 2017), while capable of generating architectures from scratch, uses a controller that is explicitly parameterized to sample architectures with no less than 6 layers, and to increase that size by 2 every 1600 samples, while taking 22400 GPU days to sample an efficient architecture for CIFAR-10. LEMONADE (Elsken et al., 2019a), designs architectures by performing three network morphism operations - insert convolution, insert skip connection, and increase the number of filters, requiring an initial architecture, where these operations are then performed.

In this paper, we propose **HMCNAS**, a method capable of generating a CNN from scratch, in a complex, arbitrarily large, search space, that is automatically created without human-intervention or compounded operations (complex operations that are the result of combining two or more operations), and that does not require any parameterization regarding the number number of layers nor its architecture.

3 PROPOSED METHOD

The proposed method is composed of several parts: i) a novel search space mechanism, which is capable of autonomously creating new search spaces, and in our case, uses information about human-designed networks, since those networks are the result of years of expertise, trial and error, and are known to perform well; and ii) a novel NAS mechanism, that performs Bayesian optimization with evolutionary strategies. In the next sections, we detail the novel approaches proposed in this work: the novel strategy to create search spaces and the new way of representing networks to allow the generation of new architectures using Bayesian optimization.

3.1 SEARCH SPACE

In this work, the search space is composed of the operations contained in human-generated networks that are known to do well. From these, we extract information regarding the layer transition probabilities and create a Hidden Markov chain for each network, where vertices represent Layers and edges represent the probability of going from one layer to the next. A node also contains probabilities for different layer components. The Hidden Markov chains represent the initial population (the search space), forcing the search space to be the possible operations and components that were used in those networks. This means that, in contrast to the most common search spaces that use just a few operations, our method has a search space which is inherited from other methods - requiring no definition or human intervention. Moreover, it does not require the specification of the number of layers that the networks should have, and is extremely flexible, as new networks with different operations can be added with ease.

To create the HMCNAS the initial population, we use the implemented CNN models present on TorchVision 1.6: AlexNet (Krizhevsky, 2014), GoogLeNet (Szegedy et al., 2015), Inception v3 (Szegedy et al., 2016), VGG $\{11, 16, 19\}$ and their batch normalization versions (Simonyan & Zis-

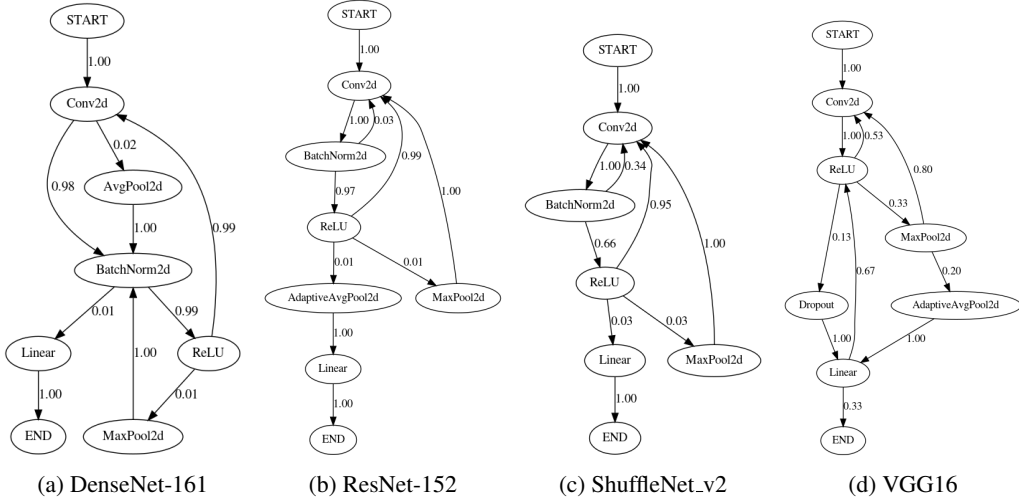


Figure 1: Example of generated Hidden Markov-Chains for human-designed models.

serman, 2015), ResNet {18, 34, 50, 101, 252} (He et al., 2016), ResNext {50, 101} (Xie et al., 2017), DenseNet {121, 161, 169, 201} (Huang et al., 2017), MNASNet {0.5, 0.75, 1.0, 1.3} (Tan et al., 2019), MobileNet v2 (Sandler et al., 2018), ShuffleNet v2 {0.5, 1.0, 1.5, 2.0} (Ma et al., 2018), SqueezeNet {1.0, 1.1} (Iandola et al., 2016), and Wide ResNet {50, 101} (Zagoruyko & Komodakis, 2016), thus totaling 34 models, which results in a search space of 19 different operations. Examples of generated Markov-Chains of PyTorch models are shown in Figure 1.

Each of the models that comprise the search space were trained for 1 epoch and then had their performance evaluated using the validation set, from which the validation accuracy was extracted to be used as fitness in the upcoming processes. For our experiments, we did this using the CIFAR-10 dataset, in two different setups: using the entire dataset, and a partial dataset, that comprises a stratified 10% of the entire dataset. The fitness of each model and the time taken to create both search spaces can be seen in Table 1.

3.2 DESIGNING CONVOLUTIONAL NEURAL NETWORKS

After the initial population has been created, as opposed to most common strategies, which are based on reinforcement learning, gradient descent or evolutionary strategies, the proposed method, uses Bayesian Optimization and an Evolutionary Algorithm to perform the search. In this, a new generation is created by: 1) performing Elitism, where the 15% best individuals from the previous generation are copied without modifications, and 2) generating new individuals using Bayesian Optimization, where layers are sampled from the individuals of the previous generation based on their fitness. A model is sampled using the roulette wheel algorithm, where models that do not contain the current layer are removed from the pool of selections. After selecting a model, the next layer and the inner components are sampled from all the possible transitions, taken into account the probability of state transition from the parent model. Then, partial training is performed, and the validation accuracy is obtained, which serves as Fitness score. In the end, State Transition Hidden Markov-Chains are generated for all the new individuals and the generation is incremented by one.

As opposed to other methods that force residual blocks by having every layer input coming from two other layers, we included residual blocks as a design choice. When a convolutional layer is sampled from the search space, there is a small percentage of it being replaced with a residual block, similar to the Bottleneck in ResNet (Zagoruyko & Komodakis, 2016).

The last component of the proposed method is the model selection, where the best individual from the last generation is selected and trained from scratch for several epochs and evaluated using the test set.

Table 1: Accuracy of each method that composes the search space, both using entire and partial CIFAR-10 dataset. The last row represents the time, in GPU days, taken to create the entire search space using a GeForce 1080Ti graphics card.

Model	CIFAR-10 Accuracy (%)		Model	CIFAR-10 Accuracy (%)	
	Partial	Entire		Partial	Entire
AlexNet	49.60	82.92	ShuffleNet_v2_x0.5	68.60	86.21
DenseNet121	81.10	93.51	ShuffleNet_v2_x1.0	78.80	91.00
DenseNet161	87.50	95.22	ShuffleNet_v2_x1.5	23.30	46.53
DenseNet169	86.20	94.15	ShuffleNet_v2_x2.0	24.50	48.07
DenseNet201	85.30	95.35	SqueezeNet1.0	25.10	75.34
GoogLeNet	82.70	92.94	SqueezeNet1.1	29.90	74.49
MNASNet0.5	3.20	12.38	VGG11	64.20	87.93
MNASNet0.75	9.80	16.19	VGG11_bn	73.40	92.05
MNASNet1.0	3.20	80.89	VGG13	55.60	87.22
MNASNet1.3	9.20	9.56	VGG13_bn	71.90	90.96
MobileNet_v2	79.30	90.98	VGG16	39.40	97.13
ResNet18	82.00	92.77	VGG16_bn	75.60	93.18
ResNet34	79.80	93.90	VGG19	33.00	87.25
ResNet50	87.20	94.18	VGG19_bn	78.70	93.34
ResNet101	89.50	95.13	Wide ResNet50.2	86.60	94.62
ResNet152	88.30	95.77	Wide ResNet101.2	86.50	94.67
ResNeXt50_32x4d	88.10	95.15			
ResNeXt101_32x8d	92.20	96.56	Δt (days)	0.016	0.143

4 EXPERIMENTS

4.1 EXPERIMENTAL SETUP

To evaluate the proposed method, we used the following parameters: the number of generations, n was 50, the number of individuals nI per generation was 25. Elitism was set to 15%, meaning that the 15% individuals with highest fitness from generation i is passed to generation $i + 1$ without any changes or further training in the next generation. The number of epochs to perform the partial train while searching for architectures was 1, and the number of epochs to train the best model after completing all the generations was 100, using Stochastic Gradient Descent (Bottou et al., 2018).

To conduct the experiments, we used a computer with an NVidia GeForce GTX 1080 Ti, 16Gb of ram, SSD disk and an AMD Ryzen 7 2700 processor.

4.2 RESULTS

In this experiment, we search for entire neural network architectures using the partial CIFAR-10 dataset, where training set was split up in training (4k) and a validation set (1k). In the process of training the final model, the CIFAR-10 dataset was used entirely: 40k images for train, 10k for validation, and the test set remained unchanged, with 10k images. To perform the search, the proposed method took 0.18 days, and the final model, obtained a test error of 9.41%. The results are compared against the state-of-the-art in Table 2, where the first block represents a high performant human-designed network, and the second block presents the results of different approaches that design entire networks. Note that, while HMCNAS has a higher error rate, it is extremely fast, requiring only 0.23 days to search for a competitive model. Moreover, it was done using a more complex search space, without any required human-defined parameters, as opposed to the other methods that require a definition of initial architectures, the number of layers to be sampled, and rely on small and biased search spaces. Thus, HMCNAS is a promising approach to generalize NAS, as for many problems (including new and unseen ones), it may be the only viable option, as the need for defined parameters relies on human knowledge about the specific problem.

Table 2: Classification errors of different methods on CIFAR-10. The first block presents state-of-the-art human-designed networks. The second block presents approaches that design the entire networks. Acronyms used: RL - Reinforcement Learning, OS - One Shot, EA - Evolutionary Algorithm, GB - Gradient Boost, BO - Bayesian Optimization, R - Random.

Architecture	Test Error (%)	Search Cost (GPU Days)	Params (M)	Search Method
DenseNet-BC (Huang et al., 2017)	3.46	-	25.6	manual
Budgeted Super Nets (Veniat & Denoyer, 2018)	9.21	-	-	-
ConvFabrics (Saxena & Verbeek, 2016)	7.43	-	21.2	-
Macro NAS + Q-Learning (Baker et al., 2016)	6.92	80-100	11.2	RL
Net Transformation (Cai et al., 2018a)	5.7	10	19.7	RL
SMASH (Brock et al., 2017)	4.03	1.5	16.0	OS
NAS (Zoph & Le, 2017)	4.47	22400	7.1	RL
NAS + more filters (Zoph & Le, 2017)	3.65	22400	37.4	RL
ENAS (Pham et al., 2018)	3.87	0.32	38.0	RL
LEMONADE I (Elsken et al., 2019a)	3.37	56	8.9	EA
RandGrow (Hu et al., 2018)	2.93	6	3.1	R
Petridish (Hu et al., 2019)	2.83	5	2.2	GB
HMCNAS	9.41	0.23	5.1	EA+BO

5 CONCLUSIONS

In this work, we propose a novel approach to the problem of neural architecture search for designing entire architectures from scratch. Our method is capable of automatically designing search spaces, and leverages human knowledge by using information about some of the best Human-designed networks, which were the result of years of experience and trial and error. By using such information, we can create state transition Hidden Markov-chains of each one of the networks and use that to generate new architectures.

By using a Bayesian selection, the method is extremely fast and even though it gives more importance to the best networks of the previous generation, it allows for controlled novelty search by also selecting components from networks with smaller fitnesses. The proposed method not only removes the need to specify the possible operations, but also the number of nodes (layers) to be sampled, and information about initial architectures or final skeletons. HMCNAS provides a step towards generalizing NAS, by providing a way to create competitive models, without requiring any human knowledge about the specific task.

REFERENCES

- Bowen Baker, Otkrist Gupta, Nikhil Naik, and Ramesh Raskar. Designing neural network architectures using reinforcement learning. *arXiv preprint arXiv:1611.02167*, 2016.
- Bowen Baker, Otkrist Gupta, Nikhil Naik, and Ramesh Raskar. Designing Neural Network Architectures using Reinforcement Learning. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*, 2017.
- Léon Bottou, Frank E Curtis, and Jorge Nocedal. Optimization methods for large-scale machine learning. *Siam Review*, 60(2):223–311, 2018.
- Andrew Brock, Theodore Lim, James M Ritchie, and Nick Weston. Smash: one-shot model architecture search through hypernetworks. *arXiv preprint arXiv:1708.05344*, 2017.
- Han Cai, Tianyao Chen, Weinan Zhang, Yong Yu, and Jun Wang. Efficient architecture search by network transformation. In *Thirty-Second AAAI conference on artificial intelligence*, 2018a.

-
- Han Cai, Ligeng Zhu, and Song Han. Proxylessnas: Direct neural architecture search on target task and hardware. *arXiv preprint arXiv:1812.00332*, 2018b.
- Xin Chen, Lingxi Xie, Jun Wu, and Qi Tian. Progressive differentiable architecture search: Bridging the depth gap between search and evaluation. In *Proceedings of the IEEE International Conference on Computer Vision*, pp. 1294–1303, 2019a.
- Yukang Chen, Tong Yang, Xiangyu Zhang, Gaofeng Meng, Chunhong Pan, and Jian Sun. Detnas: Neural architecture search on object detection. *arXiv preprint arXiv:1903.10979*, 1(2):4–1, 2019b.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee, 2009.
- Thomas Elsken, Jan Hendrik Metzen, and Frank Hutter. Efficient multi-objective neural architecture search via lamarckian evolution. In *International Conference on Learning Representations*, 2019a. URL <https://openreview.net/forum?id=ByME42AqK7>.
- Thomas Elsken, Jan Hendrik Metzen, and Frank Hutter. Neural architecture search: A survey. *Journal of Machine Learning Research*, 20(55):1–21, 2019b.
- Chen Gao, Yunpeng Chen, Si Liu, Zhenxiong Tan, and Shuicheng Yan. Adversarialnas: Adversarial neural architecture search for gans. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 5680–5689, 2020.
- Xinyu Gong, Shiyu Chang, Yifan Jiang, and Zhangyang Wang. Autogan: Neural architecture search for generative adversarial networks. In *Proceedings of the IEEE International Conference on Computer Vision*, pp. 3224–3234, 2019.
- Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep learning*. MIT press, 2016.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778, 2016.
- Hanzhang Hu, John Langford, Rich Caruana, Eric Horvitz, and Debadeepta Dey. Macro neural architecture search revisited. In *2nd Workshop on Meta-Learning at NeurIPS*, 2018.
- Hanzhang Hu, John Langford, Rich Caruana, Saurajit Mukherjee, Eric J Horvitz, and Debadeepta Dey. Efficient forward architecture search. In *Advances in Neural Information Processing Systems*, pp. 10122–10131, 2019.
- Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger. Densely connected convolutional networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4700–4708, 2017.
- Frank Hutter, Lars Kotthoff, and Joaquin Vanschoren. *Automated Machine Learning*. Springer, 2019.
- Forrest N Iandola, Song Han, Matthew W Moskewicz, Khalid Ashraf, William J Dally, and Kurt Keutzer. Squeezenet: Alexnet-level accuracy with 50x fewer parameters and 0.5 mb model size. *arXiv preprint arXiv:1602.07360*, 2016.
- Alex Krizhevsky. One weird trick for parallelizing convolutional neural networks. *arXiv preprint arXiv:1404.5997*, 2014.
- Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. Technical report, Citeseer, 2009.
- Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *Nature*, 521(7553):436–444, 2015.

-
- Chenxi Liu, Liang-Chieh Chen, Florian Schroff, Hartwig Adam, Wei Hua, Alan L Yuille, and Li Fei-Fei. Auto-deeplab: Hierarchical neural architecture search for semantic image segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 82–92, 2019a.
- Hanxiao Liu, Karen Simonyan, Oriol Vinyals, Chrisantha Fernando, and Koray Kavukcuoglu. Hierarchical Representations for Efficient Architecture Search. In *International Conference on Learning Representations*, 2018.
- Hanxiao Liu, Karen Simonyan, and Yiming Yang. DARTS: Differentiable architecture search. In *International Conference on Learning Representations*, 2019b.
- Ningning Ma, Xiangyu Zhang, Hai-Tao Zheng, and Jian Sun. Shufflenet v2: Practical guidelines for efficient cnn architecture design. In *Proceedings of the European conference on computer vision (ECCV)*, pp. 116–131, 2018.
- Razvan Pascanu, Tomas Mikolov, and Yoshua Bengio. Understanding the exploding gradient problem. *CoRR, abs/1211.5063*, 2:417, 2012.
- Hieu Pham, Melody Guan, Barret Zoph, Quoc Le, and Jeff Dean. Efficient neural architecture search via parameters sharing. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pp. 4095–4104. PMLR, 10–15 Jul 2018.
- Esteban Real, Alok Aggarwal, Yanping Huang, and Quoc V Le. Regularized Evolution for Image Classifier Architecture Search. In *Proceedings of the AAAI conference on Artificial Intelligence*, volume 33, pp. 4780–4789, 2019.
- Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4510–4520, 2018.
- Shreyas Saxena and Jakob Verbeek. Convolutional neural fabrics. In *Advances in Neural Information Processing Systems*, pp. 4053–4061, 2016.
- Jürgen Schmidhuber. Deep Learning in Neural Networks: An Overview. *Neural networks*, 61: 85–117, 2015.
- Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. In *International Conference on Learning Representations*, 2015.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *The journal of machine learning research*, 15(1):1929–1958, 2014.
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 1–9, 2015.
- Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2818–2826, 2016.
- Mingxing Tan, Bo Chen, Ruoming Pang, Vijay Vasudevan, Mark Sandler, Andrew Howard, and Quoc V Le. Mnasnet: Platform-aware neural architecture search for mobile. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2820–2828, 2019.
- Tom Veniat and Ludovic Denoyer. Learning time/memory-efficient deep architectures with budgeted super networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 3492–3500, 2018.
- Saining Xie, Ross Girshick, Piotr Dollár, Zhuowen Tu, and Kaiming He. Aggregated residual transformations for deep neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 1492–1500, 2017.

-
- Sirui Xie, Hehui Zheng, Chunxiao Liu, and Liang Lin. Snas: stochastic neural architecture search. *arXiv preprint arXiv:1812.09926*, 2018.
- Yuhui Xu, Lingxi Xie, Xiaopeng Zhang, Xin Chen, Guo-Jun Qi, Qi Tian, and Hongkai Xiong. Pc-darts: Partial channel connections for memory-efficient architecture search. In *International Conference on Learning Representations*, 2020.
- Sergey Zagoruyko and Nikos Komodakis. Wide residual networks. *Proceedings of the British Machine Vision Conference 2016*, 2016. doi: 10.5244/c.30.87. URL <http://dx.doi.org/10.5244/C.30.87>.
- Arber Zela, Thomas Elsken, Tonmoy Saikia, Yassine Marrakchi, Thomas Brox, and Frank Hutter. Understanding and Robustifying Differentiable Architecture Search. In *International Conference on Learning Representations*, 2020.
- Zhao Zhong, Junjie Yan, Wei Wu, Jing Shao, and Cheng-Lin Liu. Practical Block-Wise Neural Network Architecture Generation. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2018*, 2018.
- Barret Zoph and Quoc V. Le. Neural architecture search with reinforcement learning. In *International Conference on Learning Representations 2017 (ICLR)*, 2017.
- Barret Zoph, Vijay Vasudevan, Jonathon Shlens, and Quoc V. Le. Learning transferable architectures for scalable image recognition. *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, Jun 2018. doi: 10.1109/cvpr.2018.00907. URL <http://dx.doi.org/10.1109/CVPR.2018.00907>.