
ANALYSING RISK OF CORONARY HEART DISEASE THROUGH DISCRIMINATIVE NEURAL NETWORKS

Ayush Khaneja[†], Siddharth Srivastava^{*‡}, Astha Rai^{*}, A S Cheema^{*}, P K Srivastava^{*}

[†]Vellore Institute of Technology, Vellore, India

^{*}Centre for Development of Advanced Computing, Noida, India

Email: ayush.khaneja@gmail.com, {siddharthsrivastava, asthar, ascheema, pksrivastava}@cdac.in

ABSTRACT

The application of data mining, machine learning and artificial intelligence techniques in the field of diagnostics is not a new concept, and these techniques have been very successfully applied in a variety of applications, especially in dermatology and cancer research. But, in the case of medical problems that involve tests resulting in true or false (binary classification), the data generally has a class imbalance with samples majorly belonging to one class (ex: a patient undergoes a regular test and the results are false). Such disparity in data causes problems when trying to model predictive systems on the data. In critical applications like diagnostics, this class imbalance cannot be overlooked and must be given extra attention. In our research, we depict how we can handle this class imbalance through neural networks using a discriminative model and contrastive loss using a Siamese neural network structure. Such a model does not work on a probability-based approach to classify samples into labels. Instead it uses a distance-based approach to differentiate between samples classified under different labels. The code is available at <https://tinyurl.com/DiscriminativeCHD>

Keywords First keyword · Second keyword · More

1 Introduction

The medical practitioners especially in tertiary care hospitals work under tremendous workload resulting in a considerable impact on patient care [1, 2]. Further, machine learning has shown promise in assisting medical practitioners such as predicting diseases[3], prognosis[4], complications[5] and many more [6]. Therefore, there is a need for automated diagnostic systems that can work based on patient details such as age, gender, medical history etc. Also, the level of skill and knowledge of medical professionals is highly variable [7, 8]. Through our work, we aim at providing a solution to these problems by developing a model that can perform binary classification (predicting if a patient is at risk of suffering from a particular disease or not) while handling problems of real-life data like class imbalance [8]. To demonstrate the effectiveness of the proposed method we select the Heart diseases are one of the most common ailments in the current times due to a lifestyle of fast food, stress, no exercise, and vices like smoking and drinking. Thus, it becomes an important medical problem to be able to predict heart-related problems efficiently. We build our model to predict the risk of coronary heart disease in patients using the publicly available Framingham Heart Study data[9]. The data is captured over a wide variety of patients and is amongst the most established datasets for heart disease prediction [10].

Automated prediction of diagnoses based on patient data has been a subject of interest for long now [11]. Various techniques have been successfully applied to different types of data and varied styles of diagnoses. Machine learning models made to classify data follow one of the two paradigms, generative or discriminative. Generative classifiers model how data is generated in order to classify a signal. Discriminative classifiers do not care how data is generated, they just categorize a given signal through a distance or similarity metric. In our work, we propose a discriminative

During this work, Ayush Khaneja was an intern at Centre for Development of Advanced Computing, Noida, India.
[‡]Corresponding Author

approach to classification through the use of Siamese networks with a contrastive loss function for binary classification of coronary heart disease. We show that the proposed method is highly stable and handles bias due to class imbalance better than a vanilla neural network.

The rest of the paper is organized as follows. In Section 2, we describe the works tackling health care data for disease classification. In Section 3, we provide background of the techniques used and describe the proposed method. In Section 4. Finally, the conclusion is provided in Section 5.

2 Related Works

A lot of research has been done in the field of disease prediction. But none of the system is put in real life picture to the best of our knowledge. Some of the earliest Machine Learning based disease prediction was done by W. Nick et al in 1995[12]. They used a linear programming function for the prediction of the disease. Haq et al [13] used Logistic regression to detect heart related problems from patient’s demographic and diagnosis data. Miotto et al [14] used Decision Tree, Artificial Neural Network and Support Vector Machine for detecting Breast Cancer from demographic and EHR data of the patient. Benjamin Shickel et al [15] conducted a survey on the deep learning technologies for the analysis of Electronic Health Record data. They compared in total of 6 projects in their paper.

Guo et al [16] have studied time series with Recurrent Neural Network. In the WG-Learning, they introduce the weighted gradient to the online SGD for the RNN models, based on the local features of time series. The method enables to update the RNN models with down weighted gradients for outliers while full gradients for change points. Shiyue Zhang et al [17] proposed a Variational Recurrent Neural Networks (VRNN) and Discriminative Neural Network for the analysis of lab test and their relation to diseases prediction. They used a dataset of more than 46000 patients covering 50 lab tests to diagnose 50 common diseases. Detrano et al. Authors in [18] proposed a logistic regression classifier-based decision support system for heart disease classification. Leveraging large historical data in electronic health record (EHR), Edward Choi[19] developed Doctor AI, a generic predictive model that covers observed medical conditions and medication uses. Doctor AI is a temporal model using recurrent neural networks (RNN) and was developed and applied to longitudinal time stamped EHR data from 260K patients and 2,128 physicians over 8 years.

Edward Choi [20] explored whether use of deep learning to model temporal relations among events in electronic health records (EHRs) would improve model performance in predicting initial diagnosis of heart failure (HF) compared to conventional methods that ignore temporality. Recurrent neural network (RNN) models using gated recurrent units (GRUs) were adapted to detect relations among time-stamped events (eg, disease diagnosis, medication orders, procedure orders, etc.) with a 12- to 18-month observation window of cases and controls. Model performance metrics were compared to regularized logistic regression, neural network, support vector machine, and K-nearest neighbor classifier approaches. In contrast to the above method, the proposed method works on the premise that it is important to learn a discriminative embedding among the classes to be classified rather than only a *good* embedding.

3 Methodology

3.1 Background

Prior to explaining the proposed method, we briefly describe the background concepts for the paper.

3.1.1 Discriminative Networks

Discriminative or conditional models are commonly used in supervised learning applications. Instead of modelling class-conditional probability distributions and prior probabilities, they directly estimate posterior probabilities directly from training data and do not try to model the core probability distributions. Essentially, discriminative models do not try to model how a particular data sample might have been generated. Instead, they measure how similar or dissimilar a data sample is from data of a particular class. Discriminative models do not learn how to predict the probability of data belonging to a particular class, but learn how to differentiate between data from different classes by observing its features.

3.1.2 Siamese Networks

They are a type of artificial neural networks that are made up of two or more identical networks that have identical weights. Working in tandem, each of these inner networks receives an input vector based on which an output vector is generated. These output vectors can then be compared to see how similar they are. Usually, Siamese networks are used to perform binary classification. This classification is done by seeing how similar or dissimilar a data sample is

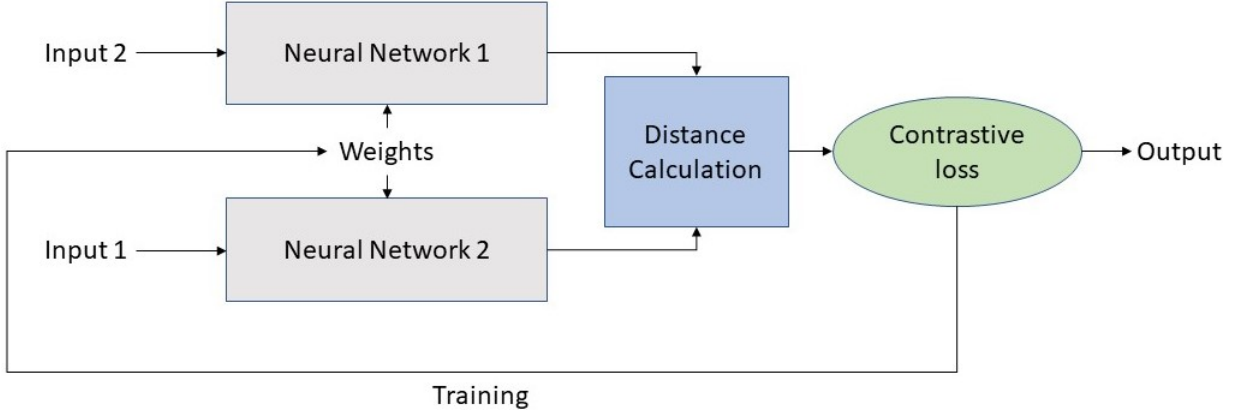


Figure 1: Structure of the proposed Siamese network

to samples of the two classes. The class exhibiting more similarity is decided as the predicted class. These networks generally find use in applications like facial identification, signature verification etc.

3.1.3 Contrastive Loss

It is a loss function typically used to learn the data's discriminative features, i.e. learn to differentiate between samples from different classes. It is a distance-based loss function that tries to ensure that data samples that are semantically similar are embedded closer together, hence, calculated on pairs.

3.2 Proposed Network

The network we propose has two identical feed-forward neural networks that work together and share weights. An input pair is given to the Siamese network and the inner networks receive one sample each from the pair. The inner networks then calculate the embeddings for their respective inputs and then the distance is calculated on these embeddings. This distance is then used to calculate the contrastive loss. Based on this calculate loss and the accuracy of the whole network, the weights are accordingly updated.

3.2.1 Missing value imputation

All missing values were imputed and the whole data was normalized. Then, the input pairs were generated. To generate these pairs, we used random number generation. The first step was to split our data based on its label. Next, these new datasets were shuffled to ensure randomness. Then, pairs were created based on the generation of random numbers. random samples were picked from our new data sets and paired together. 100000 pairs were generated where data was picked from different classes. 50000 samples each were generated here data was selected from the same classes, i.e. 0 paired with 0 and 1 paired with 1. The 200000 pairs obtained were split in an 80-20 ratio to generate our training and testing data respectively. Since our goal is to differentiate between the two classes, we do not need to worry about samples being repeated in the data.

4 Experiments

4.1 Dataset

The dataset used is the Framingham dataset, which contains 4240 samples and has 16 columns. the properties of the dataset is given in Table 1.

4.2 Base Network

A simple feed-forward network with fully connected layers was trained on regular data and its characteristics were evaluated. This gave us a basis to improve upon. The Siamese network's job was to improve upon the performance of this network. The following table summarizes the final results obtained on the base network after tweaking its hyperparameters. During training 25% of the data was used for validation. The parameters of base network are shown

Table 1: Summary of the dataset

Data Type	Column Name	Missing Values
Nominal	male	0
	currentSmoker	0
	BPMeds	53
	prevalentStroke	0
	prevalentHyp	0
	diabetes	0
	TenYearCHD (Label)	0
Continuous	age	0
	cigsPerDay	29
	totChol	50
	sysBP	0
	diaBP	0
	BMI	19
	heartRate	1
	glucose	388
Discrete	education	105

in Table 2 along with training loss and confusion matrices over the classes. The goal was not only to increase accuracy, but to keep the number of ‘false negative’ errors (1 classified as 0) at a minimum, because in the case of medical data, a positive diagnosis being identified correctly is more important.

Table 2: Parameter and experiments on base network

Model Layers	Input layer (size = 15)
	Hidden layer 1 (size = 256, L2 activity regularization = 0.01)
	Dropout = 0.175
	Activation layer 1 (ReLU)
	Hidden layer 2 (size = 256, L2 activity regularization = 0.01)
	Dropout = 0.175
	Activation layer 2 (ReLU)
	Output layer (size = 1, L2 activity regularization = 0.01)
	Dropout = 0.175
	Activation layer 3 (Sigmoid)
Optimizer	Adam optimizer (learning rate = 0.001)
Loss Function	Binary Crossentropy
Evaluation Metric	Accuracy
Batch Size / No. of Epochs	16 / 250
Class Weights	Class 0: 1.0
	Class 1: 5.0
Loss on Training data	1.01
Confusion Matrix	[[508, 211], [42, 87]]

4.3 Results on the proposed network

The model was trained and its hyperparameters were tweaked to reach accuracies of almost 100% in being able to differentiate between samples belonging to different classes. Again, during training, a 25% validation split was used. Now, to make predictions, all that is needed is to take the new data and pair it with data from both the class 0 and the class 1. The network will tell us which class our data is closer to in terms of distance and we can classify our new data accordingly. Table 2 summarizes the network parameters. Additionally, Fig 2 and 3 show the training and testing curves for accuracy and loss of the proposed network.

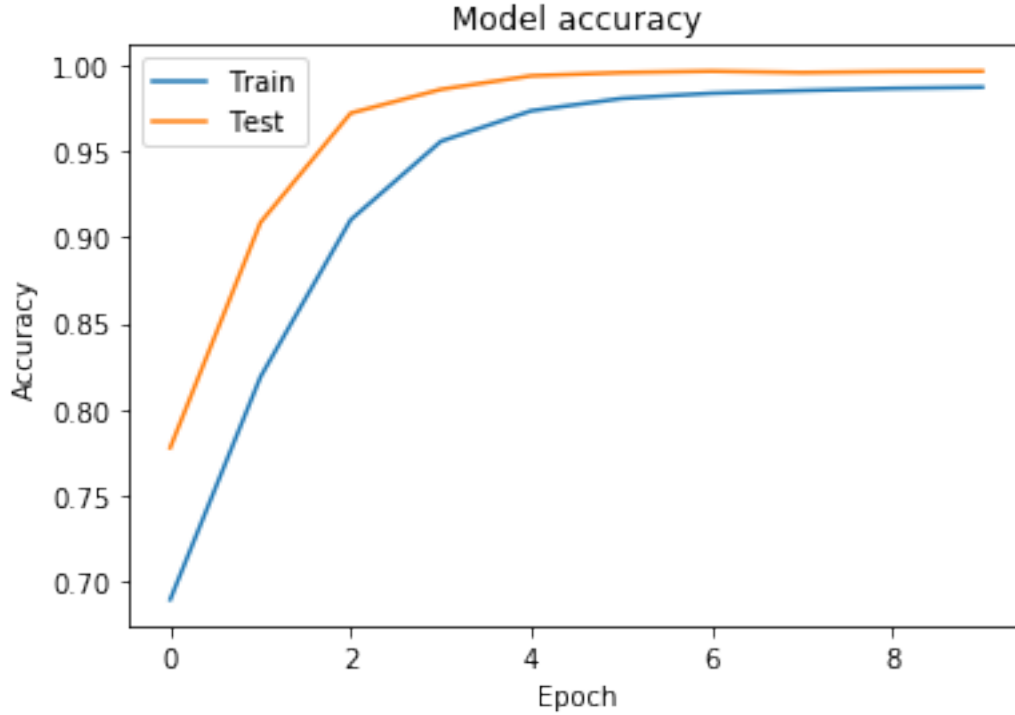


Figure 2: Accuracy

4.4 Comparison among networks

The results on the base network and proposed network are shown in Table 4. It can be observed that the proposed method obtains a significant improvement over the base network while achieving nearly 100% accuracy. It shows that while classification based on feed-forward network work well if the data is balanced, the discriminative network, with their ability to learn a distance metric to map the input classes to separate embedding space, allow for stronger representation of the inputs, and hence result in more stable classification. This is indicated by the fact that while the precision for class 1 using the base network is 0.29 as compared to 0.92 for class 0, with the proposed network the precision is nearly same for both the classes.

Table 3: Parameter and experiments on the proposed network

Model Layers	Input layer (Dense, size = 15),
	Hidden layer 1 (Dense, size = 256, activation = ReLU)
	Dropout = 0.2
	Hidden layer 2 (Dense, size = 256, activation = ReLU)
	Dropout = 0.2
	Output layer (Dense, size = 256, activation = ReLU)
Optimizer	RMSProp (learning rate = 0.001)
Loss Function	Contrastive Loss
Evaluation Metric	Accuracy
Batch Size / Number of Epochs	64 / 10
Loss on Training data	0.0029
Confusion Matrix	[[19913, 133],
	[0, 19954]]

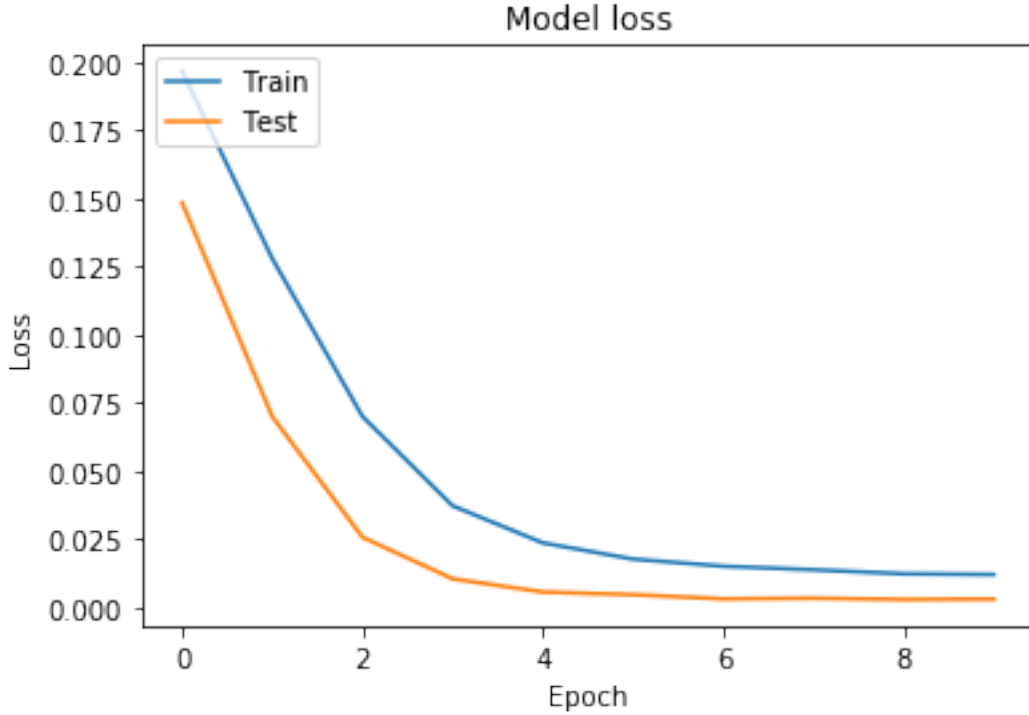


Figure 3: Loss

Table 4: Empirical Results on the Framingham dataset

Method/metric	Accuracy		Precision		Recall	
	Training	Test	Class 0	Class 1	Class 0	Class 1
Base Network	0.72	0.70	0.92	0.29	0.71	0.67
Proposed Network	0.9966	0.9966	1.00	0.99	0.99	1.00

5 Conclusion

In this paper we proposed a method based on discriminative network for classifying coronary heart disease. We showed that such networks are more stable on imbalanced data as compared to vanilla neural networks. In future, we believe that our work has potential to be integrated in practice with Hospital Management Information Systems and used in real time for patient diagnosis.

References

- [1] Henry J Michtalik, Hsin-Chieh Yeh, Peter J Pronovost, and Daniel J Brotman. Impact of attending physician workload on patient care: a survey of hospitalists. *JAMA internal medicine*, 173(5):375–377, 2013.
- [2] Jane B Lemaire, Erin Nicole Miller, Alicia J Polachek, and Holly Wong. Stakeholder groups’ unique perspectives about the attending physician preceptor role: A qualitative study. *Journal of general internal medicine*, pages 1–9, 2019.
- [3] Jingshu Liu, Zachariah Zhang, and Narges Razavian. Deep ehr: Chronic disease prediction using medical notes. *arXiv preprint arXiv:1808.04928*, 2018.
- [4] Dongdong Sun, Minghui Wang, and Ao Li. A multimodal deep neural network for human breast cancer prognosis prediction by integrating multi-dimensional data. *IEEE/ACM Transactions on Computational Biology and Bioinformatics (TCBB)*, 16(3):841–850, 2019.

- [5] Alexander Meyer, Dina Zverinski, Boris Pfahringer, Jörg Kempfert, Titus Kuehne, Simon H Sündermann, Christof Stamm, Thomas Hofmann, Volkmar Falk, and Carsten Eickhoff. Machine learning for real-time prediction of complications in critical care: a retrospective study. *The Lancet Respiratory Medicine*, 6(12):905–914, 2018.
- [6] Andrew L Beam and Isaac S Kohane. Big data and machine learning in health care. *Jama*, 319(13):1317–1318, 2018.
- [7] L Cuthbert, B Duboulay, D Teather, B Teather, M Sharples, and G Duboulay. Expert/novice differences in diagnostic medical cognition-a review of the literature. 1999.
- [8] Ayako Basugi, Yoshiyuki Ohira, and Masatomi Ikusaka. Comparison of the outpatient diagnostic process between novice and trained residents. *General medicine*, 12(1):35–41, 2011.
- [9] William B Kannel, William P Castelli, Tavia Gordon, and Patricia M McNamara. Serum cholesterol, lipoproteins, and the risk of coronary heart disease: the framingham study. *Annals of internal medicine*, 74(1):1–12, 1971.
- [10] Zhihong Zhu, Zhili Zheng, Futao Zhang, Yang Wu, Maciej Trzaskowski, Robert Maier, Matthew R Robinson, John J McGrath, Peter M Visscher, Naomi R Wray, et al. Causal associations between risk factors and common diseases inferred from gwas summary data. *Nature communications*, 9(1):224, 2018.
- [11] Min Chen, Yixue Hao, Kai Hwang, Lu Wang, and Lin Wang. Disease prediction by machine learning over big data from healthcare communities. *Ieee Access*, 5:8869–8879, 2017.
- [12] W Nick Street, Olvi L Mangasarian, and William H Wolberg. An inductive learning approach to prognostic prediction. In *Machine Learning Proceedings 1995*, pages 522–530. Elsevier, 1995.
- [13] Amin Ul Haq, Jian Ping Li, Muhammad Hammad Memon, Shah Nazir, and Ruinan Sun. A hybrid intelligent system framework for the prediction of heart disease using machine learning algorithms. *Mobile Information Systems*, 2018, 2018.
- [14] Riccardo Miotto, Li Li, Brian A Kidd, and Joel T Dudley. Deep patient: an unsupervised representation to predict the future of patients from the electronic health records. *Scientific reports*, 6:26094, 2016.
- [15] Benjamin Shickel, Patrick James Tighe, Azra Bihorac, and Parisa Rashidi. Deep ehr: a survey of recent advances in deep learning techniques for electronic health record (ehr) analysis. *IEEE journal of biomedical and health informatics*, 22(5):1589–1604, 2017.
- [16] Tian Guo, Zhao Xu, Xin Yao, Haifeng Chen, Karl Aberer, and Koichi Funaya. Robust online time series prediction with recurrent neural networks. In *2016 IEEE International Conference on Data Science and Advanced Analytics (DSAA)*, pages 816–825. Ieee, 2016.
- [17] Shiyue Zhang, Pengtao Xie, Dong Wang, and Eric P Xing. Medical diagnosis from laboratory tests by combining generative and discriminative learning. *arXiv preprint arXiv:1711.04329*, 2017.
- [18] Robert Detrano, Andras Janosi, Walter Steinbrunn, Matthias Pfisterer, Johann-Jakob Schmid, Sarbjit Sandhu, Kern H Guppy, Stella Lee, and Victor Froelicher. International application of a new probability algorithm for the diagnosis of coronary artery disease. *The American journal of cardiology*, 64(5):304–310, 1989.
- [19] Edward Choi, Mohammad Taha Bahadori, Andy Schuetz, Walter F Stewart, and Jimeng Sun. Doctor ai: Predicting clinical events via recurrent neural networks. In *Machine Learning for Healthcare Conference*, pages 301–318, 2016.
- [20] Edward Choi, Andy Schuetz, Walter F Stewart, and Jimeng Sun. Using recurrent neural network models for early detection of heart failure onset. *Journal of the American Medical Informatics Association*, 24(2):361–370, 2016.