

NASE: Learning Knowledge Graph Embedding for Link Prediction via Neural Architecture Search

Xiaoyu Kou
kouxiaoyu@pku.edu.cn
Peking University
Beijing Shi, China

Huang Hu
huahu@microsoft.com
Microsoft Corporation
Beijing Shi, China

Bingfeng Luo
luobingfeng981@pingan.com.cn
Pingan Life Insurance of China
Shenzhen Shi, China

Yan Zhang
zhyzhy001@gmail.com
Peking University
Beijing Shi, China

ABSTRACT

Link prediction is the task of predicting missing connections between entities in the knowledge graph (KG). While various forms of models are proposed for the link prediction task, most of them are designed based on a few known relation patterns in several well-known datasets. Due to the diversity and complexity nature of the real-world KGs, it is inherently difficult to design a model that fits all datasets well. To address this issue, previous work has tried to use Automated Machine Learning (AutoML) to search for the best model for a given dataset. However, their search space is limited only to bilinear model families. In this paper, we propose a novel Neural Architecture Search (NAS) framework for the link prediction task. First, the embeddings of the input triplet are refined by the *Representation Search Module*. Then, the prediction score is searched within the *Score Function Search Module*. This framework entails a more general search space, which enables us to take advantage of several mainstream model families, and thus it can potentially achieve better performance. We relax the search space to be continuous so that the architecture can be optimized efficiently using gradient-based search strategies. Experimental results on several benchmark datasets demonstrate the effectiveness of our method compared with several state-of-the-art approaches.

CCS CONCEPTS

• **Computing methodologies** → **Knowledge representation and reasoning**.

KEYWORDS

knowledge graph, kg embedding, neural architecture search

ACM Reference Format:

Xiaoyu Kou, Bingfeng Luo, Huang Hu, and Yan Zhang. 2020. NASE: Learning Knowledge Graph Embedding for Link Prediction via Neural Architecture Search. In *Proceedings of the 29th ACM International Conference*

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

CIKM '20, October 19–23, 2020, Virtual Event, Ireland

© 2020 Association for Computing Machinery.

ACM ISBN 978-1-4503-6859-9/20/10...\$15.00

<https://doi.org/10.1145/3340531.3412104>

on Information and Knowledge Management (CIKM '20), October 19–23, 2020, Virtual Event, Ireland. ACM, New York, NY, USA, 4 pages. <https://doi.org/10.1145/3340531.3412104>

1 INTRODUCTION

Knowledge Graph (KG) consists of facts in the form of triplet (h, r, t) , where the head h and tail t are entities while the relation r refers to different types of edges between entities. In recent years, KG has been successfully applied to many fields [3, 10]. However, most existing KGs are incomplete and noisy, which severely limits their application in practice [5]. To tackle this issue, the link prediction task has been proposed to predict the existence of links between any two entities in a KG [2], which quickly becomes a fundamental and challenging task in the KG field.

One strand of existing link prediction models operates in a reconstructive way. They reconstruct the embedding of the head (or tail) of a triplet (h, r, t) using the corresponding relation and tail (or head) embeddings, and calculate the plausibility of the triplet by measuring the difference between the original and the reconstructed embeddings. These works either model this relationship in an explainable way (e.g., TransE [2], RotatE [12]), or utilize the black-box but expressive convolution operations (e.g., ConvE [4]). Another strand of works considers link prediction as a semantic matching problem [6]. They take the embeddings of the head, relation and tail as input, and output a matching score for the elements in each triplet using bi-linear transformation (e.g., DistMult [15], Simple [7]), convolution (e.g., ConvKB [11]) and etc.

These works vary a lot in situations that they are suitable for, like the relation types in the KG, the sparsity of the KG, etc. Therefore, choosing a suitable architecture for a specific KG often requires careful analysis of both the dataset and the model. To tackle this issue, Zhang et al. [16] proposes to use AutoML to greedily search for optimal score functions for distinct KGs. However, their work is constrained to bilinear semantic matching models and does not include the reconstruction-based models into their search space.

In this paper, we propose a novel Neural Architecture Search (NAS) framework to search for the most effective architecture for a given dataset. The framework entails a more general search space that contains both semantic matching models and reconstructive models. Therefore, it has the potential to combine the strength of the two model families. Instead of searching over a discrete set of candidate architectures, we relax the search space to be continuous,

so that the architecture can be optimized using the efficient gradient-based search algorithm.

As shown in Fig. 1, our NAS framework contains two search modules. The *representation search module* aims to refine the embeddings e_h, e_r, e_t of the head, relation, and tail respectively through multiple representation layers. The *score function search module* is responsible for selecting a shallow architecture to calculate a plausibility score for the input triplet. While the operators in each module have a broad range of choices, in this work, we primarily focus on a proof-of-concept of this two-level search space by constraining the operators to architectures that are representatives of existing link prediction models. Specifically, we constrain the search space of the *representation search module* to be reconstructive models, whose input and output have good compatibility of this module. As for the *score function search module*, we select representative models from mainstream model families in the link prediction task. To avoid overfitting, we also add the identity operation in the *representation search module* so that the NAS algorithm could choose to use the original e_h, e_r, e_t , or even degenerate to the basic models in the *score function search module* when necessary.

On the one hand, we can consider the representation search module refines e_h, e_r, e_t in a black-box way. On the other hand, the output of the *representation search module* may also embed the constraints modeled in the reconstruction-based models. Therefore, the final score could potentially benefit from the cross-validation of multiple models, which will likely lead to better prediction results.

We evaluate our approach on several popular benchmark datasets. Extensive experiments demonstrate that our approach has good generalization ability over different datasets, and achieves better performance than strong baseline models in most of the datasets.

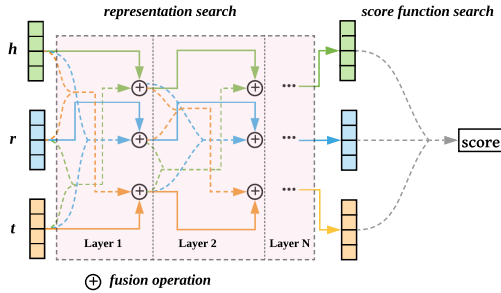


Figure 1: Overview of NASE. Solid lines indicate direct connections, while dashed lines indicate searchable connections that are determined by the architecture search process.

2 APPROACH

2.1 Problem Formulation

Let $\mathcal{E}, \mathcal{R}$ denote the entity set and the relation set in a knowledge graph G which can be formalised as a set of triplets $\{(h, r, t)\} \subseteq \mathcal{E} \times \mathcal{R} \times \mathcal{E}$. Given a triplet (h, r, t) , we denote the embeddings of them as $e_h, e_r, e_t \in \mathbb{R}^d$. The link prediction task can be formulated as maximizing a function $f(h, r, t)$ over all triplets, which is expected to give higher scores for valid triplets than invalid ones. Our work aims to find the best performing architecture of $f(h, r, t)$ given a pre-defined architecture space via Network Architecture Search (NAS) for a specific dataset.

2.2 Search Space for Link Prediction

We name our framework as NASE, which refers to NAS-based knowledge graph embedding for link prediction. As illustrated in Fig. 1, NASE utilizes two search modules. The *representation search module* aims to generate more informative embeddings for head, relation, and tail, while the goal of the *score function search module* is to find a suitable architecture to integrate these embeddings to produce the final plausibility score for the (h, r, t) triplet. The representation part searches among several reconstructive models. And the search space of the score function is more flexible that it contains both reconstruction based and semantic matching based ones. Since the resulting architecture may contain multiple base models, our framework potentially has the ability to combine the strength of several model families.

2.2.1 Representation Search Module. In the representation search module, we include the convolution operators and translation operators in our search space, which correspond to two mainstream model families of the reconstruction-based link prediction models.

As shown in Fig. 1, each representation layer takes the embeddings of the head, relation, and tail as input, and produce a set of new embeddings. Each operator is followed by a fusion step that linearly combines the new embeddings of the head, relation, or tail with the original ones. For example, we define the fusion step of the head embedding as follow:

$$e_h^{l+1} = \beta_h^l e_h^l + (1 - \beta_h^l) \text{opt}(e_r^l, e_t^l), \quad (1)$$

$$\beta_h^l = \sigma(W_h^l [e_h^l; \text{opt}(e_r^l, e_t^l)] + b_h^l), \quad (2)$$

where e_h^l is the head embedding output at layer l , $\text{opt}(\cdot, \cdot)$ denotes an searchable operator, W_h^l and b_h^l are trainable parameters. The goal of introducing the fusion step is to force the new embedding to focus on the information about the head, rather than things that should be modeled by relation or tail embeddings. Likewise, this transformation is also applied to e_r^l and e_t^l . Specifically, we enumerate the three categories of candidate operators as follows:

Convolution Operators. Similar to ConvE [4], we use 1D convolution with filter sizes 2, 4, and 2D convolution with filter sizes 3, 5 as candidate operators.

$$e_h^{l+1} = \text{ReLU}(\text{Conv1d}([e_r^l; e_t^l])), \quad e_h^{l+1} = \text{ReLU}(\text{Conv2d}([\bar{e}_r^l; \bar{e}_t^l])), \quad (3)$$

where $[\cdot; \cdot]$ is row-wise concatenation, $\bar{e}$ denote 2D reshaping of e .

Translation Operators. Translation-based models follow the restriction of:

$$g_{r,1}(e_h) + e_r - g_{r,2}(e_t) = 0 \quad (4)$$

where $g_{r,\cdot}(x)$ is a model-specific transformation function. e_h, e_r, e_t can be inferred using Eq. 4 given the other two embeddings and the inverse function of $g_{r,\cdot}(x)$. In this work, we use $g_{r,\cdot}(x) = \mathbf{W}x$, and $\mathbf{W}$ can be either an identity matrix or an unconstrained one. Therefore, our search space includes two famous translation-based models: TransE [2] and TransR [8].

Identity Operators. The identity operator directly maps the input to output without any transformations. The purpose of introducing such an operator is to prevent the resulting architecture from being too complicated, and it enables the final model to degenerate to basic models in the *score function search space*.

2.2.2 Score Function Search Module. In this module, we search among several semantic matching based models to produce a final plausibility score, which is used to predict whether the triplet is valid. While we can include as many models as we want, we only include 1-2 representative models in each model family for proof-of-concept. The experimental results show that this search space already produces satisfying results.

Convolution-Based Score Function. Our convolution-based score function has a similar form to ConvKB [11]:

$$f(h, r, t) = \mathbf{W} (\text{ReLU}(\text{Conv}([\mathbf{e}_h; \mathbf{e}_r; \mathbf{e}_t]))) , \quad (5)$$

where $\text{Conv}(\cdot)$ indicates the convolution layer with $M \times 3 \times 3$ filters and $\mathbf{W} \in \mathbb{R}^{1 \times Md}$ is a trainable matrix.

Translation-Based Score Function. We use the classic TransE [2] as the translation-based score function:

$$f(h, r, t) = \|\mathbf{e}_h + \mathbf{e}_r - \mathbf{e}_t\|_p, \quad (6)$$

where $\|\cdot\|_p$ denotes the p -norm.

Bilinear Score Function. We adopt two bilinear models: DistMult [15] (Eq. 7), and Simple [7] (Eq. 8):

$$f(h, r, t) = \mathbf{e}_h^T \mathbf{M}_r \mathbf{e}_t, \quad (7)$$

$$f(h, r, t) = 1/2 (\mathbf{e}_h^T \mathbf{M}_r \mathbf{e}_t + \mathbf{e}_h^T \mathbf{M}'_r \mathbf{e}_t), \quad (8)$$

where $\mathbf{M}_r$ is the diagonal matrix generated from $\mathbf{e}_r$, and $\mathbf{M}'_r$ is another randomly initialized diagonal matrix for relation r .

MLP Score Function. Each triplet representation $(\mathbf{e}_h, \mathbf{e}_r, \mathbf{e}_t)$ is concatenated into a single feature vector. The feature vector is then fed into a single-hidden-layer MLP to calculate the final score.

2.3 Search Procedure of NASE

We use the gradient-based search strategy proposed by DARTS [9] as the architecture search algorithm. Specifically, if a function $g = \varphi(x)$ can be instantiated by k candidate operations $\varphi_1, \varphi_2, \dots, \varphi_k$, we then define k corresponding operation weights $\alpha_1, \alpha_2, \dots, \alpha_k$, and relaxes the original equation as follows in the search phase:

$$g = \sum_{i=1}^k \alpha_i \varphi_i(x), \quad \alpha_i = \frac{\exp(\alpha_i)}{\sum_{i=1}^k \exp(\alpha_i)} \quad (9)$$

In NASE, as shown in the dashed hyperedges that links inputs and outputs in Fig. 1, we need to search for the functions used to calculate $\mathbf{e}_h, \mathbf{e}_r, \mathbf{e}_t$ in each representation layer, and the final score function. The candidates for each dashed hyperedge have their own operation weights.

The model weights θ and the operation weights α are updated iteratively. For each batch, we first update θ with α fixed using SGD. Then, α is updated using the new θ . Both θ and α are updated according to the following loss function:

$$\mathcal{L} = -\frac{1}{N} \sum_{i=1}^N (y_i \log(f(\cdot)) + (1 - y_i)(1 - \log(f(\cdot))), \quad (10)$$

where the label y_i is 1 if the triplet (h, r, t) is valid and 0 otherwise, $f(\cdot)$ is the architecture that produces the plausibility score. After convergence, the candidates with the most significant weights are selected to form the final architecture. Finally, the resulting architecture is then trained from scratch.

3 EXPERIMENTS

3.1 Experimental Setup

Datasets We evaluate our model on five public benchmark datasets: FB15k-237 [13], WN18RR [2], Medical-E¹, Medical-C², and Military³. Existing KG embedding methods are usually designed based on the commonly used FB15k-237 and WN18RR datasets. Therefore, we include the other three less common datasets to better compare the dataset adaptation ability of each system. The statistics of these KGs are shown in Table 1.

Dataset	Entity	Relation	Train	Validation	Test
FB15k-237	14,541	237	272,115	17,535	20,466
WN18RR	40,943	11	86,835	3,034	3,134
Medical-E	1,516	5	5,000	1,000	1,000
Medical-C	22,119	6	156,367	13,682	24,048
Military	11,975	15	92,016	11,502	11,502

Table 1: Statistics of Each Dataset.

Training Details We perform grid search for hyper-parameters: number of representation layers $N = \{1, 2, 3, 4\}$, embedding dimension $d = \{100, 200, 400\}$, learning rate $lr = \{1e-2, 1e-3, 1e-4\}$, batch size $M = \{128, 256\}$. We find that the following combination performs best in most datasets: $N = 1, d = 400, lr = 1e-3, M = 128$.

Baselines We compare NASE with several state-of-the-art models: (1) Reconstruction-Based Models: TransE [2], TransR [8], ConvE [4] and RotatE [12]. (2) Semantic Matching Models: DistMult [15], ComplEx [14], Simple [7], TuckER [1] and ConvKB [11]. (3) AutoML System: AutoSF [16]. Results are taken from published papers, if possible. Other results are produced by running publicly released codes, and we tune the hyperparameters via grid search.

3.2 Results

As can be seen in Table 2, NASE clearly outperforms AutoSF in four out of five datasets, which demonstrates the effectiveness of our architecture. However, we also observe that our model is inferior to AutoSF in the WN18RR dataset except for the MR metric. The main reason for this phenomenon is that, as shown in Table 1, the WN18RR dataset is the sparsest one in the five datasets. Besides, we can also see that there is no absolute winner among human-designed models. On the other side, NASE achieves better or comparable results to them except for RotatE in WN18RR. Note that FB15k-237 and WN18RR are two of the most commonly used datasets in link prediction, which means their characteristics are well studied by existing link prediction works. Therefore, achieving the best results in FB15k-237 and all other less common datasets confirms that NASE has a good generalization ability to different datasets with various characteristics. We do not include RotatE in our search space because it requires $\mathbf{e}_r$ to have different dimension from $\mathbf{e}_h$ and $\mathbf{e}_t$. We leave this to the future work.

Fig. 2 shows two architectures searched by NASE. We observe that most of the resulting architectures only utilize one representation layer, which is consistent with the observations in previous

¹We construct Medical-E by extracting drug and disease entities from the Freebase with five relations: treatments, symptoms, risk factors, causes, and prevention factors.

²<https://github.com/liuhuanrong/QASystemOnMedicalKG>

³<http://openkg.cn/dataset/techkg10>

	FB15k-237			WN18RR			Medical-E			Medical-C			Military		
	MR	MRR	H@10	MR	MRR	H@10	MR	MRR	H@10	MR	MRR	H@10	MR	MRR	H@10
TransE	357	.294	.465	3384	.226	.501	289	.350	.425	1061	.304	.391	198	.387	.618
TransR	349	.301	.461	3317	.219	.498	301	.352	.421	1059	.302	.401	192	.381	.599
RotatE	177	.338	.533	3340	.476	.571	149	.437	.541	1122	.320	.412	155	.419	.633
ConvE	244	.325	.501	5277	.460	.480	247	.399	.458	1739	.321	.397	305	.391	.561
DistMult	254	.241	.419	5110	.430	.490	271	.362	.429	1273	.346	.427	187	.380	.592
Complex	339	.247	.428	5261	.440	.510	207	.367	.496	1577	.335	.419	487	.367	.496
Simple	203	.341	.534	3561	.462	.550	154	.429	.539	1108	.313	.440	167	.402	<u>.635</u>
TuckER	-	.358	.544	-	.470	.526	152	.445	<u>.545</u>	1010	.350	.423	161	.399	.612
ConvKB	257	.396	.517	<u>2554</u>	.248	.525	150	.361	.521	989	.341	.449	160	.420	.624
AutoSF	-	.360	<u>.552</u>	-	.490	<u>.567</u>	151	<u>.451</u>	.537	896	<u>.352</u>	.440	231	.418	.606
NASE	170	.421	.575	2147	.465	.553	147	.525	.588	765	.360	.461	154	.440	.654

Table 2: Link prediction results. Bold and underlined numbers refer to the best and second-best results respectively.




Figure 2: Two architectures searched on by NASE.

works that deep architectures will usually cause overfitting problem. The only exception occurs in the Medical-E dataset, where the resulting architecture contains two representation layers. We conjecture that this is due to the simplicity of the Medical-E dataset. It only has two types of entities with five relation types. The test set and train set are also identically distributed. Therefore, overfitting is a less severe problem than underfitting in this dataset.

3.3 Ablation Study

Ablation	MR	MRR	H@10
Full NASE	170	.421	.575
(-) Representation search module	201	.395	.566
(-) Score function search module	229	.389	.559
(-) Fusion step	251	.380	.550

Table 3: Ablation study on FB15k-237 dataset by NASE.

To demonstrate the influence of the components in our NAS framework, we also conduct an ablation study using FB15k-237. As shown in Table 3, removing the representation search module clearly decreases the performance in all metrics, which proves the effectiveness of our representation search module. Besides, as shown in the third row of Table 3, removing the score function search module also decreases the performance, but it still performs much better than vanilla TransE (see Table 2). This again indicates that the representation search module can produce more informative representations than the original one. Moreover, we also examine the performance of the fusion step by replacing the linear combination with direct addition. The drop indicates that using learnable weights to linearly combine the input and output vectors in the representation layers plays an essential role in learning high-quality representations.

4 CONCLUSION AND FUTURE WORK

In this paper, we propose a novel NAS framework for the link prediction task, which can combine the strength of both reconstruction based and semantic matching based models. Experimental results show that NASE outperforms several state-of-the-art

human-designed models and AutoML based models in most of the datasets. In future work, we would like to explore the possibility of more general search spaces to include more strong architectures.

5 ACKNOWLEDGMENTS

This work is supported by National Key Research and Development Program of China under Grant No. 2018AAA0101902, NSFC under Grant No. 61532001, and MOE-ChinaMobile Program under Grant No. MCM20170503.

REFERENCES

- [1] Ivana Balažević, Carl Allen, and Timothy M Hospedales. 2019. TuckER: Tensor Factorization for Knowledge Graph Completion. *EMNLP* (2019).
- [2] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. 2013. Translating embeddings for modeling multi-relational data. In *Advances in neural information processing systems*. 2787–2795.
- [3] Antoine Bordes, Jason Weston, and Nicolas Usunier. 2014. Open question answering with weakly supervised embedding models. In *ECML PKDD*. Springer.
- [4] Tim Dettmers, Pasquale Minervini, Pontus Stenetorp, and Sebastian Riedel. 2018. Convolutional 2d knowledge graph embeddings. In *Thirty-Second AAAI*.
- [5] Xin Dong, Evgeniy Gabrilovich, Jeremy Heitz, Wilko Horn, Ni Lao, Kevin Murphy, Thomas Strohmann, Shaohua Sun, and Wei Zhang. 2014. Knowledge vault: A web-scale approach to probabilistic knowledge fusion. In *Proceedings of the 20th ACM SIGKDD*. ACM, 601–610.
- [6] Shaoxiong Ji, Shirui Pan, Erik Cambria, Pekka Marttinen, and Philip S Yu. 2020. A Survey on Knowledge Graphs: Representation, Acquisition and Applications. *arXiv preprint arXiv:2002.00388* (2020).
- [7] Seyed Mehran Kazemi and David Poole. 2018. Simple embedding for link prediction in knowledge graphs. In *Advances in neural information processing systems*.
- [8] Yankai Lin, Zhiyuan Liu, Maosong Sun, Yang Liu, and Xuan Zhu. 2015. Learning entity and relation embeddings for knowledge graph completion. In *Twenty-ninth AAAI conference on artificial intelligence*.
- [9] Hanxiao Liu, Karen Simonyan, and Yiming Yang. 2018. Darts: Differentiable architecture search. *arXiv preprint arXiv:1806.09055* (2018).
- [10] Seungwhan Moon, Pararth Shah, Anuj Kumar, and Rajen Subba. 2019. OpenDi-aKG: Explainable Conversational Reasoning with Attention-based Walks over Knowledge Graphs. In *Proceedings of the 57th Conference of ACL*. 845–854.
- [11] Dai Quoc Nguyen, Tu Dinh Nguyen, Dat Quoc Nguyen, and Dinh Phung. 2017. A novel embedding model for knowledge base completion based on convolutional neural network. *arXiv preprint arXiv:1712.02121* (2017).
- [12] Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. 2019. RotatE: Knowledge Graph Embedding by Relational Rotation in Complex Space. In *ICLR*.
- [13] Kristina Toutanova and Danqi Chen. 2015. Observed versus latent features for knowledge base and text inference. In *Proceedings of CVSC*. 57–66.
- [14] Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. 2016. Complex embeddings for simple link prediction. In *ICML*.
- [15] Bishan Yang, Wen-tau Yih, Xiaodong He, Jianfeng Gao, and Li Deng. 2014. Embedding entities and relations for learning and inference in knowledge bases. *arXiv preprint arXiv:1412.6575* (2014).
- [16] Yongqi Zhang, Quanming Yao, Wenyuan Dai, and Lei Chen. 2020. AutoSF: Searching Scoring Functions for Knowledge Graph Embedding. In *ICDE*. IEEE.