

Contextualized moral inference

Jing Yi Xie , Graeme Hirst , and Yang Xu

Department of Computer Science, University of Toronto, Toronto, Canada
jingyi.xie@mail.utoronto.ca, {gh,yangxu}@cs.toronto.edu

Abstract

Developing moral awareness in intelligent systems has shifted from a topic of philosophical inquiry to a critical and practical issue in artificial intelligence over the past decades. However, automated inference of everyday moral situations remains an under-explored problem. We present a text-based approach that predicts peoples intuitive judgment of moral vignettes. Our methodology builds on recent work in contextualized language models and textual inference of moral sentiment. We show that a contextualized representation offers a substantial advantage over alternative representations based on word embeddings and emotion sentiment in inferring human moral judgment, evaluated and reflected in three independent datasets from moral psychology. We discuss the promise and limitations of our approach toward automated textual moral reasoning.

1 Introduction

The relation of morality and computational intelligence has been a topic of philosophical inquiry among the early pioneers of artificial intelligence (Turing, 1950; Wiener, 1960). Recent advances in artificial intelligence in areas such as autonomous driving makes it desirable for intelligent systems to develop moral awareness (e.g., Awad et al., 2018). The ability to reason about everyday moral situations is one key aspect that distinguishes humans from machines, and language provides a natural conduit for generic moral inference. Here we explore methodologies for automated inference of moral vignettes from textual input.

There exist multiple schools of thought on human morality. Some theories present morality as a form of deliberate reasoning, while others assert that moral judgment is driven largely by emotion. Recent research from moral psychology has sug-

gested that morality depends on five to six foundational dimensions shared across cultures (Haidt and Joseph, 2004; Haidt et al., 2007; Graham et al., 2013). As such, morality may be viewed as intuitive judgement that nevertheless depends on fine-grained categorical inference. Our emphasis here departs from the theoretical debate and instead focuses on examining the possibility of machine inference for daily moral situations.

Given a generic vignette such as “if you tell a secret someone told you”, we ask whether the human-judged moral category of the vignette (e.g., *loyalty* in this case) can be automatically inferred from text alone. One important aspect we explore here is whether the moral vignettes can be represented effectively, and in particular we examine several alternative representations including the recent contextualized language models (e.g., Reimers and Gurevych, 2019). Another avenue we explore is whether these representations can be generalized accurately onto fine-grained moral categories (e.g., fairness, care, loyalty) above and beyond the binary distinction between right and wrong (e.g., Schramowski et al., 2019), given only a limited number of human examples as training data.

2 Related work

A few disparate ideologies concerning morality have prevailed in philosophy. Immanuel Kant proposed that morality is grounded in reasoning, and that reflecting on principles is how moral judgment ought to be made (Kant, 1785). To the contrary, Hume argued that reasoning was second to emotion: It is feelings and emotions that primarily guide us in our moral judgment (Hume, 1751). The recent advent of the Moral Foundations Theory (MFT) (Graham et al., 2013) presents a modular view of morality based on a core set

of dimensions or foundations. Examples of such foundations include care, fairness, loyalty, authority, purity, etc. The moral foundations dictionary (MFD) (Graham et al., 2009) was created as a linguistic resource to bridge moral psychology and natural language processing, where key lexical terms were listed under each moral foundation. The MFT and MFD have been the basis of several studies in natural language processing, which have typically focused on predicting moral sentiment from social media text (Mooijman et al., 2018; Lin et al., 2018). Other lines of work have explored moral rhetoric in political discourse (Garten et al., 2016), inference of moral sentiment change from diachronic word embeddings (Xie et al., 2019), classification of moral sentiment from tweets (Hoover et al., 2020), and analyses of moral bias toward right or wrong using contextualized language models SBERT (Schramowski et al., 2019). Our study extends this line of research by exploring textual inference of moral vignettes that often entail complex world knowledge, and we contribute a set of empirical data collected from moral psychology experiments which are under-represented in the existing natural language processing studies of morality.

3 Data

We collect text-based moral vignettes, each of which refers to a scenario in the form of a short text, e.g., “A guy cheats his family out of their money and property” (Clifford et al., 2015). Moral vignettes have traditionally been presented as stimuli to study the bases of human moral judgment in moral psychology. We collect vignettes from the following three independent sources, with their characteristics summarized in Table 1:

- **Set 1 – Chadwick.** Chadwick et al. (2006) present a rich source of pretested behaviours, each corresponding to either a positive or negative example of the traits of honesty, loyalty, friendliness, charitableness.
- **Set 2 – McCurrie.** McCurrie et al. (2018) provide video clips of moral stimuli that depict violations or the five vice dimensions of the Moral Foundations Theory: harm, unfairness or cheating, disloyalty, anti-authority, and (sexual) impurity. We use the textual description of the content from each video clip.

Table 1: Key characteristics of the moral vignette sets.

Set	Size	Polarity	Categories
Chadwick	500	+ve/-ve	honesty, loyalty, friendliness, charitableness, cooperativeness
McCurrie	69	-ve	MFT foundations
Clifford	132	-ve	MFT foundations

Videos were sourced from YouTube and validated through human ratings.

- **Set 3 – Clifford.** Clifford et al. (2015) present a set of moral violations, each of which is an infringement on one of the five Moral Foundations. Vignettes were written to incorporate a varied content and minimize overlap among the foundations. The vignettes were validated through factor analysis and human participants.

For both vignette datasets associated with MFT, we considered vignettes from the five categories and excluded the sixth category, liberty. This is in an effort to be consistent with the MFD v1.0 used in our models that does not contain words pertaining to liberty.

The dataset is available [here](#).

4 Methodology

We explore how various representations of moral vignettes contribute to effective inference of human moral judgment. For each dataset, we transform each textual scenario into each of the five representations. We choose these representations to reflect the most relevant aspects of human moral judgment grounded in existing theories on moral reasoning and emotion, and state-of-the-art language models. Standard classification methods are applied in 5-fold cross-validation of the resulting representations. Classes are determined by the trait categorizations of the vignettes summarized in Table 1. We evaluate model performance across all permutations of the datasets ($\times 3$), representational schemes ($\times 5$), and classification methods ($\times 4$).

4.1 Representations

- **Contextual Embeddings.** Contextual embeddings capture meanings for words as a function of their context. We use a pretrained

sentence-based BERT model to embed each vignette (Reimers and Gurevych, 2019).

- **Average Embeddings.** As a baseline to contextual embeddings, we take the average of word embeddings in a vignette. In this approach, we consider scenarios as a whole, drawing information from its background semantic knowledge. Embeddings are pretrained using GloVe (Pennington et al., 2014).
- **Verb Embeddings.** With verb embeddings, we extract the root verb of a vignette and perform classification based solely on the root. The root is determined through dependency parsing (Manning et al., 2014). We also use GloVe vectors to produce embeddings for the verb. Deontological ethics (Kant, 1785; Alexander and Moore, 2007) in particular is fundamentally concerned with the inherent rightness and wrongness of an action. Due to the high variability in context, it is feasible that the verb is strong enough signal on its own. For instance, “to kill” carries a heavy negative association. In the majority of cases, it is not necessary to know who or what is the direct object.
- **Moral Sentiment.** We extend previous work (Garten et al., 2018; Xie et al., 2019) to create a representation grounded in the MFT. We compute centroids c_f for each foundation f . The centroid is the mean of all word embeddings w_f in f : $c_f = \frac{1}{N} \sum w_f$. The euclidean distance to each centroid for each word vector w_v in a vignette is then calculated. The mean of these distances for each f is taken as a feature e_f : $e_f = ||w - c_f||_2$.
- **Emotion.** As theorized by Hume (1751), emotion may play an integral role in how humans make moral judgment. We consider representations based on the affective ratings of individual ratings. We use the valence, arousal and dominance mean scores from (Warriner et al., 2013). Scores are then averaged across all words in a vignette.

4.2 Classifiers

We use a range of standard models for classification, exploiting various aspects of the data. Gaussian Naive Bayes (NB) and Regression (LR) clas-

sifiers are used as standard methods. Also considered is a k Nearest Neighbors (kNN) model, which makes predictions from local density. Although we explored at various values for k , results shown are for $k = 5$, which has proven robust against all datasets. Additionally, SVM classifiers (SVC) amenable to high-dimensional data (Suykens and Vandewalle, 1999) are also considered.

5 Results

We summarize the results of model evaluation against human judgement in Table 2. Given that random chance is 10% for all datasets, the majority of models correlate with human judgment substantially above chance. Despite limited training examples, the contextual embeddings yield the best overall performance across the 3 datasets and among the 5 representations, and this advantage is robust across the 4 classification methods. This may be a direct consequence of the rich semantic information encoded into the contextual models, as well as its ability to capture multiple senses of a word (Hewitt and Manning, 2019). Logistic regression produces the highest accuracy in most cases. A visual representation of the contextual embeddings is shown in Figure 1, which displays the density of moral categories for the vignettes, projected onto two dimensions using TSNE (Maaten and Hinton, 2008). We observe a clean delineation in the Chadwick set, suggesting a division between vignettes that are morally acceptable versus not. We also observe categorical structure in the McCurrie set that illustrates a fine-grained moral inferential capacity.

5.1 Error interpretation

To examine the limitations of the contextual approach, we extract errors in Table 3 under the best performing logistic regression model. In several examples, the model is misled by words that are strongly associated with alternative categories. For instance, “cheating” is in violation of fairness, but the vignette is categorized as an infraction of loyalty (row 4). Another common error is the handling of negation (row 3), only some of which were predicted correctly.

6 Conclusion

We present a first exploration of textual inference for moral vignettes and demonstrate the effectiveness and limitations of predicting human catego-

Figure 1: Projection of all vignette contextual embeddings onto a 2-D space. Example points are marked for each dataset and category. In the Chadwick (binary) plot, “charitable”, “cooperative”, “friendly”, “honest” and “loyal” labels are grouped as Positive.

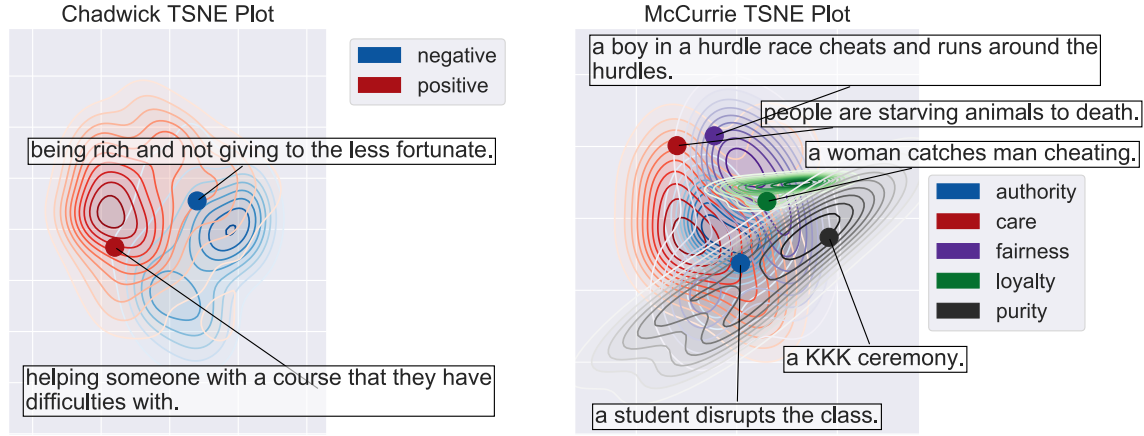


Table 2: Performance by representation and classification method. Model accuracy is averaged over 5-fold cross-validation.

Dataset	Representation	NB	kNN	LR	SVC	Mean accuracy (SD)
Chadwick	Context. Embed. (SBERT)	44.80%	46.20%	51.80%	50.00%	48.20% (2.81%)
Chadwick	Avg. Embed. (GloVe)	16.80%	14.00%	13.20%	6.80%	12.70% (3.66%)
Chadwick	Verb Embed. (GloVe)	28.67%	27.45%	34.28%	30.67%	30.27% (2.58%)
Chadwick	Moral Sentiment	11.40%	11.00%	8.40%	7.00%	9.45% (1.82%)
Chadwick	Emotion	11.80%	9.40%	8.00%	12.60%	10.45% (1.84%)
Clifford	Context. Embed. (SBERT)	58.68%	51.68%	65.79%	54.63%	57.70% (5.29%)
Clifford	Avg. Embed. (GloVe)	24.37%	28.37%	32.32%	32.32%	29.34% (3.29%)
Clifford	Verb Embed. (GloVe)	47.47%	30.21%	58.58%	46.53%	45.70% (10.11%)
Clifford	Moral Sentiment	25.32%	38.11%	32.26%	32.26%	31.99% (4.53%)
Clifford	Emotion	18.11%	15.16%	23.32%	27.26%	20.96% (4.66%)
McCurrie	Context. Embed. (SBERT)	47.95%	38.21%	49.23%	42.82%	44.55% (4.38%)
McCurrie	Avg. Embed. (GloVe)	35.00%	28.33%	37.95%	37.95%	34.81% (3.93%)
McCurrie	Verb Embed. (GloVe)	36.54%	41.41%	47.56%	41.15%	41.67% (3.92%)
McCurrie	Moral Sentiment	28.33%	31.67%	37.95%	37.95%	33.97% (4.15%)
McCurrie	Emotion	36.28%	31.67%	37.95%	37.82%	35.93% (2.55%)

Table 3: Errors committed by the Contextual Embeddings representation under the logistic regression classifier.

Dataset	Vignette	Prediction	Truth
Chadwick	Holding back snide comments you have for a team member.	Unfriendly	Cooperative
Chadwick	Helping someone with a course that they have difficulties with.	Charitable	Friendly
Chadwick	Not offering service to someone who isn’t dressed up to par.	Charitable	Uncharitable
McCurrie	A guy cheats his family out of their money and property.	Fairness	Loyalty
McCurrie	A man takes drugs on a bus.	Care	Purity
McCurrie	A basketball player yells at his coaches.	Care	Loyalty
Clifford	A soccer player pretends to be seriously fouled by an opposing player.	Authority	Fairness
Clifford	A man leaves his family business to go work for their main competitor.	Care	Loyalty
Clifford	A Hollywood star agrees with a foreign dictator’s denunciation of the US.	Authority	Loyalty

rization of everyday moral situations under limited training data. We show that an approach based on contextualized representation offers a superior performance over alternative representations based on existing theories of morality and non-contextualized word embeddings. Future work should explore common knowledge and reasoning in moral inference beyond semantic information, and our current study serves as a stepping stone toward automated moral reasoning from text.

References

- Larry Alexander and Michael Moore. 2007. [Deontological ethics](#). *Stanford Encyclopedia of Philosophy*.
- Edmond Awad, Sohan Dsouza, Richard Kim, Jonathan Schulz, Joseph Henrich, Azim Shariff, Jean-François Bonnefon, and Iyad Rahwan. 2018. The moral machine experiment. *Nature*, 563(7729):59–64.
- Roger A Chadwick, Gregg Bromgard, Irina Bromgard, and David Trafimow. 2006. An index of specific behaviors in the moral domain. *Behavior Research Methods*, 38(4):692–697.
- Scott Clifford, Vijeth Iyengar, Roberto Cabeza, and Walter Sinnott-Armstrong. 2015. Moral foundations vignettes: A standardized stimulus database of scenarios based on moral foundations theory. *Behavior Research Methods*, 47(4):1178–1198.
- Justin Garten, Reihane Boghrati, Joe Hoover, Kate M Johnson, and Morteza Dehghani. 2016. Morality between the lines: Detecting moral sentiment in text. In *Proceedings of IJCAI 2016 Workshop on Computational Modeling of Attitudes*.
- Justin Garten, Joe Hoover, Kate M Johnson, Reihane Boghrati, Carol Iskiwitch, and Morteza Dehghani. 2018. Dictionaries and distributions: Combining expert knowledge and large scale textual data content analysis. *Behavior research methods*, 50(1):344–361.
- Jesse Graham, Jonathan Haidt, Sena Koleva, Matt Motyl, Ravi Iyer, Sean P Wojcik, and Peter H Ditto. 2013. Moral foundations theory: The pragmatic validity of moral pluralism. In *Advances in Experimental Social Psychology*, volume 47, pages 55–130.
- Jesse Graham, Jonathan Haidt, and Brian A Nosek. 2009. Liberals and conservatives rely on different sets of moral foundations. *Journal of Personality and Social Psychology*, 96(5):1029.
- Jonathan Haidt and Craig Joseph. 2004. Intuitive ethics: How innately prepared intuitions generate culturally variable virtues. *Daedalus*, 133(4):55–66.
- Jonathan Haidt, Craig Joseph, et al. 2007. The moral mind: How five sets of innate intuitions guide the development of many culture-specific virtues, and perhaps even modules. *The Innate Mind*, 3:367–391.
- John Hewitt and Christopher D Manning. 2019. A structural probe for finding syntax in word representations. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4129–4138.
- Joe Hoover, Gwenth Portillo-Wightman, Leigh Yeh, Shreya Havaladar, Aida Mostafazadeh Davani, Ying Lin, Brendan Kennedy, Mohammad Atari, Zahra Kamel, Madelyn Mendlen, et al. 2020. Moral foundations Twitter corpus: A collection of 35k tweets annotated for moral sentiment. *Social Psychological and Personality Science*, pages 1–15.
- David Hume. 1751. *An Enquiry Concerning the Principles of Morals*. A. Millar, London.
- Immanuel Kant. 1785. *Grundlegung zur Metaphysik der Sitten*. J.F. Hartknoch, Riga.
- Ying Lin, Joe Hoover, Gwenth Portillo-Wightman, Christina Park, Morteza Dehghani, and Heng Ji. 2018. Acquiring background knowledge to improve moral value prediction. In *2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining (ASONAM)*, pages 552–559.
- Laurens van der Maaten and Geoffrey Hinton. 2008. Visualizing data using t-SNE. *Journal of Machine Learning Research*, 9(Nov):2579–2605.
- Christopher D. Manning, Mihai Surdeanu, John Bauer, Jenny Finkel, Steven J. Bethard, and David McClosky. 2014. [The Stanford CoreNLP natural language processing toolkit](#). In *Association for Computational Linguistics (ACL) System Demonstrations*, pages 55–60.
- Caitlin H McCurrie, Damien L Crone, Felicity Bigelow, and Simon M Laham. 2018. Moral and Affective Film Set (MAAFS): A normed moral video database. *PloS ONE*, 13(11).
- Marlon Mooijman, Joe Hoover, Ying Lin, Heng Ji, and Morteza Dehghani. 2018. Moralization in social networks and the emergence of violence during protests. *Nature Human Behaviour*, 2(6):389–396.
- Jeffrey Pennington, Richard Socher, and Christopher D Manning. 2014. Glove: Global vectors for word representation. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1532–1543.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.

- Patrick Schramowski, Cigdem Turan, Sophie Jentzsch, Constantin Rothkopf, and Kristian Kersting. 2019. BERT has a moral compass: Improvements of ethical and moral values of machines. *arXiv preprint arXiv:1912.05238*.
- Johan AK Suykens and Joos Vandewalle. 1999. Least squares support vector machine classifiers. *Neural Processing Letters*, 9(3):293–300.
- Alan Turing. 1950. Computing machinery and intelligence. *Mind*, 59(236):433–460.
- Amy Beth Warriner, Victor Kuperman, and Marc Brysbaert. 2013. Norms of valence, arousal, and dominance for 13,915 English lemmas. *Behavior Research Methods*, 45(4):1191–1207.
- Norbert Wiener. 1960. Some moral and technical consequences of automation. *Science*, 131(3410):1355–1358.
- Jing Yi Xie, Renato Ferreira Pinto Jr., Graeme Hirst, and Yang Xu. 2019. Text-based inference of moral sentiment change. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*.