

A Framework of Randomized Selection Based Certified Defenses Against Data Poisoning Attacks

Ruoxin Chen,¹ Jie Li,¹ Chentao Wu,¹ Bin Sheng,¹ Ping Li,²

¹ Shanghai JiaoTong University

²The Hong Kong Polytechnic University

Abstract

Neural network classifiers are vulnerable to data poisoning attacks, as attackers can degrade or even manipulate their predictions through poisoning only a few training samples. However, the robustness of heuristic defenses is hard to measure. Random selection based defenses can achieve certified robustness by averaging the classifiers' predictions on the sub-datasets sampled from the training set. This paper proposes a framework of random selection based certified defenses against data poisoning attacks. Specifically, we prove that the random selection schemes that satisfy certain conditions are robust against data poisoning attacks. We also derive the analytical form of the certified radius for the qualified random selection schemes. The certified radius of bagging derived by our framework is tighter than the previous work. Our framework allows users to improve robustness by leveraging prior knowledge about the training set and the poisoning model. Given higher level of prior knowledge, we can achieve higher certified accuracy both theoretically and practically. According to the experiments on three benchmark datasets: MNIST 1/7, MNIST, and CIFAR-10, our method outperforms the state-of-the-art.

Introduction

Neural network classifiers are vulnerable to designed training samples added in the training set or the testing data (Biggio, Nelson, and Laskov 2012; Szegedy et al. 2014). Manipulating 1% of the dataset can cause the target image to be misclassified at a 90% success rate (Huang et al. 2020). Inserting less than 5% poisoned training samples can make the classifier's feature selection almost randomly (Xiao et al. 2015). There exists many kinds of data poisoning attacks (Chen et al. 2017; Liu et al. 2018; Turner, Tsipras, and Madry 2018; Zhao et al. 2020; Turner, Tsipras, and Madry 2019; Ji, Zhang, and Wang 2017; Yao et al. 2019b; Zhang et al. 2020; Yao et al. 2019a). Therefore, it is urgent to develop defenses against data poisoning attacks. Many heuristic defenses have been proposed (Wang et al. 2019; Chen et al. 2018; Chen et al. 2019; Gao et al. 2019; Tran, Li, and Madry 2018; Liu et al. 2019; Qiao, Yang, and Li 2019; Steinhardt, Koh, and Liang 2017) against data poisoning attacks, but the security level of those defenses is hard to measure. To

achieve certified robustness, various certified defenses have been proposed, including randomized smoothing based defenses (Wang et al. 2020; Rosenfeld et al. 2020; Jia, Cao, and Gong 2020), loss based defenses (Steinhardt, Koh, and Liang 2017) and differential privacy based defenses (Ma, Zhu, and Hsu 2019). Compared with other defenses, randomized smoothing has no limitation on the training algorithms and is able to certify robustness for each testing data. To our knowledge, previous works of randomized smoothing defenses only considered one specific smooth scheme. There is a lack of a framework of randomized smoothing based defenses in defending data poisoning attacks.

In this paper, we propose a framework of random selection based defenses against data poisoning attacks, which is a subset of randomized smoothing. Our framework shows that any random selection scheme satisfying certain conditions is robust to data poisoning attacks. Through our framework, we can derive the certified radius for all qualified random selection schemes, including bagging. We also propose a method to enhance robustness by leveraging 2 types of prior knowledge: the prior knowledge about the training set and the poisoning model. We divide the poisoning model into 6 cases and the prior knowledge about the training set into 3 cases. We can improve the derived certified radius theoretically when the poisoning model is weak. When we have high level of prior knowledge about the training set, we propose 2-phase classification to enhance robustness empirically. In addition, our training algorithms use a weight balance method to solve the problem of low certified accuracy when the size of the selection is small. Our contributions are as follow:

- We propose a framework of random selection based defenses against data poisoning attacks. The certified radius derived by our framework is tighter than previous works.
- We propose a method to enhance robustness by leveraging prior knowledge about the training set and the poisoning model, which makes our framework more practical in real applications.
- We evaluate 3 random selection based defenses across three classification tasks: MNIST 1/7, MNIST and CIFAR-10. Our certified accuracy outperforms previous works.

Related Works

Previous works have investigated in using randomized smoothing to defend data poisoning attacks. The main challenges in applying randomized smoothing are choosing an appropriate smooth scheme and deriving its certified radius. Rosenfeld et al. (Rosenfeld et al. 2019) proposed the random flip scheme to defend label flipping attacks, but Rosenfeld has not considered the attacks of modifying training data. Wang et al. (Wang et al. 2020) proposed the smooth scheme of adding noise into each training sample to defend backdoor attacks, but the certified radius derived by Wang is loose. Jia et al. (Jia, Cao, and Gong 2020) proposed the bagging smooth scheme, which is a variant of random selection schemes. However, Jia has not considered other random selection schemes in defending data poisoning attacks. We also find that the certified radius derived by Jia still has room for improvement. The randomized smoothing defenses also have their intrinsic limitation. Weber and Kumar et al. (Weber et al. 2020; Kumar et al. 2020) have proved the no-go theorem for randomized smoothing independently: *without more information than label statistics under random input perturbations, the largest ℓ_p certified radius decreases as $O(d^{1/p-1/2})$ with dimension d for $p > 2$* . This theorem proves the upper bound for the robustness of randomized smoothing methods. To bypass this limitation, leveraging prior knowledge is necessary. Jia et al. (Jia, Cao, and Gong 2020) propose to use transfer learning to improve robustness. However, the improvement of transfer learning methods is depending on the pre-train models. In many cases, a satisfactory pre-train model is not available. Instead of pre-train models, we propose to use prior knowledge about the poisoning model and the training set to improve robustness. The prior knowledge about the training set is the clean training samples known in advance, which is more practical than pre-train models.

Preliminaries

Neural Network

A neural network $h(x|D_n) : \mathbb{R}^d \rightarrow \mathcal{Y}$ is a mapping from the input feature space to the output space. We refer to the input space as $\mathbb{R}^d$ and the output space as $\mathcal{Y} \stackrel{\text{def}}{=} \{y : y = 0, 1, \dots, k\}$. The confidence for each class is $h^c(x) : \mathbb{R}^d \rightarrow [0, 1]$ ($c = 1, 2, \dots, k$). We rank each class by its confidence in decreasing order $c_1(x), c_2(x), \dots, c_k(x)$. We denote the confidence of $c_i(x)$ as $p_i(x) \stackrel{\text{def}}{=} h^{c_i}(x)$.

Classifier

We refer to $D_n \stackrel{\text{def}}{=} \{(x_i, y_i)_{i=1}^n : x_i \in \mathbb{R}^d, y_i \in \mathcal{Y}\}^k$ as the training set¹. $h(x|D_n)$ is the classifier trained on the dataset D_n . In this paper, we mainly focus on the relation between the predictions and the training set. We express $h(x|D_n)$ as $f_x(D_n)$, as a function of D_n when x is fixed. $f_x(D_n)$ can be any deterministic or random function.

¹We only consider the training sample of unique label

Poisoning model

Poisoning model is prior knowledge about the attacker's capability. We denote the poisoning model as $P_\rho : D_n \rightarrow \{D'_m\}$ that maps a dataset to a set of all possible poisoned datasets. ρ is the intensity of the poisoning attacks. In this paper, we consider 6 cases of the poisoning model:

1. (P_ρ^1) Insert at most ρ arbitrary samples into D_n .
2. (P_ρ^2) Delete at most ρ arbitrary samples in D_n .
3. (P_ρ^3) Modify at most ρ arbitrary samples in D_n .
4. (P_ρ^4) Insert and/or modify at most ρ arbitrary samples in D_n .
5. (P_ρ^5) Delete and/or modify at most ρ arbitrary samples in D_n .
6. (P_ρ^6) Insert, delete and/or modify at most ρ arbitrary samples in D_n .

We do not consider the case of **Insertion and deletion** because the effect of deleting k training sample and inserting k new sample simultaneously is equivalent to modifying k training sample. In the later of this paper, we will show how to leverage the information about the poisoning model to improve robustness.

Random selection scheme

A random selection scheme is a scheme of selecting a subset from the dataset $\mu : D_n \rightarrow D_{sub}$. Here $D_{sub} = \{(x_i, y_i)_{i \in S} : S \subset \{1, 2, \dots, n\}\}$. Random selection schemes will not modify any sample in D_n .

Certified radius

Given a classifier $f_x(\cdot)$ and the poisoning model P_ρ , the certified radius of $f_x(\cdot)$ at x under P_ρ is the maximum value of ρ that satisfies:

$$f_x(D'_m) = f_x(D_n), \forall D'_m \in P_\rho(D_n)$$

Certified radius means the maximum attack intensity that the defense can defend.

Proposed Framework

In this paper, our goal is to solve the following 2 problems:

1. Which random selection schemes are robust to the poisoning model?
2. How to compute the certified radius of the random selection schemes that are robust to the poisoning model?

In this section, we solve the above 2 problems by Theorem 1. To show the applicability of Theorem 1, we propose 3 commonly used variants of random selection schemes. All 3 schemes satisfy the conditions proposed in theorem 1. Finally we propose 2 training algorithms for different cases of prior knowledge about the training set to apply random selection schemes into practice.

To achieve certified robustness against the attack where training samples are arbitrarily changed, we first assume that the prediction will change if the training set contains greater

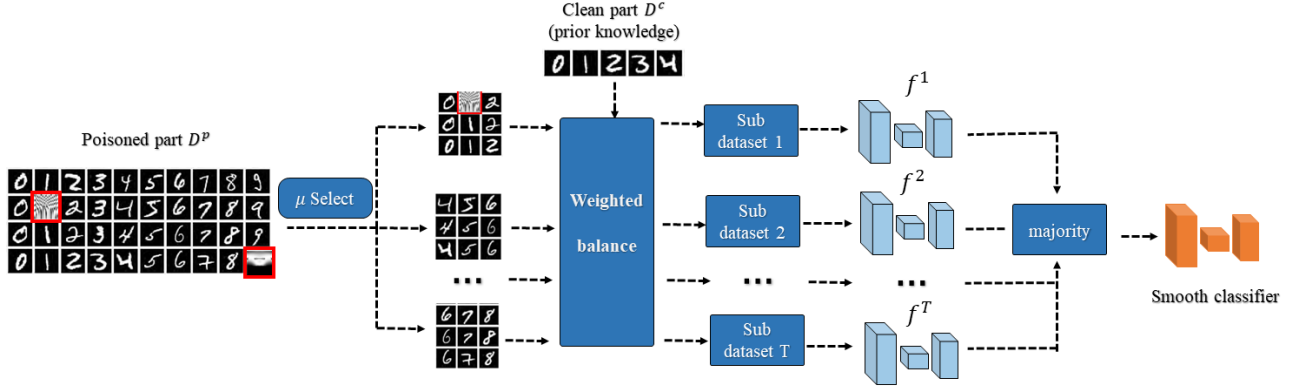


Figure 1: A sketch map of random selection based defenses. We sample T sub-datasets $\{D_{sub}^i\}_{i=1}^T = \mu(D^p)$ from the poisoned part D^p of the training set. μ is the random selection scheme. We combine $\{D_{sub}^i\}_{i=1}^T$ with the clean part D^c of the training set to generate the training set for the base classifiers $D_{sub} \cup D^c$. We train T base classifiers on T datasets $\{D_{sub}^i \cup D^c\}_{i=1}^T$. The smooth classifier g is the aggregation of those T base classifiers by majority rule.

than or equal to one poisoned training sample. The assumption is conservative but reasonable because there is no limitation on the neural networks. For a simple model like logistic regression, changing only one training sample can largely affect its predictions. We propose random selection methods to prevent predictions from being affected by limited number of poisoned training samples greatly. The main idea of random selection is to sample a subset of the training set and learns the base classifiers on the subset, which is showed in Figure 1. Theorem 1 gives the theoretical guarantee for the robustness of random selection schemes. The proof of theorem 1 is in the appendix due to space limitation.

Theorem 1. Given any classifier $f_x(\cdot)$, the smooth classifier of the random selection scheme μ is $g_x(\cdot) = \mathbb{E}_{D_{n_s} \sim \mu_{n_s}(D_n)} f_x(\cdot)$. Let g_x predicts top-2 classes c_1, c_2 with the confidence p_1, p_2 ($p_1 > p_2$) respectively. Let $P_\rho : D_n \rightarrow D'_m$ as the poisoning model. Let $\Omega = D_n \cap D'_m$ be the set of unmodified samples. If the random selection scheme μ satisfies

$$\forall D'_m \in P_\rho(D_n), \exists \text{ constants } \pi_1, \pi_2 \quad (1)$$

$$\text{s.t. } \forall D_{sub} \in \Omega \quad (2)$$

$$\pi_2 \Pr(\mu(D_n) = D_{sub}) \geq \Pr(\mu(D'_m) = D_{sub}) \quad (3)$$

$$\Pr(\mu(D'_m) = D_{sub}) \geq \pi_1 \Pr(\mu(D_n) = D_{sub}) \quad (4)$$

and if p_1, p_2 satisfy:

$$\begin{aligned} \pi_1 p_1 - \pi_1 \sum_{D_{sub} \notin \Omega} \Pr(\mu(D_n) = D_{sub}) &\geq \\ \pi_2 p_2 + \sum_{D_{sub} \notin \Omega} \Pr(\mu(D'_m) = D_{sub}) &\end{aligned} \quad (5)$$

Then:

$$g_x(D'_m) = c_1 \quad (6)$$

According to Theorem 1, if we can find π_1, π_2 for the random selection scheme μ , μ is robust to data poisoning attacks. Given the poisoning model P_ρ , we can compute the

tight certified radius according to the equation 5. To show the applicability of Theorem 1, we give 3 typical random selection schemes and prove that they all satisfy the conditions.

Certified robustness of 3 random selection schemes

We introduce 3 typical random selection schemes: bagging without replacement, bagging with replacement and binomial selection. Those 3 schemes all have the property $\pi_1 = \pi_2$, so the inequality 5 can be simplified to be $p_1 - p_2 \geq \delta(\rho)$ where $\delta(\rho)$ is

$$\sum_{D_{sub} \notin \Omega} \Pr(\mu(D_n) = D_{sub}) + \frac{1}{\pi_1} \sum_{D_{sub} \notin \Omega} \Pr(\mu(D'_m) = D_{sub})$$

$\delta(\rho)$ is the minimum value of $p_1 - p_2$ for x to be robust against poisoning ρ training samples. $\delta(\rho)$ increases in proportion to ρ . $\delta(\rho) = 0$ when $\rho = 0$. We will give analytical forms of $\delta(\rho)$ for 3 schemes.

1. (Bagging without replacement). Given D_n and let n_s be the size of D_{sub} , bagging without replacement μ is:

$$\Pr(\mu(D_n) = D_{sub}) = 1 / \binom{n}{n_s} \quad (7)$$

2. (Bagging with replacement). Given D_n and n_s , bagging with replacement μ is.

$$\Pr(\mu(D_n) = D_{sub}) = \left(\frac{1}{n}\right)^{n_s} \quad (8)$$

3. (Binomial selection). For each sample $(x_i, y_i)_{i=1}^n \in D_n$, the probability of (x_i, y_i) being selected is $p = n_s/n$.

$$\Pr(\mu(D_n) = D_{sub}) = p^{n_s} (1-p)^{n-n_s} \quad (9)$$

$\delta(\rho)$ of 3 random selection schemes against the poisoning model P_ρ are as follow:

Corollary 1. (Certified robustness of bagging without replacement). π_1, π_2 of bagging without replacement is

$$\pi_1 = \pi_2 = \binom{m}{n_s} / \binom{n}{n_s} \quad (10)$$

$\delta(\rho)$ of bagging without replacement is

$$\max_{m \in [n-\rho, n+\rho]} 1 - \binom{\max(m, n) - \rho}{n_s} / \binom{n}{n_s} + \binom{n}{n_s} / \binom{m}{n_s} - \binom{n}{n_s} \binom{\max(m, n) - \rho}{n_s} / \binom{m}{n_s}^2$$

Corollary 2. (Certified robustness of bagging with replacement). π_1, π_2 of bagging with replacement is

$$\pi_1 = \pi_2 = \left(\frac{n}{m}\right)^{n_s} \quad (11)$$

$\delta(\rho)$ of bagging without replacement is

$$\max_{m \in [n-\rho, n+\rho]} 1 + \left(\frac{m}{n}\right)^{n_s} - 2 \left(\frac{\max(m, n) - \rho}{n}\right)^{n_s}$$

Corollary 3. (Certified robustness of binomial selection). π_1, π_2 of binomial selection is

$$\pi_1 = \pi_2 = (1 - p)^{m-n} \quad (12)$$

$\delta(\rho)$ of binomial selection is

$$\max_{m \in [n-\rho, n+\rho]} 1 + (1 - p)^{n-m} - 2(1 - p)^{\min(n-m, 0) + \rho} \quad (p = n_s/n)$$

Comparison with previous works To our knowledge, only bagging with replacement (Jia, Cao, and Gong 2020) and differentially-private learners (Ma, Zhu, and Hsu 2019) achieve certified robustness against general data poisoning attacks. The assumption of differentially-private learners is different from us, so it is hard to compare with it theoretically. Therefore, we only compare our theory with (Jia, Cao, and Gong 2020). Compared with (Jia, Cao, and Gong 2020), δ derived by Jia contains 2 additional non-negative terms $\underline{p}_1 - (\lfloor \underline{p}_1 \cdot n^k \rfloor / n^k)$ and $\bar{p}_2 - (\lceil \bar{p}_2 \cdot n^k \rceil / n^k)$. In almost all cases, those 2 terms are greater than 0. Therefore, the certified robustness derived by us is tighter than Jia.

Prior knowledge about poisoning model P If we know the poisoning model P in advance, we can add additional restriction on the variable m and $\delta(\rho)$ to derive lower $\delta(\rho)$. Here we formulate 6 cases of poisoning model into the form that can be used into our theorem 1.

1. (P_1)

$$m \in [n, n + \rho], \sum_{D_{sub} \notin \Omega} Pr(\mu(D_n) = D_{sub}) = 0$$

2. (P_2)

$$m \in [n - \rho, n], \sum_{D_{sub} \notin \Omega} Pr(\mu(D'_m) = D_{sub}) = 1$$

3. (P_3) $m = n$

4. (P_4) $m \in [n, n + \rho]$

5. (P_5) $m \in [n - \rho, n]$

6. (P_6) $m \in [n - \rho, n + \rho]$

A comparison of 3 random selection schemes

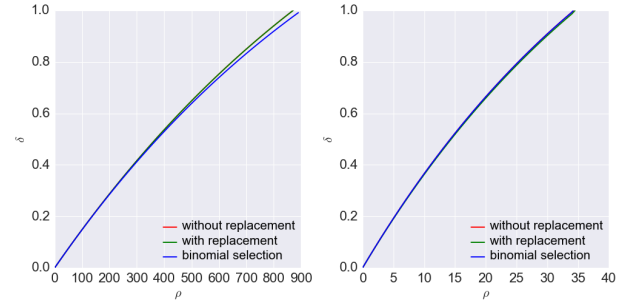


Figure 2: $\delta(\rho)$ of 3 random selection schemes as a function of ρ under the poisoning scheme P_6 . **Left:** $n = 13007, n_s = 10$. **Right:** $n = 50000, n_s = 1000$.

In Figure 2, we show $\delta(\rho)$ of 3 random selection schemes respectively. When n and n_s are small, $\delta(\rho)$ of binomial selection is the smallest and $\delta(\rho)$ of bagging without replacement is the highest. When n and n_s are large, $\delta(\rho)$ of 3 random selection schemes are nearly the same.

Practical Algorithm

In practice, evaluating the precise value of p_1, p_2 needs unaffordable computation cost. Therefore, we use a Monte-Carlo method to estimate $\underline{p}_1, \bar{p}_2$. We follow (Jia et al. 2020) to use SimuEM for the confidence interval estimation. We estimate $\underline{p}_1, \bar{p}_2$ with confidence level of $1 - \alpha/2$. Then the simultaneous confidence level of $\underline{p}_1, \bar{p}_2$ is higher than $1 - \alpha$.

$$\underline{p}_1 = \text{BinoCP}(\alpha/2; T, \text{count}(c_1)) \quad (13)$$

$$\bar{p}_2 = \min(1 - \underline{p}_1, \text{BinoCP}(1 - \alpha/2; T, \text{count}(c_2))) \quad (14)$$

Our certified prediction 1 is as follow:

Training algorithms and prior knowledge about D_n

In reality, users may know the clean part D^c of D_n in advance. In this case, D_n can be divided into 2 parts: the clean part D^c and the potentially poisoned part D^p . $D^c = \emptyset$ means that all the training samples have the probability of being poisoned. Treating D^c in the same way as D^p is not ideal. We regard D^c as prior knowledge and only apply random selection schemes on D^p . However, how to leverage D^c efficiently is a problem. We divide prior knowledge into 3 cases as Figure3.

1. (Case 1). The attacker can poison all the training samples in D_n . ($D^c = \emptyset$)

Algorithm 1 Certified prediction

Input: The input x , the smooth classifier g , the number of selections N_s , the size of poisoned part N_p ;
Output: Prediction y and certified radius $r(x)$;
 1: Compute $f_i(x)_{i=1}^T$ and counts the number of labels;
 2: $c_1, c_2 \leftarrow \text{top-2 classes in } \{f_i(x)\}_{i=1}^T$;
 3: $\text{count}_1, \text{count}_2 \leftarrow \text{Count}(c_1), \text{Count}(c_2)$;
 4: $p_1 \leftarrow \text{BINOC}(p/\alpha, \text{count}_1, T)$,
 $\bar{p}_2 \leftarrow \text{BINOC}(1 - p/\alpha, \text{count}_2, T)$;
 5: Compute $r(x) = \max \rho$ that satisfies $\delta(\rho) \leq p_1 - \bar{p}_2$
 6: **if** $r(x)$ not exists **then**
 7: **return** ABSTAIN, ABSTAIN
 8: **else**
 9: **return** $y = c_1$ and $r(x)$;
 10: **end if**

2. (Case 2). The attacker can operate limited number of training samples in the poisoned part of the training set. (D^c is a set of several training samples)
3. (Case 3). The attacker can operate limited number of training samples of specific classes. (D^c is all the training samples from the unpoisoned classes)



Figure 3: A toy example of 3 conditions. We assume D_n is those 40 training samples and the attacker can poison at most 2 samples. **Case 1:** the attacker modifies 2 arbitrary samples. **Case 2:** the attacker poisons 2 samples in the poisoned part D^p . **Case 3:** the attacker poisons 2 samples of classes 8, 9.

In this section, we propose 2 training algorithms corresponding to the above 3 cases.

Training algorithm for cases 1,2 We sample T sub-datasets of size n_s from D_n and train T base classifiers on those T sub-datasets. In practice, we found that the sampled sub-datasets are usually imbalanced. Especially when n_s is small, the problem of imbalance is highly severe. The base classifiers tend to predict the most frequent class in the sub-datasets. The most frequent class of each sampled sub-dataset has a high probability to be different, which causes T base classifiers tend to make different predictions. Therefore, imbalance not only decreases the accuracy of base clas-

sifiers, but also lower the robustness of the smooth classifiers. We use the weighted balance method to eliminate the negative influence brought from the imbalance in D_n . The training algorithm for cases 1,2 is showed in Algorithm 2

Algorithm 2 The training algorithm for cases 1,2

Input: The potentially poisoned part of the training set D^p , the clean part of the training set D^c , selection size n_s , the number of base classifiers T ;
Output: smooth classifier g ;
 1: **for** i in range(T) **do**
 2: Sample a n_s -size sub-dataset from D^p : $D_{n_s}^i = \mu(D^p)$;
 3: Sample *minibatches* from $\text{BALANCE}(D_{n_s}^i \cup D^c)$
 # $\text{BALANCE}()$ is a sample balancing method;
 4: Train f^i on the *minibatches*;
 5: **end for**
 6: **return** $g = \text{Maj}(f^1, f^2, \dots, f^T)$ # Majority rule;

Algorithm 3 2-phase weighted training for case 3

Input: The potentially poisoned part of the training set D^p , the clean part of the training set D^c , selection size n_s , the number of base classifiers T ;
Output: smooth classifier g ;
 1: **for** i in range(T) **do**
 2: Sample a n_s -size sub-dataset from D^p : $D_{n_s}^i = \mu(D^p)$;
 3: Construct training set $D_{sub}^i = D_{n_s}^i \cup D^c$;
 # All the samples in D^c is of the class $\tilde{c}$
 4: $\tilde{D}_{sub}^i, G_{D_{sub}^i} = \text{DETERMINE}(D_{sub}^i, \text{HASH}(), G)$;
 5: Sample *minibatches* from $\text{BALANCE}(\tilde{D}_{sub}^i \cup D^c)$
 # $\text{BALANCE}()$ is a sample balancing method
 6: Train f^i on the *minibatches*;
 7: **end for**
 8: Train ϕ_2 on the dataset D^c for the 2nd phase classification;
 9: **return** $g = \phi_2(\text{Maj}(\phi_1^1, \phi_1^2, \dots, \phi_1^T))$ # Majority rule;

Training algorithm for case 3 We refer to the set of clean classes and the set of potentially poisoned classes as $C_{\text{clean}}, C_{\text{poisoned}}$ respectively. $C_{\text{clean}} \cup C_{\text{poisoned}}$ is the set of all classes. For convenience, we use a virtual class $\tilde{c}$ to represent C_{clean} . The main idea is to use 2-phase classifiers as the base classifiers for case 3. In the 1st phase, we use the sub-classifier ϕ_1 to classify x to be which class among $\tilde{c} \cup C_{\text{poisoned}}$. If $\phi_1(x) = \tilde{c}$, we use the sub-classifier ϕ_2 to classify x to be which class in C_{clean} . The base classifier is $\phi_2(\phi_1(\cdot))$. For the i th base classifier, the sub-classifier ϕ_1^i is trained on the sub-dataset $D_{sub}^i \cup D^c$, $D_{sub}^i \in D^p$. ϕ_2 is trained on the clean dataset D^c , so ϕ_2 would not be affected by poisoning attacks. We let all the base classifiers share the same ϕ_2 . If two sub-classifiers ϕ_1^i, ϕ_1^j predict the same class, the prediction of the base classifiers $\phi_1^i(\phi_2)$ and $\phi_1^j(\phi_2)$ will

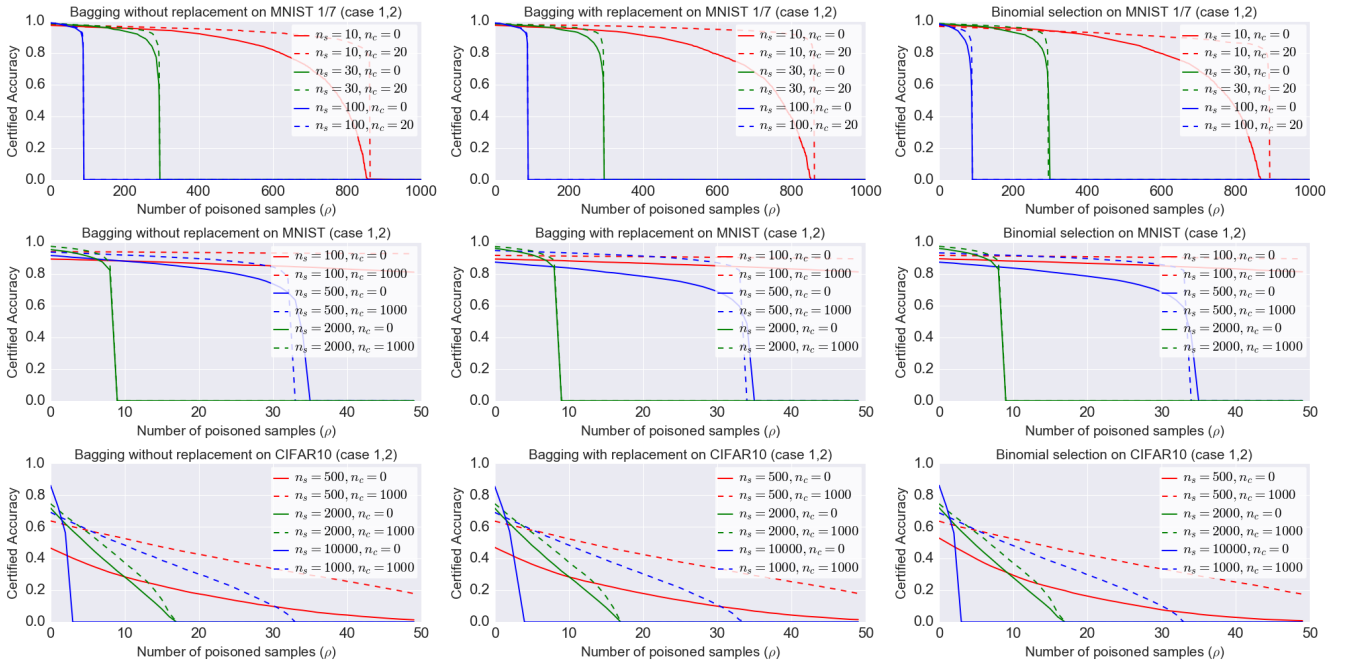


Figure 4: Experiments of 3 random selection schemes on MNIST 1/7 (**Top row**), full MNIST (**Middle row**) and CIFAR10 (**Bottom row**). **Left**: bagging without replacement 1, **Middle**: bagging with replacement 2 **Right**: binomial selection 3 (n_s : the size of the random selection, n_c : the number of known clean samples).

be the same. Therefore, training T base classifiers is equal to training T sub-classifiers $\{\phi_1^i\}_{i=1}^T$ on $\{D_{sub}^i \cup D^c\}_{i=1}^T$ and one ϕ_2 . The original $\#C_{clean} + \#C_{poisoned}$ classification task is converted into a $1 + \#C_{poisoned}$ classification task. The complexity of neural networks ϕ_1 and ϕ_2 can be much lower than the original base classifiers, which decreases computation cost.

Experiment

Experimental Setup

To compare fairly, we conduct experiments on three typical datasets: MNIST 1/7 (13,007 training samples), MNIST (60,000 training samples) and CIFAR10 (60,000 training samples), which are the same as previous works. We use LeNet for MNIST 1/7, MNIST and use ResNet 18 for CIFAR10. We train $T = 1000$ base classifiers for MNIST, 1/7 MNIST and $T = 500$ base classifiers for CIFAR-10. For all base classifiers, we use the weight balance method to train. We found that when the size of D_{sub} is small, the I/O cost of loading D_{sub} is much higher than computation. When $n_s = 10$ for MNIST 1/7, the GPU-Util is only 1%. Therefore, for each sampled sub-dataset D_{sub} , we apply **WeightedRandomSampler** to expand D_{sub} to a fixed-size dataset. We can achieve convergence after training only a few epochs on the expanded dataset, which vastly accelerates the training. For conciseness, we use scheme 1, 2, 3 to represent the bagging without replacement, the bagging with replacement and the binomial selection respectively.

We evaluate robustness of the defenses by their certified

accuracy. Given ρ , the certified accuracy of ρ is:

$$CA = \frac{1}{n} \sum_{i=1}^n 1 \{g_{x_i}(D_n) = y_i \text{ and } \underline{p}_1 - \overline{p}_2 \geq \delta(\rho)\} \quad (15)$$

where $\underline{p}_1, \overline{p}_2$ is estimated by SimuEM with confidence level 0.999, which is the same as (Jia, Cao, and Gong 2020).

A comparison on 3 random selection schemes (case 1, 2)

Figure 4 shows the performances of 3 random selection schemes on MNIST 1/7, full MNIST and CIFAR-10. The certified accuracy of 3 random selection schemes is nearly the same across all the combinations of n_s and n_c . However, for the dataset MNIST 1/7 when $n_s = 10, n_c = 0$, the certified accuracy of scheme 3 decreases to 0% at 868 while scheme 1, 2 are at 855, 857 respectively. This is because $\delta(\rho)$ of scheme 3 is less than the $\delta(\rho)$ of scheme 1, 2 when the size of the training set n and the selection size n_s are small, which is showed in Figure 2. Some people may worry that the variation in the sizes of sub-datasets sampled by scheme 3 will cause several base classifiers to perform not well. Figure 5 shows the distribution of the sizes of the sub-datasets and the average accuracy corresponding to the size of training set. Among $T = 1000$ sub-datasets, more than 994 datasets are of the sizes larger than 3. The accuracy of 994 base classifiers is higher than 80%. MNIST 1/7 is a simple classification task, so the classifiers trained with few samples can achieve high accuracy. On full MNIST and CIFAR-10, 3 schemes perform almost the same. One reason is showed in Figure 2: when $n_s + n_c$ is large, $\delta(\rho)$ of

3 schemes are nearly the same. Another reason is that when the classification task is not simple, the improvement in accuracy needs bigger changes of the dataset. Therefore, the accuracy of 3 schemes is close.

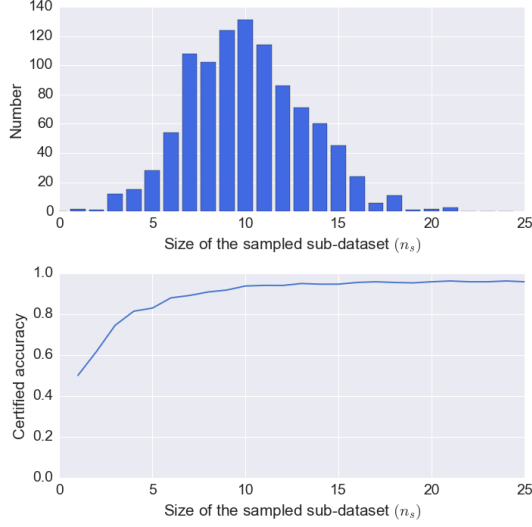


Figure 5: **Top:** the number of the n_s -size sub-datasets sampled by the binomial selection. The number of all sub-datasets is 13007, which is the size of MNIST 1/7 training set. **Bottom:** the average clean accuracy as a function of the size of the datasets.

A comparison on case 3

We conduct experiments on MNIST to compare the 2-phase classifiers with the traditional training algorithm used in (Jia, Cao, and Gong 2020). For a fair comparison, we use the random selection scheme 2, which is the same as (Jia, Cao, and Gong 2020). Let 0, 1, 2, 3, 4, 5, 6, 7, 8 to be the clean classes and 9 to be the poisoned class. In our 2-phase classification, the dataset for training the 2nd-phase sub-classifier ϕ_2 is well balanced. Therefore, we can easily train ϕ_2 of the accuracy of classifying 0, 1, 2, 3, 4, 5, 6, 7, 8 up to 99.1%. For the 1st-phase sub-classifier ϕ_1 , we use the weight balance method to balance the dataset for the binary classification. In Figure 6, the accuracy of ϕ_1 is higher than 95% as $n_s = 10$. For all the values of ρ , the certified accuracy of the 2-phase classifier outperforms that of the classifier trained by the traditional training algorithm.

A comparison with other methods

We only compare our random selection defenses with bagging method (Jia, Cao, and Gong 2020) because it outperforms other 2 methods (Rosenfeld et al. 2019; Ma, Zhu, and Hsu 2019) largely in the experiments of (Jia, Cao, and Gong 2020). The bagging method is the same as scheme 2. For case 1,2, the $\delta(\rho)$ of scheme 2 is larger than scheme 3 that we propose. Therefore, scheme 3 achieve better certified accuracy in MNIST 17 when $n_s = 10, n_c = 0$ as showed in Figure 4. For case 3, we propose 2-phase classifiers, which outperforms previous training algorithms.

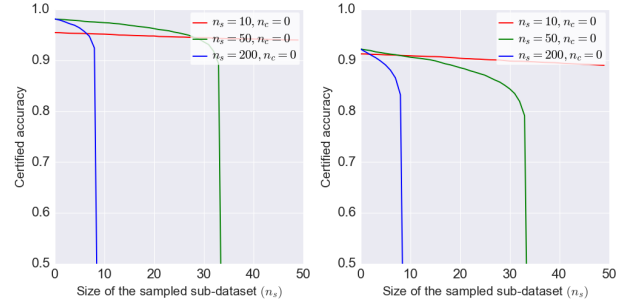


Figure 6: **Left:** the certified accuracy of 2-phase classifiers 3 as a function of the size of the sub-datasets n_s . **Right:** the certified accuracy of classifiers trained by the algorithm 2 as a function of the size of the sub-datasets n_s .

Ablation study

Impact of the random selection scheme When the classification task is simple, which means classifiers trained on a small size sub-dataset can already achieve high accuracy, scheme 3 may be the best choice among 3 random selection schemes. It is because $\delta(\rho)$ of scheme 3 is lower than other 2 schemes when n and n_s are small. When the classification task is difficult, which means only the classifiers trained on large size sub-datasets can achieve ideal accuracy, 3 schemes perform nearly the same.

Impact of n_s n_s is the size of the selection. As n_s increases, each sub-dataset contains more training samples. Therefore, the accuracy of the smooth classifiers increases. Higher n_s also results in higher $\delta(\rho)$, so $p_1 - \bar{p}_2$ needs to be larger for the same ρ . Therefore, n_s controls the trade-off between the clean accuracy and robustness.

Impact of n_c n_c is the size of the clean part D^c . In all experiments, the certified accuracy at all ρ improves as n_c increases. For the random selection schemes at small n_s , the degree of the increase in certified accuracy is higher than that of the high n_s .

Conclusion

We propose a general framework of random selection based certified defenses against data poisoning attacks in this work. We prove the certified robustness of all the random selection schemes that satisfy our proposed conditions. The certified radius derived from our framework is tighter than previous works. To make our framework more practical, we consider the leverage of prior knowledge about the training set and the attacker's capability. Given prior knowledge about the training set, our certified radius can be tighter. Given prior experience of the poisoning model, our training algorithm can achieve better certified accuracy practically. Our framework shows the potential of random selection schemes in defending data poisoning. Our study highlights the use of prior knowledge for the improvement of randomized smoothing. We hope our framework would inspire the future work on random selection based defenses.

References

- Biggio, B.; Nelson, B.; and Laskov, P. 2012. Poisoning Attacks against Support Vector Machines. In *Proceedings of the 29th International Conference on Machine Learning*, 1467–1474.
- Chen, B.; Carvalho, W.; Baracaldo, N.; Ludwig, H.; Edwards, B.; Lee, T.; Molloy, I.; and Srivastava, B. 2018. Detecting backdoor attacks on deep neural networks by activation clustering. *arXiv preprint arXiv:1811.03728*.
- Chen, H.; Fu, C.; Zhao, J.; and Koushanfar, F. 2019. DeepInspect: A Black-box Trojan Detection and Mitigation Framework for Deep Neural Networks. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence*, 4658–4664.
- Chen, X.; Liu, C.; Li, B.; Lu, K.; and Song, D. 2017. Targeted Backdoor Attacks on Deep Learning Systems Using Data Poisoning. *arXiv preprint arXiv:1712.05526*.
- Gao, Y.; Xu, C.; Wang, D.; Chen, S.; Ranasinghe, D. C.; and Nepal, S. 2019. STRIP: a defence against trojan attacks on deep neural networks. In *Proceedings of the 35th Annual Computer Security Applications Conference on*, 113–125.
- Huang, W. R.; Geiping, J.; Fowl, L.; Taylor, G.; and Goldstein, T. 2020. MetaPoison: Practical General-purpose Clean-label Data Poisoning. *arXiv preprint arXiv:2004.00225*.
- Ji, Y.; Zhang, X.; and Wang, T. 2017. Backdoor attacks against learning systems. In *2017 IEEE Conference on Communications and Network Security (CNS)*, 1–9. IEEE.
- Jia, J.; Cao, X.; and Gong, N. Z. 2020. Intrinsic Certified Robustness of Bagging against Data Poisoning Attacks. *arXiv preprint arXiv:2008.04495*.
- Jia, J.; Cao, X.; Wang, B.; and Gong, N. Z. 2020. Certified Robustness for Top-k Predictions against Adversarial Perturbations via Randomized Smoothing. In *ICLR 2020 : Eighth International Conference on Learning Representations*.
- Kumar, A.; Levine, A.; Goldstein, T.; and Feizi, S. 2020. Curse of Dimensionality on Randomized Smoothing for Certifiable Robustness. *arXiv preprint arXiv:2002.03239*.
- Liu, Y.; Lee, W.-C.; Tao, G.; Ma, S.; Aafer, Y.; and Zhang, X. 2019. ABS: Scanning Neural Networks for Backdoors by Artificial Brain Stimulation. In *CCS '19 Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*, 1265–1282.
- Liu, Y.; Ma, S.; Aafer, Y.; Lee, W.-C.; Zhai, J.; Wang, W.; and Zhang, X. 2018. Trojaning Attack on Neural Networks. In *Proceedings 2018 Network and Distributed System Security Symposium*.
- Ma, Y.; Zhu, X.; and Hsu, J. 2019. Data poisoning against differentially-private learners: Attacks and defenses. *arXiv preprint arXiv:1903.09860*.
- Qiao, X.; Yang, Y.; and Li, H. 2019. Defending Neural Backdoors via Generative Distribution Modeling. In *NeurIPS 2019 : Thirty-third Conference on Neural Information Processing Systems*, 14004–14013.
- Rosenfeld, E.; Winston, E.; Ravikumar, P.; and Kolter, J. Z. 2020. Certified Robustness to Label-Flipping Attacks via Randomized Smoothing. *arXiv preprint arXiv:2002.03018*.
- Rosenfeld, E.; Winston, E.; Ravikumar, P.; and Kolter, Z. 2019. Certified Robustness to Adversarial Label-Flipping Attacks via Randomized Smoothing.
- Steinhardt, J.; Koh, P. W.; and Liang, P. 2017. Certified Defenses for Data Poisoning Attacks. In *NIPS*.
- Szegedy, C.; Zaremba, W.; Sutskever, I.; Bruna, J.; Erhan, D.; Goodfellow, I.; and Fergus, R. 2014. Intriguing properties of neural networks. In *ICLR 2014 : International Conference on Learning Representations (ICLR) 2014*.
- Tran, B.; Li, J.; and Madry, A. 2018. Spectral Signatures in Backdoor Attacks. In *Advances in Neural Information Processing Systems*, 8000–8010.
- Turner, A.; Tsipras, D.; and Madry, A. 2018. Clean-Label Backdoor Attacks.
- Turner, A.; Tsipras, D.; and Madry, A. 2019. Label-Consistent Backdoor Attacks. *arXiv preprint arXiv:1912.02771*.
- Wang, B.; Cao, X.; Jia, J.; and Gong, N. Z. 2020. On Certifying Robustness against Backdoor Attacks via Randomized Smoothing. *arXiv preprint arXiv:2002.11750*.
- Wang, B.; Yao, Y.; Shan, S.; Li, H.; Viswanath, B.; Zheng, H.; and Zhao, B. Y. 2019. Neural Cleanse: Identifying and Mitigating Backdoor Attacks in Neural Networks. In *2019 IEEE Symposium on Security and Privacy (SP)*, 707–723.
- Weber, M.; Xu, X.; Karlas, B.; Zhang, C.; and Li, B. 2020. RAB: Provable Robustness Against Backdoor Attacks. *arXiv preprint arXiv:2003.08904*.
- Xiao, H.; Biggio, B.; Brown, G.; Fumera, G.; Eckert, C.; and Roli, F. 2015. Is Feature Selection Secure against Training Data Poisoning. In *Proceedings of The 32nd International Conference on Machine Learning*, volume 2, 1689–1698.
- Yao, Y.; Li, H.; Zheng, H.; and Zhao, B. Y. 2019a. Latent Backdoor Attacks on Deep Neural Networks. In *CCS '19 Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*, 2041–2055.
- Yao, Y.; Li, H.; Zheng, H.; and Zhao, B. Y. 2019b. Regula Sub-rosa: Latent Backdoor Attacks on Deep Neural Networks. *arXiv preprint arXiv:1905.10447*.
- Zhang, Z.; Jia, J.; Wang, B.; and Gong, N. Z. 2020. Backdoor Attacks to Graph Neural Networks. *arXiv preprint arXiv:2006.11165*.
- Zhao, S.; Ma, X.; Zheng, X.; Bailey, J.; Chen, J.; and Jiang, Y.-G. 2020. Clean-Label Backdoor Attacks on Video Recognition Models. In *CVPR 2020: Computer Vision and Pattern Recognition*, 14443–14452.

Appendix

Proof of Theorem 1

Let $P_\rho : D_n \rightarrow D'_m$ as the training model on the dataset D_n . For all $D'_m \in P_\rho(D_n)$, let Ω be $D_n \cap D'_m$. If the random selection scheme μ satisfies

$$\forall D'_m \in P_\rho(D_n) \quad (16)$$

$$\exists \text{ constant } \pi_1, \pi_2 \quad (17)$$

$$\forall D_{sub} \in \Omega \quad (18)$$

$$\pi_2 Pr(\mu(D_n) = D_{sub}) \geq Pr(\mu(D'_m) = D_{sub}) \geq \pi_1 Pr(\mu(D_n) = D_{sub}) \quad (19)$$

We refer to $g_x(D_n) = \mathbb{E}_{D_{sub} \sim \mu(D_n)} f_x(D_{sub})$ as the smooth classifier (x is arbitrary). Without loss of generality, we assume g predicts c_1, c_2 as the top-2 classes for x . The g 's confidence of c_1, c_2 is p_1, p_2 .

$$\mathbb{E}_{D_{sub} \sim \mu(D_n)} Pr(f_x(D_{sub}) = c_1) = p_1 \quad (20)$$

$$\mathbb{E}_{D_{sub} \sim \mu(D_n)} Pr(f_x(D_{sub}) = c_2) = p_2 \quad (21)$$

Our goal is equal to prove $\forall D'_m \in \{P_\rho(D_n)\}, Pr(g_x(D'_m) = c_1) \geq Pr(g_x(D'_m) = c_2)$. First we consider the case that the attacker only modify D_n , without insertion or deletion. For the poisoned dataset D'_m that different from D_n at most ρ samples. We denote S_ρ as the set of those ρ poisoned samples. Then we have:

$$Pr(g_x(D'_m) = c_1) \quad (22)$$

$$= \mathbb{E}_{D_{sub} \sim \mu(D'_m)} Pr(f_x(D_{sub}) = c_1) \quad (23)$$

$$= \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \quad (24)$$

$$\geq \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) * 0 \quad (25)$$

$$= \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \quad (26)$$

$$= \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \quad (27)$$

For our assumption about μ , we have:

$$\sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \quad (28)$$

$$\geq \pi_1 \left[\sum_{D_{sub} \subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \right] \quad (29)$$

$$= \pi_1 \left[Pr(g_x(D_n) = c_1) - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \right] \quad (30)$$

$$= \pi_1 \left[p_1 - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_1 | D_{sub}) \right] \quad (31)$$

$$\geq \pi_1 \left[p_1 - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) * 1 \right] \quad (32)$$

$$= \pi_1 \left[p_1 - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) \right] \quad (33)$$

Same as the above proof, we have:

$$Pr(g_x(D'_m) = c_2) \quad (34)$$

$$= \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) \quad (35)$$

$$\leq \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) * 1 \quad (36)$$

$$= \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (37)$$

$$\leq \pi_2 \sum_{D_{sub} \subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (38)$$

$$= \pi_2 \left[Pr(g_x(D_n) = c_2) - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) \right] + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (39)$$

$$= \pi_2 \left[p_2 - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) Pr(f_x(D_{sub}) = c_2 | D_{sub}) \right] + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (40)$$

$$\leq \pi_2 \left[p_2 - \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) * 0 \right] + \sum_{D_{sub} \subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (41)$$

$$= \pi_2 p_2 + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (42)$$

if

$$\pi_1 p_1 - \pi_1 \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) \geq \pi_2 p_2 + \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (43)$$

then we have

$$Pr(g_x(D'_m) = c_1) \geq Pr(g_x(D'_m) = c_2) \quad (44)$$

For all the inequalities above 25,29,32,36,38,41, the equalities can hold. Therefore, our bound of the certified radius is tight. The proof of theorem 1 is complete.

Proof of certified radius bound for 3 random selection schemes.

Without loss of generality, we assume D_{sub} is of n_s size. Give m, n , the size of Ω is equal to $\max(m, n) - \rho$. For all 3 random selection schemes that satisfy $\pi_1 = \pi_2$, the inequality 43 can be expressed as

$$p_1 - p_2 \geq \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) + \frac{1}{\pi_1} \sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) \quad (45)$$

Bagging without replacement First we prove μ satisfies theorem 1

$$\forall D_{sub} \in \{D_{sub} : D_{sub} \subset \Omega\} \quad (46)$$

$$Pr(\mu(D_n) = D_{sub}) = \binom{n}{n_s} \quad (47)$$

$$Pr(\mu(D'_m) = D_{sub}) = \binom{m}{n_s} \quad (48)$$

$$\pi_1 = \pi_2 = \binom{m}{n_s} / \binom{n}{n_s} \quad (49)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) = 1 - \binom{max(m, n) - \rho}{n_s} / \binom{n}{n_s} \quad (50)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) = 1 - \binom{max(m, n) - \rho}{n_s} / \binom{m}{n_s} \quad (51)$$

The certified radius is $\max \rho$ that satisfies

$$\max_{n-\rho \leq m \leq n+\rho} 1 - \binom{max(m, n) - \rho}{n_s} / \binom{n}{n_s} + \binom{n}{n_s} / \binom{m}{n_s} - \binom{n}{n_s} \binom{max(m, n) - \rho}{n_s} / \binom{m}{n_s}^2 \leq p_1 - p_2 \quad (52)$$

Bagging with replacement First we prove μ satisfies theorem 1

$$\forall D_{sub} \in \{D_{sub} : D_{sub} \subset \Omega\} \quad (53)$$

$$Pr(\mu(D_n) = D_{sub}) = \left(\frac{1}{n}\right)^{n_s} \quad (54)$$

$$Pr(\mu(D'_m) = D_{sub}) = \left(\frac{1}{m}\right)^{n_s} \quad (55)$$

$$\pi_1 = \pi_2 = \left(\frac{n}{m}\right)^{n_s} \quad (56)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) = 1 - \left(\frac{max(m, n) - \rho}{n}\right)^{n_s} \quad (57)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) = 1 - \left(\frac{max(m, n) - \rho}{m}\right)^{n_s} \quad (58)$$

The certified radius is $\max \rho$ that satisfies

$$\max_{n-\rho \leq m \leq n+\rho} 1 + \left(\frac{m}{n}\right)^{n_s} - 2 \left(\frac{max(m, n) - \rho}{n}\right)^{n_s} \leq p_1 - p_2 \quad (59)$$

Binomial selection μ_p First we prove μ_p satisfies theorem 1

$$\forall D_{sub} \in \{D_{sub} : D_{sub} \subset \Omega\} \quad (60)$$

$$Pr(\mu(D_n) = D_{sub}) = p^{n_s} (1-p)^{n-n_s} \quad (61)$$

$$Pr(\mu(D'_m) = D_{sub}) = p^{n_s} (1-p)^{m-n_s} \quad (62)$$

$$\pi_1 = \pi_2 = (1-p)^{m-n} \quad (63)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D_n) = D_{sub}) = 1 - (1-p)^{min(n-m, 0) + \rho} \quad (64)$$

$$\sum_{D_{sub} \not\subset \Omega} Pr(\mu(D'_m) = D_{sub}) = 1 - (1-p)^{min(m-n, 0) + \rho} \quad (65)$$

The certified radius is $\max \rho$ that satisfies

$$\max_{n-\rho \leq m \leq n+\rho} 1 + (1-p)^{n-m} - 2(1-p)^{min(n-m, 0) + \rho} \leq p_1 - p_2 \quad (66)$$