

Enhancing Dialogue Generation via Multi-Level Contrastive Learning*

Xin Li¹, Piji Li², Yan Wang², Xiaojiang Liu² and Wai Lam¹

¹The Chinese University of Hong Kong

²Tencent AI Lab

{lixin, wlam}@se.cuhk.edu.hk

{pijili, brandenwang, kieranliu}@tencent.com

Abstract

Most of the existing works for dialogue generation are data-driven models trained directly on corpora crawled from websites. They mainly focus on improving the model architecture to produce better responses but pay little attention to considering the quality of the training data contrastively. In this paper, we propose a multi-level contrastive learning paradigm to model the fine-grained quality of the responses with respect to the query. A Rank-aware Calibration (RC) network is designed to construct the multi-level contrastive optimization objectives. Instead of emphasising the sentence-level quality, which may erroneously encourage/suppress the generation of uninformative/informative words, we design an exquisite token-level strategy for estimating the instance loss more accurately. On the other hand, we build a Knowledge Inference (KI) component to capture the keyword knowledge from the reference during training and exploit such information to encourage the generation of informative words. We evaluate the proposed model on a carefully annotated dialogue dataset and the results suggest that our model can generate more relevant and diverse responses compared to the baseline models.

1 Introduction

Response generation for dialogue systems has stimulated great interests for researchers recently [Ritter *et al.*, 2011; Shang *et al.*, 2015; Vinyals and Le, 2015]. The core idea of dialogue generation is to formulate the task as a sequence translation problem and translate the query to a response. One common neural model is the sequence-to-sequence (S2S) encoder-decoder framework [Cho *et al.*, 2014; Sutskever *et al.*, 2014; Bahdanau *et al.*, 2015]. Many approaches have been proposed to improve the basic S2S model for better human-computer conversation performance [Li *et al.*, 2016; Li *et al.*, 2017; Xing *et al.*, 2017; Shao *et al.*, 2017; Xu *et al.*, 2017; Zhou *et al.*, 2017; Pei and Li, 2018; Wang *et al.*, 2018;

Query	Response	Quality
又开始下雨了 It started to rain again	1. 下雨虽然带来很多不便, 可太阳也好无情啊, 就怕晒 Although rains are inconvenient, sunny day is no better than rainy day since I am afraid of the sun.	Relevant and interesting
	2. 最讨厌下雨天! I hate rainy days!	Relevant but simple
	3. 你现在在青岛还是广州? Are you in Qingdao or Guangzhou now?	Acceptable but universal
	4. 嗯, 又下雨了 Yes, it rains again.	Quiet boring
	5. 这所大学和烈士陵园很近 The university is near martyrs cemetery.	Irrelevant

Table 1: Example of a sample from training-set: query with responses in different quality.

Gao *et al.*, 2019a; Zhang *et al.*, 2020; He and Glass, 2020; Tian *et al.*, 2020].

Despite their popularity, these approaches assume that each training sample, namely, query-response pair, contributes equally to the model and ignore the consideration of different response quality contrastively. Table 1 depicts some example responses for a particular query in a dialogue dataset. Both of the first and the second response are relevant to the query but the first one is obviously better when considering informativeness and interestingness. The third response is acceptable for the conversation but quite universal, meaning that, it can also be used to answer other queries. Thus, its quality is not as good as that of the first two responses. The fourth response is poor since it directly copies part of the query. Although the fourth response is not acceptable, it is still better when compared with the fifth response, which is completely irrelevant to the query.

Some initial attempts [Shang *et al.*, 2018; Liu *et al.*, 2018] have been conducted to consider the quality of the training data. Following the idea of instance weighting [Jiang and Zhai, 2007], [Shang *et al.*, 2018] pre-train a calibration network to calculate the response quality score for each training sample (i.e., query-response pair) and update the model with the weighted combination of the sample loss. Similarly, [Liu *et al.*, 2018] estimate the instance score based on the corpus-level n-gram co-occurrence and the length of the response. Both of them are simple to implement but they still have some limitations: (1) The calibration network is only trained on relevant responses and irrelevant responses from other queries and therefore cannot capture the fine-grained

*This work was done when Xin Li was an intern as Tencent AI Lab.

response quality, as exemplified in Table 1; (2) The instance weighting strategy treats all tokens in the response as equal importance to the query by assigning them with the same quality score, which may erroneously encourage the generation of some uninformative words in the relevant responses (e.g., “since” and “afraid” in the first response in Table 1).

To tackle the issues mentioned above, we introduce the Contrastive Learning paradigm [Hadsell *et al.*, 2006; He *et al.*, 2019; Chen *et al.*, 2020; Iter *et al.*, 2020] to model the multi-level fine-grained quality of the responses with respect to the query. Specifically, we develop a Rank-aware Calibration (RC) network aiming for modeling the fine-grained quality and characterizing the response properties (e.g., relevance and informativeness) that will affect the conversation experience with a multi-scale response quality score. The rank-aware calibrator adopts the strategies of pointwise regression and pairwise ranking for gauging the quality of the query-response pair. Besides, to address the second limitation aforementioned, we design a more exquisite strategy to consider the different importance of tokens instead of simply scaling the training sample loss with the response-level quality score. Concretely, we propose to conditionally sample a response via Monte-Carlo Rollout [Yu *et al.*, 2017; Lin *et al.*, 2017] for each gold standard response token and deem the quality scores of the sampled responses as the importance of the tokens in the sample loss estimation.

It is also observed that some meaningful words such as “university” and “martyrs cemetery” in the fifth response in Table 1 are very likely to receive low quality scores due to the irrelevance to the query. Thus, we propose Knowledge Inference (KI) component to explicitly encourage the generation of the informative tokens in the gold standard responses. This component firstly associates the query and the decoder hidden representation with the memories of the informative tokens and then incorporates the summarized memories into each decoding step.

In summary, our contributions are as follows:

- To enhance the performance of dialogue generation, we propose a multi-level contrastive learning paradigm to model the fine-grained quality of the responses with respect to the query.
- We propose a Rank-aware Calibration (RC) network to construct the multi-level contrastive objectives. We further design a strategy to calibrate the model training with token-level quality information.
- We propose to reconsider the generation of some informative words erroneously punished by the calibrator via a tailor-made Knowledge Inference (KI) component.
- We build a dataset with fine-grained response annotations and conduct extensive evaluations. The experimental results validate the effectiveness of the proposed framework.

Code and the labelled dataset will be public to facilitate the research.

2 Model

2.1 Overview

Given a query-response pair $(\mathbf{X}, \mathbf{Y})$, where the query word sequence $\mathbf{X} = \{x_1, x_2, \dots, x_n\}$ and the response word se-

quence $\mathbf{Y} = \{y_1, y_2, \dots, y_m\}$. The aim of the dialogue generation task is to maximize the conditional probability $p(\mathbf{Y}|\mathbf{X})$ and generate the relevant and meaningful responses with respect to the query.

As shown in Figure 1, the model proposed in this paper consist of three major components: the backbone S2S model, a rank-aware calibration network (RC) for response quality estimation, and a knowledge inference component (KI) for encouraging the generation of informative words. For RC-based response quality estimation, we apply Monte-Carlo Rollout with the policy network G^β to perform response sampling conditioned on the current token y_t and feed the sampled response $\hat{\mathbf{Y}}_t \in \mathbb{R}^m$ to the RC, where three contrastive quality estimation components D^{ns} , D^{pt} and D^{pair} , namely, negative sampling component, pointwise ranking component, and pairwise ranking component are included. The produced quality scores of the $\hat{\mathbf{Y}}_t$ are q^{ns} , q^{pt} , q^{pair} respectively. For knowledge inference (KI), a knowledge memory $\mathbf{K} \in \mathbb{R}^{n_k \times \dim_k}$ and a knowledge attention layer are designed. n_k refers to the number of the knowledge memories for the informative tokens. The knowledge summary c_t^k will also serve as the input for the t -th decoding step.

2.2 Response Generation

The backbone generation model is an attention-based sequence-to-sequence framework. Specifically, in encoding, we employ a bi-directional LSTM [Hochreiter and Schmidhuber, 1997] to map the query input x_i to the distributed hidden representation $\mathbf{h}_i \in \mathbb{R}^{2\dim_h}$ ($i \in [1, n]$) as follows:

$$\mathbf{h}_i = [\overrightarrow{\text{LSTM}}(x_i, \vec{\mathbf{h}}_{i-1}); \overleftarrow{\text{LSTM}}(x_i, \overleftarrow{\mathbf{h}}_{i+1})] \quad (1)$$

where the operation of an LSTM unit on x_t is denoted as $\text{LSTM}(x_t, \mathbf{h}_{t-1})$. In decoding, the computational formula of the decoding hidden representation $\mathbf{s}_t$ at the t -th time step is below:

$$\mathbf{s}_t = f(y_{t-1}, \mathbf{s}_{t-1}, \mathbf{c}_t) \quad (2)$$

The context vector $\mathbf{c}_t$ is computed as the weighted combination of the encoder hidden memories $\mathbf{H} = \{\mathbf{h}_1, \dots, \mathbf{h}_n\}$ along with the attention signal $\mathbf{a}_t \in \mathbb{R}^n$. Then $\mathbf{s}_t$ is fed to a softmax layer to calculate the probability distribution of the candidate words:

$$p(\mathbf{Y}|\mathbf{X}) = \prod_{t=1}^m p(y_t|\mathbf{X}, y_{1:t-1}) \quad (3)$$

2.3 Rank-Aware Quality Estimation

As shown in Figure 1, the Rank-aware Calibrator (RC) model is composed of three components: D^{ns} , D^{pt} and D^{pair} . Each of the component contains a scoring network for calculating the quality score, either performing semantic matching or learning a joint semantic representation for a query and a response. The matching-based scoring network g_M maps a query and a response to vector representations and employs a bi-linear layer to measure the semantic relatedness between these two representations. The joint-representation-based scoring network g_J learns the joint semantic representation for the query and the response and utilize a non-linear transformation layer to obtain the quality score. To exploit the fine-grained response quality, we propose three ranking

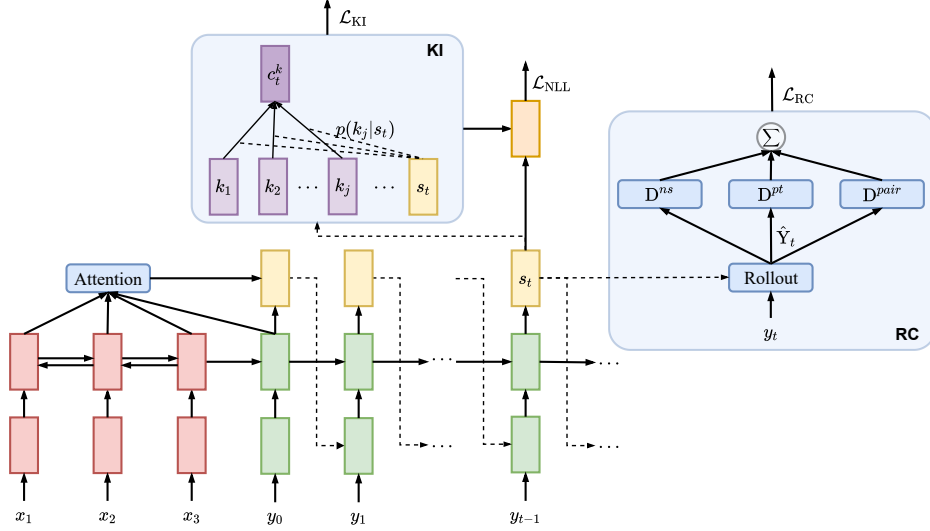


Figure 1: Architecture of the proposed model. Note that the components **KI** and **RC** are disabled during inference.

strategies, namely, **Negative Sampling**, **Pointwise Ranking** and **Pairwise Ranking**, to pre-train the components D^{ns} , D^{pt} and D^{pair} respectively.

Negative Sampling Negative sampling is the strategy for optimizing the model D^{ns} . Specifically, for each query response pair $(\mathbf{X}, \mathbf{Y})$, we sample a response $\mathbf{Y}^-$ from other queries in the training dataset to construct a negative sample $(\mathbf{X}, \mathbf{Y}^-)$. Then, we augment the original training dataset with the sampled negative data and train the scoring network by maximizing the following objective:

$$L^{ns} = b * g_J^{ns}(\mathbf{X}, \mathbf{Y}^*) + (1 - b) * (1 - g_J^{ns}(\mathbf{X}, \mathbf{Y}^-)) \quad (4)$$

where g_J^{ns} denotes the score obtained based on the joint representation of $\mathbf{X}$ and $\mathbf{Y}^*$. The binary variable b is set as 1 if $\mathbf{Y}^*$ is from the original training dataset. Otherwise, b is 0. Optimizing this classification-based objective can rank the relevant responses higher than the irrelevant ones.

Pointwise Ranking As mentioned in the Introduction section, only differentiating relevant responses from the irrelevant responses is not enough. Since the multi-level quality annotations are available in the training dataset, one direct way for modeling the fine-grained response quality is to minimize the gap between the predicted quality scores and the gold standard multi-level scores. Thus, we propose a regression-based criterion for optimizing the model D^{pt} . The objective function is given by:

$$L^{pt} = (q^g - g_M^{pt}(\mathbf{X}, \mathbf{Y}))^2 \quad (5)$$

where q^g is the gold-standard quality score for the query-response pair $(\mathbf{X}, \mathbf{Y})$ and g_M^{pt} is the matching-based scoring function. With this objective, the D^{pt} is enforced to pay attention to different levels of quality scores rather than just 0-1 relevance. In other words, D^{pt} can exploit how good the response $\mathbf{Y}$ is apart from its relevance/irrelevance to the query $\mathbf{X}$.

Pairwise Ranking The pointwise ranking strategy adopted in D^{pt} is to directly model the absolute quality scores. Compared to the pointwise ranking, the pairwise ranking strategy

implicitly exploits the multi-level quality scores by learning to assign preference for the pre-built paired responses $\mathbf{Y}^{++}$ and $\mathbf{Y}^+$ from the same query $\mathbf{X}$. Here, $\mathbf{Y}^{++}$ and $\mathbf{Y}^+$ denote the responses belonging to the adjacent quality levels and $\mathbf{Y}^{++}$ is the better one. To optimize the scoring component g_M^{pair} in D^{pair} , the pairwise ranking strategy rewards the better response in the ranking pair and penalizes the other one so that the margin of their quality estimations is as close as possible to the pre-specified value Δ . The loss function is as follows:

$$L^{pair} = \max(0, \Delta - g_M^{pair}(\mathbf{X}, \mathbf{Y}^{++}) + g_M^{pair}(\mathbf{X}, \mathbf{Y}^+)) \quad (6)$$

where the score function g_M^{pair} calculates the quality scores of the response via matching the semantic representations of the response and the query. Then, we traverse all of the possible response pairs under the query $\mathbf{X}$ to make the model D^{pair} aware of different quality levels.

Intuitively, we can utilize the RC model to estimate the quality of each training sample and leverage the quality scores to adjust the weight of the training sample loss. However, as mentioned above, such response-level strategy ignores the consideration of the importance of different tokens in the same response. In this paper, we give a solution that performing token-level calibration with the fine-grained quality estimation.

2.4 Token-Level Calibration

The aim of the vanilla sequence-to-sequence (S2S) model is to minimize the following negative log-likelihood (NLL) objective function:

$$\mathcal{L}_{NLL} = \frac{1}{|\mathbb{D}|} \sum_{(\mathbf{X}, \mathbf{Y}) \in \mathbb{D}} -\log(p(\mathbf{Y}|\mathbf{X})) \quad (7)$$

where $\mathbb{D}$ denotes the training dataset or a training batch and $p(\mathbf{Y}|\mathbf{X})$ is the conditional generation probability given by Eq 3.

Recall that response-level quality estimation treats all of the tokens in the response as equal importance and cannot

accurately reflect the importance of the token in the response, which may erroneously encourage the generation of some uninformative words. In order to integrate the quality information more accurately, we propose to calibrate the S2S training with token-level quality information. Specifically, we propose to measure the quality of the sampled response conditioned on each token and deem the quality score estimated by rank-aware calibrator as the importance of the corresponding token in the sample loss estimation.

Given the training sample $\mathbf{X}, \mathbf{Y}$ and the gold standard response token y_t at the t -th decoding step, we firstly apply Monte-Carlo search with a rollout policy G^β (see the ‘‘Rollout’’ component in Figure 1), which is set identical to the current generator (i.e., S2S model), to conduct the sampling conditioned on y_t (that is, perform generation with the starting token as y_t). Let $\hat{\mathbf{Y}}_t$ be the sampled response, then, we employ the pre-trained rank-aware calibrator to calculate the fine-grained quality score for $\hat{\mathbf{Y}}_t$. Specifically, $\hat{\mathbf{Y}}_t$ is fed to the components D^r , D^{pt} and D^{pair} separately and the final quality score is the mean value of the outputs from the scoring models:

$$q_t = \frac{1}{3}[D^r(\mathbf{X}, \hat{\mathbf{Y}}_t) + D^{pt}(\mathbf{X}, \hat{\mathbf{Y}}_t) + D^{pair}(\mathbf{X}, \hat{\mathbf{Y}}_t)] \quad (8)$$

To reduce the variance of the sampling, we perform the Monte-Carlo search N times, yielding a set of simulated responses $\{\hat{\mathbf{Y}}_t^1, \dots, \hat{\mathbf{Y}}_t^N\}$ for the response token y_t . The final token-level quality estimations for y_t is:

$$q_t = \frac{1}{N} \sum_{i=1}^N q_t^i \quad (9)$$

where q_t^i is the fine-grained quality score of the sampled response $\hat{\mathbf{Y}}_t^i$. Here, q_t characterizes the contribution of the t -th generation step to computing the training sample loss. Compared to [Shang *et al.*, 2018; Liu *et al.*, 2018], which treat each generation step equally, performing the weighted sum of the losses at each generation step can alleviate the incorrect bonus on some uninformative words. The calculations of the sample loss $\mathcal{L}_{RC}(\mathbf{X}, \mathbf{Y})$ and the total loss $\mathcal{L}_{RC}$ are given below:

$$\begin{aligned} \mathcal{L}_{RC}(\mathbf{X}, \mathbf{Y}) &= - \sum_{t=1}^m q_t * \log(p(y_t | \mathbf{X}, y_{1:t-1})) \\ \mathcal{L}_{RC} &= \frac{1}{|\mathbb{D}|} \sum_{(\mathbf{X}, \mathbf{Y}) \in \mathbb{D}} \mathcal{L}_{RC}(\mathbf{X}, \mathbf{Y}) \end{aligned}$$

2.5 Knowledge Inference

Recall the issue that some meaningful words in the irrelevant responses may be erroneously penalized due to the topical irrelevance. For example, in the fifth response in Table 1, the tokens ‘‘university’’ and ‘‘martyrs’’ will be assigned low quality scores and thus the generation of these words will be suppressed after the training. To reduce such kind of side effect, we propose Knowledge Inference (KI) component. The key idea of this component is to guide the generation with the useful knowledge. In this paper, we regard **keywords** (i.e., informative words) as the knowledge. Firstly, we utilize TextRank model [Mihalcea and Tarau, 2004] to extract the keywords

from the responses in the training dataset. Then, we construct a knowledge memory $\mathbf{K} \in \mathbb{R}^{n_k \times \dim_k}$, where n_k memory vectors correspond to n_k informative words obtained from the training corpus. After building the knowledge memory, we leverage the context-aware decoding hidden representation $\mathbf{s}_t$ to pay attention to the memory vectors $\mathbf{k}_j$ ($j \in (1, \dots, n_k)$) and summarize the knowledge via weighted combination:

$$\begin{aligned} p(\mathbf{k}_j | \mathbf{s}_t) &= \tanh(\mathbf{s}_t^\top \mathbf{W}_K \mathbf{k}_j) \\ \mathbf{c}_t^k &= \frac{1}{n_k} \sum_{j=1}^{n_k} p(\mathbf{k}_j | \mathbf{s}_t) \mathbf{k}_j \end{aligned} \quad (10)$$

where $\mathbf{W}_K$ is a parameter matrix in the KI component and $\tanh$ denotes the hyperbolic tangent function. $\mathbf{c}_t^k$ is the summarized knowledge at the t -th generation timestep. To incorporate the knowledge into the generation, we feed the concatenated $\mathbf{c}_t^k$ and decoder hidden representation $\mathbf{s}_t$ to the ultimate softmax layer for producing the token y_t' .

Learning the alignment between the memory $\mathbf{K}$ and the decoder hidden representation $\mathbf{s}_t$ from scratch is difficult because the model has no prior knowledge of the informative words. Thus, we regard the extracted informative words from the current ground-truth response $\mathbf{Y}$ as additional supervision signal to help the training of $\mathbf{K}$. Given the informative words $\mathbf{Y}^K$ extracted from $\mathbf{Y}$, the objective of the KI component is defined as follows:

$$\begin{aligned} \mathcal{L}_{KI} &= - \frac{1}{|\mathbb{D}|} \sum_{(\mathbf{X}, \mathbf{Y}) \in \mathbb{D}} \sum_{t=1}^{|\mathbf{Y}|} \sum_{j=1}^{n_k} b_j^K * \delta(p(\mathbf{k}_j | \mathbf{s}_t)) \\ b_j^K &= \begin{cases} 1, & j \in \mathbf{Y}^K \\ 0, & \text{otherwise} \end{cases} \end{aligned} \quad (11)$$

where the binary variable b_j^K is the indicator of the existence of the j -th informative word and δ denotes the sigmoid activation function. $p(\mathbf{k}_j | \mathbf{s}_t)$ is the alignment score between $\mathbf{k}_j$ and $\mathbf{s}_t$. By introducing the objective $\mathcal{L}_{KI}$, the model can learn better knowledge memory $\mathbf{K}$ and its alignment with $\mathbf{s}_t$ based on more feedback from both the S2S component and the KI component. Consequently, there will be a higher potential generating informative words.

2.6 Joint Training

The parameters of the pre-trained rank-aware calibrator model are kept fixed all the time. Although the loss with rank-aware calibration, i.e., $\mathcal{L}_{RC}$, reduce the possibility of generating unimportant words, it may weaken the language model constraint on the generated responses. Thus, we combine the NLL loss $\mathcal{L}_{NLL}$ with $\mathcal{L}_{RC}$ during the training. The loss $\mathcal{L}_{KI}$ is also included to encourage the generation of the informative words. The final training objective $\mathcal{J}(\theta)$ of the proposed framework is as follows:

$$\mathcal{J}(\theta) = \mathcal{L}_{NLL} + \mathcal{L}_{RC} + \mathcal{L}_{KI} \quad (12)$$

3 Experimental Setup

3.1 Dataset

To investigate the effectiveness of the proposed framework, we build a dialogue dataset with multi-level fine-grained

Model		Word Overlap			Embedding Similarity			Diversity	
		BLEU-1	BLEU-2	BLEU-3	Average	Extrema	Greedy	Dist-1	Dist-2
w/o MMI	S2S	17.3	3.9	1.3	0.481	0.286	0.403	0.059	0.232
	S2S-RW	17.1	3.4	1.1	0.519	0.294	0.409	0.052	0.213
	S2S-CN	18.1	4.0	1.0	0.525	0.302	0.401	0.058	0.224
	S2S-GT	18.9	4.3	1.5	0.521	0.317	0.411	0.062	0.245
	S2S-DF	16.9	3.0	0.8	0.491	0.295	0.398	0.060	0.238
	S2S-DF ⁺	20.2	4.5	1.7	0.501	0.308	0.417	0.054	0.213
	OURS	20.9	4.9	1.8	0.559	0.342	0.471	0.077	0.288
w/ MMI	S2S	22.0	4.8	1.6	0.530	0.308	0.395	0.076	0.321
	S2S-RW	20.2	4.3	1.4	0.519	0.318	0.400	0.072	0.309
	S2S-CN	21.0	4.4	1.4	0.517	0.313	0.398	0.066	0.310
	S2S-GT	21.5	4.7	1.6	0.523	0.306	0.410	0.076	0.318
	S2S-DF	21.0	4.5	1.5	0.510	0.299	0.408	0.070	0.315
	S2S-DF ⁺	21.4	4.6	1.5	0.520	0.304	0.415	0.072	0.307
	OURS	22.0	4.8	1.7	0.563	0.347	0.478	0.095	0.377

Table 2: Results on automatic metrics.

quality labels. As shown in Table 1, we consider 5-level response quality: (1) L5: relevant and interesting; (2) L4: relevant but simple; (3) L3: acceptable but universal; (4) L2: quiet boring; (5) L1: irrelevant. To process such quality labels, we convert L1 to L5 to the normalized quality scores, namely, 0.0, 0.25, 0.5, 0.75 and 1.0 respectively.

We crawl 534,381 query-response pairs from *Douban Group*, a famous forum in China¹, and recruit human annotators to annotate the multi-level quality labels for each sample. We split the annotated dataset into three parts, where 522,881 query-response pairs are for training, 10000 query-response pairs are for validation and the remaining 1500 query-response pairs are for testing. There is no overlap among the queries in training, validation and testing set.

3.2 Settings

We compare our model with the following baselines and comparison models:

- **S2S**: It is the standard attention-based sequence-to-sequence model [Bahdanau *et al.*, 2015].
- **S2S-RW** [Liu *et al.*, 2018]: **S2S** with **Re-Weighting**. It is an extended S2S model with response quality measurement based on the corpus-level n-gram co-occurrence statistics and the length of the response.
- **S2S-CN** [Shang *et al.*, 2018]: **S2S** with **Calibration Networks**. It is an enhanced S2S model where a pre-trained calibration networks is introduced to adjust the weight of the sample loss.
- **S2S-GT**: **S2S** with **Ground Truth**. It is a variant of the models [Liu *et al.*, 2018] and [Shang *et al.*, 2018], where we replace the instance quality measurement with the ground truth quality scores.
- **S2S-DF**: **S2S** with **Data Filtering**. It is a S2S model trained on the high quality data where we adopt the data filtering strategy proposed in [Xu *et al.*, 2018] to obtain the topically related query-response pairs.²
- **S2S-DF⁺**: A variant of **S2S-DF**. We perform data filtering according to the gold standard multi-level quality score.

¹<https://www.douban.com/group/explore>

²https://github.com/XinnuoXu/CVAE_Dial.

Model	+2	+1	0	Avg.
S2S	7.50	61.00	31.50	76.00
S2S w/ MMI	10.00	59.50	30.50	79.50
S2S-GT w/ MMI	10.50	60.00	29.50	81.00
OURS w/ MMI	13.50	58.00	28.50	85.00

Table 3: Human evaluation results. (%)

Specifically, we only preserve query-response pairs of L4 or L5 quality for training the model.³

We divide the comparisons with the baseline models into two groups according to using the Maximum Mutual Information (MMI) decoding [Li *et al.*, 2016] or not. The first group of comparison is under the setting **w/o MMI**, where the decoding is identical to the normal beam search. The second group is under the setting **w/ MMI**, where an inverse S2S (response-to-query) model is introduced to rerank the N -best (N is set as 50) hypothesis generated from the standard S2S (query-to-response) model. We employ a two-layer bi-directional LSTM as the encoder and a two-layer unidirectional LSTM as the decoder. The dimension $\dim_h$ of both the encoder and the decoder hidden representations is 500. The word embeddings are randomly initialized and the size of each word vector is 300. For the model training, we employ Adam [Kingma and Ba, 2014] as optimizer, with the initial learning rate being 0.0001 and the decay rate being 0.9. The dimension of the keyword memory vector $\dim_k$ is 30. In the rank-aware calibrator, we employ multi-channel CNN [Kim, 2014] to extract sentence-level features. The sizes of convolutional filter are 1, 2, 3 and the number of filters is 100 for each size.

3.3 Evaluation Metrics

We evaluate our model and the comparison models using the following evaluation metrics:

Word Overlap: we employ BLEU-1, BLEU-2 and BLEU-3 to measure the word overlap between the generated and the gold standard responses.

Embedding Similarity: Actually, BLEU metric does not

³By doing this, the size of the training dataset reduces from 522,881 to 334,471.

Model	Embedding Similarity			Diversity	
	Average	Extrema	Greedy	Dist-1	Dist-2
OURS	0.559	0.342	0.471	0.077	0.288
OURS w/o KI	0.521	0.311	0.435	0.068	0.261
OURS w/o RC	0.497	0.275	0.418	0.066	0.267
OURS w/o RC & KI	0.481	0.286	0.403	0.059	0.232

Table 4: Results of ablation study.

correlate strongly with human judgements. Thus, we introduce the embedding-based metrics [Liu *et al.*, 2016] to measure the similarity between the generated results and the ground truth.

Diversity: Following [Li *et al.*, 2016], we calculate the ratios of the distinct unigrams (Dist-1) and bigrams (Dist-2) in the generated responses, and use the metrics to measure how diverse and informative the responses are.

Human Evaluation: Apart from the automatic evaluations, we randomly sample 200 queries in the testing dataset and recruit three helpers to judge the quality of each generated response from the best models on the automatic metrics. The rating criteria, which is same as that in [Shang *et al.*, 2018], is as follows: **+2**: The response is not only relevant and natural, but also informative and interesting. **+1**: The response can be used as a reply to the message, but is too universal like “Yes, I see”, “Me too” and “I don’t know”. **0**: The response cannot be used as a reply to the message. It is either semantically irrelevant or disfluent. For each model, we report the ratio of each score (**+2**, **+1** or **0**) and the average score as the human evaluation results.

4 Results and Discussions

4.1 Main Results

Table 2 depicts the experimental results on the automatic metrics. Under the settings of both **w/o MMI** (the first group in Table 2) and **w/ MMI** (the second group in Table 2), our model consistently outperforms the baseline and the comparison models on all of the metrics, demonstrating the effectiveness of the proposed components. Specifically, our model is better than all of the non MMI-based baselines on Dist-1 and Dist-2, suggesting that the proposed model can generate more diverse and informative responses. The probable reason is that we introduce a knowledge inference component to encourage the generation of some informative words erroneously punished by the models adopting instance-weighting strategies (i.e., S2S-RW, S2S-CN and S2S-GT). We also observe that OURS achieves better performance on BLEU scores and Embedding Similarity compared with S2S-GT. This finding shows that token-level training loss estimation together with rank-aware calibration is a better strategy than just scaling the sample loss with an instance weight. Another interesting finding is that training model with only the high-quality data, as done in S2S-DF and S2S-DF⁺, is still worse than the instance weighting strategy adopted in S2S-GT, indicating that soft data filtering via quality estimation is a more suitable way for integrating quality information into the model training.

From the human evaluation results in Table 3, our model generates the most satisfactory responses (responses labeled as **+2**) and the least invalid responses (responses labeled as

Query	老家哪的啊 (where is your hometown?)
Response	四川(Sichuan) 的 , 你 呢
Query	上海天气 (What's the weather of Shanghai today?)
Response	多云(cloudy) , 下午(afternoon) 阵雨(rainy) . . . 持续(last) 到 下周一

Figure 2: Example output for token-level quality estimation (i.e., q_t in Equation 8), “Response” refers to the gold standard response. Better viewed in color.

0). Specifically, OURS **w/ MMI** increases 3.5% **+2** responses and reduces 2.0% **0** responses compared with S2S **w/ MMI**. Without introducing the additional knowledge and diversity modeling, the pure S2S model tend to produce more generic responses than the MMI-based models, i.e., S2S **w/ MMI** and OURS **w/ MMI**. We also find that taking the instance quality into consideration can lead to less generation of the **0** responses, for example, OURS **w/ MMI** / S2S-GT **w/ MMI** versus S2S **w/ MMI**. The above observations are somewhat consistent with those in the Table 2.

4.2 Ablation Study

To further investigate the effectiveness of the proposed component, we compare our model with the ablated models. The results of the ablation study are listed in Table 4. OURS significantly outperforms the ablated models on the relevance metrics (i.e., Embedding Similarity) but the performance gap on the diversity metrics is small. It is reasonable because the aim of the proposed components is not to model the diversity. Removing either the KI component or the RC component will result in performance degradation, especially for the case removing the RC component, our model degenerates to the S2S model together with the knowledge inference (KI) component. Comparing with OURS, the relevance scores of the OURS w/o RC drastically decrease (-6%, -6%, -7% on Average, Extrema and Greedy respectively), indicating that our token-level rank-aware calibration is helpful for improving the relevance of the generated responses. Without RC & KI components, our model will become equivalent to the standard S2S model and the metric scores will drop for further step.

4.3 Case Visualization and Analysis

In Figure 2, we visualize the token-level quality scores calculated from Eq 8. Each cell corresponds to a Chinese word and it uses depth of color to represent the importance of this word. We can observe that the importance score for the token “Sichuan”, a province in China, is significantly larger than those for other tokens when the query is talking about “hometown” (the upper query). Similarly, the token “cloudy” and “rainy” are highlighted by the rank-aware calibrator when the topic of the query is related to the weather. These examples demonstrate that our token-level strategy armed with Monte-Carlo Rollout can accurately characterize the quality of token with respect to the query, leading to better calibration for the training.

Table 5 shows some example outputs. The informative words appearing in the training dataset are wrapped in the

Query	S2S w/ MMI	S2S-GT w/ MMI	OURS w/ MMI
1. 夜深人静了 All is quiet at dead of night.	嗯, 是的 Oh, yes.	我也想 I want to eat too.	我还没[睡觉] But I haven't gone to [sleep] yet.
2. 说说处女们的初恋-最爱-被爱都是什么星座的 Tell me the constellations of your first love, your best love and your suitor	我是[摩羯座] I am [Capricorn].	我也是[天蝎] My constellation is also [Scorpio].	[初恋]是[天秤座] The constellation of my [first love] is [Libra].
3. 你玩的第一个网游是什么?别吹 What is the first online game you have ever played?	我玩的[游戏] The [game] I am playing.	最近玩的[游戏] The [game] I recently played.	[梦幻西游]!! An [online game] called [Fantasy Westward Journey] !!
4. 我曾跨过过山和大海 I've crossed the mountains and the sea.	我也想知道 I also want to know	我也想和他在一起 I want to be with him too.	我一直很喜欢这句[话] It is the [quotation] I've always loved
5. 你用的什么浏览器 Which browser do you use.	我用的是[浏览器] What I use is [browser]	我用的是[浏览器] What I use is browser.	用的是[百度][浏览器] The used [browser] is [Baidu].

Table 5: Example output, color printing is preferred. The informative words are wrapped in brackets and coupled with underline.

brackets and coupled with underlines. According to these cases, we find that our model (i.e., OURS w/ MMI) can produce some interesting responses with the meaningful words. For example, the response for the third query mentions “Fantasy Westward Journey”, the name of a very popular online game in China. Similarly, the response answers “Baidu”, a Chinese IT company, for the fifth query. We attribute these phenomena to the KI component, which explicitly encourages the generation of the important words. Besides, our model can give replies closely relevant to some queries without explicit topic, for example, the first and the fourth query, it is probably because our model introduces fine-grained quality information via token-level rank-aware calibration and the probability of generating generic response such as “oh, yes” and “I also want to know” is thus reduced.

5 Related Work

Neural Dialogue Generation is usually formulated as a sequence translation problem [Ritter *et al.*, 2011; Shang *et al.*, 2015; Serban *et al.*, 2016; Wang *et al.*, 2018] and the sequence-to-sequence (S2S) encoder-decoder framework [Cho *et al.*, 2014; Sutskever *et al.*, 2014; Bahdanau *et al.*, 2015] is applied. Various approaches have been proposed to improve the S2S model for better human-computer conversation, for example, via introducing topic or keyword information into the generation process [Mou *et al.*, 2016; Xing *et al.*, 2017; Gao *et al.*, 2019a], diversifying the generated responses with additional memories or objectives [Li *et al.*, 2016; Zhou *et al.*, 2018], and arming the S2S model with GAN or other advanced techniques [Xu *et al.*, 2017; Du *et al.*, 2018; Tao *et al.*, 2018; Cai *et al.*, 2019; Gao *et al.*, 2019b].

Different from the above works, [Shang *et al.*, 2018; Liu *et al.*, 2018; Xu *et al.*, 2018; Csáky *et al.*, 2019; Cai *et al.*, 2020] attempt to incorporate the quality modeling of training data into S2S training. The basic idea of these approaches is either instance weighting [Jiang and Zhai, 2007] or filtering data of low quality [Wojciechowski and Zakrzewicz, 2002]. The potential issue of these strategies is that the tokens within each training instance are treated equally and the informative words in a low-quality response may be erroneously punished. Similarly, the model guided by these strategies tends to generate some boring but frequently-used words.

6 Conclusion

We propose a multi-level contrastive learning paradigm to exploit the fine-grained response quality to calibrate the training

of the response generation models. We design a Rank-aware Calibration (RC) network to construct the contrastive optimization objectives. We further build a Knowledge Inference (KI) component to capture the keyword knowledge from the reference during training and exploit such information to encourage the generation of informative words. We evaluate the proposed model on a carefully annotated short-text conversation dataset and the results suggest that our model can generate more relevant and diverse responses compared to the baseline models.

References

- [Bahdanau *et al.*, 2015] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate. In *Proceedings of ICLR*, 2015.
- [Cai *et al.*, 2019] Deng Cai, Yan Wang, Wei Bi, Zhaopeng Tu, Xiaojiang Liu, Wai Lam, and Shuming Shi. Skeleton-to-response: Dialogue generation guided by retrieval memory. In *Proceedings of NAACL*, pages 1219–1228, 2019.
- [Cai *et al.*, 2020] Hengyi Cai, Hongshen Chen, Yonghao Song, Cheng Zhang, Xiaofang Zhao, and Dawei Yin. Data manipulation: Towards effective instance learning for neural dialogue generation via learning to augment and reweight. In *Proceedings of ACL*, pages 6334–6343, 2020.
- [Chen *et al.*, 2020] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. *arXiv preprint arXiv:2002.05709*, 2020.
- [Cho *et al.*, 2014] Kyunghyun Cho, Bart van Merriënboer, Caglar Gulcehre, Dzmitry Bahdanau, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. Learning phrase representations using RNN encoder-decoder for statistical machine translation. In *Proceedings of EMNLP*, pages 1724–1734, 2014.
- [Csáky *et al.*, 2019] Richárd Csáky, Patrik Purgai, and Gábor Recski. Improving neural conversational models with entropy-based data filtering. In *Proceedings of ACL*, pages 5650–5669, 2019.
- [Du *et al.*, 2018] Jiachen Du, Wenjie Li, Yulan He, Ruifeng Xu, Lidong Bing, and Xuan Wang. Variational autoregressive decoder for neural response generation. In *Proceedings of EMNLP*, pages 3154–3163, 2018.
- [Gao *et al.*, 2019a] Jun Gao, Wei Bi, Xiaojiang Liu, Junhui Li, and Shuming Shi. Generating multiple diverse responses for short-text conversation. In *Proceedings of AAAI*, volume 33, pages 6383–6390, 2019.
- [Gao *et al.*, 2019b] Jun Gao, Wei Bi, Xiaojiang Liu, Junhui Li, Guodong Zhou, and Shuming Shi. A discrete CVAE for response generation on short-text conversation. In *Proceedings of EMNLP*, pages 1898–1908, 2019.

- [Hadsell *et al.*, 2006] Raia Hadsell, Sumit Chopra, and Yann LeCun. Dimensionality reduction by learning an invariant mapping. In *Proceedings of CVPR*, volume 2, pages 1735–1742, 2006.
- [He and Glass, 2020] Tianxing He and James Glass. Negative training for neural dialogue response generation. In *Proceedings of ACL*, pages 2044–2058, 2020.
- [He *et al.*, 2019] Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. *arXiv preprint arXiv:1911.05722*, 2019.
- [Hochreiter and Schmidhuber, 1997] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [Iter *et al.*, 2020] Dan Iter, Kelvin Guu, Larry Lansing, and Dan Jurafsky. Pretraining with contrastive sentence objectives improves discourse performance of language models. *arXiv preprint arXiv:2005.10389*, 2020.
- [Jiang and Zhai, 2007] Jing Jiang and ChengXiang Zhai. Instance weighting for domain adaptation in NLP. In *Proceedings of ACL*, pages 264–271, 2007.
- [Kim, 2014] Yoon Kim. Convolutional neural networks for sentence classification. In *Proceedings of EMNLP*, pages 1746–1751, 2014.
- [Kingma and Ba, 2014] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *Proceedings of ICLR*, 2014.
- [Li *et al.*, 2016] Jiwei Li, Michel Galley, Chris Brockett, Jianfeng Gao, and Bill Dolan. A diversity-promoting objective function for neural conversation models. In *Proceedings of NAACL*, pages 110–119, 2016.
- [Li *et al.*, 2017] Jiwei Li, Will Monroe, Tianlin Shi, Sébastien Jean, Alan Ritter, and Dan Jurafsky. Adversarial learning for neural dialogue generation. In *Proceedings of EMNLP*, pages 2157–2169, 2017.
- [Lin *et al.*, 2017] Kevin Lin, Dianqi Li, Xiaodong He, Zhengyou Zhang, and Ming-Ting Sun. Adversarial ranking for language generation. In *Proceedings of NeurIPS*, pages 3155–3165, 2017.
- [Liu *et al.*, 2016] Chia-Wei Liu, Ryan Lowe, Iulian Serban, Mike Noseworthy, Laurent Charlin, and Joelle Pineau. How NOT to evaluate your dialogue system: An empirical study of unsupervised evaluation metrics for dialogue response generation. In *Proceedings of EMNLP*, pages 2122–2132, 2016.
- [Liu *et al.*, 2018] Yahui Liu, Wei Bi, Jun Gao, Xiaojiang Liu, Jian Yao, and Shuming Shi. Towards less generic responses in neural conversation models: A statistical re-weighting method. In *Proceedings of EMNLP*, pages 2769–2774, 2018.
- [Mihalcea and Tarau, 2004] Rada Mihalcea and Paul Tarau. TextRank: Bringing order into text. In *Proceedings of EMNLP*, pages 404–411, 2004.
- [Mou *et al.*, 2016] Lili Mou, Yiping Song, Rui Yan, Ge Li, Lu Zhang, and Zhi Jin. Sequence to backward and forward sequences: A content-introducing approach to generative short-text conversation. In *Proceedings of COLING*, pages 3349–3358, 2016.
- [Pei and Li, 2018] Jiaxin Pei and Chenliang Li. S2SPMN: A simple and effective framework for response generation with relevant information. In *Proceedings of EMNLP*, pages 745–750, 2018.
- [Ritter *et al.*, 2011] Alan Ritter, Colin Cherry, and William B. Dolan. Data-driven response generation in social media. In *Proceedings of EMNLP*, pages 583–593, 2011.
- [Serban *et al.*, 2016] Iulian V Serban, Alessandro Sordoni, Yoshua Bengio, Aaron Courville, and Joelle Pineau. Building end-to-end dialogue systems using generative hierarchical neural network models. In *Proceedings of AAAI*, pages 3776–3783, 2016.
- [Shang *et al.*, 2015] Lifeng Shang, Zhengdong Lu, and Hang Li. Neural responding machine for short-text conversation. In *Proceedings of ACL*, pages 1577–1586, 2015.
- [Shang *et al.*, 2018] Mingyue Shang, Zhenxin Fu, Nanyun Peng, Yansong Feng, Dongyan Zhao, and Rui Yan. Learning to converse with noisy data: generation with calibration. In *Proceedings of IJCAI*, pages 4338–4344, 2018.
- [Shao *et al.*, 2017] Yuanlong Shao, Stephan Gouws, Denny Britz, Anna Goldie, Brian Strope, and Ray Kurzweil. Generating high-quality and informative conversation responses with sequence-to-sequence models. In *Proceedings of EMNLP*, pages 2210–2219, 2017.
- [Sutskever *et al.*, 2014] Ilya Sutskever, Oriol Vinyals, and Quoc V Le. Sequence to sequence learning with neural networks. In *Proceedings of NeurIPS*, pages 3104–3112, 2014.
- [Tao *et al.*, 2018] Chongyang Tao, Shen Gao, Mingyue Shang, Wei Wu, Dongyan Zhao, and Rui Yan. Get the point of my utterance! learning towards effective responses with multi-head attention mechanism. In *Proceedings of IJCAI*, pages 4418–4424, 2018.
- [Tian *et al.*, 2020] Zhiliang Tian, Wei Bi, Dongkyu Lee, Lanqing Xue, Yiping Song, Xiaojiang Liu, and Nevin L. Zhang. Response-anticipated memory for on-demand knowledge integration in response generation. In *Proceedings of ACL*, pages 650–659, 2020.
- [Vinyals and Le, 2015] Oriol Vinyals and Quoc Le. A neural conversational model. *arXiv preprint arXiv:1506.05869*, 2015.
- [Wang *et al.*, 2018] Wenjie Wang, Minlie Huang, Xin-Shun Xu, Fumin Shen, and Liqiang Nie. Chat more: Deepening and widening the chatting topic via a deep model. In *Proceedings of SIGIR*, pages 255–264, 2018.
- [Wojciechowski and Zakrzewicz, 2002] Marek Wojciechowski and Maciej Zakrzewicz. Dataset filtering techniques in constraint-based frequent pattern mining. In *Pattern detection and discovery*, pages 77–91. Springer, 2002.
- [Xing *et al.*, 2017] Chen Xing, Wei Wu, Yu Wu, Jie Liu, Yalou Huang, Ming Zhou, and Wei-Ying Ma. Topic aware neural response generation. In *Proceedings of AAAI*, pages 3351–3357, 2017.
- [Xu *et al.*, 2017] Zhen Xu, Bingquan Liu, Baoxun Wang, Chengjie Sun, Xiaolong Wang, Zhuoran Wang, and Chao Qi. Neural response generation via GAN with an approximate embedding layer. In *Proceedings of EMNLP*, pages 617–626, 2017.
- [Xu *et al.*, 2018] Xinnuo Xu, Ondřej Dušek, Ioannis Konstas, and Verena Rieser. Better conversations by modeling, filtering, and optimizing for coherence and diversity. In *Proceedings of EMNLP*, pages 3981–3991, 2018.
- [Yu *et al.*, 2017] Lantao Yu, Weinan Zhang, Jun Wang, and Yong Yu. Seqgan: Sequence generative adversarial nets with policy gradient. In *Proceedings of AAAI*, pages 2852–2858, 2017.
- [Zhang *et al.*, 2020] Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, Jingjing Liu, and Bill Dolan. DIALOGPT: Large-scale generative pre-training for conversational response generation. In *Proceedings of ACL: System Demonstrations*, pages 270–278, 2020.

[Zhou *et al.*, 2017] Ganbin Zhou, Ping Luo, Rongyu Cao, Fen Lin, Bo Chen, and Qing He. Mechanism-aware neural machine for dialogue response generation. In *Proceedings of AAAI*, pages 3400–3406, 2017.

[Zhou *et al.*, 2018] Ganbin Zhou, Ping Luo, Yijun Xiao, Fen Lin, Bo Chen, and Qing He. Elastic responding machine for dialog generation with dynamically mechanism selecting. In *Proceedings of AAAI*, 2018.