t-Resilient *k*-Immediate Snapshot and its Relation with Agreement Problems*

Carole Delporte[†], Hugues Fauconnier[†], Sergio Rajsbaum[°], Michel Raynal^{*,‡}

[†] IRIF, Université Paris Diderot, Paris, France
 ° Instituto de Matemáticas, UNAM, México D.F, 04510, México
 * Institut Universitaire de France
 [‡] IRISA, Université de Rennes, 35042 Rennes, France

October 17, 2021

Abstract

An immediate snapshot object is a high level communication object, built on top of a read/write distributed system in which all except one processes may crash. It provides the processes with a single operation denoted write_snapshot_k(), which allows a process to write a value and obtain a set of pairs (process id, value) satisfying some set containment properties, that represent a snapshot of the values written to the object, occurring immediately after the write step.

Considering an *n*-process model in which up to *t* processes may crash, this paper introduces first the *k*-resilient immediate snapshot object, which is a natural generalization of the basic immediate snapshot (which corresponds to the case k = t = n - 1). In addition to the set containment properties of the basic immediate snapshot, a *k*-resilient immediate snapshot object requires that each set returned to a process contains at least (n - k) pairs.

The paper first shows that, for k, t < n - 1, k-resilient immediate snapshot is impossible in asynchronous read/write systems. Then the paper investigates a model of computation where the processes communicate with each other by accessing k-immediate snapshot objects, and shows that this model is stronger than the t-crash model. Considering the space of x-set agreement problems (which are impossible to solve in systems such that $x \le t$), the paper shows then that x-set agreement can be solved in read/write systems enriched with k-immediate snapshot objects for $x = \max(1, t + k - (n - 2))$. It also shows that, in these systems, k-resilient immediate snapshot and consensus are equivalent when $1 \le t < n/2$ and $t \le k \le (n - 1) - t$. Hence, the paper establishes strong relations linking fundamental distributed computing objects (one related to communication, the other to agreement), which are impossible to solve in pure read/write systems.

Keywords: Asynchronous system, Atomic read/write register, Consensus, Distributed computability, Immediate snapshot, Impossibility, Iterated model, *k*-Set Agreement, Linearizability, Process crash failure, Snapshot object, *t*-Resilience, Wait-freedom.

^{*}Parts of this work were presented at the 23rd International Colloquium on Structural Information and Communication Complexity (SIROCCO'2016) [9] and at the 22nd International Symposium on Stabilization, Safety, and Security of Distributed Systems (SSS'2020).

1 Introduction

Context This article considers the t-crash model consisting of n asynchronous processes, among which any subset of at most t processes may crash, and communicate through a shared memory composed of single writer/multi reader (SWMR) atomic registers. The (n-1)-crash model is also called wait-free model [12]. We keep the term t-resilience for algorithms. Several progress conditions have been associated with (n-1)-resilient algorithms: wait-freedom [12], non-blocking [18], or obstructionfreedom [14] (see a unified presentation in Chapter 5 of [23]). This article focuses on the wait-free condition, in the context of tasks: every non-failed process has to produce an output value. A task is defined in terms of (a) possible inputs to the processes, and (b) valid outputs for each assignment of input values (tasks are precisely defined in [6, 15, 17]). Of special importance is the family of x-set agreement tasks [8], one for each integer value of x, $1 \le x \le n$. Set agreement was introduced to show a hierarchy of tasks whose solvability depends on t, the number of processes that may crash. In the x-set agreement task, processes decide at most x different values, out of their input assignments. When x = 1, x-set agreement is the celebrated consensus task, which is impossible even in the presence of a single process crash [10, 20]. More generally, x-set agreement is solvable if and only if t < x, a result proved using algebraic topology [3, 6, 17, 24]. There are characterizations of the solvability of any given task, in the *t*-crash model, and in others (for an overview of results see [13]).

Immediate snapshot object The *immediate snapshot* (IS) communication object was first introduced in [4, 24], and then further investigated as an "object" in [3]. This object is at the heart of the *iterated immediate snapshot* (IIS) model introduced in [5, 16], which consists of n asynchronous processes, among which any subset at most (n - 1) processes may crash. These processes execute a sequence of asynchronous rounds, and each round is provided with exactly one IS object, which allows the processes to communicate only during this round. More precisely, for any x > 0, a process accesses the x-th immediate snapshot only when it executes the x-th round, and it accesses it only once.

From an abstract point of view, an IS object IS, can be seen as an initially empty set, which can then contain up to n pairs (one per process), each made up of a process index and a value. This object provides each process with a single operation denoted write_snapshot(), that it can invoke only once. The invocation IS.write_snapshot(v) by a process p_i adds the pair $\langle i, v \rangle$ to IS and returns a set of pairs belonging to IS such that the sets returned to the processes that invoke write_snapshot() satisfy specific inclusion properties. It is important to notice that, in the IIS model, the processes access the sequence of IS objects one after the other, in the same order, and asynchronously.

Contribution of the paper As previously said, the IS object was designed for the wait-free model (i.e., t = n - 1). This paper considers it in the context of the *t*-crash *n*-process system models where t < n - 1. To this end it generalizes the IS object by introducing the notion of a *k*-immediate snapshot (*k*-IS) object. Such an object provides the processes with a single operation denoted write_snapshot_k() which, in addition to the properties of an IS object, returns a set including at least (n - k) pairs. Hence, for k < n - 1, due to the implicit synchronization implied by the constraint on the minimal size of the sets it returns, a *k*-IS object allows processes to obtain more information from the whole set of processes than a simple IS object (which may return sets containing less than (n - k) pairs).

The obvious question is then the implementability of a k-IS object in the t-crash n-process asynchronous read/write model. The paper shows first that, differently from the basic IS object which can be implemented in the wait-free model, no k-IS object where k < n - 1, can be implemented in a 1-crash n-process read/write system.

This impossibility result is far from being the first impossibility result in the presence of asynchrony and process crashes. The most famous of them, which concern agreement problems, are the impossibility of Consensus (CONS) in the presence of even a single process crash [10, 20], and the impossibility of

x-set agreement (*x*-SA) when $x \le t$ [4, 17, 24] (let us remind that CONS is 1-SA). These objects are at the heart of the theory of fault-tolerant distributed computing.

Hence, a second natural question: Are they relations linking the previous "impossible" objects, namely k-IS and x-SA? The paper provides the following answers to this question.

- Let 1 ≤ k ≤ t < n. It is possible to implemented a k-IS object in a t-crash n-process read/write system enriched with consensus objects.
- Let $1 \le t < n/2$ and $t \le k \le (n-1) t$. k-IS and Consensus are equivalent in a t-crash *n*-process read/write system. (A and B are equivalent if A can be implemented in the t-crash *n*-process read/write system enriched with B, and reciprocally.)
- Let (n − 1)/2 ≤ k ≤ n − 1 and (n − 1) − k ≤ t ≤ k. It is possible to implemented an x-SA object, where x = t + k − (n − 2), in a t-crash n-process read/write system enriched with k-IS objects.

Roadmap The paper develops the previous map. It is made up of 7 sections. Section 2 presents the basic *t*-crash *n*-process asynchronous read/write model, and the definitions of the IS and *x*-SA objects. Section 3 defines the *k*-IS object and its impossibility in the previous basic model.

The other sections are on the power of k-IS with respect to x-SA. Section 4 shows that x-SA can be built in the t-crash n-process asynchronous read/write model enriched with k-IS objects, for $x = \max(1, t + k - (n - 2))$. Section 5 shows that t-IS and CONS are equivalent in the t-crash n-process asynchronous read/write model when $1 \le t < n/2$. Section 6 shows that CONS is stronger than k-IS when $n/2 \le t \le k < n - 1$. Finally, Section 7 concludes the paper. An illustration of the previous results is presented in Table 1, which considers a system of n = 11 processes.

$k \rightarrow$	1	2	3				n-4	n-3	n-2	n-1
$t\downarrow$	1	2	3	4	5	6	7	8	9	10
1	1-SA	2-SA								
2		1-SA	2-SA	3-SA						
3			1-SA	1-SA	1-SA	1-SA	1-SA	2-SA	3-SA	4-SA
4				1-SA	1-SA	1-SA	2-SA	3-SA	4-SA	5-SA
5 < n/2					1-SA	2-SA	3-SA	4-SA	5-SA	6-SA
$6 \ge n/2$						3-SA	4-SA	5-SA	6-SA	7-SA
7 = n - 4							5-SA	6-SA	7-SA	8-SA
8 = n - 3								7-SA	8-SA	9-SA
9 = n - 2									9-SA	10-SA
10 = n - 1										11-SA

Table 1: From k-IS to x-SA with $x = \max(1, t + k - (n - 2))$ (n = 11)

2 Basic Model, Immediate Snapshot, and *x*-Set Agreement

2.1 Basic read/write system model

Processes The computing model is composed of a set of $n \ge 3$ sequential processes denoted $p_1, ..., p_n$. Each process is asynchronous which means that it proceeds at its own speed, which can be arbitrary and remains always unknown to the other processes.

A process may halt prematurely (crash failure), but executes correctly its local algorithm until it possibly crashes. The model parameter t denotes the maximal number of processes that may crash in a run. A process that crashes in a run is said to be *faulty*. Otherwise, it is *correct* or *non-faulty*. Let us notice that, as a faulty process behaves correctly until it crashes, no process knows if it is correct or

faulty. Moreover, due to process asynchrony, no process can know if another process crashed or is only very slow.

It is assumed that (a) 0 < t < n (at least one process may crash and at least one process does not crash), and (b) any process, until it possibly crashes, executes correctly the algorithm assigned to it.

Communication layer The processes cooperate by reading and writing Single-Writer Multi-Reader (SWMR) atomic read/write registers [19]. This means that the shared memory can be seen as a set of arrays A[1..n] where, while A[i] can be read by all processes, it can be written only by p_i .

Notation The previous model is denoted $CARW_{n,t}[\emptyset]$ (which means "Crash Asynchronous Read/Write with *n* processes, among which up to *t* may crash"). A model constrained by a predicate on *t* (e.g. t < a) is denoted $CARW_{n,t}[t < a]$. It is assumed that at least one process does not crash, $CARW_{n,t}[t = n-1]$ is a synonym of $CARW_{n,t}[\emptyset]$, which (as always indicated) is called *wait-free* model. When considering *t*-crash models, $CARW_{n,t}[t < a]$ is less constrained than $CARW_{n,t}[t < a-1]$. More generally, $CARW_{n,t}[P,T]$ denotes the system model $CARW_{n,t}[\emptyset]$ restricted by the predicate *P*, and enriched with any number of shared objects of the type *T* (e.g., consensus objects).

Shared objects are denoted with capital letters. The local variables of a process p_i are denoted with lower case letters, sometimes suffixed by the process index i.

2.2 Immediate snapshot

The immediate snapshot (IS) object [3] was informally presented in the introduction. Defined in the context of the wait-free model (i.e., t = n - 1), it can be seen as a variant of the snapshot object introduced in [1, 2]. While a snapshot object provides the processes with two operations (write() and snapshot()) which can be invoked separately by a process (usually a process invokes write() before snapshot()), a one-shot immediate snapshot object provides the processes with a single operation write_snapshot() (one-shot means that a process may invoke write_snapshot() at most once).

Definition Let *IS* be an IS object. It is a set, initially empty, that will contain pairs made up of a process index and a value. Let us consider a process p_i that invokes *IS*.write_snapshot(v). This invocation adds the pair $\langle i, v \rangle$ to *IS* (contribution of p_i to *IS*), and returns to p_i a set, called view and denoted $view_i$, such that the sets returned to the processes collectively satisfy the following properties.

- Termination. The invocation of write_snapshot() by a correct process terminates.
- Self-inclusion. $\forall i : \langle i, v \rangle \in view_i$.
- Validity. $\forall i : (\langle j, v \rangle \in view_i) \Rightarrow p_i \text{ invoked write_snapshot}(v).$
- Containment. $\forall i, j : (view_i \subseteq view_j) \lor (view_j \subseteq view_i)$.
- Immediacy. $\forall i, j : (\langle i, v \rangle \in view_j) \Rightarrow (view_i \subseteq view_j).^1$

Implementations of an IS object in the wait-free model $CARW_{n,t}[t = n-1]$ are described in [3, 11, 22, 23]. While both a one-shot snapshot object and an IS object satisfy the Self-inclusion, Validity and Containment properties, only an IS object satisfies the Immediacy property. This additional property creates an important difference, from which follows that, while a snapshot object is atomic (operations on a snapshot object can be linearized [18]), an IS object is not atomic (its operations cannot always be linearized). However, an IS object is set-linearizable (set-linearizability allows several operations to be linearized at the same point of the time line [7, 21]).

¹An equivalent formulation of the Immediacy property is: $\forall i, j : ((\langle i, - \rangle \in view_j) \land (\langle j, - \rangle \in view_i)) \Rightarrow (view_i = view_j).$

2.3 *x*-Set agreement

x-Set agreement was introduced by S. Chaudhuri [8] to investigate the relation linking the number x of different values that can be decided in an agreement problem, and the maximal number of faulty processes t. It generalizes consensus which corresponds to the instance x = 1.

An x-set agreement (x-SA) object is a one-shot object that provides the processes with a single operation denoted $propose_x()$. This operation allows the invoking process p_i to propose a value, which is called *proposed* value, an is passed as an input parameter. It returns a value, called *decided* value. The object is defined by the following set of properties.

- Termination. The invocation of $propose_x()$ by a correct process terminates.
- Validity. A decided value is a proposed value.
- Agreement. No more than x different values are decided.

It is shown in [4, 17, 24] that the problem is impossible to solve in $CARW_{n,t}[x \le t]$.

3 *k*-Immediate Snapshot and its *t*-Resilience Impossibility

3.1 Definition and a property of *k***-immediate snapshot**

A k-immediate snapshot (k-IS) object is an immediate snapshot object with the following additional property.

• Output size. The set *view* obtained by a process is such that $|view| \ge n - k$.

This means that in addition to the Self-inclusion, Validity, Containment, and Immediacy properties, the set returned to a process contains at least (n - k) pairs. The associated operation is denoted write_snapshot_k().

k-Immediate snapshot vs x-set agreement When considering a k-IS object and a x-SA object, we have the following differences.

- On concurrency. An *x*-SA object is atomic (linearizable), while a *k*-SA object is not (it is only setlinearizable [7, 21]). In other words, *k*-SA objects "accept" concurrent accesses (this is captured by the Immediacy property), while *x*-SA objects do not.
- On the values returned. When considering an x-SA object, each process p_i knows that each other process p_j (which returns from its invocation of propose_x()) obtains a single value, but it does know which one (uncertainty); p_i knows only that at most k values are decided by all processes (certainty).

When considering a k-IS object, each process p_i knows that each other process p_j (which returns from its invocation of write_snapshot_k()) obtains a set of pairs $view_j$ that is included in, is equal to, or includes its own set of pairs (certainty due to the containment property), but it does not know the size of $view_j$ (uncertainty).

A property associated with k-IS objects The next theorem characterizes the power of a k-IS object in term of its Output size and Containment properties.

Theorem 1 Let us consider a k-IS object, and assume that all correct processes invoke write_snapshot_k(). If the size of the smallest view obtained by a process is ℓ ($\ell \ge n - k$), there is a set S of processes such that $|S| = \ell$ and each process of S obtains the smallest view or crashes during its invocation of write_snapshot_k().

Proof It follows from the Output size property of the k-IS object that no view contains less than $\ell \ge n - k$ pairs. Let min_view be the smallest view returned by a process; hence $\ell = |min_view|$.

Let us consider a process p_i such that $(\langle i, - \rangle \in min_view)$, which returns a view. Due to (a) the Immediacy property (namely $(\langle i, - \rangle \in min_view) \Rightarrow (view_i \subseteq min_view))$ and (b) the minimality of min_view , it follows that $view_i = min_view$. As this is true for each process whose pair participates in min_view , it follows that there is a set S of processes such that $|S| = \ell \ge n - k$, and each of these processes obtains min_view , or crashes during its invocation of write_snapshot_k(). Due to the Containment property, the others processes crash or obtain views which are a superset of min_view .

This theorem establishes the most important property of a k-IS object. This property is used in nearly all lemmas and theorems appearing in the paper.

3.2 An impossibility result

Theorem 2 A k-IS object cannot be implemented in $CARW_{n,t}[k < t]$.

Proof To satisfy the output size property, the view obtained by a process p_i must contain pairs from (n-k) different processes. If t processes crash (e.g., initial crashes), a process can obtain at most (n-t) pairs. If t > k, we have n - t < n - k. It follows that, after it has obtained pairs from (n-t) processes, a process can remain blocked forever waiting for the (t - k) missing pairs. $\Box_{Theorem 2}$

Theorem 3 Let k < n-1. It is impossible to implement a k-IS object in $CARW_{n,t}[1 \le t \le k < n-1]$.

Proof The case where k < t was proved in Theorem 2. Hence, the proof considers the case $1 = t \le k < n - 1$ (this constraint explains the model assumption $n \ge 3$, Section 2.1). If, for $k \le n - 1$, there is no implementation of a k-IS object in $CARW_{n,t}[t = 1]$, there is no implementation either for $t \ge 1$. The proof is by contradiction, namely, assuming an implementation of a k-IS object, where k < n - 1, in $CARW_{n,t}[t = 1]$, we show that it is possible to solve consensus in $CARW_{n,t}[t = 1, k-IS]$. As consensus cannot be solved in $CARW_{n,t}[t = 1]$, it follows that k-IS cannot be implemented in $CARW_{n,t}[1 \le t \le k]$.

Let us recall the main property of k-IS (captured by Theorem 1). Let ℓ be the size of the smallest view (min_view) returned by a process. There is a set S of ℓ processes such that any process of S returns min_view or crashes, and $\ell \ge n - k$. As k < n - 1 (theorem assumption), we have $\ell \ge 2$, which means that at least two processes obtain min_view . It follows that, if a process obtains the views returned by the k-IS object to (n - 1) processes, one of these views is necessarily min_view . This constitutes Observation O.

operation $propose_1(v)$ is					
(1)	$view_i \leftarrow IS.write_snapshot_k(v);$				
(2)	$VIEW[i] \leftarrow view_i;$				
(3) v	wait($ \{ j \text{ such that } VIEW[j] \neq \bot \} = n - t$);				
(4) l	let view be the smallest of the previous $(n - t)$ views;				
(5) I	return(smallest proposed value in <i>view</i>)				
end operation.					

Algorithm 1: Solving consensus in $CARW_{n,t}[t = 1, k-IS]$ (code for p_i)

Let us now consider Algorithm 1. In addition to a k-IS object denoted IS, the processes access an array VIEW[1..n] of SWMR atomic registers, initialized to $[\perp, \dots, \perp]$. The aim of VIEW[i] is to store the view obtained by p_i from the k-IS object IS. When it calls propose₁(v), a process p_i invokes

first the k-IS object, in which it deposits the pair $\langle i, v \rangle$, and obtains a view from it (line 1), that it writes in VIEW[i] to make it publicly known (line 2). Then, it waits until it sees the views of at least (n - 1)processes (line 3). Finally, p_i extracts from these views the one with the smallest cardinality (line 4), and returns the smallest value contained in this smallest view (line 5).

We show that this reduction algorithm solves consensus in $CARW_{n,t}[t = 1, k\text{-IS}]$. As at least (n-1) processes do not crash, and write in their entry of the array VIEW[1..n], no correct process can block forever at line 2, proving the Termination property of consensus.

As $\ell \ge n - k \ge 2$, it follows from Observation *O* that at least one of the views obtained by a process at line 3 is necessarily *min_view*. It follows that each process that executes line 3 obtains *min_view* and returns its smallest value at line 4), proving the Agreement property of consensus.

The consensus Validity property follows directly from k-IS Validity property, and the observation that any set *view* contains only proposed values line 4). $\Box_{Theorem 3}$

Remark When considering the algorithm described in Figure 1, let us observe that, as $n - k \le n - t$, the array VIEW[1..n] can replaced by a second k-immediate snapshot object IS2. We obtain then the following algorithm.

 $\begin{array}{l} \textbf{operation} \ \text{propose}_1(v) \ \textbf{is} \\ view1_i \leftarrow IS.\text{write_snapshot}_k(v); \\ view2_i \leftarrow IS2.\text{write_snapshot}_k(view1_i); \\ \textbf{let} \ view \ \textbf{be} \ \textbf{the smallest view in} \ view2_i; \\ return(smallest proposed value in view) \\ \textbf{end operation.} \end{array}$

4 From k-Immediate Snapshot to x-Set Agreement

This section proves the content of Table 1, namely x-SA can be implemented in the system model $CARW_{n,t}[t \le k < n-1]$, for $x = \max(1, t+k-(n-2))$. Interestingly, the algorithm providing such an implementation is Algorithm 1, whose operation name is now propose_x() (instead of propose₁(v)).

Theorem 4 Let $x = \max(1, k+t-(n-2))$. Algorithm 1 implements an x-SA object in $CARW_{n,t}[1 \le t \le k < n-1, k-IS]$.

Proof The consensus Termination follows directly from the Termination property of the underlying k-IS object IS, the fact that there are at least (n - t) correct processes, and the assumption that all correct processes invoke propose_x(). The consensus Validity property follows directly from the Validity property of the IS.

As far as the consensus Agreement property is concerned, we have the following. Due to Theorem 1, a set of $\ell \ge n - k$ processes obtain the smallest possible view min_view , which is such that $|min_view| = \ell \ge n - k$. It follows that, at most k processes obtain a view different from min_view . In the worst case, these k views are different. Consequently, there are at most k + 1different views, namely min_view , V(1), ..., V(k), and due to their Containment property, we have $min_view \subset V(1) \subset \cdots \subset V(k)$. The rest of the proof is a case analysis according to the value of (n-t) with respect to k.

• n-t > k. In this case, a process obtains at line 3 views from (n-t) processes, and in the first case it obtains the views V(1), ..., V(k). But as n-t > k it also obtains min_view from at least one process. It follows that, all processes see min_view , and they consequently decide the same value at line 5. Hence, $(n-t > k) \Rightarrow (x = 1)$.

- n-t = k. In this case, it is possible that some processes do not obtain min_view at line 3. But, if this occurs, they necessarily obtain the views from the n-t = k processes that deposited V(1), ..., V(k) in VIEW[1..n]. Hence, all these processes obtains V(1) at line 3, and decide consequently the same value from V(1). As the decided values are decided from the views min_view and V(1), we have (n t = k) ⇒ (x = 2).
- n t = k 1. In this case, it is possible that, at line 3, some processes do not obtain not only min_view, but also V(1) and decide the smallest value of V(2). As the decided values are then decided from the views min_view, V(1), and V(2), we have (n t = k 1) ⇒ (x = 3).
- Applying the same reasoning to the general case n t = k c, we obtain $(n t = k c) \Rightarrow (x = 2 + c)$.

Abstracting the previous case analysis, we obtain x = 1 (consensus) for n-t > k, and x = k+t-(n-2), i.e., when n - t = k - x + 2, from which follows that $x = \max(1, k + t - (n - 2))$, which completes the proof of the theorem.

The next corollary is a re-statement of Theorem 4 for x = 1.

Corollary 1 Algorithm 1 implements a consensus object in $CARW_{n,t}[1 \le t < n/2, t \le k \le (n-1) - t, k$ -IS].

5 An Equivalence Between k-Immediate Snapshot and Consensus

This section shows first that consensus is strong enough to implement a k-IS object when $t \leq k$. Combining this result with the fact consensus can be implemented from a k-IS object in $CARW_{n,t}[1 \leq t < n/2, t \leq k \leq (n-1) - t]$ (Corollary 1), we obtain that consensus and k-IS are equivalent in $CARW_{n,t}[1 \leq t < n/2, t \leq k \leq (n-1) - t]$.

5.1 From consensus to *k*-IS in $CARW_{n,t}[t \le k \le n-1]$

Algorithm 2 describes a reduction of k-IS to consensus in $CARW_{n,t}[0 < t \leq k \leq n-1]$. This algorithm uses three shared data structures. The first is an array REG[1..n] of SWMR atomic registers (where REG[i] is associated with p_i), the second is a consensus objects denoted CS, and the third is an immediate snapshot object denoted IS (let us recall that such an object can be implemented in $CARW_{n,t}[t \leq n-1]$).

```
operation write_snapshot<sub>k</sub>(v_i) is
(1) REG[i] \leftarrow v_i;
(2) wait (|j \text{ such that } REG[j] \neq \bot\}| \ge n-k);
(3) aux_i \leftarrow \{\langle j, REG[j] \rangle \text{ such that } REG[j] \neq \bot\};
(4) view_i \leftarrow CS.propose_1(aux_i);
(5) if (\langle i, v_i \rangle \in view_i)
(6)
         then return(view_i)
(7)
          else aux_i \leftarrow IS.write_snapshot(v_i);
(8)
                view_i \leftarrow view_i \cup aux_i;
(9)
                return(view_i)
(10) end if
end operation.
```

Algorithm 2: Implementing k-IS in $CARW_{n,t}[0 < t \le k \le n-1, \text{CONS}]$ (code for p_i)

The behavior of a process p_i can be decomposed in three parts.

- When it invokes write_snapshot_k(v_i), p_i first deposits its value v_i in REG[i], in order all processes can know it, and waits until at least (n k) processes have deposited their input value in REG[1..n] (lines 1-2).
- Then p_i proposes to the underlying consensus object CS, the set of all the pairs (j, REG[j]) such that REG[j] ≠ ⊥ (lines 3-4). Let us notice that this set contains at least (n k) pairs. Hence, the consensus object returns to p_i a view view_i, which contains at least (n k) pairs.
- Finally, p_i returns a view (of at least (n k) pairs).
 - If $view_i$ contains its own pair $\langle i, v_i \rangle$, p_i returns $view_i$ (line 6).
 - If $view_i$ does not contain $\langle i, v_i \rangle$, p_i proposes v_i to the underlying immediate snapshot object from which it obtains a set pairs aux_i (line 7). Let us notice that, due the properties of the immediate snapshot object *IS*, aux_i contains the pair $\langle i, v_i \rangle$. Process p_i then adds aux_i to $view_i$ (line 8) and returns it (line 9).

Theorem 5 Algorithm 2 implements k-IS in $CARW_{n,t}[0 < t \le k \le n-1, CONS]$.

Proof Proof of k-IS Self-inclusion. If p_i returns at line 6, self-inclusion follows directly from the predicate of line 5. If this predicate is not satisfied, p_i invokes the underlying immediate snapshot object *IS* with the value v_i it initially proposed (line 7). It then follows from the self-inclusion property of *IS* that aux_i contains $\langle i, v_i \rangle$, and due to line 8, the set $view_i$ that is returned at line 9 contains $\langle i, v_i \rangle$.

Proof of k-IS Validity. This property follows from (a) the fact that a process p_i assigns to REG[i] the value it wants to deposit in the k-IS object, (b) this atomic variable is written at most once (line 1), and (c) the predicate $REG[j] \neq \bot$ is used at line 3 to extract values from REG[1..n].

The Output size property follows from (a) the predicate of line 2, which ensures that the set $view_i$ obtained at line 4 from the underlying consensus object contains at least $n - t \ge n - k$ pairs, and the fact that a set $view_i$ cannot decrease (line 8).

Proof of k-IS Containment. Let P6 (resp., P9) the set of processes that terminate at line 6 (resp., 9). Let *view* be the set of pairs decided by the underlying consensus object CS (line 4). Hence, all the processes in P6 return *view*. Due to line 8, the set *view_i* returned by a process that terminates at line 9 includes *view*. It follows that $\forall p_j \in P6, p_i \in P9$, we have $view_j = view \subset view_i$.

Let us now consider two processes p_i and p_j belonging to P9. It then follows from the IS Containment property of the underlying *IS* object, that we have $aux_i \subseteq aux_j$ or $aux_j \subseteq aux_i$ (where the value of aux_i and aux_j are the ones at line 7). Consequently, at line 8 we have $view_i \subseteq view_j$ or $view_j \subseteq view_i$, which completes the proof of the k-IS Containment property.

Proof of k-IS Immediacy. Let p_i and p_j be two processes that return $view_i$ and $view_j$, respectively, such that $\langle i, v \rangle \in view_j$. We have to show that $view_i \subseteq view_j$. Let us considering the sets P6 and P9 defined above. There are three cases.

- Both p_i and p_j belong to P6. In this case, due to line 4, we have $view_i = view_j$.
- p_i belongs to P6, while p_j belong to P9. In this case, due to line 8, we have $view_i \subset view_j$.
- Both p_i and p_j belong to P9. In this case, due to the IS Immediacy property of IS we have (at line 8) (i, -) ∈ aux_j ⇒ aux_i ⊆ aux_j (and (j, -) ∈ aux_i ⇒ aux_j ⊆ aux_i). Let view the set of pairs returned by the consensus object line 4. As, due to line 9, we have view_i ← view ∪ aux_i and view_j ← view ∪ aux_j, the k-IS Immediacy property follows.

Proof of k-IS Termination. Let p be the number of processes that deposit a value in REG. As $t \le k$, we have $n - k \le n - t \le p \le n$. It follows that no correct process can wait forever at line 2.

The fact that no correct process blocks forever at line 4 and line 7 follows from the termination property of the underlying consensus and immediate snapshot objects. $\Box_{Theorem 5}$

5.2 When consensus and *k*-IS are equivalent

Let us consider the right triangular matrix defined by the entries are marked "x-SA" in Table 1. Theorem 5 states that it is possible to to implement k-IS from CONS for any entry (t, k) belonging to this triangular matrix. Combined with Corollary 1, we obtain the following theorem.

Theorem 6 Consensus and k-IS are equivalent in $CARW_{n,t}[0 < t < n/2, t \le k \le (n-1) - t]$.

6 When Consensus is Stronger than k-Immediate Snapshot

Section 4 investigated the power of k-IS to implement x-SA objects, namely x-SA can be implemented in $CARW_{n,t}[1 \le t \le k < n-1, k-IS]$ where $x = \max(1, t + k - (n-2))$, see Theorem 4. As we have seen, considering the other direction, Section 5 has shown that k-IS can be implemented in $CARW_{n,t}[1 \le t \le k < n-1, \text{CONS}]$ (Theorem 5). The combination of these results showed that Consensus and k-IS are equivalent in $CARW_{n,t}[0 < t = k < n/2]$ (Theorem 6).

This section shows an upper bound on the power of k-IS to implement x-SA objects, namely, k-IS objects are not powerful enough to implement consensus in $CARW_{n,t}[n/2 \le t \le k < n-1]$.

Preliminary: a simple lemma Let us remark that, as immediate snapshot objects that they generalize, k-immediate snapshot objects are not linearizable. As a k-IS object IS contains values from at least (n-k) processes, at least (n-k) processes must have invoked the operation IS.write_snapshot_k() for any invocation of write_snapshot_k() be able to terminate. It follows that there is a time τ at which n-k processes have invoked IS.write_snapshot_k() and have not yet returned. We then say that these (n-k) processes are "inside IS". Hence the following lemma.

Lemma 1 If an invocation of write_snapshot_k() on a k-immediate snapshot object IS terminates, there is a time τ at which at least (n - k) processes are inside IS.

Theorem 7 There is no algorithm implementing consensus in $CARW_{n,t}[n/2 \le t \le k < n-1, k$ -IS].

Proof To prove the theorem, let us first consider first the case n = 2t. The proof is by contradiction. Let us assume that \mathcal{A} is a *t*-resilient consensus algorithm for a set of processes $\{p_1, \dots, p_n\}$ which uses a *k*-IS object in a system where n = 2t. The contradiction is obtained by simulating \mathcal{A} with two processes Q_0 and Q_1 , such that Q_0 and Q_1 solve consensus despite the possible crash of one of them. As there is no wait-free consensus algorithm for 2 processes, it follows that such a consensus algorithm \mathcal{A} based on *t*-immediate snapshot objects cannot exist. The simulation is described in Algorithm 3.

Let A_0 and A_1 be a partition of $\{p_1, \dots, p_n\}$ such that $|A_0| = |A_1| = t$. Q_0 simulates the processes in A_0 , while Q_1 simulates the processes in A_1 . In the simulation, if Q_i is correct, then each simulated process in A_i executes its sequence of operations (it is consequently correct in the simulated run). If Q_i crashes, its crash entails (in the simulated run) the crashes of all the processes in A_i . Note that, as at most t simulated processes may crash in a simulated run, no process of A_{1-i} crashes if all processes of A_i crash.

In the following, given a simulated process p, and a k-IS object o, op(o, v) denotes the invocation by p of write_snapshot_k(v) by p on the k-IS object o. The underlying idea of the simulation is that a 1-IS

Let A_0 and A_1 be a partition of $\{p_1, \dots, p_n\}$: $|A_0| = |A_1| = t, \{p_1, \cdots, p_n\} = A_0 \cup A_1, \text{ and } A_0 \cap A_1 = \emptyset.$ Code for $Q_i \ (i \in \{0, 1\})$: (1) for all p_j in A_i : initialize v_{p_j} with the initial value of Q_i ; (2) repeat forever for each p in A_i in a round robin way do (3)(4)if next operation of p is op(o, v) (i.e. write_snapshot(v) on the k-IS object o) (5) then $prop_i[o] \leftarrow prop_i[o] \cup \{(p, v)\};$ (6)if $REG[i][o] = \bot$ (7)then if $REG[1-i][o] \neq \bot$ then $REG[i][o] \leftarrow REG[1-i][o] \cup \{(p,v)\};$ (8) simulation of op(o, v) for p which returns REG[i][o](9) (10)end if else $REG[i][o] \leftarrow REG[i][o] \cup \{(p,v)\};$ (11)(12)simulation of op(o, v) for p which returns REG[i][o](13)end if (14)**else** simulate the next operation of *p*; (15)if p decides v in this step then Q_i decides v end if (16)end if; (17)if $((|prop_i(o)| = t) \land (REG[i][o] = \bot))$ (18)then $REG[i][o] \leftarrow IS[o]$.write_snapshot($prop_i(o)$) (19)end if (20)end for (21) end repeat

Algorithm 3: Simulation of \mathcal{A} by Q_i $(i \in \{0, 1\})$ for n = 2t

object accessed by Q_0 and Q_1 allows them to simulate a k-IS object shared by the simulated processes $p_1, ..., p_n$.

The 1-IS object associated with the simulated k-IS object o, is denoted IS[o]. Hence, in the following "write_snapshot_k()" refers to an operation on a simulated object o, while write_snapshot₁()" refers to an operation issued by a simulator on a simulation object IS[o].

In addition to the 1-IS objects, the simulator processes Q_0 and Q_1 manage the following variables.

- REG[0,1][o] is an array made up of two atomic read/write registers associated with each simulated k-IS object o. REG[i][o] is written by Q_i and read by both Q_i and Q_{1-i}. It contains (at least) the values written in o by the processes simulated by Q_i (lines 8 and 11). If Q_i has not already simulated write_snapshot_k() on o while Q_{1-i} has, REG[i][o] is initialized to the result of the write_snapshot_k() operations on o issued by the processes of A_{1-i} simulated by Q_{1-i} (lines 6-8).
- prop_i[o] is a local variable of Q_i containing the values written in the k-IS object o by the simulated processes in A_i (line 5). When the next step of all the simulated processes is write_snapshot_k() on o, Q_i returns the initial value of REG[i][o] (line 19). In the next t executions of the loop, when Q_i considers the simulated process p, this value will be returned to p (line 12) by the simulation of write_snapshot_k() on o issued by p.

The central point of the simulation lies in the way the k-IS objects are simulated. For this, only when the next step of *all* the simulated processes in A_i are *o*.write_snapshot_k() (write_snapshot_k() on the *same* object *o*), the simulator Q_i performs write_snapshot₁() on associated 1-IS object IS[o] shared by Q_0 and Q_1 , where the values written by the processes in A_i in this k-IS object *o*. The result of this invocation of write_snapshot₁() contains either all the values from all simulated processes, or only the values of the processes in A_i . Moreover, all processes of Q_i obtain the same result, and Q_i also writes this result value into REG[i, o] (line 19). Let us now consider the case in which the next step of the processes in A_i is not write_snapshot_k() on the same object. If the next step of some process $p \in A_i$ is write_snapshot_k() on object o and no write_snapshot_k() on o by processes in A_i has already returned, we prove that there is a time τ at which all processes in A_0 , or all processes A_1 , are *inside* the k-IS object o. To this end, let us assume that there is no time at which all processes in A_i are inside a k-IS object o. By Lemma 1 there is a time τ at which a set of at least k processes, say C, are inside a k-IS object o. At this time, as -by assumption- at least one process in A_i is not inside a k-IS object, it follows that at least one process of A_{1-i} is inside a k-IS object. But let us then consider the run in which all processes in A_i crash (in particular all processes in A_i may be considered as crashed before they invoked write_snapshot_k() on o). Hence for this run, C contains no process in A_i and, as $|C| \ge k$, C is equal to A_{i-1} .

From this observation we deduce that either there is a time for which the next operation of all $p \in A_i$ is a write_snapshot_k() on o, or there is a time at which the next step of all processes $p \in A_{1-i}$ is a write_snapshot_k() on o. Hence, Q_i or Q_{1-i} executes write_snapshot₁() on IS[o]). If Q_{1-i} performs executes write_snapshot₁() on IS[o], the result for each process in A_{1-i} is the set V made up of the values written by the processes in A_{1-i} . After that, Q_i can read V from a shared variable, and is able to compute the result of a write_snapshot_k() on o (the result is V union the set of values of processes in A_i for which Q_i has simulated the write_snapshot_k() on o). Hence, if $p \in A_i$ is stuck in the simulation on an object o, either Q_{1-i} eventually executes write_snapshot₁() on IS[o], and Q_i eventually simulates write_snapshot_k() on o for p, or eventually the next operation of all processes in A_i is a write_snapshot_k() on o, and Q_i can compute the result returned by these write_snapshot_k() on o.

To extend the result to 2t > n, we partition $\{p_1, \dots, p_n\}$ in 3 sets A_0, A_1, D such that $|A_0| = n - t$, $|A_1| = n - t$, |D| = 2t - n. Then, we run the previous simulation algorithm \mathcal{A} where all processes in D are initially crashed, Q_0 simulates the set of processes of A_0 , and Q_1 simulates the processes of A_1 . With this simulation, Q_0 and Q_1 realizes a wait-free consensus, which is known to be impossible. $\Box_{Theorem} 7$

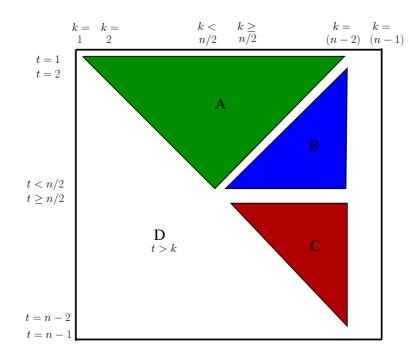


Figure 1: Summarizing the results

7 Conclusion

The aim and content of the paper The paper has first introduced the notion of a k-immediate snapshot (k-IS) object, which generalizes the notion of immediate snapshots (IS) objects to t-crash n-process systems (the IS object corresponds to the case k = t = n - 1). It has then shown that k-IS objects cannot be implemented in asynchronous read/write systems for k < n - 1.

The paper considered then the respective power of k-IS objects and x-set agreement objects (x-SA) in t-crash-prone systems. As both these family of objects are impossible to implement in read/write systems for t, k < n - 1 or $x \le t$, respectively, the paper strove to establish which of k-IS and x-SA objects are the most "impossible to solve". The main results are the following where the zones A, B, C, D, refer to Figure 1.

- Even if we have consensus objects, it is not possible to implement k-IS objects in a t-crash system where t > k (Zone D).
- It is possible to implement x-SA objects, where $x = \max(1, t + k (n 2))$, from k-IS objects in systems where $1 \le t \le k < n 1$ (Zone A + B + C).
- It is possible to implement k-IS objects from 1-SA objects (consensus) in read/write systems where 1 ≤ t ≤ k ≤ n − 1 (Zone A + B + C).
- 1-SA objects (consensus) and k-IS objects are equivalent in read/write systems where $1 \le t < n/2$ and $t \le k \le (n-1) t$ (Zone A).
- It is not possible to implement 1-SA (consensus) from k-IS objects in read/write systems when n/2 ≤ t ≤ k < n − 1 (Zone C).

Stated in a more operational way, these results exhibit the price of the synchronization hidden in k-IS object (which requires that the view returned to a process contains at least (n - k) pairs, (where a pair is made up of a value plus the id of the process that deposited it in the k-IS object).

More generally, the previous results establish a computability map relating important problems, which are impossible to solve in pure read/write systems.

Open problems The following problems remain to be solved to obtain a a finer relation linking k-IS and x-SA, when > 1.

- Direction "from k-IS to x-SA". Is it possible to implement x-SA objects, with $1 \le x < t + k (n-2)$ in t-crash n-process systems enriched with k-IS objects (Zone B)? We conjecture that the answer to this question is no.
- Direction "from *x*-SA to *k*-IS". Given an *x*-SA object, which *k*-IS objects can be implemented from it? More generally, is there a "*k*-IS-like" communication object such that *x*-SA and this "*k*-SA-like" object are computationally equivalent (by "*k*-IS-like" we mean an object possibly weaker than a *k*-IS object)?

Acknowledgments

This work has been partially supported by the French ANR project DESCARTES devoted to the study of abstraction layers in distributed computing, the UNAM-PAPIIT project IN107714, and the INRIA-UNAM *Équipe Associée* LiDiCo (At the Limits of Distributed Computing).

References

- Afek Y., Attiya H., Dolev D., Gafni E., Merritt M. and Shavit N., Atomic snapshots of shared memory. *Journal of the ACM*, 40(4):873-890 (1993)
- [2] Anderson J., Multi-writer composite registers. Distributed Computing, 7(4):175-195 (1994)
- [3] Borowsky E. and Gafni E., Immediate atomic snapshots and fast renaming. *Proc. 12th ACM Symposium on Principles of Distributed Computing (PODC'93)*, ACM Press, pp. 41-50 (1993)
- [4] Borowsky E. and Gafni E., Generalized FLP impossibility results for tresilient asynchronous computations. Proc. 25th ACM Symposium on Theory of Computation (STOC'93), ACM Press, pp. 91-100 (1993)
- [5] Borowsky E. and Gafni E., A simple algorithmically reasoned characterization of wait-free computations. *Proc. 16th ACM Symposium on Principles of Distributed Computing (PODC'97)*, ACM Press, pp. 189-198 (1997)
- [6] Borowsky E., Gafni E., Lynch N. and Rajsbaum S., The BG distributed simulation algorithm. *Distributed Computing*, 14:127-146 (2001)
- [7] Castañeda A., Rajsbaum S., and Raynal M., Specifying concurrent problems: beyond linearizability and up to tasks. *Proc. 29th Symposium on Distributed Computing (DISC'15)*, Springer LNCS 9363, pp. 420-435 (2015)
- [8] Chaudhuri S., More choices allow more faults: set consensus problems in totally asynchronous systems. *Information and Computation*, 105(1):132-158 (1993)
- [9] Delporte C., Fauconnier H., Rajsbaum S., and Raynal M., t-Resilient immediate snapshot is impossible. Proc. 23nd Int'l Colloquium on Structural Information and Communication Complexity (SIROCCO'16), Springer LNCS 9988, pp. 177-191 (2016)
- [10] Fischer M.J., Lynch N.A., and Paterson M.S., Impossibility of distributed consensus with one faulty process. *Journal of the ACM*, 32(2):374-382 (1985)
- [11] Gafni E. and Rajsbaum S., Recursion in distributed computing. *Proc. 12th Int'l Conference on Stabilization, Safety, and Security of Distributed Systems (SSS'10)*, Springer LNCS 6366, pp. 362-376 (2010)
- [12] Herlihy M. P., Wait-free synchronization. ACM Transactions on Programming Languages and Systems, 13(1):124-149 (1991)
- [13] Herlihy M.P., Kozlov D., and Rajsbaum S., *Distributed computing through combinatorial topology*, Morgan Kaufmann/Elsevier, 336 pages, ISBN 9780124045781 (2014)
- [14] Herlihy M.P., Luchangco V., and Moir M., Obstruction-free synchronization: double-ended queues as an example. Proc. 23th Int'l IEEE Conference on Distributed Computing Systems (ICDCS'03), IEEE Press, pp. 522-529, 2003.
- [15] Herlihy M., Rajsbaum S., and Raynal M., Power and limits of distributed computing shared memory models. *Theoretical Computer Science*, 509:3-24 (2013)
- [16] Herlihy M. P. and Shavit, N., A simple constructive computability theorem for wait-free computation. Proc. 26th ACM Symposium on Theory of Computing (STOC'94), ACM Press, pp. 243-252 (1994)
- [17] Herlihy M. P. and Shavit, N., The topological structure of asynchronous computability. *Journal of the ACM*, 46(6):858-923 (1999)
- [18] Herlihy M. P. and Wing J. M., Linearizability: a correctness condition for concurrent objects. ACM Transactions on Programming Languages and Systems, 12(3):463-492 (1990)
- [19] Lamport L., On interprocess communication, Part I: basic formalism. *Distributed Computing*, 1(2):77-85 (1986)
- [20] Loui M. and Abu-Amara H., Memory requirements for agreement among unreliable asynchronous processes. Advances in Computing Research, 4:163-183, JAI Press (1987)

- [21] Neiger G., Set-linearizability. Brief announcement in *Proc. 13th ACM Symposium on Principles of Distributed Computing (PODC'94)*, ACM Press, page 396 (1994)
- [22] Rajsbaum, S. and Raynal, M., An introductory tutorial to concurrency-related distributed recursion. *Bulletin* of the European Association of TCS, 111:57-75 (2013)
- [23] Raynal M., Concurrent programming: algorithms, principles and foundations. Springer, 515 pages, ISBN 978-3-642-32026-2 (2013)
- [24] Saks M. and Zaharoglou F., Wait-free *k*-set agreement is impossible: the topology of public knowledge. *SIAM Journal on Computing*, 29(5):1449-1483 (2000)