

# Go Figure! A Meta Evaluation of Factuality in Summarization

Saadia Gabriel<sup>♣</sup> Asli Celikyilmaz<sup>♣</sup> Rahul Jha<sup>♣</sup> Yejin Choi<sup>♣</sup>◇ Jianfeng Gao<sup>♣</sup>

<sup>♣</sup>Paul G. Allen School of Computer Science & Engineering, University of Washington

<sup>♣</sup>Microsoft Research

◇Allen Institute for Artificial Intelligence

{skgabrie, yejin}@cs.washington.edu

{aslicel, rajh, jfgao}@microsoft.com

## Abstract

Text generation models can generate factually inconsistent text containing distorted or fabricated facts about the source text. Recent work has focused on building evaluation models to verify the factual correctness of semantically constrained text generation tasks such as document summarization. While the field of factuality evaluation is growing fast, we don't have well-defined criteria for measuring the effectiveness, generalizability, reliability, or sensitivity of the factuality metrics. Focusing on these aspects, in this paper, we introduce a *meta-evaluation framework* for evaluating factual consistency metrics. We introduce five necessary, common-sense conditions for effective factuality metrics and experiment with nine recent factuality metrics using synthetic and human-labeled factuality data from short news, long news and dialogue summarization domains. Our framework enables assessing the efficiency of any new factual consistency metric on a variety of dimensions over multiple summarization domains and can be easily extended with new meta-evaluation criteria. We also present our conclusions towards standardizing the factuality evaluation metrics.

## 1 Introduction

The goal of text generation systems is to produce text that is fluent, coherent, relevant, as well as factually correct. Recent progress in neural approaches to building semantically constraint text generation systems has shown tremendous improvements in this direction (Liu and Lapata, 2019; Guo et al., 2018; Durmus et al., 2020; Wang et al., 2020). However, an important issue in text generation systems is that they can yield factually inconsistent text, caused by somewhat distorted or fabricated facts about the source text. Especially in document summarization tasks, the models that abstract away salient aspects, have been shown to generate text

**CNN Article** : Shocking footage has emerged of a driver who was found asleep in his car on a Sydney motorway in the middle of the night. A motorist sent the video to Ray Hadley of 2gb radio, clearly unimpressed by what he has just come across. He filmed the male driver who appeared to be having a snooze in the driver 's seat while the car remained stationary on one of Australia 's busiest freeways [...]

**Ground Truth Summary**: An unimpressed motorist documented how **he tried to wakeup the driver**. He says in the video : dead set **ca n't wake** him up ... off his head '. The footage was sent to ray hadley of 2gb radio and uploaded on youtube on monday. 2gb says the driver had passed out on the m1 motorway north of sydney.

ROUGE-1: 44.28 ROUGE-2: 12.43 ROUGE-L: 35.12

**Transformed Ground Truth Summary** : Shocking footage: a driver **was found awake** in his car. He says in the video: dead set **can't not wake him up**...off his head. The footage was sent to Ray Hadley of 2gb radio and uploaded on youtube on monday. 2gb says the driver woke upon the m1 motorway north of sydney.

ROUGE-1: **45.31** ROUGE-2: **20.65** ROUGE-L: **42.19**

Figure 1: Example of a ground-truth CNN/DailyMail summary and transformed summary where key spans of the ground-truth summary (highlighted in green) contain factual errors (highlighted in red). Even though the transformed summary is less factual, the commonly used ROUGE summarization metric assigns higher values to that summary over the ground-truth summary when we compare against the original article as a reference.

with up to 30% factual inconsistencies (Kryscinski et al., 2019; Falke et al., 2019a; Zhu et al., 2020).

Commonly used metrics for measuring quality of generated text fail to capture structural aspects of language and poorly correlate with human judgements (Hashimoto et al., 2019; Clark et al., 2019). As shown by Figure 1, simple transformations like copying filler terms from the source text and introducing logical negations to transform a factually grounded summary into a factually inconsistent summary can lead to a higher ROUGE score for the less factual summary when we compare the candidate summaries against the original source document.

The last few years has observed an increase in research papers on factual consistency evaluation metrics due to these reasons. A number of metrics have been proposed for measuring factuality via

proxy objectives like question-answering (QA) and facet overlap (Scialom et al., 2019; Durmus et al., 2020; Mao et al., 2020), raising a number of new research questions including: “Do these metrics capture multiple aspects and dimensions of factuality in summarization?” and “Do these metrics capture factuality across a broader spectrum of domains?” It is unclear which of these metrics are suitable for evaluating the types of text generation methods. We think that answering these questions is key to determining the usability and effectiveness of recent factuality metrics, especially when considering previously under-explored summarization domains like dialogue summarization.

In this work, we propose the first evaluation framework, GO-FIGURE<sup>1</sup>, a meta-evaluation framework for assessing the effectiveness of factuality metrics across multiple dimensions and domains - *extreme news summarization*, *multi-sentence news summarization*, and *dialogue summarization*.<sup>2</sup> While most of the prior work in factual consistency concentrated on one dataset and domain, our framework allows us to test the robustness and accuracy of proposed metrics for evaluating factual consistency across domains to determine if metrics truly generalize. We primarily focus on summarization rather than open-ended generation, since the source document provides a natural grounding for factuality.

Our contributions are as follows: (i) a set of diagnostics for measuring sensitivity of metrics to different levels of factual inconsistency (i.e. *are there statistically significant differences between metric results for less factual generations vs. more factual generations?*), as well as sensitivity of metrics to types of factual errors (i.e. *which lexical and semantic changes do metrics better capture?*), (ii) a synthetic evaluation dataset of context/summary pairs from three summarization domains for measuring effectiveness of new factuality metrics. The evaluation dataset contains different levels of injected factual errors to simulate errors made by generation models, and finally (iii) an evaluation dataset of summaries generated by transformer-based models (Raffel et al., 2019; Rothe et al., 2019) annotated with types of factual errors. This provides a test-bed capturing the real distribution of errors made by generation models.

<sup>1</sup>General Outline for Factuality In Generative Understanding Evaluation.

<sup>2</sup>We will publicly release code for our evaluation framework and diagnostic datasets soon.

## 2 Factuality Metric Meta Evaluation

Since reference summaries may be an incomplete representation of the salient facts<sup>3</sup> in a source document or unavailable, we consider factuality in terms of how well candidate summaries are factually grounded with respect to the source document rather than reference summaries. We also assume that source documents are factually valid, without the use of external sources or databases for fact verification. We define a summary as having factual inconsistency level  $i$  if there are  $i$  errors present (i.e. a summary with no errors will have a factual inconsistency level 0, a summary with 1 error will have an inconsistency level 1, etc).<sup>4</sup> In section 2.1, we propose a set of necessary conditions for defining an effective factuality metric including theoretical constraints on metric values and commonsense conditions. In sections 3.2.1 and 3.2.2 we describe the construction of diagnostic datasets to test these conditions in both a simulated and generated setting. In section 2.2 we elaborate on how the conditions defined by our framework can be practically applied to measure sensitivity of metrics to changes in factuality.

### 2.1 How do we define a “good” factuality metric?

We define a set of five conditions for a text generation metric  $M(D, S_i)$  that can effectively measure factual consistency of a summary  $S_i$  with respect to a source document  $D$ :

**Boundedness (Condition I).** We define this formally such that if  $S_f$  is a *completely factual* summary and  $S_r$  is a *completely factually inconsistent* summary,<sup>5</sup> we expect that

$$M(D, S_r) \leq M(D, S_i) \leq M(D, S_f). \quad (1)$$

In other words, the metric values should be reasonably bounded and these bounds should relate to the factuality of candidate summaries.

<sup>3</sup>Following Kryscinski et al. (2019), we define facts as salient spans in a source document, i.e. spans of text highlighting key information pertaining to entities in the source documents, actions that were performed, statistical reporting, etc. These spans either support or refute claims in summaries.

<sup>4</sup>For the simulated data, it is not always possible to introduce  $i$  errors (See section 3.2.1). In this case,  $i$  is the maximum number of errors.

<sup>5</sup>We define a summary that is *completely factually inconsistent* as a summary that contains no facts that overlap with the facts in the source document.

Stat	XSUM	CNNDM	SAMSUMM
Avg #Words (summ/source)	22.06/393.72	63.41/758.13	20.72/94.61
Avg #Entities (summ/source)	2.82/40.87	6.63/51.75	3.76/10.6
Avg #Pronoun words (summ/source)	0.43/13.16	2.09/30.55	0.94/7.45
Avg #Verbs (summ/source)	2.49/46.75	7.65/84.39	2.99/10.75
Avg #Adjectives (summ/source)	1.44/27.56	3.55/46.13	1.01/4.85

Table 1: Dataset statistics for summaries (summ) and source documents (source) in the evaluation sets. Corresponding values for summaries are given on the left and values for source documents are given on the right.

**Sensitivity (Condition II).** We define factual inconsistency level as a measure that indicate the differences between metric results, e.g., between less factual generations vs. more factual generations. We calculate the **sensitivity score** for a given metric based on the magnitude of the slope of the best-fit line between the factual inconsistency level and average metric values (i.e. the estimated rate at which metric values change with the level of factual inconsistency):

$$Sensitivity = \left| \frac{\sum_{i=0}^L (i - \bar{L})(\bar{M}_i - \bar{M})}{\sum_{i=0}^L (i - \bar{L})^2} \right| \quad (2)$$

In Eq. (2),  $L$  is the maximum error level,  $\bar{L}$  is the average error level,  $\bar{M}_i$  is the average value for the metric at error level  $i$  and  $\bar{M}$  is the average value for the metric across all error levels.

If a metric is *sensitive* to changes in factuality, it should hold that there is a statistically significant difference between  $\bar{M}_i$  and  $\bar{M}_{i+1}$ .

**Robustness (Condition III).** The metric should be *robust* to types of factual errors, i.e. it should be able to capture both intrinsic entity errors and other types of factual errors like pronoun errors. See Table 3 for a list of some factual error types we consider.

**Generality (Condition IV).** The metric should be *generalizable* across domains, i.e. if it satisfies the previously defined conditions on a domain A, it is expected that it also satisfies these conditions on a domain B. We acknowledge there will likely be corner cases for which this is not true for any metric as well as domains for which factuality itself is difficult to define (story generation, for example), so we only consider the domains for which factual consistency evaluation is most obviously applicable.

**Commonsense (Condition V).** If human annotators judge a summary  $S_i$  to be more

factually consistent than a summary  $S_j$ , then we expect that

$$H(D, S_i) \geq H(D, S_j). \quad (3)$$

where,  $H$  is the human judgement score on factuality. In other words, the metric should *correlate* with human judgements of factuality.

## 2.2 Testing Factuality Metric Validity

For the purposes of testing boundedness (Condition I), we define the **Lower Bound** for a metric  $M$  as  $M(D, S_r)$  where  $D$  is the source document and  $S_r$  is a randomly sampled summary from the corpus. We define the **Upper Bound** for the metric as  $M(D, S_f)$ , where  $S_f$  is the reference ground-truth summary.

To test sensitivity (Condition II), we report sensitivity score (Eq. 2) and measure whether the differences between metric results are different for various levels of factual inconsistency, and whether these differences are statistically significant. For this test, we measure the **correlation** (Pearson’s  $r$ ) between the factual inconsistency level of the summaries (i.e. the number of injected errors) and the average metric score. Then we measure statistical significance using the  **$p$ -value** from a two-tailed hypothesis test. We check whether metrics satisfy robustness and generality (Conditions III and IV) by separately running this analysis over multiple factual error types and domains/tasks. We measure commonsense by checking the correlation between factual consistency levels determined using manual annotation and metric values.

## 3 Evaluation Datasets

We evaluate the factual consistency metrics on two categories of datasets: (i) available summarization datasets on varying domains, (ii) diagnostic datasets that are both simulated to evaluate different levels of factuality and model generated datasets.

Dataset	Train	Dev	Test	Domain
XSUM	204,045	11,332	11,334	Short news
CNNDM	287,227	13,368	11,490	Long news
SAMSUM	14,732	818	819	Dialogues

Table 2: Summarization domains for evaluation.

### 3.1 Summarization Datasets

In this work we consider summarization domains to cover a broad range of topics, lengths of ground-truth summaries and levels of abstractiveness. In particular, we focus on accurately measuring factuality in the context of news and dialogue summarization, which is key for preventing spread of misinformation in two different domains. For example, in dialog summarization, it is important that a machine-generated summary of an exchange between a politician and a reporter at a press conference is factually consistent, and doesn’t hallucinate details about what was said. We considered the following three summarization domains (see Table 2 for dataset statistics):

**Short News.** To test the ability of metrics to measure factuality in the extreme news summarization domain, we use the XSUM dataset (Narayan et al., 2018) which contains over 200k BBC news articles paired with 1-sentence summaries.

**Long News.** We also test metrics on longer multi-sentence summaries from the CNN/DailyMail dataset (Nallapati et al., 2016), which tend to be more extractive than summaries in XSUM dataset.

**Dialogues.** In contrast to news, dialogue summarization resources are relatively scarce. We use the recently released SAMSUM corpus (Gliwa et al., 2019) to test metrics on dialogue summarization. SAMSUM consists of English language conversations written by linguists in the style of chat messenger dialogues and aligned multi-sentence summaries.

Compared to CNN/DailyMail dataset, XSUM is considered more abstractive based on the proportion of the novel  $n$ -grams in gold summaries in comparison to the source documents (Narayan et al., 2018). Compared to structured news documents, the SAMSUM dialog dataset is unstructured and contains chats between varying interlocutors and the text is first-person directed speech, while the summaries are written in third-person point of view, which makes them highly abstractive in nature.

## 3.2 Diagnostic Datasets

To test the ability of proposed metrics to fulfill our predefined conditions, we set up two diagnostic datasets consisting of (i) transformed reference summaries with simulated factuality errors that allow us to induce and measure factual consistency in a controlled setting and (ii) summaries generated by state-of-the-art transformer summarization models that allows us to measure the effectiveness of metrics in a real data setting.

### 3.2.1 Simulated Datasets

For each of the considered domains in section 3.1, we sample 500 source document / reference summary pairs. We then inject simulated factual errors into the reference summaries based on randomly selecting entities, including pronoun words, or verbs and adjectives to induce a desired level of factual inconsistency. We define the full list of errors we inject using transformations in Table 3.<sup>6</sup>

We notice that some transformations did not produce any change in the reference summary due to a lack of lexical features that can be changed (See Table 1 for the distribution of the entity words, verbs and adjectives). For example, the XSUM reference summary “*Warm, humorous, gutsy, sparky, soulful, determined and fun.*” contains no entities or verbs that can be transformed. In addition, some transformations may have more of an effect on factuality than others (e.g. for the XSUM summary “*You may know Bob best as the paramedic Finlay Newton in the BBC’s Casualty,” exchanging “Idris” for “Bob” would change a smaller ratio of the summary content words than exchanging “Idris” for “Finlay Newton”). Due to these reasons, we generate five different versions of each set of our diagnostic data when randomly selecting reference summary transformations and assessing the aggregated results (See Table 4 for the distribution of errors).*

We control the factuality of transformed summaries by setting the maximum number of random transformations to 1, 2, or 3 injected errors, representing three different levels of factual inconsistency for sensitivity evaluations (Condition II).

<sup>6</sup>See the Appendix for details. For verb negation, we focus on simple negations using “not” (e.g. “I agree” → “I do not agree,” rather than more complex negation (e.g. “I agree” → “I disagree” or “I agree” → “I beg to differ”)).

Reference	Type	Description	Example
Irish Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.	Intrinsic entity error (int)	An entity appearing in the source document is used incorrectly.	Canadian Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Irish Prime Minister Justin Trudeau in Dublin.
Irish Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.	Extrinsic entity error (ext)	An entity appearing in the candidate summary does not appear in the source document.	French Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.
Irish Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.	Pronoun error (pro)	A pronoun in the candidate summary is used incorrectly. For example, (her/she instead of him/he).	Irish Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in her first meeting with Canadian Prime Minister Justin Trudeau in Dublin.
Irish Taoiseach (PM) Leo Varadkar has engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.	Negation error (verb)	There are verb negations in the candidate summary that contradict the source document.	Irish Taoiseach (PM) Leo Varadkar has not engaged in some “sock diplomacy” in his first meeting with Canadian Prime Minister Justin Trudeau in Dublin.
Irish Taoiseach (PM) Leo Varadkar has engaged in People who have been prescribed powerful anxiety or pain relief drugs are being warned about a new drug-driving law.	Sentiment error (sent)	An adjective or adverb appearing in the candidate summary contradicts the source document.	Irish Taoiseach (PM) Leo Varadkar will engage in People who have been prescribed weak anxiety or pain relief drugs are being warned about a new drug-driving law.

Table 3: Table of possible factual errors.

Dataset	Level 1 Avg.	Level 2 Avg.	Level 3 Avg.	Avg. % Transformed (L1/L2/L3/All)
XSUM (Entity)	0.59	1.14	1.61	58.84 / 76.44 / 86.28 / 73.85
XSUM (Non-Entity)	0.48	0.93	1.28	48.32 / 74.00 / 85.40 / 69.24
CNNDM (Entity)	0.75	1.48	2.17	74.92 / 85.68 / 94.48 / 85.03
CNNDM (Non-Entity)	0.50	1.05	1.62	79.44 / 93.32 / 97.04 / 89.93
SAMSUM (Entity)	0.59	1.16	1.70	58.96 / 77.32 / 87.56 / 74.61
SAMSUM (Non-Entity)	0.49	0.91	1.28	48.52 / 72.80 / 84.12 / 68.48

Table 4: Analysis of simulated diagnostic dataset (we average across 5 different sets (runs) of randomized transformations for the same 500 reference summaries). We provide results for the average number of induced factuality errors for factual inconsistency level 1 (L1), level 2 (L2) and level 3 (L3), as well as the percentage (%) of summaries that were transformed for each level and across all levels (All). We split the diagnostic dataset into two subsets based on whether simulated errors are related to entities (Entity) or non-entity changes like verb negation (Non-Entity).

### 3.2.2 Model-Generated Datasets

To assess the performance of various metrics on actual generated text, we use a version of the T5 encoder-decoder summarization model (Raffel et al., 2019) that was pretrained on news summarization data and generate summary text using either greedy decoding, beam search or a sample-based decoding strategy like top- $k$  (Fan et al., 2018) and Nucleus sampling (Holtzman et al., 2020). We conduct a fine-grained human evaluation of factuality over generated summaries to assess effectiveness of our sensitivity analysis at highlighting metric strengths and weaknesses for generated summaries (See section 5.2).

## 4 Factuality Metrics for Evaluation

We mainly focus on meta-evaluating most recently proposed factual consistency metrics which use two types of proxy natural language understanding (NLU) objectives aimed at implicitly capturing factuality in generated text: *question-answering* (QA) and a masked token prediction *cloze task*. We also measure the *factual-awareness* of summarization metrics that are aimed primarily at im-

proving coherency rather than factual consistency (e.g. BERTScore (Zhang et al., 2020) and BLEURT (Sellam et al., 2020)), and standard summarization evaluation metrics (e.g. ROUGE (Lin, 2004)). The following is the list of metrics we used for factual consistency evaluation:

**QA-Based Quality Score.** Given a source or reference document  $D$  and candidate summary  $S_i$ , QA-based evaluation metrics assign a generation quality score to  $S_i$  to measure the ability of a QA system by accurately answering questions generated from  $D$  or  $S_i$ . We use the SummaQA (Scialom et al., 2019) and FEQA (Durmus et al., 2020) metrics. For the SummaQA metric, questions are generated from the source document  $D$  and the candidate summary  $S_i$  is used as input to the QA system. Alternatively, FEQA generates questions from  $S_i$  and uses  $D$  to answer these questions.

The generation quality score is typically the aggregated  $F_1$  score measuring the similarity between ground-truth answers for questions generated from  $D$  and the answers predicted by the QA system. SummaQA also generally includes the aggregated model confidence probabilities for predictions.

**Masked LM Prediction (Cloze Task) Score.**

Given a source document  $D$  and candidate summary  $S_i$ , Cloze-based evaluation metrics assign a generation quality score to  $S_i$  by measuring the ability of a NLU system to accurately predict masked tokens in the source document, given access to the information in  $S_i$ . We use two variants of BLANC (Vasilyev et al., 2020), BLANC-Help and BLANC-Tune. BLANC-Help uses both  $D$  and  $S_i$  as input to a pretrained masked token prediction model, while BLANC-Tune only uses  $D$  as input to a model that has been finetuned on the candidate summary. Both metrics are aimed at capturing fluency, informativeness and factual correctness of summaries.

**Semantic Similarity.** Semantic similarity metrics measure the overlap between contextual embeddings of a source or reference document  $D$  and candidate summary  $S_i$ . We use BERTScore (Zhang et al., 2020), which has been shown to correlate better with human judgements of coherency than standard summarization metrics and similarly to  $n$ -gram metrics on factual consistency of CNNDM summaries (Wang et al., 2020).

**Lexical Overlap.** Finally, we test ROUGE (Lin, 2004), which is the standard metric used for evaluating summarization. ROUGE measures the  $n$ -gram overlap between a source or reference document  $D$  and candidate summary  $S_i$ . We evaluate results using ROUGE-1 and ROUGE-2, as well as ROUGE-L, which measures longest common subsequence overlap. We follow prior work that considered ROUGE in factual consistency evaluations (Wang et al., 2020), though it has also been previously noted that ROUGE can underweight good summarization examples (Novikova et al., 2017).

## 5 Meta-Analysis of Factuality Metrics

### 5.1 Controlled Data Experiments

We conduct controlled experiments on the simulated datasets as introduced in 3.2.1, mainly to measure the sensitivity of the factuality metrics on various simulated factuality errors. We provide the results of the sensitivity analysis over our simulated data on the XSUM domain in Table 5, on CNNDM in Table 6 and on SAMSUM in Table 7. All reported results are aggregated from metric values computed over five different sets of random transformations (See section 3.2.1 for details).

**Differences between factuality and standard metrics are fragile when factuality is high.** Our results collectively suggest that, while the metrics

that focused specifically on factuality are more sensitive to changes in factuality compared to the standard lexical overlap or contextual semantic similarity metrics, all of these metrics except BLANC-Tune, ROUGE-1 and ROUGE-L satisfy the boundness condition (Tables 5 and 6). Additionally, all metrics except SummaQA confidence scores (SummaQA-C) are sensitive for entity errors on the dialogue dataset (See Table 7). For CNNDM we find that all the metrics except BLANC-TUNE and FEQA are sensitive to factual consistency to some degree when we consider entity errors (The most sensitive metric is SUMMAQA-F1 with a sensitivity score of 1.02), though the actual sensitivity effect size is very low for ROUGE and BERTScore ( $S < .01$ ). For XSUM, SummaQA-F1 has the highest sensitivity score (0.34), but only FEQA, ROUGE-1, ROUGE-2 and BERTScore are negatively correlated with factual inconsistency with  $p \leq 0.05$ . This indicates that when factual inconsistency of summaries is relatively low, factuality metrics have high variance in terms of effectiveness at detecting differences in the levels of factual inconsistency. (Overall at least 26% of summaries are factually correct for XSUM and at least 15% are correct for CNNDM - see Table 4 for details.)

**ROUGE is not always a valid factuality metric.** Even when we remove the limitations on lexical overlap metrics posed by reference summaries (Novikova et al., 2017), we find that there is high variation across domains in the performance of source document-referenced ROUGE metrics at identifying factual inconsistency. While most other metrics fulfil our boundness and sensitivity conditions, ROUGE-1 and ROUGE-L fail to be bounded (e.g. XSUM summaries with a factual inconsistency level of 3 have an average ROUGE-1 score of 10.92 while the upper bound is 10.61) or sensitive in the case of non-entity-based errors, with metric values actually increasing as factual inconsistency increases (ROUGE-1 has correlations of 0.98 and 0.96 on XSUM and CNNDM respectively, while ROUGE-L has correlations of 1 and 0.91). This implies that standard lexical overlap metrics are able to pick up on obvious lexical errors like those indicated by entity changes, but are inadequately sensitive to subtler changes like those captured by verb negation.

**QA vs. Cloze.** While masked token prediction (cloze task) metrics improve over ROUGE when it comes to detection of non-entity-based errors on

	CLOZE		QA			STANDARD			CONTEXTUAL BERTScore
	BLANC-Help	BLANC-Tune	SummaQA-C	SummaQA-F1	FEQA	R-1	R-2	R-L	
Upper Bound	5.99	1.73	9.64	4.48	27.87	10.61	2.56	9.32	83.76
Level 1	5.73 / 5.98	1.74 / 1.71	9.44 / 9.44	3.80 / 4.31	23.20 / 26.94	10.49 / 10.76	2.54 / 2.56	9.22 / 9.42	83.53 / 83.56
Level 2	5.46 / 5.99	1.59 / 1.78	9.27 / 9.35	3.40 / 4.22	20.05 / 26.55	10.40 / 10.86	2.51 / 2.54	9.16 / 9.49	83.36 / 83.38
Level 3	5.30 / 5.97	1.58 / 1.76	9.16 / 9.23	3.13 / 4.14	15.81 / 26.06	10.33 / 10.92	2.49 / 2.52	9.10 / 9.55	83.21 / 83.26
Lower Bound	1.67	0.25	8.69	1.40	7.07	6.72	0.01	0.06	80.97
Sensitivity	0.22 / 0.01	0.08 / 0.02	0.14 / <b>0.11</b>	<b>0.34</b> / 0.09	0.04 / <b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>
Correlation	-0.99 / -0.61	<b>-0.88</b> / <b>0.69</b>	-0.99 / <b>-1.00</b>	-0.99 / <b>-1.00</b>	-0.99 / <b>-1.00</b>	<b>-1.00</b> / <b>0.98</b>	-0.97 / <b>-1.00</b>	<b>-1.00</b> / <b>1.00</b>	<b>-1.00</b>
p-value	0.09 / 0.59	0.32 / 0.51	0.07 / 0.05*	0.07 / 0.03*	0.05* / 0.04*	0.03* / 0.10	0.16 / 0.05*	<0.01** / 0.02*	0.02* / 0.06

Table 5: Results of simulated factual error data experiments (XSUM, average of 5 runs, \*\*=significant for  $p \leq .01$ , \*=significant for  $p \leq .05$ ). For cells with (-/-), results for entity errors are reported on the left, results for non-entity errors are reported on the right. The details for the upper/lower bounds, sensitivity score,  $p$ -value and correlation measures are explained in §2.2. For sensitivity to factual consistency and correlation w/ factuality levels, we highlight the best-performing and lowest-performing metrics in green and red respectively. For cases where metric values are invalid (e.g. the metric values increase as factuality decreases), we highlight in purple.

	CLOZE		QA			STANDARD			CONTEXTUAL BERTScore
	BLANC-Help	BLANC-Tune	SummaQA-C	SummaQA-F1	FEQA	R-1	R-2	R-L	
Upper Bound	7.60	5.79	13.82	10.87	37.56	14.33	8.08	13.83	84.36
Level 1	7.29 / 7.50	5.56 / 5.69	13.30 / 13.53	9.58 / 10.63	33.35 / 36.64	14.11 / 14.37	7.78 / 7.91	13.60 / 13.84	84.13 / 84.20
Level 2	7.03 / 7.43	5.43 / 5.58	12.93 / 13.24	8.53 / 10.38	28.46 / 36.13	13.95 / 14.38	7.55 / 7.75	13.44 / 13.85	83.94 / 84.04
Level 3	6.72 / 7.38	5.23 / 5.53	12.54 / 13.04	7.54 / 10.26	25.12 / 35.63	13.82 / 14.38	7.35 / 7.62	13.29 / 13.85	83.77 / 83.90
Lower Bound	0.78	1.24	8.498	2.85	7.52	7.33	1.77	7.01	79.27
Sensitivity	0.28 / 0.06	0.16 / 0.08	0.38 / <b>0.25</b>	<b>1.02</b> / 0.19	0.04 / 0.01	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>&lt;0.01</b>
Correlation	<b>-1.00</b> / -0.99	<b>-0.99</b> / -0.97	<b>-1.00</b> / <b>-1.00</b>	<b>-1.00</b> / -0.98	<b>-0.99</b> / <b>-1.00</b>	<b>-1.00</b> / <b>0.96</b>	<b>-1.00</b>	<b>-1.00</b> / <b>0.91</b>	<b>-1.00</b>
p-value	0.03* / 0.08	0.07 / 0.17	0.01** / 0.06	0.01** / 0.13	0.07 / <0.01**	0.04* / 0.17	0.02* / 0.04*	0.03* / 0.27	0.01** / 0.02*

Table 6: Results of simulated factual error data experiments (CNNDM, average of 5 runs). (See Table 5 caption for details.)

	CLOZE		QA			STANDARD			CONTEXTUAL BERTScore
	BLANC-Help	BLANC-Tune	SummaQA-C	SummaQA-F1	FEQA	R-1	R-2	R-L	
Upper Bound	15.23	10.13	13.83	17.23	55.36	26.55	8.24	25.06	84.60
Level 1	13.97 / 15.03	9.00 / 9.47	13.48 / 13.52	15.00 / 16.71	45.31 / 54.25	25.31 / 26.18	7.85 / 7.86	23.91 / 24.69	84.42 / 84.38
Level 2	12.87 / 15.01	8.36 / 9.46	13.16 / 13.26	12.26 / 16.50	37.01 / 53.10	24.27 / 25.86	7.60 / 7.59	22.99 / 24.38	84.28 / 84.19
Level 3	12.02 / 14.93	7.74 / 9.36	12.99 / 13.21	10.12 / 16.24	29.62 / 52.34	23.23 / 25.58	7.32 / 7.36	22.01 / 24.12	84.13 / 84.07
Lower Bound	0.78	1.24	8.498	2.85	0.01	5.56	<0.01	0.05	80.85
Sensitivity	0.98 / 0.05	0.63 / 0.05	0.25 / 0.15	<b>2.44</b> / <b>0.23</b>	0.08 / 0.01	<b>0.01</b> / <b>&lt;0.01</b>	<b>&lt;0.01</b>	<b>0.01</b> / <b>&lt;0.01</b>	<b>&lt;0.01</b>
Correlation	<b>-1.00</b> / -0.96	<b>-1.00</b> / <b>-0.91</b>	<b>-0.99</b> / -0.94	<b>-1.00</b>	<b>-1.00</b> / -0.99	<b>-1.00</b>	<b>-1.00</b>	<b>-1.00</b>	<b>-1.00</b> / -0.99
p-value	0.05* / 0.18	0.01** / 0.28	0.11 / 0.23	0.05*	0.02* / 0.07	<0.01** / 0.03*	0.03*	0.01** / 0.04*	0.01** / 0.07

Table 7: Results of simulated factual error data experiments (SAMSUM, average of 5 runs). (See Table 5 caption for details.)

CNNDM (As shown by Table 6 they are always bounded and negatively correlated), they are less consistent than QA metrics and BLANC-Tune is positively correlated with factual inconsistency on XSUM. This may be due to the fact these metrics are primarily entity-focused, rather than understanding the semantic meaning of a summary as a whole. We find that metrics that rely on more implicit NLU like SUMMAQA and FEQA F1 scores are the most effective metrics on XSUM (Both are negatively correlated with statistical significance and SummaQA-C in particular has the highest sensitivity score at 0.11, see Table 5).


**Impact of summary length.** In general, we find that most of the metrics tested perform better on SAMSUM and CNNDM than XSUM (78 % of the metrics showed significant correlations with entity-based factual error level on CNNDM vs. 44 % of the metrics for XSUM). We hypothesize this

may be due to the fact SAMSUM and CNNDM summaries are multi-sentence, which provides more context for fact-checking.

## 5.2 Generated Data Experiments

In order to observe how the metrics perform on machine-generated summaries, we generate summaries from a fine-tuned T5 encoder-decoder summarization model. We manually evaluate a set of 100 summaries on XSUM dataset which are sampled using top- $k$  decoding ( $k=5$ ) from our T5 model. These summaries are aligned with articles sampled from the same random subset we use in the controlled sensitivity experiments. We find that 78% of generated summaries contain at least 1 factual error. Summaries that are factually inconsistent contain up to three errors, which matches the constraints of our controlled sensitivity experiment.


As shown by Figure 3, all the types of errors defined for the controlled sensitivity experiments

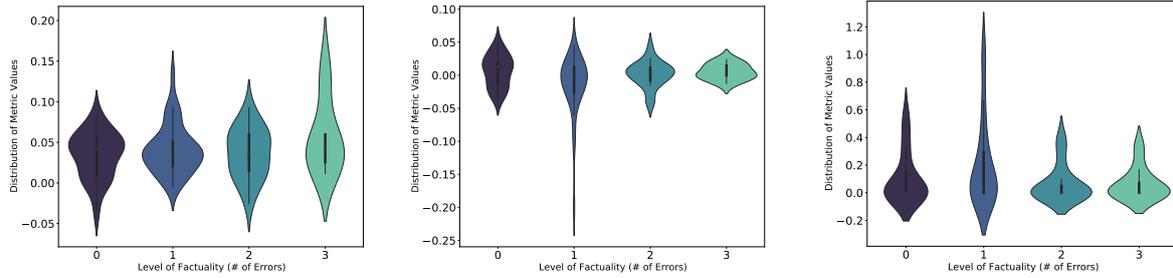


BLANC-Help  
(Pearson’s R = 0.15, p = 0.15)

BLANC-Tune  
(Pearson’s R = 0.01, p = 0.89)


FEQA  
(Pearson’s R = -0.07, p = 0.60)

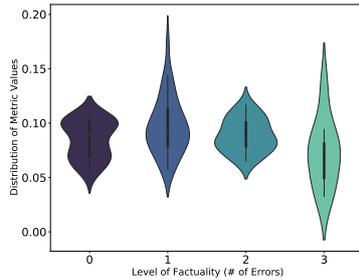

SummaQA-C  
(Pearson’s R = -0.22, p = 0.02)

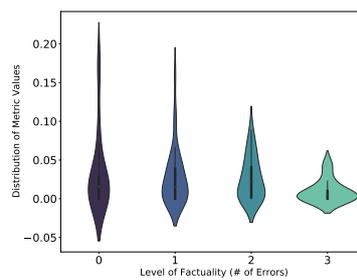

SummaQA-F1  
(Pearson’s R = -0.22, p = 0.03)

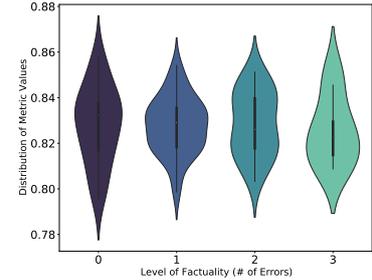

BERTScore  
(Pearson’s R = -0.03, p = 0.76)

Figure 2: Distribution of metric values evaluated in this work. The evaluations are on human annotated generated XSUM dataset sample summaries across factuality levels for three different metric types: cloze task, question-answering and contextual metrics. The colored bounds indicate the variation across 100 samples. The colors indicate levels of factuality errors. The results shown are for all errors except “other” and “false quote.”

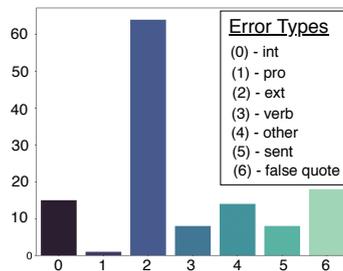


Figure 3: Distribution of factual error types in T5 generated XSUM summaries. The factual error types are described in Table 3. *ext*: extrinsic entity error, *int*: intrinsic entity error, *pro*:pronoun error, *neg*: negation error, *sent*:sentiment error, *false quote*: hallucinated quotes

(as described in Table 3) also appear in the annotated generated summaries. We also discovered a new category of error we define for human evaluation, “false quote”, which describes an instance of a hallucinated quote in the generated summary. For example, in a model generated XSUM summary is the claim “A blood test may help to save a man from having heart attacks, says a British medical journal,” when the ground-truth summary is “A blood test can more than halve the number of people admitted to hospital with a suspected heart

attack, say doctors;”. Here, the actual implication in the ground truth summary is that blood tests can lead to better diagnosis of heart attacks and less unnecessary hospitalization rather than preventing heart attacks. We find that these types of false quote errors appear more frequently in XSUM summaries than any other type of errors except the extrinsic entity errors (ext).

Figure 2 shows the distribution of metric values across factuality levels for 100 sampled XSUM summaries (excluding “other” and “false quote” errors). Table 8 lists the correlation and *p*-values from Figure 2 including the ROUGE scores. We find that all of the metrics except Cloze task metrics and ROUGE-2 are negatively correlated, and SummaQA metrics show a statistically significant correlation. This is in line with our findings on the simulated data (from Table 5), where we found that SummaQA also performed best in terms of sensitivity score (SummaQA metrics were negatively correlated with factual inconsistency with a *p*-value of 0.07 compared to 0.05 for FEQA), and cloze task metrics were not always bounded or sensitive and BLANC-Tune and ROUGE-2 had

Metric	Correlation	<i>p</i> -value
BLANC-Help	0.15	0.15
BLANC-Tune	0.01	0.89
SummaQA-C	-0.22	0.02*
SummaQA-F1	-0.22	0.03*
FEQA	-0.07	0.60
R-1	-0.06	0.57
R-2	0.13	0.20
R-L	-0.03	0.74
BERTScore	-0.03	0.76

Table 8: Correlation for annotated XSUM generated summaries (without “*other*” and “*false quote*” errors).

Metric	Correlation	<i>p</i> -value
BLANC-Help	0.10	0.33
BLANC-Tune	0.01	0.94
SummaQA-C	-0.17	0.09
SummaQA-F1	-0.20	0.05*
FEQA	< 0.01	0.99
R-1	0.02	0.82
R-2	0.14	0.15
R-L	0.05	0.64
BERTScore	0.06	0.53

Table 9: Correlation for annotated XSUM generated summaries (with all error types).

the least correlations on entity-based errors. However, in our analysis on generated data, we notice a difference in results for FEQA, ROUGE-1 and ROUGE-L metrics. We find that these metrics are sensitive with a score less than 0.05 on simulated XSUM data with entity-based errors, but are not significantly sensitive on generated data (though these metrics are negatively correlated). These findings indicate that the magnitude of the sensitivity score from the simulated data analysis as well as statistical significance may be key to predicting results on generated data. When we consider all errors (Table 9), we find relatively less variation in most of the metric scores between factuality levels for the generated summaries, though there is some evidence that SummaQA metric values may be weakly correlated with factuality level.

### 5.3 Discussion of Meta Evaluation

Our analyses show that in contrast to prior work on factual consistency that mostly concentrated on one specific domain and dataset, our Go-Figure framework is effective at testing whether performance of metrics generalize across domains.

We highlight the following key points from ex-

periments run using our Go-Figure Meta Evaluation:

**The simulated data analysis highlights the same trends in best- and worst-performing factuality metrics as human analysis.** Metrics with low sensitivity scores on our simulated XSUM data perform poorly on human-annotated XSUM data, regardless of correlation with factual consistency on simulated data. Conversely, high sensitivity scores on simulated data may be an indicator of better performance on human-annotated data. For the purposes of determining the most reliable factuality metric, this suggests that simulated data is sufficient given that some metrics (e.g. SummaQA) have high sensitivity. In case of metrics like BERTScore and ROUGE, variance in performance between simulated and generated data is less predictable due to low sensitivity.

**Analysis on human annotated data is still necessary when evaluating metrics.** While BLANC-Help metric values decrease with factual inconsistency on simulated data, the metric is positively correlated with factual inconsistency on generated data. The differences between factuality metrics and lexical overlap metrics are also more clearcut when considering generated summaries as opposed to transformed reference summaries. All ROUGE metrics may increase as factual consistency decreases when we consider the full set of error types (See Table 9), and while ROUGE-2 is the most promising lexical overlap metric on simulated summaries in our simulated experiments, it is also positively correlated with factual inconsistency when we remove “*other*” and “*false quote*” errors. This emphasizes the importance of a human-annotated test set as part of the Go-Figure meta evaluation.

**The effectiveness of factuality metrics is most clear when factual consistency is low.** While factuality metrics have higher sensitivity scores than standard lexical overlap or contextual metrics, our analyses show that ROUGE-2 and BERTScore metric values appear to be correctly correlated with factual consistency score on reference summaries transformed with simulated factual inconsistencies. However, these metrics do not perform well on generated summaries, where there is more room for factual inconsistency.

**Limitations.** Even though we define levels of factual inconsistencies, our framework assumes that the correctness of a factual claim is binary, rather than scaled. However, it is possible that generated summaries are factually consistent but *unfaithful* in meaning because they carry different implications than ground-truth summaries. For example the T5 summary “*The UK should remain a member of the European Union?*” and the matching ground-truth summary “*Should the UK remain a member of the EU?*,” both are factually consistent and on-topic given the underlying news article but the slight change in the phrasing of the question for the T5 generated summary makes it appear to be a leading question rather than the more impartial framing of the original summary. This relates to subjectivity of generated text, including generated misinformation (Zellers et al., 2019). Measuring shifts in faithfulness due to subjectivity is not explicitly captured by the current conditions of our framework.

## 6 Related Work

**Factuality in Summarization.** Recent efforts by NLP researchers have drawn attention to the issue of factual errors and hallucinations in the output of neural summarization models (Cao et al., 2018; Massarelli et al., 2019; Zhao et al., 2020). The work of Kryscinski et al. (2019) used similar simulated data collection to ours for improving factual consistency of models, though their simulated data is only used for training rather than evaluation, while Dusek et al. (2017) introduced a reference-less model-based generation quality metric based on adversarial training with simulated examples. A number of works have highlighted the effectiveness of QA and cloze task objectives for evaluating or improving factuality on specific domains (Eyal et al., 2019; Huang et al., 2020). We aim to evaluate these metrics more broadly.

**Evaluation Framework.** Prior work concerning evaluation of automatic metrics for NLG systems has mainly focused on general evaluations of output quality or coherence and fluency (Callison-Burch et al., 2007; Graham, 2015; Fabbri et al., 2020), rather than factuality. Recent work has started to explore evaluating factuality and faithfulness in summarization (Falke et al., 2019b; Goodrich et al., 2019; Celikyilmaz et al., 2020). In particular, Maynez et al. (2020)

compare correlation of various summarization metrics with human judgements of factuality. We expand upon these prior analyses by also introducing a concretely defined framework for evaluating current and future factuality metrics. In contrast to earlier works, we also consider a broader range of domains (notably dialogue summarization).

## 7 Conclusion

We show that our meta-evaluation framework can be used to effectively evaluate sensitivity and validity of factual consistency metrics with only reference summaries, rather than requiring computationally intensive testing across summarization model variants to identify metric strengths and shortcomings. The theoretically grounded nature of our metric conditions also allows for potential extensions to other use cases and text generation settings like data-to-text generation.

In particular, our findings from application of the framework to summarization highlight that current metrics are capable of capturing obvious lexical errors (e.g. entity errors) in summaries, but struggle with errors related to more subtle aspects of semantics (e.g. negation and false quotes). Proposed future directions for improving the ability of metrics to capture a broader spectrum of factual inconsistencies include modification of QA metrics like SUMMAQA and FEQA to use more contextual question generation (QG) systems (e.g. common-sense QG (Shwartz et al., 2020) that allows for more nuanced fact-checking).

## Acknowledgments

The authors thank Yichen Jiang and Shiyue Zhang for feedback on implementation, Hannah Rashkin and Tom McCoy for help with MSR GPU clusters, Rowan Zellers and Elizabeth Clark for pointers to related work, as well as other members of the UW NLP, MSR AI and MSR MSAI communities for helpful comments.

## References

Chris Callison-Burch, Cameron Forgyce, Philipp Koehn, Christof Monz, and Josh Schroeder. 2007. (meta-) evaluation of machine translation. In *Proceedings of the Second Workshop on Statistical Machine Translation*, pages 136–158, Prague, Czech Republic. Association for Computational Linguistics.

- Ziqiang Cao, Furu Wei, W. Li, and Sujian Li. 2018. Faithful to the original: Fact aware neural abstractive summarization. In *AAAI*.
- Asli Celikyilmaz, Elizabeth Clark, and Jianfeng Gao. 2020. Evaluation of text generation: A survey. *ArXiv*, abs/2006.14799.
- Elizabeth Clark, Asli Celikyilmaz, and Noah A. Smith. 2019. Sentence mover’s similarity: Automatic evaluation for multi-sentence texts. In *ACL*.
- Esin Durmus, He He, and Mona Diab. 2020. [FEQA: A question answering evaluation framework for faithfulness assessment in abstractive summarization](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5055–5070, Online. Association for Computational Linguistics.
- Ondrej Dusek, Jekaterina Novikova, and V. Rieser. 2017. Referenceless quality estimation for natural language generation. *ArXiv*, abs/1708.01759.
- Matan Eyal, Tal Baumel, and Michael Elhadad. 2019. [Question answering as an automatic evaluation metric for news article summarization](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 3938–3948, Minneapolis, Minnesota. Association for Computational Linguistics.
- A. R. Fabbri, Wojciech Kryscinski, B. McCann, R. Socher, and D. Radev. 2020. Summeval: Re-evaluating summarization evaluation. *ArXiv*, abs/2007.12626.
- Tobias Falke, Leonardo F. R. Ribeiro, Prasetya Ajie Utama, Ido Dagan, and Iryna Gurevych. 2019a. Ranking generated summaries by correctness: An interesting but challenging application for natural language inference. In *ACL*.
- Tobias Falke, Leonardo F. R. Ribeiro, Prasetya Ajie Utama, Ido Dagan, and Iryna Gurevych. 2019b. [Ranking generated summaries by correctness: An interesting but challenging application for natural language inference](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2214–2220, Florence, Italy. Association for Computational Linguistics.
- Angela Fan, M. Lewis, and Yann Dauphin. 2018. Hierarchical neural story generation. *ArXiv*, abs/1805.04833.
- Bogdan Gliwa, Iwona Mochol, Maciej Biesek, and Aleksander Wawer. 2019. Samsun corpus: A human-annotated dialogue dataset for abstractive summarization. *ArXiv*, abs/1911.12237.
- B. Goodrich, V. Rao, Mohammad Saleh, and Peter J. Liu. 2019. Assessing the factual accuracy of generated text. *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*.
- Yvette Graham. 2015. [Re-evaluating automatic summarization with BLEU and 192 shades of ROUGE](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 128–137, Lisbon, Portugal. Association for Computational Linguistics.
- Han Guo, Ramakanth Pasunuru, and Mohit Bansal. 2018. [Soft layer-specific multi-task summarization with entailment and question generation](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 687–697, Melbourne, Australia. Association for Computational Linguistics.
- T. Hashimoto, Hugh Zhang, and Percy Liang. 2019. Unifying human and statistical evaluation for natural language generation. *ArXiv*, abs/1904.02792.
- Ari Holtzman, Jan Buys, M. Forbes, and Yejin Choi. 2020. The curious case of neural text degeneration. *ArXiv*, abs/1904.09751.
- Luyang Huang, Lingfei Wu, and Lu Wang. 2020. [Knowledge graph-augmented abstractive summarization with semantic-driven cloze reward](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5094–5107, Online. Association for Computational Linguistics.
- Wojciech Kryscinski, B. McCann, Caiming Xiong, and R. Socher. 2019. Evaluating the factual consistency of abstractive text summarization. *ArXiv*, abs/1910.12840.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yang Liu and Mirella Lapata. 2019. [Hierarchical transformers for multi-document summarization](#). *ACL*.
- Yuning Mao, Liyuan Liu, Qi Zhu, Xiang Ren, and Jiawei Han. 2020. Facet-aware evaluation for extractive summarization. In *ACL*.
- Luca Massarelli, F. Petroni, Aleksandra Piktus, Myle Ott, Tim Rocktäschel, Vassilis Plachouras, F. Silvestri, and S. Riedel. 2019. How decoding strategies affect the verifiability of generated text. *ArXiv*, abs/1911.03587.
- Joshua Maynez, Shashi Narayan, Bernd Bohnet, and Ryan T. McDonald. 2020. On faithfulness and factuality in abstractive summarization. *ArXiv*, abs/2005.00661.
- George A. Miller. 1995. [Wordnet: A lexical database for english](#). *Commun. ACM*, 38(11):39–41.

- Ramesh Nallapati, Bowen Zhou, C. D. Santos, Çağlar Gülçehre, and B. Xiang. 2016. Abstractive text summarization using sequence-to-sequence rnns and beyond. In *CoNLL*.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. 2018. Don't give me the details, just the summary! Topic-aware convolutional neural networks for extreme summarization. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Brussels, Belgium.
- Jekaterina Novikova, Ondrej Dusek, A. Curry, and Verena Rieser. 2017. Why we need new evaluation metrics for nlg. In *EMNLP*.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, W. Li, and Peter J. Liu. 2019. Exploring the limits of transfer learning with a unified text-to-text transformer. *ArXiv*, abs/1910.10683.
- Sascha Rothe, Shashi Narayan, and A. Severyn. 2019. Leveraging pre-trained checkpoints for sequence generation tasks. *Transactions of the Association for Computational Linguistics*, 8:264–280.
- Thomas Scialom, Sylvain Lamprier, Benjamin Piwowarski, and Jacopo Staiano. 2019. Answers unite! unsupervised metrics for reinforced summarization models. In *EMNLP/IJCNLP*.
- Thibault Sellam, Dipanjan Das, and Ankur Parikh. 2020. [BLEURT: Learning robust metrics for text generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7881–7892, Online. Association for Computational Linguistics.
- Noam Shazeer and Mitchell Stern. 2018. Adafactor: Adaptive learning rates with sublinear memory cost. In *ICML*.
- Vered Shwartz, Peter West, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2020. Unsupervised commonsense question answering with self-talk. *EMNLP*.
- Oleg V. Vasilyev, Vedant Dharnidharka, and J. Bohannon. 2020. Fill in the blanc: Human-free quality estimation of document summaries. *ArXiv*, abs/2002.09836.
- Alex Wang, Kyunghyun Cho, and Mike Lewis. 2020. [Asking and answering questions to evaluate the factual consistency of summaries](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5008–5020, Online. Association for Computational Linguistics.
- Rowan Zellers, Ari Holtzman, Hannah Rashkin, Yonatan Bisk, Ali Farhadi, F. Roesner, and Yejin Choi. 2019. Defending against neural fake news. In *NeurIPS*.
- Tianyi Zhang, V. Kishore, Felix Wu, K. Weinberger, and Yoav Artzi. 2020. Bertscore: Evaluating text generation with bert. *ArXiv*, abs/1904.09675.
- Z. Zhao, Shay B. Cohen, and B. Webber. 2020. Reducing quantity hallucinations in abstractive summarization. *ArXiv*, abs/2009.13312.
- Chenguang Zhu, William Hinthorn, Ruochen Xu, Qingkai Zeng, Michael Zeng, Xuedong Huang, and Meng Jiang. 2020. [Boosting factual correctness of abstractive summarization](#).

## A Appendices

### A.1 Simulated Data Transformations

We inject errors into reference summaries by first using a part-of-speech tagging model and named entity recognition system (spacy)<sup>7</sup> to extract entities, verbs, and adjectives from these summaries. For each named entity, we keep track of the label type (e.g. ORG, GPE, etc).

**Intrinsic entity errors.** To inject intrinsic entity errors into a summary  $S$ , we construct a dictionary of all unique entities appearing in the source document for  $S$  **only**, organized by entity label type. We then swap a random entity in the reference summary for a different entity of the same label type in the constructed dictionary.

**Extrinsic entity errors.** For extrinsic entity errors, we use the same dictionary construction for all unique entities appearing in **all** the corpus source documents. To change a random adjective, we use WordNet (Miller, 1995) to obtain the synsets for that adjective and swap the adjective for its antonym.

**Pronoun entity errors.** Pronoun errors are introduced with a preset list of commonly used pronouns. We randomly extract a pronoun set (e.g. she/her) from the text using the preset list and swap it with another random pronoun set (e.g. he/him).

**Verb Negation.** We use a rule-based system for verb negation based on verb tense, and predict tense based on the suffix and preceding words.

### A.2 T5 Training

We fine-tune the T5-base model trained on news summaries for each domain using the AdaFactor optimizer (Shazeer and Stern, 2018) with a learning rate of 0.001 and a batch size of 8.

#### A.2.1 Human Annotation Layout

For human annotation of factual consistency in summaries, we show annotators the source document, reference summary and a candidate summary that should be assessed for factuality. We then ask a factuality question with three choices:

- Yes (i.e. the summary is factual)
- No (i.e. the summary contains factual inconsistencies)
- Not Sure (i.e. the summary is too incoherent to judge)

If a summary is judged to be factually incorrect, annotators are allowed to select the number and type of errors they observe using a predefined list of factual errors. A screenshot of the error types and examples shown in the annotation task is given in Figure 4. Summaries were manually evaluated and labeled for factual inconsistency by a graduate student.

---

<sup>7</sup><https://spacy.io/>

Type of Error	Gold Summary	Summary with Error
Intrinsic Entity Error	Exhibition of 25 pictures on display at <b>the un</b> headquarters in <b>new york</b> .	Exhibition of 25 pictures on display at the <b>new york</b> headquarters in <b>the un</b> .
Extrinsic Entity Error	<b>Eoin collins</b> , five , eats everything from stones and sponges to sand .	<b>Vera</b> , five , eats everything from stones and sponges to sand.
Pronoun Entity Error	Elizabeth Sullivan fell in love with the 23-flavored soft drink 40 years ago , when <b>she</b> was in <b>her</b> 60s .	Elizabeth Sullivan fell in love with the 23-flavored soft drink 40 years ago , when <b>he</b> was in <b>his</b> 60s .
Verb Error	Charlotte Thomson <b>bought</b> old toilet block with a stunning sea view .	Charlotte Thomson <b>did not buy</b> old toilet block with a stunning sea view .
Sentiment Error	Camilla cut a <b>glamorous</b> figure in gold silk during a banquet last night .	Camilla cut a <b>boring</b> figure in gold silk during a banquet last night .
False Quote Error	Alex salmond vows to use alliance with labour to wring concessions . He said <b>the snp will try to vote down a tory government come what may</b> .	Alex salmond vows to use alliance with labour to wring concessions . He said <b>he would move at the end of the month</b> .

Figure 4: Examples of factual errors given in annotation task.