

Multi-Task Learning with Shared Encoder for Non-Autoregressive Machine Translation

Yongchang Hao^{†*} Shilin He^{‡*} Wenxiang Jiao[‡] Zhaopeng Tu^{††} Michael R. Lyu[‡] Xing Wang^{††}

[†]Soochow University, China

[‡]Department of Computer Science and Engineering
The Chinese University of Hong Kong, HKSAR, China

^{††}Tencent AI Lab

[†]yongchanghao.w@gmail.com

[‡]{slhe, wxjiao, lyu}@cse.cuhk.edu.hk

^{††}{zptu, brightxwang}@tencent.com

Abstract

Non-Autoregressive machine Translation (NAT) models have demonstrated significant inference speedup but suffer from inferior translation accuracy. The common practice to tackle the problem is transferring the Autoregressive machine Translation (AT) knowledge to NAT models, e.g., with knowledge distillation. In this work, we hypothesize and empirically verify that AT and NAT encoders capture different linguistic properties and representations of source sentences. Therefore, we propose to adopt the multi-task learning to transfer the AT knowledge to NAT models through the encoder sharing. Specifically, we take the AT model as an auxiliary task to enhance NAT model performance. Experimental results on WMT14 English \leftrightarrow German and WMT16 English \leftrightarrow Romanian datasets show that the proposed MULTI-TASK NAT achieves significant improvements over the baseline NAT models. In addition, experimental results demonstrate that our MULTI-TASK NAT is complementary to the standard knowledge transfer method, knowledge distillation. ¹

1 Introduction

Neural machine translation (NMT), as the state-of-the-art machine translation paradigm, has recently been approached with two different sequence decoding strategies. The first type *autoregressive translation* (AT) models generate output tokens one by one following the left to right direction (Vaswani et al., 2017; Bahdanau et al., 2015), but it is often criticized for its slow inference speed (Gu et al., 2018). The second type *non-autoregressive translation* (NAT) models adopt a parallel decoding algorithm to produce output tokens simultaneously (Gu

et al., 2019; Ghazvininejad et al., 2019), but the translation quality of which is often inferior to autoregressive models (Gu et al., 2018).

A line of research (Wang et al., 2019; Guo et al., 2020) argues that the lack of contextual dependency in target sentences potentially leads to the deteriorated performance of NAT models. To boost the NAT translation performance, many recent works resort to the knowledge transfer from a well-trained AT model. Typical knowledge transfer methods include sequence-level knowledge distillation with translation outputs generated by strong AT models (Gu et al., 2019; Ghazvininejad et al., 2019), word-level knowledge distillation with AT decoder representations (Wei et al., 2019; Li et al., 2019), and fine-tuning on AT model by curriculum learning (Guo et al., 2020), etc.

In this work, we adopt a multi-task learning framework with a shared encoder (i.e., MULTI-TASK NAT) to transfer the AT model knowledge into the NAT model. Specifically, we take the AT task as an auxiliary task by sharing the encoder parameters of both AT and NAT models. We hypothesize that AT and NAT encoders, although they belong to the same sequence-to-sequence learning task, capture different linguistic properties and representations of source sentences. To empirically verify our hypothesis, we evaluate the encoder on a set of probing tasks (Conneau et al., 2018; Raganato and Tiedemann, 2018) for AT and NAT models. Further machine translation experiments on WMT14 English \leftrightarrow German and WMT16 English \leftrightarrow Romanian datasets confirm the effectiveness of the proposed MULTI-TASK NAT.

Our contributions are as follows:

- We propose a multi-task learning framework to boost NAT translation quality by transferring the AT knowledge to the NAT model.
- Our analyses reveal that the encoder sharing is necessary for capturing more linguistic and

The first two authors contributed equally to this work. This work was conducted when Yongchang Hao, Shilin He, and Wenxiang Jiao were interning at Tencent AI Lab.

¹Code is publicly available at <https://github.com/yongchanghao/multi-task-nat>

	Task	AT	NAT
<i>Surface</i>	SeLen	91.7	93.4
	WC	76.0	79.1
<i>Syntactic</i>	TrDep	45.8	46.0
	ToCo	78.3	79.7
	BShif	74.8	73.4
<i>Semantic</i>	Tense	89.2	89.2
	SubN	86.2	87.5
	ObjN	85.2	85.3
	SoMo	54.0	53.0
	CoIn	64.9	62.8

Table 1: Performance on the probing tasks of evaluating linguistic properties embedded in the learned representations of AT and NAT models.

semantic information.

- Experiments on standard benchmark datasets demonstrate the effectiveness of the proposed MULTI-TASK NAT.

2 Why Shared Encoder?

To verify our hypothesis that AT and NAT encoders capture different linguistic properties of source sentences and can thereby complement each other, in this section, we conduct preliminary experiments on probing tasks and representation similarity.

First, we probe the linguistic knowledge (Conneau et al., 2018) that embedded in the AT and NAT encoders on a set of tasks, to investigate to what extent an encoder captures the linguistic properties. Then, we use the Canonical Correlation Analysis (CCA, Morcos et al., 2018), a widely-employed tool to measure the similarity of two neural network representations, to compare the representations of AT encoder and NAT encoder.

The AT and NAT models referred to in the following experiments are TRANSFORMER and MASK-PREDICT. We train the models on the WMT14 English⇒German dataset, and the details of the experiments are introduced in the Appendix.

2.1 Probing Tasks

Probing tasks (Conneau et al., 2018) can quantitatively measure the linguistic knowledge embedded in the model representation. The experimental results are depicted in Table 1.

Table 1 shows the AT and NAT encoders capture different linguistic properties of source sentences. We observe that on average, the NAT model

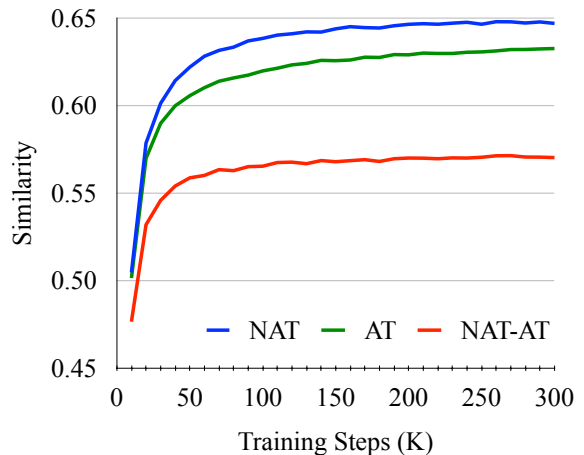


Figure 1: Representation similarity evolution during the learning course, NAT (or AT) denotes the baseline of representation similarity between two baselines NAT (or AT) models with different initialization seeds. NAT-AT denotes the representation similarity between NAT and AT encoder. Best viewed in color.

captures more surface features but less semantic features than the AT model. For example, on the sentence length prediction (SeLen) task, NAT models significantly outperform AT models since the sentence length prediction is a key component in NAT models. However, for sentence modification (SoMo) and coordinate clauses inversion (CoIn) tasks, the AT model outperforms the NAT model by a large margin. The linguistic probing results reveal that AT and NAT models capture different linguistic properties, which thereby leaves space for the encoder sharing structure.

2.2 Representation Similarity

In this section, we mainly investigate the differences between AT and NAT encoders from the representation perspective. More specifically, we adopt CCA (Morcos et al., 2018), a widely-utilized representation comparison metric (Saphra and Lopez, 2019; Voita et al., 2019), to calculate the encoder representation similarity throughout the training course. The CCA score ranges from 0 to 1, and a higher CCA score indicates both encoder representations contain more similar information.

Figure 1 shows the evolution of representation similarity during the model training. We compute the CCA similarity between two NAT (or AT) models under different initialization seeds and take the similarity as the baseline (green and blue lines in Figure 1). Comparing to the baseline similarity of NAT (or AT), a lower similarity between AT and

NAT representations (red line in Figure 1) indicates that AT and NAT encoders capture different source information.

3 Approach

In this section, we introduce that our shared encoder structure between AT and NAT models under the multi-task learning framework.

Multi-Task NAT Given the AT and NAT models under the standard encoder-decoder structure, we employ the hard parameter sharing method (Ruder, 2017) to share their encoder parameters.

Therefore, the proposed model MULTI-TASK NAT consists of three components: shared encoder, AT decoder, and NAT decoder. Their parameters are jointly optimized towards minimizing the multi-task loss function, as introduced in the next section.

3.1 Multi-Task Loss

The loss function \mathcal{L} of the proposed MULTI-TASK NAT is defined as the weighted sum of AT loss and NAT loss:

$$\mathcal{L} = \lambda \mathcal{L}_{at}(X, Y; \theta_{enc}, \theta_{AT_dec}) + (1 - \lambda) \mathcal{L}_{nat}(X, Y; \theta_{enc}, \theta_{NAT_dec}) \quad (1)$$

where \mathcal{L}_{at} and \mathcal{L}_{nat} are AT loss and NAT loss, respectively. λ is the hyper-parameter for balancing the preference between the AT and NAT models.

Training and Inference During the model training with training pairs (X, Y) , we feed the source sentence X to the encoder and the target sentence Y to two decoders separately. The target sentence Y can be either the target sentence in the raw training data (4.1) or the generated target sentence with knowledge distillation (4.2). During the model inference, we only use the NAT decoder to generate the target tokens simultaneously while ignoring the AT decoder. Therefore, the inference overhead is the same as the NAT model before sharing.

4 Experiment

We conducted experiments on two widely used WMT14 English \leftrightarrow German and WMT16 English \leftrightarrow Romanian benchmark datasets, which consist of 4.5M and 610K sentence pairs, respectively. We applied BPE (Sennrich et al., 2016) with 32K merge operations for both language pairs. The experimental results are evaluated in case-sensitive BLEU score (Papineni et al., 2002).

Model	En \Rightarrow De	De \Rightarrow En
MASK-PREDICT ¹	24.61	–
TRANSFORMER-LEV ²	25.20	–
MASK-PREDICT ³	24.70	29.52
MULTI-TASK NAT	25.66	30.09

¹ Ghazvininejad et al. (2019); ² Gu et al. (2019);

³ Our implementation.

Table 2: Evaluation of translation performance on WMT14 En \Rightarrow De and WMT14 De \Rightarrow En test sets without knowledge distillation.

We use TRANSFORMER (Vaswani et al., 2017) as our baseline AT model and the state-of-the-art MASK-PREDICT (Ghazvininejad et al., 2019) as our baseline NAT model. We integrate the TRANSFORMER decoder into the MASK-PREDICT to implement the proposed MULTI-TASK NAT model. We set the hyper-parameter λ in Eq.(1) to 0.5. More training details are introduced in Appendix A.1.

4.1 Ablation Study

Table 2 shows that the performance of our MULTI-TASK NAT model and baseline models on WMT14 En \leftrightarrow De datasets without using the knowledge distillation. Our MULTI-TASK NAT model outperforms the baseline MASK-PREDICT model by 0.96 and 0.57 BLEU score in En \Rightarrow De and De \Rightarrow En direction respectively and even surpasses the strong baseline TRANSFORMER-LEV by 0.46 BLEU points in En \Rightarrow De translation. The improvements demonstrate the effectiveness of our proposed model using multi-task learning.

4.2 Main Result

We further evaluate the proposed MULTI-TASK NAT model with the standard practice of knowledge distillation. Table 3 depicts the performances of our model as well as strong baseline models. Our proposed MULTI-TASK NAT model achieves a significant improvement of 0.63 and 0.41 BLEU point over the strong baseline MASK-PREDICT model on En \Rightarrow De and De \Rightarrow En translation. On En \leftrightarrow Ro translation, our model outperforms the baseline model by 0.63 and 0.82 BLEU scores respectively.

We use the `compare-mt` (Neubig et al., 2019)² with 1000 re-samples to perform statistical significance tests for the MASK-PREDICT model output and our model output. The results show that our model significantly outperforms the baseline model

²<https://github.com/neulab/compare-mt>

Model	WMT14		WMT16	
	En⇒De	De⇒En	En⇒Ro	Ro⇒En
<i>Baseline models</i>				
Transformer (Ghazvininejad et al., 2019)	27.74	31.09	34.28	33.99
Hint-based NAT (Li et al., 2019)	25.20	29.52	–	–
NAT-REG (Wang et al., 2019)	24.61	28.90	–	–
FCL-NAT (Guo et al., 2020)	25.75	29.50	–	–
Levenshtein Transformer (Gu et al., 2019)	27.27	–	–	33.26
Mask-Predict (Ghazvininejad et al., 2019)	27.03	30.53	33.08	33.31
<i>Our work</i>				
Mask-Predict	27.18	30.86	33.03	32.71
MULTI-TASK NAT	27.81 [↑]	31.27 [↑]	33.66 [↑]	33.53 [↑]

Table 3: Evaluation of translation performance on WMT14 En⇔De and WMT16 En⇔Ro test sets. All NAT models are trained with AT knowledge distillation. “↑ / [↑]”: indicate a statistically significant improvement over the corresponding baseline $p < 0.05/0.01$ respectively. Some baselines do not perform well because they are not built upon the MASK-PREDICT.

Task		OURS	Δ_{AT}	Δ_{NAT}
<i>Surface</i>	SeLen	94.5	2.8	1.1
	WC	77.9	1.9	-1.2
<i>Syntactic</i>	TrDep	47.1	1.3	1.1
	ToCo	80.2	1.9	0.5
	BShif	76.1	1.3	2.7
<i>Semantic</i>	Tense	89.1	-0.1	-0.1
	SubN	86.9	0.7	-0.6
	ObjN	85.4	0.2	0.1
	SoMo	52.4	-1.6	-0.6
	CoIn	61.9	-3.0	-0.9

Table 4: Performance on the probing tasks of our MULTI-TASK NAT model. Δ_{AT} and Δ_{NAT} denote the relative increase over the AT and NAT probing performance, respectively.

in all language directions. All these experimental results confirm the effectiveness of our proposed method even with knowledge distillation. Besides, considering the results in Table 2, as a new knowledge transfer approach, our proposed multi-task learning method MULTI-TASK NAT can complement the classic knowledge distillation method, which is promising for future exploration.

4.3 Analysis

We conduct probing tasks to empirically reconfirm our hypothesis in Section 2 and better understand our MULTI-TASK NAT in terms of linguistic properties. The results are presented in Table 4. Our

MULTI-TASK NAT could learn better surface and syntactic information than the TRANSFORMER and MASK-PREDICT baseline models, indicating that our multi-task learning framework can indeed take the advantages of two separate tasks and capture better linguistic properties. Especially on the sentence length (Selen) prediction task and tree depth (TrDep) task, the MULTI-TASK NAT shows significantly better performance. Regarding the semantic features, the shared encoder structure shows equivalent or even worse performance than individual AT and NAT models. We conjecture that the shared encoder structure might hinder the learning of semantic features due to the significant differences between AT and NAT models on semantic features.

5 Conclusion and Future Work

In this paper, we have presented a novel multi-task learning approach for NAT model with a hard parameter sharing mechanism. Experimental results confirm the significant effect of the proposed MULTI-TASK NAT model, which shows the complementary effects of multi-task learning to the knowledge distillation method.

Based on our MULTI-TASK NAT, there are many promising directions for future research. For example, 1) decoder interaction: knowledge distillation in an online fashion between AT and NAT decoders; 2) share-all framework: shared-encoder and shared-decoder with two decoding strategies, and the model can dynamically choose the optimal decoding strategy during model inference.

References

- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2015. Neural machine translation by jointly learning to align and translate. In *ICLR*.
- Alexis Conneau, German Kruszewski, Guillaume Lample, Loic Barrault, and Marco Baroni. 2018. What you can cram into a single vector: Probing sentence embeddings for linguistic properties. In *ACL*.
- Marjan Ghazvininejad, Omer Levy, Yinhan Liu, and Luke Zettlemoyer. 2019. Mask-predict: Parallel decoding of conditional masked language models. In *EMNLP-IJCNLP*.
- Jiatao Gu, James Bradbury, Caiming Xiong, Victor OK Li, and Richard Socher. 2018. Non-autoregressive neural machine translation. In *ICLR*.
- Jiatao Gu, Changhan Wang, and Junbo Zhao. 2019. Levenshtein transformer. In *NeurIPS*.
- Junliang Guo, Xu Tan, Linli Xu, Tao Qin, Enhong Chen, and Tie-Yan Liu. 2020. Fine-tuning by curriculum learning for non-autoregressive neural machine translation. In *AAAI*.
- Zhuohan Li, Zi Lin, Di He, Fei Tian, QIN Tao, WANG Liwei, and Tie-Yan Liu. 2019. Hint-based training for non-autoregressive machine translation. In *EMNLP-IJCNLP*.
- Ari Morcos, Maithra Raghu, and Samy Bengio. 2018. Insights on representational similarity in neural networks with canonical correlation. In *NeurIPS*.
- Graham Neubig, Zi-Yi Dou, Junjie Hu, Paul Michel, Danish Pruthi, Xinyi Wang, and John Wieting. 2019. compare-mt: A tool for holistic comparison of language generation systems. In *NAACL (Demonstrations)*.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *ACL*.
- Alessandro Raganato and Jörg Tiedemann. 2018. An analysis of encoder representations in transformer-based machine translation. In *EMNLP 2018 workshop BlackboxNLP*.
- Sebastian Ruder. 2017. An overview of multi-task learning in deep neural networks. *arXiv preprint arXiv:1706.05098*.
- Naomi Saphra and Adam Lopez. 2019. Understanding learning dynamics of language models with SVCCA. In *NAACL*.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. Neural machine translation of rare words with subword units. In *ACL*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *NeurIPS*.
- Elena Voita, Rico Sennrich, and Ivan Titov. 2019. The bottom-up evolution of representations in the transformer: A study with machine translation and language modeling objectives. In *EMNLP-IJCNLP*.
- Yiren Wang, Fei Tian, Di He, Tao Qin, ChengXiang Zhai, and Tie-Yan Liu. 2019. Non-autoregressive machine translation with auxiliary regularization. In *AAAI*.
- Bingzhen Wei, Mingxuan Wang, Hao Zhou, Junyang Lin, and Xu Sun. 2019. Imitation learning for non-autoregressive neural machine translation. In *ACL*.