

Revisiting Neural Language Modelling with Syllables

Arturo Oncevay^{†‡} Kervy Rivas Rojas[‡]

[†] School of Informatics, University of Edinburgh, Scotland

[‡] Artificial Intelligence Research Group, Pontificia Universidad Católica del Perú, Peru
a.oncevay@ed.ac.uk, k.rivas@pucp.edu.pe

Abstract

Language modelling is regularly analysed at word, subword or character units, but syllables are seldom used. Syllables provide shorter sequences than characters, they can be extracted with rules, and their segmentation typically requires less specialised effort than identifying morphemes. We reconsider syllables for an open-vocabulary generation task in 20 languages. We use rule-based syllabification methods for five languages and address the rest with a hyphenation tool, which behaviour as syllable proxy is validated. With a comparable perplexity, we show that syllables outperform characters, annotated morphemes and unsupervised subwords. Finally, we also study the overlapping of syllables concerning other subword pieces and discuss some limitations and opportunities.

1 Introduction

In language modelling (LM), we learn distributions over sequences of words, subwords or characters, where the latter two can allow an open-vocabulary generation (Sutskever et al., 2011). We rely on subword segmentation as a widespread approach to generate rare subword units (Sennrich et al., 2016). However, the lack of a representative corpus, in terms of the word vocabulary, constrains the unsupervised segmentation (e.g. with scarce monolingual texts (Joshi et al., 2020)). As an alternative, we could use character-level modelling, since it also has access to subword information (Kim et al., 2016), but we face long-term dependency issues and require longer training time to converge.

In this context, we focus on syllables, which are based on speech units: “A syl-la-ble con-tains a sin-gle vow-el u-nit”. These are more linguistically-based units than characters, and behave as a mapping function to reduce the length of the sequence with a larger “alphabet” or syllabary. Their extraction can be rule-based and corpus-independent, but

data-driven methods or hyphenation using dictionaries can approximate them as well (see §4).

Previous work on syllable-aware neural LM failed to beat characters in a closed-vocabulary generation at word-level (Assylbekov et al., 2017); however, we propose to assess syllables under three new settings. First, we analysed an open-vocabulary scenario with syllables by disregarding additional functions in the input layer (e.g. convolutional filters to hierarchically compose the representations (Botha and Blunsom, 2014)). Second, we extended the scope from 6 to 20 languages to cover different levels of orthographic depth, which is the degree of grapheme-phoneme correspondence (Borgwaldt et al., 2005) and a factor that can increase complexity to syllabification. English is a language with deep orthography (weak correspondence) whereas Finnish is transparent (Ziegler et al., 2010). Third, we distinguished rule-based syllabification with hyphenation tools, but also validated their proximity for LM.

Therefore, we revisit LM for open-vocabulary generation with syllables using pure recurrent neural networks (Merity et al., 2018) for a more diverse set of languages, and compare their performance against characters and other subword units.

2 Open-vocabulary language modelling with a comparable perplexity

Language modelling Given an input of generic sequence units (such as words, subwords or characters), denoted as $\mathbf{s} = s_1, s_2, \dots, s_n$, a language model computes the probability of \mathbf{s} as:

$$p(\mathbf{s}) = \prod_{i=1}^{|\mathbf{s}|} p(s_i | s_1, s_2, \dots, s_{i-1}) \quad (1)$$

We then can use a recurrent neural network or RNN (e.g. a LSTM variation (Merity et al., 2018)), trained at each time step t , for calculating the prob-

ability of the input s_{t+1} , given s_t :

$$p(s_{t+1}|s_{\leq t}) = g(\text{RNN}(\mathbf{w}_t, \mathbf{h}_{t-1})) \quad (2)$$

where w_t is the learned embedding of the sequence unit s_t , h_{t-1} is the hidden state of the RNN for the previous time step, and g is a softmax function for the vocabulary space of the segmentation.

We thereafter compute the loss function $\mathcal{L}_{\text{LM}}(\mathbf{s})$ for the neural LM as the cross entropy of the model for the sequence \mathbf{s} in a time step t :

$$\mathcal{L}_{\text{LM}}(\mathbf{s}) = - \sum_{j=1}^{|V|} b_{t,j} \times \log(p(s_{t,j})) \quad (3)$$

where $|V|$ is the size of vocabulary, $p(s_{t,j})$ is the probability distribution over the vocabulary at each time-step t and $b_{t,j}$ is an indicator if j is the true token for the sequence \mathbf{s} .

Character-level perplexity For a fair comparison across all granularities, we evaluate all results with character-level perplexity:

$$\text{ppl}^c = \exp(\mathcal{L}_{\text{LM}}(\mathbf{s}) \cdot \frac{|\mathbf{s}^{\text{seg}}| + 1}{|\mathbf{s}^c| + 1}) \quad (4)$$

where $\mathcal{L}_{\text{LM}}(\mathbf{s})$ is the cross entropy of a string \mathbf{s} computed by the neural LM, and $|\mathbf{s}^{\text{seg}}|$ and $|\mathbf{s}^c|$ refer to the length of \mathbf{s} in the chosen segmentation and character-level units, respectively (Mielke, 2019). The extra unit considers the end of the sequence.

Open-vocabulary output We generate the same input unit (e.g. characters or syllables) as an open-vocabulary LM task, where there is no prediction of an “unknown” or out-of-vocabulary word-level token (Sutskever et al., 2011). We thereby differ from previous work (Assylbekov et al., 2017), and refrain from composing the syllable representations into words to evaluate only word-level perplexity.

3 Experimental setup

Languages and datasets Corpora are listed in Table 1. We do not use the English Penn Treebank (Marcus et al., 1993) as in Assylbekov et al. (2017), given that it is not suitable for open-vocabulary assessment. We then chose WikiText-2-raw (en_{w2}; Merity et al., 2016), which contains around two million word-level tokens extracted from Wikipedia articles in English. Furthermore, we employ 20 Universal Dependencies (UD; Nivre et al., 2020) treebanks, similarly to Blevins and Zettlemoyer (2019).¹

¹The languages are chosen given the availability of an open-source syllabification or hyphenation tool. We prefer to use the UD treebanks, instead of other well-known datasets

L.	Corpus	# tokens			# types		
		Word	Syl	Char	Word	Syl	Char
bg	UD-BTB	125k	386k	710k	25,067	6,035	132
ca	UD-AnCora	436k	1,123k	2,341k	31,226	12,211	108
cs	UD-PDT	1,158k	3,546k	6,868k	127,211	26,451	136
da	UD-DDT	81k	215k	442k	16,300	7,362	96
de	UD-GSD	260k	735k	1,637k	49,561	16,549	238
en*	UD-EWT	210k	488k	1,061k	20,291	13,962	100
en*	wikitext-2-raw	2,089k	4,894k	10,902k	33,279	20,173	398
es*	UD-GSD	376k	1,060k	2,043k	46,623	13,676	292
fi*	UD-TDT	165k	595k	1,224k	49,045	8,168	234
fr	UD-GSD	360k	837k	1,959k	42,520	24,418	293
it	UD-SET	263k	762k	1,504k	28,685	7,990	121
hr	UD-ISDT	154k	484k	930k	33,365	7,374	106
pt	UD-LVTB	192k	551k	1,040k	27,130	8,267	111
lv	UD-Alpino	113k	349k	690k	28,677	7,014	116
nl	UD-LFG	187k	488k	1,074k	26,704	10,553	96
pl	UD-Bosque	102k	293k	589k	28,864	7,978	104
ro	UD-RRT	183k	549k	1,056k	31,402	8,763	139
ru*	UD-SynTagRus	867k	2,707k	5,411k	108,833	16,961	153
sk	UD-SNK	80k	232k	437k	21,137	6,444	122
tr*	UD-IMST	38k	126k	242k	13,966	2,595	84
uk	UD-IU	88k	289k	501k	26,567	5,505	174

Table 1: Total number of tokens and token types in the training set for words, syllables and characters (other segmentation data is in Appendix A). We highlight (*) the languages with extracted rule-based syllables, and we report the statistics with hyphenation for the rest.

Syllable segmentation For splitting syllables in different languages, we used rule-based syllabification tools for English, Spanish, Russian, Finnish and Turkish, and a dictionary-based hyphenation tool for all of them except for Finnish and Turkish. All the tools are listed in Appendix B.

Segmentation baselines Besides the annotated morphemes in the UD treebanks, we consider Polyglot (polyglot-nlp.com), which includes models for unsupervised morpheme segmentation trained with Morfessor (Virpioja et al., 2013). Moreover, we employ an unsupervised subword segmentation baseline of Byte Pair Encoding (BPE; Sennrich et al., 2016)² with different vocabulary sizes from 2,500 to 10,000 tokens, with 2,500 steps. We also fix the parameter to the syllabary size. Appendix B includes details about the segmentation format.

Model and training Following other open-vocabulary LM studies (Mielke and Eisner, 2019; Mielke et al., 2019), we use a low-compute version of an LSTM neural network, named Average SGD Weight-Dropped (Merity et al., 2018), developed in PyTorch³. Appendix C includes more details.

for language modelling (e.g. Multilingual Wikipedia Corpus (Kawakami et al., 2017)), because they provide morphological annotation used for the study.

²We use: <https://github.com/huggingface/tokenizers>

³<https://github.com/salesforce/awd-lstm-lm>

4 Segmentation analysis

Syllabification versus Hyphenation For English, Spanish and Russian, we confirmed that hyphenation is a reasonable proxy for syllabification in LM. Table 2 shows that the overlapping of hyphenation pieces concerning rule-based syllables is more than 70%. Furthermore, we note that the perplexity gap is not significant. The small sample is still representative because English has a deep orthography in contrast with Spanish or Russian, and Russian use a different script (Cyrillic instead of Latin). In terms of morphology, all of them are fusional, but highly agglutinative languages like Turkish or Finnish are not feasible candidates for developing a Hunspell-like dictionary, which is the source of most hyphenation tools.

	$(H \cap S)/S$	$(S \cap H)/H$	$\Delta \text{ppl}^c_{S-H}$
en _{wt2}	70.07%	73.84%	-0.0001
en _{UD}	78.13%	74.68%	-0.0186
es	76.37%	61.95%	0.0373
ru	73.58%	56.13%	0.0901

Table 2: Token types overlapping of syllabification (S) versus hyphenation (H) and their perplexity gap.

Vocabulary growth In Figure 1, we show the vocabulary growth rate of unsupervised morphemes (with Morfessor)⁴ in contrast with syllables extracted by rules (S) or hyphenation (H). We do not observe a significant difference between syllabification and hyphenation, which reinforce their functional proximity for our study. We also observe that in all the UD datasets we do not have more than 10k Morfessor-based pieces, which is the reason for the upper boundary on our BPE baselines. However, for Czech, German, English and French, we observe that the syllabary size significantly surpass the number of Morfessor-based pieces. Potential explanations are the orthographic depth and the degree of syllabic complexity for those languages (Borleffs et al., 2017): a low letter-sound correspondence and the difficulty to determine the syllable boundaries can induce a larger syllabary.

Overlapping of syllables with subwords In Figure 2a, we show the stacked area plot of the overlapping ratio of syllables, Morfessor-based pieces and different BPE settings concerning the annotated morphemes. We note that the proportion

⁴We do not show the growth of the annotated morpheme pieces, because they approximate the word-level vocabulary given the presence of lemmas.

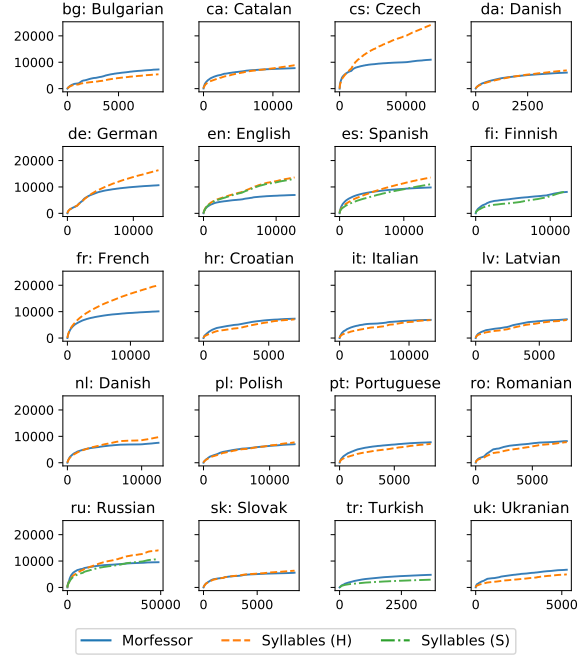


Figure 1: Vocabulary growth: accumulative number of token types (y-axis) per samples in the training data (x-axis) for all the UD datasets. Y-axis range is fixed.

of syllable overlapping is relatively low in contrast with unsupervised morphemes or BPE with larger vocabulary size. The outcome is expected, as the annotated morpheme contains lemmas or full words with long sequences of characters, which are adopted by BPE with more merge-operations.

Analogously, Figure 2b shows the overlapping of syllables and BPE concerning unsupervised morphemes. We observe that the intersection ratio of syllables has increased, and approximate the values of BPE with larger vocabulary size.

In both scenarios, it is worthy to note that the BPE setting with the largest overlapping with annotated or unsupervised morphemes has a vocabulary size that equates the syllabary. Future work can assess whether the number of unique syllables can support the tuning of the BPE vocabulary size.

Finally, in Figure 2c, we observe that syllables overlap the most with BPE pieces that uses a small vocabulary size of 2,500. From 5,000 to 10,000, the overlapping ratio shows a downtrend for most of the datasets. However, in 9 out of 20 datasets, the largest BPE setting (fixed with the syllabary size) shows an increase of the overlapping.

5 Open-vocabulary LM results

Table 3 shows the ppl^c values for the different levels of segmentation we considered in the study,

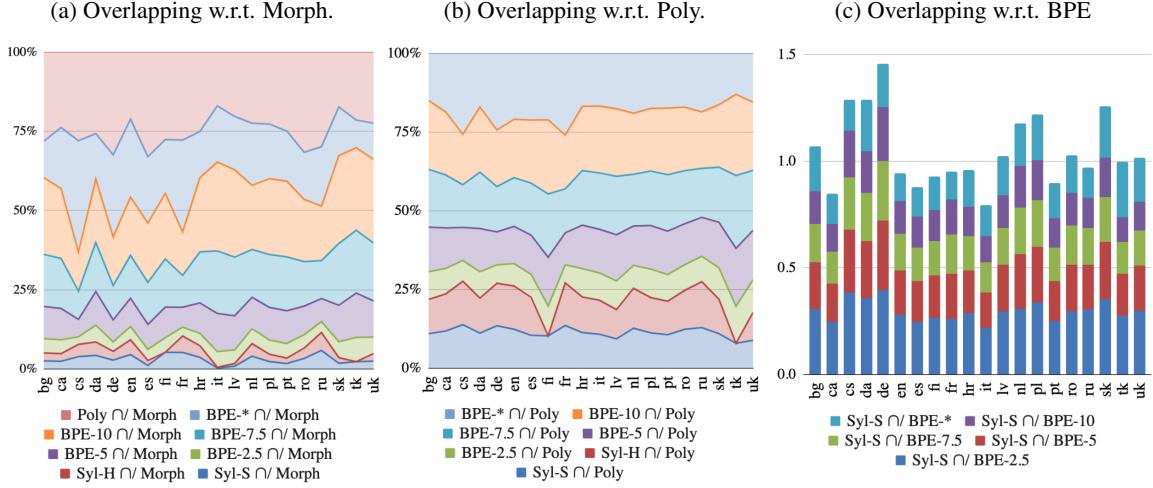


Figure 2: Overlapping analysis of syllables (Syl-S: Rules, Syl-H: Hyphenation) with respect to annotated morphemes (Morph.), unsupervised morphemes (with Morfessor on Poly.) and BPE with different vocabulary sizes in thousands (* indicates the same vocabulary size as the syllabary). The operation $A \cap / B$ is equivalent to $(A \cap B)/B$, where A and B are number of token types (unique subword pieces). Overlapping ratios in plots (a-b) are normalised from 0 to 100%, whereas in (c) is only stacked.

where we did not tune the neural LM for an specific setting. We observe that syllables always result in better perplexities than other granularities, even for deep orthography languages such as English or French. The results obtained by the BPE baselines are relatively poor as well, and they could not beat characters in any dataset. We could search for an optimal parameter for the BPE algorithm; however, the advantage of the syllables is that we do not need to tune an hyper-parameter to extract a different set of subword pieces.

As a significant outcome, we note that syllables did not fail to beat characters, at least in an open-vocabulary LM task, which extends the results provided by Assylbekov et al. (2017). Moreover, in Figure 4b in the Appendix, we can observe a strong linear relationship of the syllable type/token ratio with the gain of ppl^c obtained by syllables concerning characters. In other words, if our dataset possesses a rich syllabary, we are fairly approximating the amount of word-level tokens, which reduces the ppl^c gain.

Beating characters implies a gain in time processing as well, given the shorter sequences of the syllable pieces. Figure 3 shows details about how many epochs each segmentation requires to converge during training, as well as how much time requires all the training. Syllable-level LM trains faster than characters, and even when they are slower (seconds per epoch) than using BPE-pieces or unsupervised morphemes, they obtain a better ppl^c score.

	Char.	Morph.	Poly.	Syl.	BPE _{best}
bg	3.56 ±0.03	4.09 ±0.05	4.69 ±0.01	2.87 ±0.0	5.19 ±0.01
ca	2.84 ±0.0	3.11 ±0.02	3.26 ±0.01	2.21 ±0.0	3.31 ±0.0
cs	3.32 ±0.0	3.11 ±0.01	4.18 ±0.01	2.66 ±0.0	4.24 ±0.0
da	4.25 ±0.01	4.42 ±0.04	5.6 ±0.0	3.1 ±0.01	6.21 ±0.03
de	3.5 ±0.04	3.36 ±0.08	3.79 ±0.0	2.48 ±0.0	3.86 ±0.02
en _{UD} *	4.11 ±0.01	4.39 ±0.08	5.67 ±0.01	2.82 ±0.07	5.65 ±0.04
en _{wt2} *	2.48 ±0.0	-	2.8 ±0.0	1.96 ±0.0	2.91 ±0.0
es*	3.16 ±0.01	3.71 ±0.04	3.95 ±0.01	2.51 ±0.0	3.98 ±0.0
fi*	3.77 ±0.01	4.05 ±0.12	4.76 ±0.01	3.1 ±0.0	5.27 ±0.01
fr	3.09 ±0.01	3.67 ±0.02	3.82 ±0.01	2.3 ±0.01	3.87 ±0.01
hr	3.52 ±0.02	3.92 ±0.01	4.34 ±0.0	2.8 ±0.0	4.52 ±0.02
it	2.8 ±0.0	3.19 ±0.0	3.43 ±0.01	2.27 ±0.01	3.61 ±0.0
lv	4.55 ±0.02	5.31 ±0.0	6.82 ±0.02	3.59 ±0.0	7.19 ±0.0
nl	3.83 ±0.05	3.69 ±0.1	4.44 ±0.01	2.76 ±0.01	4.83 ±0.01
pl	4.03 ±0.01	4.77 ±0.22	5.96 ±0.04	3.19 ±0.0	5.99 ±0.0
pt	3.31 ±0.01	3.46 ±0.03	4.03 ±0.01	2.56 ±0.0	4.24 ±0.01
ro	3.4 ±0.02	3.89 ±0.04	4.25 ±0.01	2.72 ±0.0	4.71 ±0.01
ru*	3.28 ±0.0	2.93 ±0.01	4.05 ±0.0	2.69 ±0.01	4.04 ±0.0
sk	6.16 ±0.05	5.1 ±0.07	7.61 ±0.08	4.62 ±0.01	10.51 ±0.03
tr*	4.16 ±0.05	4.86 ±0.05	6.41 ±0.07	3.66 ±0.03	6.98 ±0.1
uk	4.92 ±0.02	6.45 ±0.11	8.11 ±0.03	4.24 ±0.02	9.23 ±0.02

Table 3: Character-level perplexity (\downarrow) in test. We show the mean and standard deviation for three runs with different seeds. “Syl.” presents the syllabification-based result if it is available (*), or the hyphenation otherwise.

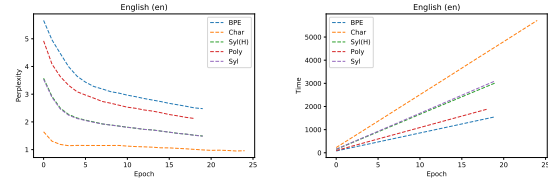


Figure 3: Left: validation perplexity for the English wikitext-2 per epoch. Right: training time (in seconds) per epoch for the same dataset. Similar plots for other datasets are included in the Appendix.

6 Related work

In subword-aware LM, Vania and Lopez (2017) investigated if we can capture morphology using characters, character n-grams, BPE pieces or morphemes with a closed-vocabulary. Whereas for open-vocabulary generation, Blevins and Zettlemoyer (2019) incorporates morphological supervision with a multi-task objective, and Kawakami et al. (2017); Mielke and Eisner (2019) have focused in improving the neural architecture to jointly use the representation of characters and words in a hybrid open-vocabulary setting.

The closest study to ours is from Mikolov et al. (2012), where they performed subword-grained prediction with different settings, and used syllables as a proxy to split words with low frequency, reduce the vocabulary and compress the model size. However, they only focused on English. Besides, syllable-aware LM was addressed by Assylbekov et al. (2017) for English, German, French, Czech, Spanish and Russian, and by Yu et al. (2017) for Korean. However, in both cases, the syllable units have been composed with convolutional filters into word-level representations to assess a closed-vocabulary setting. As far as we know, we propose the first syllable-level open-vocabulary LM study that analyses up to 20 languages and compare their results against morphemes.

7 Limitations and opportunities

Syllables only cannot offer a universal solution to the subword segmentation problem for all the languages, as the syllabification tools are language-dependent. Besides, the analysis should be extended to different scripts and morphological typology⁵. Furthermore, we do not encode any semantics in the syllable-vector space, with a few exceptions like in Korean (Choi et al., 2017).

Nevertheless, our results confirm that syllables are reliable for LM, and building a syllable splitter might require less effort than annotating morphemes to train a robust supervised tool.⁶ More-

⁵Only Bulgarian, Russian and Ukrainian use the Cyrillic script instead of Latin; and only Finnish and Turkish have highly agglutinative morphology instead of fusional. Polysynthetic languages can also be potential beneficiaries with syllable-level language modelling

⁶For instance, the syllabification tool that we used for English is based on five general rules published in: <https://www.howmanysyllables.com/divideintosyllables>. Their implementation should take less effort than annotating a UD treebank or building a Finite-State-Transducer for morphological analysis.

over, as we discussed at the end of §4, we could further assess whether the syllables can support the hyper-parameter tuning or impact the internal procedure of unsupervised segmentation methods like BPE or Morfessor, which are corpus-dependent.

8 Conclusion

We proved that syllables are valuable for an open-vocabulary LM task, where they behave positively even for languages with deep orthography, and they overcome character-level models that require longer time to train. Syllables do not have an embedded meaning in most of the languages; however, the required effort for their segmentation could be advantageous against morphological-aware or unsupervised-driven methods. Given our analysis, we could consider working on syllable-driven subword segmentation, neural machine translation and hybrid-LM (with characters and words).

Acknowledgments



The first author is supported by funding from the European Union’s Horizon 2020 research and innovation programme under grant agreements No 825299 (GoURMET) and the EPSRC fellowship grant EP/S001271/1 (MT-Stretch), whereas the second author is supported by a research grant of the “Consejo Nacional de Ciencia, Tecnología e Innovación Tecnológica” (CONCYTEC, Peru) under the contract 183-2018-FONDECYT-BM-IADT-MU.

We express our thanks to Shay B. Cohen, Clara Vania and Adam López, whose provided us feedback in a very early stage of the study, and to Alexandra Birch, Barry Haddow, Fernando Alva-Manchego, John E. Miller and Marco Sobrevilla-Cabezudo, whose reviewed different draft versions. Finally, we acknowledge the support of NVIDIA Corporation with the donation of a Titan Xp GPU used for the study.

References

- Zhenisbek Assylbekov, Rustem Takhanov, Bagdat Myrzakhmetov, and Jonathan N. Washington. 2017. Syllable-aware neural language models: A failure to beat character-aware ones. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1866–1872, Copenhagen, Denmark. Association for Computational Linguistics.

- Terra Blevins and Luke Zettlemoyer. 2019. [Better character language modeling through morphology](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1606–1613, Florence, Italy. Association for Computational Linguistics.
- Susanne R Borgwaldt, Frauke M Hellwig, and Annette MB De Groot. 2005. Onset entropy matters—letter-to-phoneme mappings in seven languages. *Reading and Writing*, 18(3):211–229.
- Elisabeth Borleffs, Ben AM Maassen, Heikki Lyytinen, and Frans Zwarts. 2017. Measuring orthographic transparency and morphological-syllabic complexity in alphabetic orthographies: a narrative review. *Reading and writing*, 30(8):1617–1638.
- Jan A. Botha and Phil Blunsom. 2014. [Compositional morphology for word representations and language modelling](#). In *Proceedings of the 31st International Conference on International Conference on Machine Learning - Volume 32, ICML'14*, pages II–1899–II–1907. JMLR.org.
- Sanghyuk Choi, Taeuk Kim, Jinseok Seol, and Sang-goo Lee. 2017. [A syllable-based technique for word embeddings of Korean words](#). In *Proceedings of the First Workshop on Subword and Character Level Models in NLP*, pages 36–40, Copenhagen, Denmark. Association for Computational Linguistics.
- Pratik Joshi, Sebastin Santy, Amar Budhiraja, Kalika Bali, and Monojit Choudhury. 2020. [The state and fate of linguistic diversity and inclusion in the NLP world](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6282–6293, Online. Association for Computational Linguistics.
- Kazuya Kawakami, Chris Dyer, and Phil Blunsom. 2017. [Learning to create and reuse words in open-vocabulary neural language modeling](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1492–1502, Vancouver, Canada. Association for Computational Linguistics.
- Yoon Kim, Yacine Jernite, David Sontag, and Alexander M. Rush. 2016. [Character-aware neural language models](#). In *Proceedings of the Thirtieth AAAI Conference on Artificial Intelligence, AAAI'16*, pages 2741–2749. AAAI Press.
- Diederik P. Kingma and Jimmy Ba. 2015. [Adam: A method for stochastic optimization](#). In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Mitchell P. Marcus, Beatrice Santorini, and Mary Ann Marcinkiewicz. 1993. [Building a large annotated corpus of English: The Penn Treebank](#). *Computational Linguistics*, 19(2):313–330.
- Stephen Merity, Nitish Shirish Keskar, and Richard Socher. 2018. [Regularizing and optimizing LSTM language models](#). In *International Conference on Learning Representations*.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. 2016. [Pointer sentinel mixture models](#). *arXiv preprint arXiv:1609.07843*.
- Sabrina J. Mielke. 2019. Can you compare perplexity across different segmentations? Available in: <http://sjmielke.com/comparing-perplexities.htm>.
- Sebastian J. Mielke, Ryan Cotterell, Kyle Gorman, Brian Roark, and Jason Eisner. 2019. [What kind of language is hard to language-model?](#) In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4975–4989, Florence, Italy. Association for Computational Linguistics.
- Sebastian J. Mielke and Jason Eisner. 2019. [Spell once, summon anywhere: A two-level open-vocabulary language model](#). In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 6843–6850.
- Tomáš Mikolov, Ilya Sutskever, Anoop Deoras, Hai-Son Le, Stefan Kombrink, and Jan Cernocky. 2012. Subword language modeling with neural networks. *preprint (http://www.fit.vutbr.cz/imikolov/rnnlm/char.pdf)*, 8:67.
- Joakim Nivre, Marie-Catherine de Marneffe, Filip Ginter, Jan Hajič, Christopher D. Manning, Sampo Pyysalo, Sebastian Schuster, Francis Tyers, and Daniel Zeman. 2020. [Universal Dependencies v2: An evergrowing multilingual treebank collection](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 4034–4043, Marseille, France. European Language Resources Association.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. [Neural machine translation of rare words with subword units](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany. Association for Computational Linguistics.
- Ilya Sutskever, James Martens, and Geoffrey Hinton. 2011. [Generating text with recurrent neural networks](#). In *Proceedings of the 28th International Conference on International Conference on Machine Learning, ICML'11*, pages 1017–1024, USA. Omnipress.

Clara Vania and Adam Lopez. 2017. [From characters to words to in between: Do we capture morphology?](#) In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2016–2027, Vancouver, Canada. Association for Computational Linguistics.

Sami Virpioja, Peter Smit, Stig-Arne Grönroos, and Mikko Kurimo. 2013. Morfessor 2.0: Python implementation and extensions for morfessor baseline. In *Aalto University publication series*. Department of Signal Processing and Acoustics, Aalto University.

Seunghak Yu, Nilesh Kulkarni, Haejun Lee, and Jihie Kim. 2017. [Syllable-level neural language model for agglutinative language](#). In *Proceedings of the First Workshop on Subword and Character Level Models in NLP*, pages 92–96, Copenhagen, Denmark. Association for Computational Linguistics.

Johannes C Ziegler, Daisy Bertrand, Dénes Tóth, Valéria Csépe, Alexandra Reis, Luís Faísca, Nina Saine, Heikki Lyytinen, Anniek Vaessen, and Leo Blomert. 2010. Orthographic depth and its impact on universal predictors of reading: A cross-language investigation. *Psychological science*, 21(4):551–559.

A Datasets

Table 4 shows the size of the training, validation and test splits for all the datasets used in the study.

	Train			Valid			Test		
	Word	Syl	Char	Word	Syl	Char	Word	Syl	Char
bg	125	386	710	16	50	92	16	49	90
ca	436	1,123	2,341	59	152	317	61	157	327
cs	1,158	3,546	6,868	157	482	933	172	524	1,012
da	81	215	442	10	28	57	10	27	56
de	260	735	1,637	12	34	75	16	45	102
en _{UD}	210	488	1,061	26	61	133	26	61	132
en _{wt2}	2,089	4,894	10,902	218	505	1,157	246	568	1,304
es	376	1,060	2,043	37	103	198	12	33	64
fi	165	595	1,224	19	67	137	21	76	155
fr	360	837	1,959	36	84	197	10	23	54
hr	154	484	930	20	62	119	23	75	145
it	263	762	1,504	11	32	64	10	28	57
lv	113	349	690	19	58	115	20	59	116
nl	187	488	1,074	12	30	66	11	31	68
pl	102	293	589	13	37	73	13	37	74
pt	192	551	1,040	10	29	54	9	27	51
ro	183	549	1,056	17	51	98	16	48	94
ru	867	2,707	5,411	118	364	722	117	360	717
sk	80	232	437	12	39	76	13	41	80
tk	38	126	242	10	33	63	10	33	64
uk	88	289	501	12	41	71	16	56	99

Table 4: Total number of tokens (in thousands) at word, syllable and character-level for all the splits.

B Segmentation

Tools We list the tools for rule-based syllabification and dictionary-based hyphenation:

- English syllabification: Extracted from <https://www.howmanysyllables.com/>
- Spanish syllabification: <https://pypi.org/project/pylabeador/>
- Russian syllabification: <https://github.com/Koziev/rusyllab>
- Finnish syllabification: <https://github.com/tsnaomi/finnsyll>
- Turkish syllabification: <https://github.com/MeteHanC/turkishnlp>
- Hyphenation: PyPhen (<https://pyphen.org/>), which is based on Hunspell dictionaries.

Format For syllables, we adopt the segmentation format used by SentencePiece (Kudo and Richardson, 2018) to separate subwords: “A @ syl la ble @ con tains @ a @ sin gle @ vow el @ u nit”, where “@” is a special token that indicates the word boundary. We also evaluated syllables with a segmentation format like in Sennrich et al. (2016): “A syl@ la@ ble con@ tains a ...”, but we obtained lower performance in general.

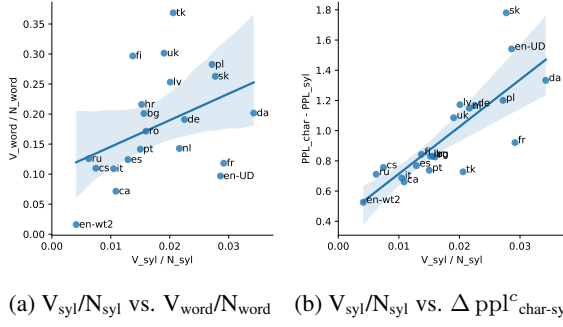


Figure 4: Left (a): Vocabulary growth rate of syllables (x-axis) versus words (y-axis). Right (b): Vocabulary growth rate of syllables (x-axis) versus the difference of ppl^c obtained by characters and syllables (y-axis).

C Model and Training

In contrast with the default settings, we use a smaller embedding size of 500 units for faster training. Additionally, we have 3 layers of depth, 1152 of hidden layer size and a dropout of 0.15. We train for 25 epochs with a batch size of 64, a learning rate of 0.002 and Adam optimiser (Kingma and Ba, 2015) with default parameters. We fit the model using the one cycle policy and an early stopping of 4. We run our experiments in a NVIDIA Titan Xp.

D Validation results

Figures 5 and 6 shows the validation perplexity (ppl^c) and the training time until convergence, respectively, in all the Universal Dependency treebanks.

E Complementary discussion

Type/token ratio of syllables In Figure 4a, we show a scatter plot of the token/type growth rate of syllables versus words for all languages and corpora. In other words, the ratio of syllable-types (syllabary or V_{syl}) per total number of syllable-tokens (N_{syl}) versus the type/token ratio of words ($V_{\text{word}}/N_{\text{word}}$) in the train set. The figure suggests at least a weak relationship, which agrees with the notion that a low word-vocabulary richness only requires a low syllabary richness for expressivity. Also, a richer vocabulary can use a richer syllabary or just longer words, so the distribution of the vocabulary richness could be larger.

We expected that the syllabary growth rate ($V_{\text{syl}}/N_{\text{syl}}$) for a low phonemic language like English would be relatively high, but wikitext-2 (en-wt2) is located in the bottom-left corner of the

plot, probably caused by its large amount of word-tokens. However, we observe a large $V_{\text{syl}}/N_{\text{syl}}$ for the English (en-UD) and French (fr) treebanks, despite their low $V_{\text{word}}/N_{\text{word}}$ ratio, which is an expected pattern for languages with deep orthographies.

We also observe that languages with a more transparent orthography, like Czech (cs) or Finnish (fi), are located in the left side of the figure, whereas Turkish (tr) is around the middle section. Nevertheless, our study does not aim to analyse the relationship between the level of phonemic orthography with the $V_{\text{syl}}/N_{\text{syl}}$ ratio. For that purpose, we might need an instrument to measure how deep or shallow a language orthography is (Borgwaldt et al., 2005; Borleffs et al., 2017), and a multi-parallel corpus for a more fair comparison.

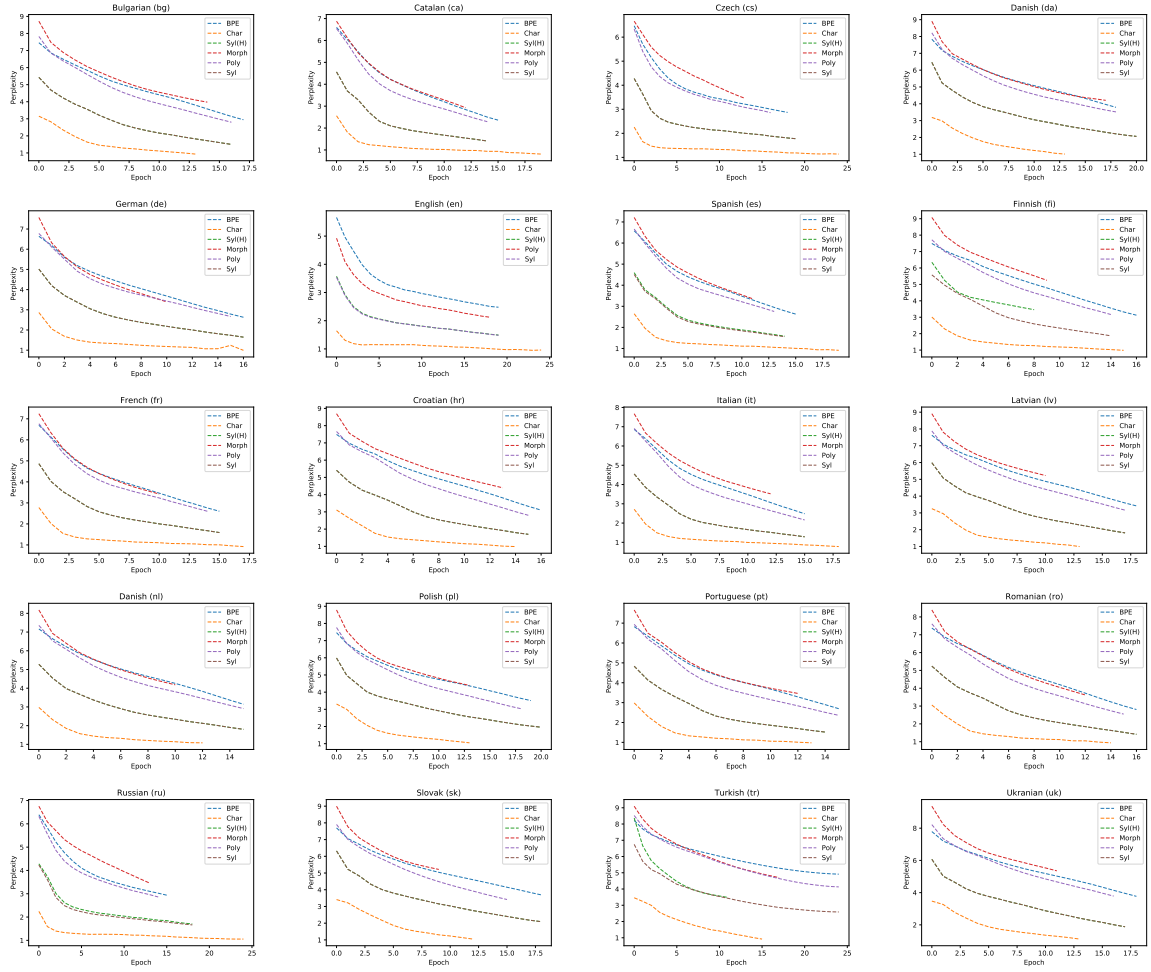


Figure 5: Validation perplexity for all the UD treebanks.

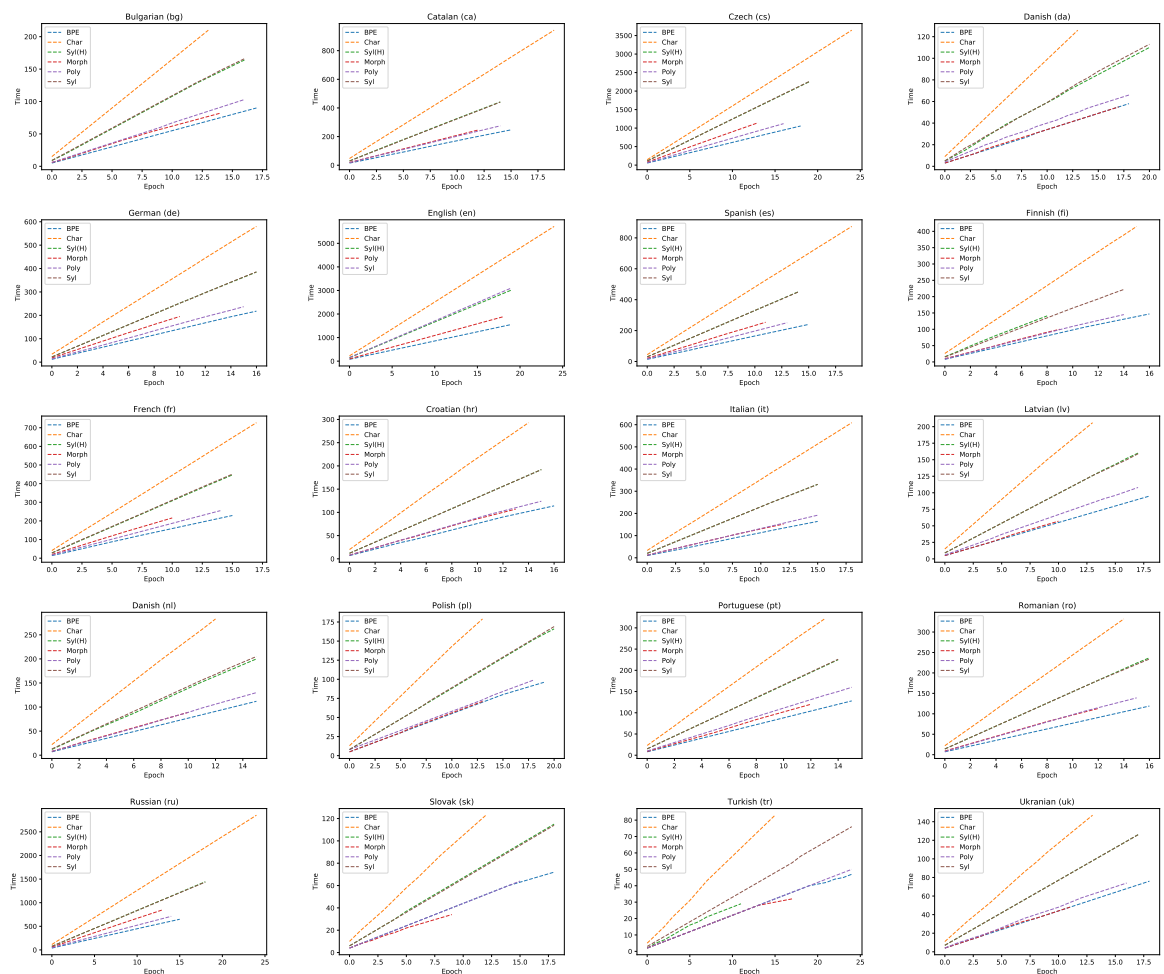


Figure 6: Training time (in seconds) until convergence for the UD treebanks