

Learning Contextualised Cross-lingual Word Embeddings for Extremely Low-Resource Languages Using Parallel Corpora

Takashi Wada^{1*} Tomoharu Iwata^{2,3} Yuji Matsumoto^{3*} Timothy Baldwin¹ Jey Han Lau¹

¹ School of Computing and Information Systems, The University of Melbourne

² NTT Communication Science Laboratories

³ RIKEN Center for Advanced Intelligence Project (AIP)

twada@student.unimelb.edu.au,

tomoharu.iwata.gy@hco.ntt.co.jp, yuji.matsumoto@riken.jp,

{tbaldwin, jeyhan.lau}@unimelb.edu.au

Abstract

We propose a new approach for learning contextualised cross-lingual word embeddings based only on a small parallel corpus (e.g. a few hundred sentence pairs). Our method obtains word embeddings via an LSTM-based encoder-decoder model that performs bidirectional translation and reconstruction of the input sentence. Through sharing model parameters among different languages, our model jointly trains the word embeddings in a common multilingual space. We also propose a simple method to combine word and subword embeddings to make use of orthographic similarities across different languages. We base our experiments on real-world data from endangered languages, namely Yongning Na, Shipibo-Konibo and Griko. Our experiments on bilingual lexicon induction and word alignment tasks show that our model outperforms existing methods by a large margin for most language pairs. These results demonstrate that, contrary to common belief, an encoder-decoder translation model is beneficial for learning cross-lingual representations, even in extremely low-resource scenarios.¹

1 Introduction

Cross-lingual word embedding learning has the goal of learning representations for words of different languages in a common space (Mikolov et al., 2013b; Conneau et al., 2018; Levy et al., 2017). Cross-lingual representations are beneficial for finding correspondences between languages, and are utilised in many downstream tasks such as machine translation (Lample et al., 2018; Artetxe et al., 2018b) and cross-lingual named entity recognition (Xie et al., 2018).

The recent trend in cross-lingual embedding models is to leverage an enormous amount of monolingual data for each of the target languages, e.g. by training word embeddings monolingually and mapping them into a common space. Another approach is to jointly train cross-lingual word embeddings in the same space. Recently, cross-lingual masked language models such as XLM (Conneau and Lample, 2019) and mBERT (Devlin et al., 2019) have succeeded in learning contextualised cross-lingual representations using large monolingual data for multiple languages.

However, when dealing with endangered or spoken languages, there is generally no such large-scale corpus of monolingual data, and when trained under low-resource settings, modern pre-training methods do not perform well (Hu et al., 2020). In this paper, we propose a joint-training method that learns contextualised cross-lingual word embeddings using only a small parallel corpus, of the scale and form constructed by field linguists for language documentation purposes. Compared to previous models based on parallel corpora (Levy et al., 2017; Dufter et al., 2018a,b; Luong et al., 2015a; Sabet et al., 2020), our model has two strengths: (1) while most previous models are based on bag-of-words models such as Skip Gram and continuous bag-of-words (CBOW) (Mikolov et al., 2013a) and capture only rudimentary word order information, our model encodes sentences with LSTMs (Hochreiter and Schmidhuber, 1997) and incorporates word order information into both static and contextualised word embeddings; and (2) our model trains subword-aware word embeddings and captures orthographic similarities among the languages.

To evaluate our model, we perform experiments in bilingual lexicon induction and word alignment, both of which are extremely important in building cross-lingual resources for endangered languages.

^{*}This work is partially done at Nara Institute of Science and Technology.

¹We will make our code available at <https://github.com/twadada/multilingual-nlm>

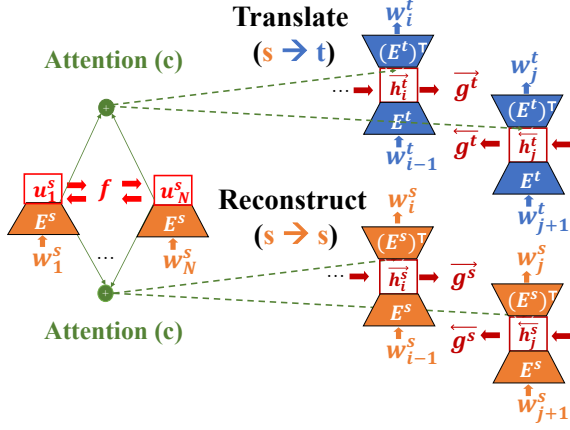


Figure 1: Our proposed model.

We target three endangered languages, Yongning Na, Shipibo-Konibo and Griko (see Sections 3.1.1, 3.1.2 and 3.1.3), and show that our model outperforms strong baselines by a large margin for most language pairs.

2 Our Method

Our model learns cross-lingual word embeddings given a parallel corpus of two or more languages. The goal of our model is to represent words of the different languages in a common space, so that similar words have close representations crosslingually.

2.1 Model Architecture

Our model is based on an LSTM encoder-decoder model with attention (Luong et al., 2015b):

- **Shared Parameters:**

- Bidirectional LSTMs in a shared encoder: f
- A matrix $W \in \mathbb{R}^{H \times H}$, which is applied to the decoder hidden states and attention context vector (Eqn. (5)).

- **Parameters Specific to Language ℓ :**

- Word Embeddings: $E^\ell \in \mathbb{R}^{D \times V^\ell}$, where V^ℓ denotes the vocabulary size in language ℓ
- LSTMs in language-specific decoders $\vec{g}^\ell, \overleftarrow{g}^\ell$, which perform forward and backward decoding independently.

Suppose that our model encodes a sentence $\langle x_1^s, \dots, x_N^s \rangle$ in the source language s and decodes a sentence $\langle y_1^t, \dots, y_M^t \rangle$ in the target language t . Our model employs bi-directional LSTMs f as an en-

coder, which is shared among all languages:

$$r_i^s = E^s x_i^s, \quad (1)$$

$$u_1^s, \dots, u_N^s = f(r_1^s, \dots, r_N^s) \quad (2)$$

where x_i^s denotes a one-hot vector. Given all the encoder states u^s , the decoders \vec{g}^t and \overleftarrow{g}^t translate (when $s \neq t$) or reconstruct (when $s = t$) the input sentence left-to-right and right-to-left, respectively (Figure 1). We train separate decoders for each language and direction, to allow for the differences of word order.² When decoding left-to-right, we set $\langle \text{BOS} \rangle$ and $\langle \text{EOS} \rangle$ as the initial input and last output tokens, and swap them in backward decoding. Similar to bidirectional language models such as ELMo (Peters et al., 2018), the decoding is performed independently in both directions:

$$r_i^t = E^t y_i^t, \quad (3)$$

$$p(y_1^t, \dots, y_{M+1}^t) = \prod_{i=1}^{M+1} p(y_i^t | \vec{h}_i, u^s),$$

$$\vec{h}_i = \vec{g}^t(\vec{h}_{i-1}, r_{i-1}^t),$$

$$p(y_0^t, \dots, y_M^t) = \prod_{i=0}^M p(y_{M-i}^t | \overleftarrow{h}_{M-i}, u^s),$$

$$\overleftarrow{h}_i = \overleftarrow{g}^t(\overleftarrow{h}_{i+1}, r_{i+1}^t).$$

The output layer and attention mechanism are shared across the two directions:

$$p(y_i^t | h_i, u^s) = \text{softmax}(E^{t \top} h_i'), \quad (4)$$

$$h_i' = W(c_i + h_i), \quad (5)$$

$$c_i = \sum_{j=1}^N \alpha_{i,j}^t (u_j^s + r_j^s), \quad (6)$$

$$\alpha_{i,j}^t = \frac{\exp(h_i u_j^s)}{\sum_{k=1}^N \exp(h_i u_k^s)},$$

where h_i denotes either \vec{h}_i or \overleftarrow{h}_i , and N is the number of words in source sentence x^s .

In Eqn. (4), we use the word embedding parameters E^t for the output layer (weight tying: Inan et al. (2017); Press and Wolf (2017)). This technique can reduce the number of the language-specific parameters substantially, encouraging the model to use the same space across languages. In

²In our preliminary experiments, we have found that learning language-specific decoders improves the model performance for distant languages that have different word order, e.g. SOV and SVO languages.

Eqn. (6), our model attends to source word embeddings as well as the hidden states to consider more direct relations between source and target word embeddings in Eqn. (4). This implementation simplifies the lexical model proposed by Nguyen and Chiang (2018), which improves translation performance in low-resource settings.³ To further encourage word embeddings to use the same space, we also apply aggressive dropout (Srivastava et al., 2014): we use a dropout rate of 0.5 for all the input and output word embeddings E^ℓ in Eqns. (1), (3), and (4), as well as to $c_i + h_i$ in Eqn. (5) before the linear transformation. We show that this strong regularisation leads to better performance in low-resource conditions.

2.2 Shared Subword Embeddings

Modern cross-lingual models tend to use subword segmentation, and train shared subword embeddings (Conneau and Lample, 2019; Johnson et al., 2017). This approach has the advantage of capturing crosslinguistic orthographic similarities. However, it has the limitation that it cannot learn accurate embeddings for rare words, since they are generally segmented into multiple subword units, each of which is heavily biased by frequent words they occur in.

To address this problem, we propose a simple but effective method to combine word and subword embeddings, inspired by FastText (Bojanowski et al., 2017). For each word w_i^ℓ , we calculate its subword-aware word embedding $\tilde{E}_{w_i}^\ell$ as follows:

$$\begin{aligned} \tilde{E}_{w_i}^\ell &= E_{w_i}^\ell + F(Z_{k \in Q(w_i)}), \\ Z &= [Z_1, \dots, Z_{V_{sw}}] \in \mathbb{R}^{D \times V_{sw}}, \end{aligned} \quad (7)$$

where $F(\cdot)$ denotes the subword encoding function; Z_k denotes the k -th subword embedding and $Q(w_i)$ denotes the indices of subwords included in w_i ; and V_{sw} is the total number of subwords across all the languages. For the encoding function $F(\cdot)$, we experiment with two methods:⁴ (1) average pooling (“SW_{ave}”); and (2) applying a convolutional neural network (CNN) function which is shared

³Nguyen and Chiang (2018) reported that they got the best result when they used different output layers to transform the weighted sum of word embeddings and hidden states into the output vocabulary size. On the other hand, we observed that sharing the same output layer yielded the best result, suggesting that the optimal model architecture is different between word and sentence translations.

⁴Dropout is applied to subword embeddings in both methods.

among all languages, followed by average pooling (“SW_{cnn}”). For instance, when we use average pooling only, the embedding of the English word *crying* is represented by the sum of its language-specific word embedding E_{crying}^{en} and the mean of its subword embeddings $Z_{@cry}$ and Z_{ing} , where $@$ in $@cry$ denotes the beginning of a word. The subword embeddings Z are shared among all languages, capturing orthographic similarities across languages. To segment words into subwords, we apply SentencePiece (Kudo and Richardson, 2018) to each monolingual corpus, with the soft limit of the subword size set to 1,000.⁵

Distinct from a standard translation model, we use the subword-aware embeddings \tilde{E}^ℓ not only as the input layers in Eqns. (1) and (3), but also as the output layer in Eqn. (4). In this way, we encourage the model to learn correspondences of subwords between the source and target languages through attention, i.e. Eqns. (4) and (5). In monolingual language modelling, Assylbekov and Takhanov (2018) investigated several ways of sharing subword-aware word embeddings between inputs and outputs. They show that, in some cases, weight tying leads to better performance.

2.3 Contextualised Word Embeddings

Unlike most existing methods that learn cross-lingual word embeddings using a parallel corpus, our model can also produce contextualised cross-lingual representations using LSTMs. Instead of word embeddings E^ℓ , we simply use the hidden states of the shared encoder u^ℓ as word representations. Our experiments show that using the contextualised representations yields much better results on word alignment tasks.

2.4 Training

Our model is trained to perform bidirectional translation and reconstruction of input sentences. Given a parallel corpus aligned between languages s and t , our model is trained to minimise the following training loss $J = J_{s,t} + J_{t,s}$:

$$\begin{aligned} J_{s,t} &= \sum_{j=1}^{C_{s,t}} \sum_{d=1}^2 \left\{ \sum_{i=1}^{N_j} \Delta(x_{j,i}^s, p(x_{j,i}^s | h_{j,i}^d, u_j^s)) \right. \\ &\quad \left. + \sum_{i=1}^{M_j} \Delta(y_{j,i}^t, p(y_{j,i}^t | h_{j,i}^d, u_j^s)) \right\} \end{aligned}$$

⁵For Chinese, we segment words into characters as there are more than 1000 character types.

Na	raw	ŋjɣ ɑɓo ətsi-ŋu zɔwɣq ^h vɔmvɔ-hĩ la ni mə!
	cln	ŋjɣ ɑɓo ətsi-ŋu zɔwɣq ^h vɔmvɔ-hĩ la ni mə
English	raw	It (i.e. this story) is only what (we’ve) heard our great-grandmother tell.
	cln	it is only what heard our great grandmother tell

Table 1: An example Na–English parallel sentence before and after pre-processing (“raw” vs. “cln”)

src–tgt	#Sents	#Tokens		#Vocab	
		src	tgt	src	tgt
nru-en	605	4,690	7,849	1,860	942
nru-fr	3,833	33,816	75,997	8,801	4,797
nru-zh	1,766	15,127	21,598	4,704	2,459
shp-es	14,276	198,024	214,127	20,654	14,781
grk-it (s)	330	2,374	2,384	689	456
grk-it (l)	9,788	207,294	178,980	12,697	9,813

Table 2: The statistics of the parallel corpora of endangered languages used in this paper. grk-it (s) and (l) denote the smaller and larger corpora, respectively.

Here, $C_{s,t}$ is the number of aligned sentences between languages s and t ; N_j, M_j are the numbers of words in the sentences x_j^s and y_j^t , resp.; and d is the direction of decoding ($h^1, h^2 = \vec{h}, \overleftarrow{h}$). The first and second terms represent the reconstruction and translation loss, respectively. For the loss function Δ , we use cross entropy.

Our model can also take multiple parallel corpora as inputs and generate multilingual word embeddings. In this case, we sum the training loss calculated on each parallel corpus. For instance, we train our multilingual model to minimise the loss $J = J_{nru,en} + J_{en,nru} + J_{nru,fr} + J_{fr,nru} + J_{nru,zh} + J_{zh,nru}$ given three parallel corpora of nru–en, nru–fr, and nru–zh,⁶ where some sentences are aligned between more than two languages. To balance the corpus size, we perform oversampling to ensure that $C_{s,t}$ is the same regardless of the language pairs s and t . We set the dimension of LSTM hidden states and word and subword embeddings to 500. For the CNN network that encodes subwords, we set the hidden state to 500 with window size 3. We use a 1-layer bidirectional LSTM for the encoder and a unidirectional LSTM for the decoder in each language and direction. We create mini-batches in each language with batch size B of 16. Gradient clipping (Pascanu et al., 2013) is applied with clipping value 5.0. We use

⁶Where “nru” is the ISO-639-3 language code for Na.

Adam (Kingma and Ba, 2015) as the optimiser.⁷

3 Experiments

3.1 Data

In this work, we conduct experiments on real-world data sets for three endangered languages: Yongning Na (“nru”), Shipibo-Konibo (“shp”) and Griko (“grk”).⁸ Table 2 shows the statistics of the parallel corpora we use in our experiments.

3.1.1 Yongning Na

Yongning Na is an unwritten Sino-Tibetan language with less than 50,000 speakers (Do et al., 2014). It does not have its own writing system, imposing severe limitations on data collection, as textual data must be professionally transcribed from speech by an expert linguist. This precludes the use of the latest pretraining methods such as mBERT (Devlin et al., 2019).

As a cross-lingual resource for Na, there exists a phonemically transcribed corpus that has been translated into French, Chinese, and English,⁹ which is a part of the Pangloss Collection (Michailovsky et al., 2014). The number of aligned sentences is 3,833 for Na–French, 1,766 for Na–Chinese, and 605 for Na–English. Aside from the limited data size, there are two other significant challenges in learning cross-lingual representations from this data. First, the syntax and orthography is very different among these languages: Na is an unwritten SOV language with rich tonal morphology (Michaud, 2017), while the others are SVO languages written in Latin script or with Chinese characters. Second, there is a lot of noise in the parallel corpora. For instance, some words or phrases in the translations are written in brackets,

⁷The hyper-parameters were tuned on different (small) data sets to those used in our experiments.

⁸Note that Griko is not included in ISO-639-3, and “grk” is an arbitrary (non-assigned) designator for the purposes of this paper.

⁹Available at <https://github.com/alexis-michaud/na>

indicating alternative translations, subsidiary information, or words that are implicit in the original Na sentences (Table 1). To clean the data, we use the pre-processing code used in Adams et al. (2017) with minor modifications.¹⁰

3.1.2 Shipibo-Konibo

Shipibo-Konibo is an indigenous language spoken by around 35,000 native speakers in the Amazon region of Peru (Vasquez et al., 2018), and is “definitely endangered” according to the UNESCO’s Atlas of the World’s Languages in Danger (Moseley, 2010). There is no large data available on the web, and even though Bustamante et al. (2020) have recently attempted to crawl its monolingual data from PDF documents, the size of the collected data is still too small (i.e. 22k sentences) to apply the latest pretraining methods. As cross-lingual resources, there are two parallel corpora aligned with Spanish. They contain about 14k pairs of sentences in total, which are extracted from Bible and educational books (Galarreta et al., 2017). Similar to Na, Shipibo-Konibo has a very rich morphology and its basic word order is SOV unlike Spanish (SVO) (Valenzuela, 1997; Vasquez et al., 2018), making it very challenging to retrieve equivalent words from parallel texts.

3.1.3 Griko

Griko is a Greek dialect spoken in southern Italy, and is “severely endangered” according to UNESCO. As with Na, there is no large-scale monolingual data to pretrain with. As cross-lingual resources for Griko, there are two parallel corpora that are both aligned with Italian: one contains 330 sentence pairs with gold word alignment annotations¹¹ (Zanon Boito et al., 2018), and the second contains about 10k sentence pairs without word alignments¹² (Anastasopoulos et al., 2018). However, since Griko has never had a consistent orthography, tokenisation and word segmentation differ across these corpora (Anastasopoulos et al., 2018): the smaller data set is based on orthographic con-

ventions from Italian, while the larger data set follows the concept of a phonological word. To investigate whether model performance improves by augmenting data, we train models on the 330 sentences with or without the 10k sentences. Then, we evaluate word alignment performance on the 330 sentences with the gold annotations, which is a standard evaluation setup for unsupervised word alignment methods such as GIZA++ and our model.

Unlike the Na and Shipibo-Konibo data set, Griko and Italian are very similar in many ways: both languages use the Latin script, and their syntax is also very similar. Therefore, the main challenge comes from the limited data size and inconsistent orthography in Griko, both of which are common problems when dealing with endangered languages.

3.2 Baselines

We compare our model against various cross-lingual models that are trained on a parallel corpus. First, we include Levy et al. (2017) and Sabet et al. (2020) as recent embedding-based baselines; we denote them as **SENTID** and **BIS2V**, respectively.¹³ SENTID assigns a sentence ID to each set of parallel sentences and trains a Skip Gram model that predicts the ID from each word in the sentences. Recently, Marie and Fujita (2019) have shown that this method can also be trained on noisy data such as pseudo-parallel sentences generated by unsupervised machine translation models, and it outperforms VecMap (Artetxe et al., 2018a), one of the best unsupervised mapping methods in word translation tasks. As such, we expect it to be a strong baseline when dealing with noisy data for endangered languages. BIS2V trains a CBOW model named Bi-Sent2Vec, which predicts a masked word from the rest of the sentence and its translation, and it significantly outperforms other cross-lingual word embedding methods that make use of a parallel corpus (e.g. BIVEC (Luong et al., 2015a)) or bilingual dictionary (e.g. RCSLS (Joulin et al., 2018)). Since BIS2V has a few relevant hyper-parameters, we tune them based on the Na-English BLI performance of the model trained

¹⁰We simply use white space as the word delimiter, while Adams et al. (2017) segmented words into morphemes if they are not present in a dictionary. We also keep all tones in Na sentences, as removing tones increases polysemy in the bilingual dictionary we use for evaluation. For Chinese, we perform word segmentation using the Stanford Word Segmenter (Chang et al., 2008) after data cleaning.

¹¹<https://github.com/antonisa/griko-italian-parallel-corpus>

¹²<https://bitbucket.org/antonis/grikoresource/src/master/>

¹³We used the authors’ implementation: https://bitbucket.org/omerlevy/xling_embeddings/src/default and <https://github.com/epfml/Bi-Sent2Vec>

for 1000 epochs.¹⁴ Regarding the vocabulary size and word embedding dimension, we always use the same values for the embedding-based baselines and our model to ensure fairness.¹⁵

We also compare our model against statistical word alignment methods, namely GIZA++¹⁶ (Och and Ney, 2003) and Fast Align¹⁷ (Dyer et al., 2013). These are pre-neural methods based on the IBM models (Brown et al., 1993), and still serve as de facto standard models to generate word alignments (Cao et al., 2020; Aldarmaki and Diab, 2019).

3.3 Experimental Settings and Evaluation

In our experiments, we train cross-lingual embeddings for five language pairs: Griko–Italian, Shipibo–Konibo–Spanish and Na–{French, Chinese, English}. In the Na data set, we also train our model to generate multilingual word embeddings, where the four languages are embedded into the same space. Since neural models can be unstable under extremely low-resource conditions, we run the embedding-based baselines and our model three times with different seeds, and report the average score.

For the Griko–Italian pair, we evaluate models on a cross-lingual word alignment task and report alignment accuracy ($1 - \text{AER}$). We evaluate models using the gold alignments manually annotated on the 330 Griko–Italian sentences. To produce alignments using the statistical word alignment models (Giza++ and Fast Align), we train them on the 330 sentences with or without additional 10k sentences from another corpus¹⁸, and combine forward and backward alignments using the grow-diag-final-and heuristic.¹⁹ For the word embedding-based methods, we train them on the same data and align each word in a sentence to the closest word in its translation using word embeddings. As with the statistical word alignment baselines, we align words bidirectionally and use

the grow-diag-final-and heuristic to produce the final result. To calculate word similarity, we use cross-domain similarity local scaling (CSLS Conneau et al. (2018)):

$$\text{CSLS}(x, y) = 2 \cos(x, y) - \frac{1}{K} \sum_{y_t \in \mathcal{N}_T(x)} \cos(x, y_t) - \frac{1}{K} \sum_{x_t \in \mathcal{N}_S(y)} \cos(x_t, y),$$

where $\cos(x, y)$ denotes cosine similarity between x and y , and $\mathcal{N}_T(x)$ and $\mathcal{N}_S(y)$ denote the K nearest words to x or y in a target or source sentence; we set K to 3 in the word alignment task.

For the Shipibo–Konibo–Spanish and Na–{French, Chinese, English} pairs, we perform bilingual lexicon induction (BLI). That is, for each source word in a bilingual dictionary, we extract the k nearest words from the whole target vocabulary and see whether they are listed as translations in the dictionary. We set k to 1 or 5, and report precision-at-one and -five (“P@1” and “P@5”, resp.). For evaluation, we use a Shipibo–Konibo–Spanish dictionary (Maguiño-Valencia et al., 2018) and Na–French–Chinese–English dictionaries²⁰ (Michaud, 2018). Based on extracting words that are present in the training data, we identified 79, 262, 215 and 87 word pairs for Shipibo–Konibo–Spanish, Na–French, Na–Chinese, and Na–English.²¹ To perform BLI with GIZA++ and Fast Align, we use their probability tables in source-to-target alignments to extract the top- k similar words.²² We also try using the result of bidirectional word alignments: we align each word to the most frequently aligned words to it.²³ For the word embedding methods, we use CSLS again to measure word embedding similarities. In BLI, $\mathcal{N}_T(x)$ and $\mathcal{N}_S(y)$ denote the K closest words extracted from the whole vocabulary, with K set to 10, following Conneau et al. (2018).

¹⁴The number of negatives sampling is set to 5, max length of word n-gram to 2, and number of n-gram dropout to 1.

¹⁵We always include all the words in the vocabulary and do not use the <unk> token.

¹⁶<https://github.com/moses-smt/giza-pp>

¹⁷https://github.com/clab/fast_align

¹⁸Note that word alignment is generally performed on seen data, not on held-out data; the main objective of word alignment is to extract equivalent words from a parallel corpus, for the purpose of building bilingual dictionaries (BLI), projecting annotation, e.g. POS tags between a parallel corpus, or training SMT models.

¹⁹Using the implementation at https://github.com/clab/fast_align

²⁰<https://github.com/alexis-michaud/na/tree/master/Dictionary>

²¹Since the Shipibo–Konibo–Spanish parallel corpora contain pairs of words as well as sentences, we include them in the evaluation data and remove them from training data

²²To avoid pruning low-probability words, in BLI we set the counts increment cutoff and probability cutoff thresholds to 0 in GIZA++, and remove the probability cutoff in Fast Align.

²³We use the probability tables as a backup when there are less than k aligned words

src-tgt	P@k	SENTID	BIS2V	Fast Align		GIZA++		Our Model		
		SG	CBOW	Ptable	+Align	Ptable	+Align	Word	+SW _{ave}	+SW _{cnn}
nru-en	1	29.7	26.6	23.0	21.6	25.7	21.6	30.2	32.0	35.6
	5	50.9	44.6	48.6	50.0	43.2	47.3	50.9	56.3	51.8
nru-fr	1	22.7	19.6	23.6	20.8	22.2	15.7	27.3	29.9	32.1
	5	37.7	30.2	35.2	36.1	32.9	37.5	43.7	47.8	46.0
nru-zh	1	28.7	25.1	31.6	29.9	29.4	25.7	31.6	36.7	38.5
	5	44.8	46.0	46.0	44.4	44.4	46.5	49.6	56.1	55.4
shp-es	1	25.1	26.2	31.1	32.8	34.4	26.2	35.0	35.0	35.5
	5	45.9	38.8	47.5	47.5	42.6	45.9	54.6	57.9	59.0

Table 3: The performance (P@1 and P@5) of the baselines and our model on bilingual lexicon induction (BLI). “Ptable” indicates the probability tables are used to retrieve words, and “+Align” indicates bidirectional alignments are used with probability tables as backup. The scores for Our Model, SENTID and BIS2V are averaged over three runs.

src-tgt	P@k	Word		+SW _{ave}		+SW _{cnn}	
		bi	multi	bi	multi	bi	multi
nru-en	1	30.2	34.2	32.0	37.8	35.6	40.5
	5	50.9	54.1	56.3	61.7	51.8	59.0
nru-fr	1	27.3	28.7	29.9	29.8	32.1	30.7
	5	43.7	44.0	47.8	46.9	46.0	46.8
nru-zh	1	31.6	36.9	36.7	40.1	38.5	40.8
	5	49.6	56.5	56.1	61.0	55.4	61.0

Table 4: Our model performance (P@1 and P@5) on bilingual lexicon induction (BLI) when the model is trained on two languages (“bi”) vs. four languages (“multi”). All scores are averaged over three runs.

3.4 Model Selection

In machine learning, model selection plays an important role in attaining good performance. However, since our evaluation data (i.e. bilingual dictionaries and word alignment annotations) are extremely limited, we cannot build a validation set for selecting the best model.²⁴ Therefore, in all the methods except for ours, we run the models with different configurations and report the best performance on the test data to show the upper bound of the baseline methods, which clearly gives a significant advantage to the baselines. For the embedding-based baselines, we train the model for 1,000 epochs and check the performance on the test data every 10 epochs, and report the best score. For Fast Align and GIZA++, we train the model for 5 (default), 10, 15 or 20 iterations independently and

²⁴Besides, all the baseline methods do not use any validation data in practice because they are “unsupervised” in a way they do not use any annotated data on a word-by-word basis.

report the best score.²⁵

For our model, on the other hand, we use a simple early-stopping criterion that does not rely on any external data. First, we build a pseudo bilingual dictionary from the training data, i.e. a parallel corpus. To retrieve pseudo bilingual word pairs, we compute the Dice Coefficient (Dice, 1945; Smadja et al., 1996) and extract the pairs of words that are used at least 3 times in each language and whose Dice Coefficient is greater than or equal to 0.8 across two languages. Using the pseudo dictionary, we have our model perform the BLI task every 10 epochs and choose the model that achieves the best performance. We train our model for 200 epochs in the Na and Griko bilingual experiments, and for 100 epochs otherwise.

3.5 Results

Table 3 shows the results for bilingual lexicon induction (BLI) for Na-{French, Chinese, English} and Shipibo-Konibo-Spanish. It clearly shows that our model outperforms all baseline models by a large margin for every language pair. It also shows that utilising shared subword embeddings (+SW_{ave} and +SW_{cnn}) further improves our model. Compared to SENTID and BIS2V, our model achieves better results even without subword information, demonstrating the efficiency of utilising the encoder-decoder model. SENTID mostly outperforms BIS2V, and this is probably due to the fact that Skip Gram generally produces

²⁵For GIZA++, we use the same number of iterations for HMM and IBM models 1, 3, and 4, following the default settings. We also train GIZA++ with the number of word classes chosen among {10, 20, 30, 40, 50}

src-tgt	#Sents	SENTID	BIS2V	Fast Align	GIZA++	Our Model			
		SG	CBOW	Align	Align	Word (static)	Word	+ SW_{ave}	+ SW_{cnn}
grk-it	330	66.7	65.3	90.2	93.3	88.0	93.1	93.4	93.5
	+10k	61.8	58.1	87.1	81.0	86.6	92.6	93.0	93.0

Table 5: The performance ($1 - \text{AER}$) of baselines and Our Model on word alignment tasks. The second row (+10k) is the result when the models utilise the additional 10k parallel sentences (with slightly different spelling and tokenisation norms to the 330 parallel sentences). To align words, Our Model employs the encoder hidden states u except for “Word (static)”, which uses static word embeddings E as in SENTID and BIS2V. Results for Our Model, SENTID and BIS2V are averaged over three runs.

better word representations than CBOW when trained on small data (Mikolov et al., 2013b), especially of magnitude smaller than 10k sentences (Adams et al., 2017). Table 4 compares our bilingual and multilingual models. The multilingual model is trained jointly on the three parallel corpora, sharing parameters among the four languages. The table shows that our model achieves better performance overall when it is trained in a multilingual way. The large improvement is observed especially for Na–English and Na–Chinese language pairs, where the number of the aligned sentences is much smaller than that of the Na–French corpus. This result demonstrates that our model is not only able to embed multiple languages into the same space, but also benefits from extra aligned sentences in additional languages. An obvious question to ask here is whether the generally higher results for multilingual training are due to the higher volume of training data or multilinguality of the data, a question which is surprisingly hard to answer definitively, because of the interaction between training data volume and vocabulary size (impacting in turn on the evaluation).

Table 5 shows the results for the Griko–Italian word alignment task. It clearly shows that our model achieves the best results of all models. This is particularly surprising given that encoder-decoder models are usually not effective when trained on small-scale data of magnitude 100s of sentence pairs. The result also shows that our model produces much better static word embeddings than SENTID and BIS2V (88.0 vs. 66.7 and 65.3), which demonstrates the importance of taking word order information into account. When we use the additional 10k sentences, the performance of the baseline methods drops substantially, likely because the two data sets have different punctuation, spelling and tokenisation, with the smaller Griko corpus closely following Italian spelling

Model	nru-en	nru-fr	nru-zh	multi
Our Model (+ SW_{ave})	32.0	29.9	36.7	35.9
–subword	30.2	27.3	31.6	33.3
– $E_{w_i}^\ell$ in Eqn. (7)	27.5	21.4	40.8	28.2
–Bkw ($\frac{1}{g}$)	30.2	28.6	34.9	33.1
–dropout	27.9	25.1	29.6	27.0
–weight tying	24.3	23.4	29.0	32.5
–reconstruction	0.9	1.2	0.4	34.8

Table 6: Ablation results for Our Model, based on P@1 for bilingual lexicon induction. “multi” indicates the average P@1 of our multilingual model over the three language pairs. All scores are averaged over three runs.

norms. On the other hand, our model achieves good results under both conditions. This result indicates that our model is robust to noisy data, which is beneficial when dealing with real-world data for endangered languages.

3.6 Ablation Studies

To investigate the effectiveness of our model, we perform ablation studies, targeting: shared subword embeddings, word-specific embeddings $E_{w_i}^\ell$ in Eqn. (7), backward decoding, dropout, weight tying, and the reconstruction objective. Table 6 shows the results. It indicates that the reconstruction objective plays a crucial role in the bilingual setting: as our model uses different decoders for each language, word embeddings are in completely different spaces without the constraint of the reconstruction loss. In the multilingual setting, however, the reconstruction is not essential because the model is trained to translate multiple languages into the Na language using a single decoder, which enforces the source languages to be encoded in the same space. The table also shows that without word-specific embeddings, the model performance drops sharply for nru-en, nru-fr and multi,

but improves for nru–zh.²⁶ This is presumably because the number of Chinese character types is very large, and words can be represented well by their component characters only. Similarly, Li et al. (2019) show that character-based models in Chinese consistently outperform word-based models. The table also shows that weight tying is very effective.²⁷ We find this result intriguing: although this technique is known to be effective in parameter reduction, it usually does not affect translation quality very much (Press and Wolf, 2017). In our model, however, the parameter reduction of language-specific embeddings is crucial, as it can mitigate the risk of the model learning word embeddings in different spaces. It also introduces more direct connections between source and target word embeddings through attention. Dropout is also very effective in all conditions, especially the multilingual setting. Lastly, backward decoding also improves performance, incorporating right-to-left contexts into the word embeddings.

4 Related Work

There are two main approaches to learn cross-lingual word embeddings. This first is to learn a matrix that maps pretrained monolingual embeddings into a common space. Most such methods exploit bilingual dictionaries to learn the mapping matrix (Mikolov et al., 2013b; Xing et al., 2015), but recently a number of methods have succeeded in aligning monolingual word embeddings without supervision (Zhang et al., 2017; Conneau et al., 2018; Artetxe et al., 2018a). However, Wada et al. (2019) show that this approach does not work well when there is insufficient monolingual data to pre-train fine-grained word embeddings. The second approach is to jointly train cross-lingual embeddings in a common space. Most existing methods extend the Skip Gram or CBOW models to incorporate cross-lingual information provided by parallel or comparable corpora (Vulic and Moens, 2016; Levy et al., 2017; Dufter et al., 2018a,b; Luong et al., 2015a; Sabet et al., 2020), or bilingual dictionaries (Gouws and Sjøgaard, 2015; Duong et al., 2016). Recently, masked language models such as XLM (Conneau and Lample, 2019) and mBERT (Devlin et al., 2019) have been shown to gener-

²⁶In the multilingual model, the word-specific embeddings enhance the performance among all the language pairs, including nru–zh.

²⁷Ablation of weight tying means that we train additional parameters for the output layer

ate cross-lingual representations without parallel data, but require an enormous amount of monolingual data, which is not readily available for endangered languages. Wada et al. (2019) show for languages that have a common word order, it is feasible to learn cross-lingual word embeddings with limited monolingual data via LSTM-based multilingual language models.

Similar to our work, some papers use multilingual neural machine translation models to obtain cross-lingual representations. For instance, Schwenk and Douze (2017) show that the encoder of a multilingual NMT model can generate cross-lingual sentence representations. Contrary to our work, however, previous work has employed extremely large and/or multilingual data aligned among more than two languages, such as Europarl, United Nations and the TED corpus (Eriguchi et al., 2018; Schwenk and Douze, 2017; Artetxe and Schwenk, 2019; Hermann and Blunsom, 2014). Another difference is that their methods focus on learning cross-lingual sentence representations only (, not at a word level), as to measure sentence similarities crosslingually or to solve sentence classification tasks.

5 Conclusion

In this work, we propose a new approach for learning contextualised cross-lingual word embeddings using a very small parallel corpus. Our model obtains cross-lingual representations via an encoder-decoder model that performs bidirectional translation and reconstruction of an input sentence. We also propose a simple method that combines word and subword embeddings to make use of orthographic similarities across languages. We evaluate our model on real-world data for the three endangered languages: Yongning Na, Shipibo-Konibo and Griko. Experiments on bilingual lexicon induction and word alignment tasks show that our model outperforms existing methods by a large margin for most language pairs. This result demonstrates that, contrary to common belief, an encoder-decoder model can be trained well with as few as 330 parallel sentences to perform word translation.

Acknowledgement

We are grateful to Oliver Adams and Alexis Michaud for providing us their pre-processing code and detailed instructions for Na data.

References

- Oliver Adams, Adam Makarucha, Graham Neubig, Steven Bird, and Trevor Cohn. 2017. [Cross-lingual word embeddings for low-resource language modeling](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 937–947, Valencia, Spain. Association for Computational Linguistics.
- Hanan Aldarmaki and Mona Diab. 2019. [Context-aware cross-lingual mapping](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 3906–3911, Minneapolis, Minnesota. Association for Computational Linguistics.
- Antonios Anastasopoulos, Marika Lekakou, Josep Quer, Eleni Zimianiti, Justin DeBenedetto, and David Chiang. 2018. [Part-of-speech tagging on an endangered language: a parallel Griko-Italian resource](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 2529–2539, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Mikel Artetxe, Gorka Labaka, and Eneko Agirre. 2018a. [A robust self-learning method for fully unsupervised cross-lingual mappings of word embeddings](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 789–798, Melbourne, Australia. Association for Computational Linguistics.
- Mikel Artetxe, Gorka Labaka, Eneko Agirre, and Kyunghyun Cho. 2018b. [Unsupervised neural machine translation](#). In *Proceedings of the 6th International Conference on Learning Representations*, Vancouver, BC, Canada.
- Mikel Artetxe and Holger Schwenk. 2019. [Massively multilingual sentence embeddings for zero-shot cross-lingual transfer and beyond](#). *Transactions of the Association for Computational Linguistics*, 7:597–610.
- Zhenisbek Assylbekov and Rustem Takhanov. 2018. [Reusing weights in subword-aware neural language models](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1413–1423, New Orleans, Louisiana. Association for Computational Linguistics.
- Piotr Bojanowski, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2017. [Enriching word vectors with subword information](#). *Transactions of the Association for Computational Linguistics*, 5:135–146.
- Peter F. Brown, Stephen A. Della Pietra, Vincent J. Della Pietra, and Robert L. Mercer. 1993. [The mathematics of statistical machine translation: Parameter estimation](#). *Computational Linguistics*, 19(2):263–311.
- Gina Bustamante, Arturo Oncevay, and Roberto Zariquiey. 2020. [No data to crawl? monolingual corpus creation from PDF files of truly low-resource languages in Peru](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 2914–2923, Marseille, France. European Language Resources Association.
- Steven Cao, Nikita Kitaev, and Dan Klein. 2020. [Multilingual alignment of contextual word representations](#). In *Proceedings of the 8th International Conference on Learning Representations*, Virtual Conference, Formerly Addis Ababa, Ethiopia.
- Pi-Chuan Chang, Michel Galley, and Christopher D. Manning. 2008. [Optimizing Chinese word segmentation for machine translation performance](#). In *Proceedings of the Third Workshop on Statistical Machine Translation*, pages 224–232, Columbus, Ohio. Association for Computational Linguistics.
- Alexis Conneau and Guillaume Lample. 2019. [Cross-lingual language model pretraining](#). In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems 32*, pages 7059–7069. Curran Associates, Inc.
- Alexis Conneau, Guillaume Lample, Marc'Aurelio Ranzato, Ludovic Denoyer, and Hervé Jégou. 2018. [Word translation without parallel data](#). In *Proceedings of the 6th International Conference on Learning Representations*, Vancouver, BC, Canada.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Lee R. Dice. 1945. [Measures of the amount of ecologic association between species](#). *Ecology*, 26(3):297–302.
- Thi-Ngoc-Diep Do, Alexis Michaud, and Eric Castelli. 2014. [Towards the automatic processing of Yongning Na \(Sino-Tibetan\): developing a 'light' acoustic model of the target language and testing 'heavy-weight' models from five national languages](#). In *4th International Workshop on Spoken Language Technologies for Under-resourced Languages (SLTU 2014)*, pages 153–160, St Petersburg, Russia.
- Philipp Dufter, Mengjie Zhao, Martin Schmitt, Alexander Fraser, and Hinrich Schütze. 2018a. [Embedding learning through multilingual concept induction](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1:*

- Long Papers*), pages 1520–1530, Melbourne, Australia. Association for Computational Linguistics.
- Philipp Dufter, Mengjie Zhao, and Hinrich Schütze. 2018b. [Multilingual embeddings jointly induced from contexts and concepts: Simple, strong and scalable](#). *CoRR*, abs/1811.00586.
- Long Duong, Hiroshi Kanayama, Tengfei Ma, Steven Bird, and Trevor Cohn. 2016. [Learning crosslingual word embeddings without bilingual corpora](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1285–1295, Austin, Texas. Association for Computational Linguistics.
- Chris Dyer, Victor Chahuneau, and Noah A. Smith. 2013. [A simple, fast, and effective reparameterization of IBM model 2](#). In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 644–648, Atlanta, Georgia. Association for Computational Linguistics.
- Akiko Eriguchi, Melvin Johnson, Orhan Firat, Hideto Kazawa, and Wolfgang Macherey. 2018. [Zero-shot cross-lingual classification using multilingual neural machine translation](#). *CoRR*, abs/1809.04686.
- Ana-Paula Galarreta, Andrés Melgar, and Arturo Onceva. 2017. [Corpus creation and initial SMT experiments between Spanish and Shipibo-konibo](#). In *Proceedings of the International Conference Recent Advances in Natural Language Processing, RANLP 2017*, pages 238–244, Varna, Bulgaria. INCOMA Ltd.
- Stephan Gouws and Anders Søgaard. 2015. [Simple task-specific bilingual word embeddings](#). In *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1386–1390, Denver, Colorado. Association for Computational Linguistics.
- Karl Moritz Hermann and Phil Blunsom. 2014. [Multilingual models for compositional distributed semantics](#). In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 58–68, Baltimore, Maryland. Association for Computational Linguistics.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation*, 9(8):1735–1780.
- Junjie Hu, Sebastian Ruder, Aditya Siddhant, Graham Neubig, Orhan Firat, and Melvin Johnson. 2020. [Xtreme: A massively multilingual multi-task benchmark for evaluating cross-lingual generalization](#). *CoRR*, abs/2003.11080.
- Hakan Inan, Khashayar Khosravi, and Richard Socher. 2017. [Tying word vectors and word classifiers: A loss framework for language modeling](#). In *Proceedings of the 5th International Conference on Learning Representations*, Toulon, France.
- Melvin Johnson, Mike Schuster, Quoc V. Le, Maxim Krikun, Yonghui Wu, Zhifeng Chen, Nikhil Thorat, Fernanda Viégas, Martin Wattenberg, Greg Corrado, Macduff Hughes, and Jeffrey Dean. 2017. [Google’s multilingual neural machine translation system: Enabling zero-shot translation](#). *Transactions of the Association for Computational Linguistics*, 5:339–351.
- Armand Joulin, Piotr Bojanowski, Tomas Mikolov, Hervé Jégou, and Edouard Grave. 2018. [Loss in translation: Learning bilingual word mapping with a retrieval criterion](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2979–2984, Brussels, Belgium. Association for Computational Linguistics.
- Diederik P. Kingma and Jimmy Ba. 2015. [Adam: A method for stochastic optimization](#). In *Proceedings of the 3rd International Conference on Learning Representations*.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Guillaume Lample, Alexis Conneau, Ludovic Denoyer, and Marc’Aurelio Ranzato. 2018. [Unsupervised machine translation using monolingual corpora only](#). In *Proceedings of the 6th International Conference on Learning Representations*, Vancouver, BC, Canada.
- Omer Levy, Anders Søgaard, and Yoav Goldberg. 2017. [A strong baseline for learning cross-lingual word embeddings from sentence alignments](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 765–774, Valencia, Spain. Association for Computational Linguistics.
- Xiaoya Li, Yuxian Meng, Xiaofei Sun, Qinghong Han, Arianna Yuan, and Jiwei Li. 2019. [Is word segmentation necessary for deep learning of Chinese representations?](#) In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3242–3252, Florence, Italy. Association for Computational Linguistics.
- Thang Luong, Hieu Pham, and Christopher D. Manning. 2015a. [Bilingual word representations with monolingual quality in mind](#). In *Proceedings of the 1st Workshop on Vector Space Modeling for Natural Language Processing*, pages 151–159, Denver, Colorado. Association for Computational Linguistics.

- Thang Luong, Hieu Pham, and Christopher D. Manning. 2015b. **Effective approaches to attention-based neural machine translation**. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 1412–1421, Lisbon, Portugal. Association for Computational Linguistics.
- Diego Maguiño-Valencia, Arturo Oncevay-Marcos, and Marco A. Sobrevilla Cabezudo. 2018. **WordNet-shp: Towards the building of a lexical database for a Peruvian minority language**. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC-2018)*, Miyazaki, Japan. European Languages Resources Association (ELRA).
- Benjamin Marie and Atsushi Fujita. 2019. **Unsupervised joint training of bilingual word embeddings**. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3224–3230, Florence, Italy. Association for Computational Linguistics.
- Boyd Michailovsky, Martine Mazaudon, Alexis Michaud, Séverine Guillaume, Alexandre François, and Evangelia Adamou. 2014. **Documenting and researching endangered languages: the Pangloss Collection**. In *Language Documentation & Conservation*, volume 8, pages 119–135. "University of Hawaii Press".
- Alexis Michaud. 2017. *Tone in Yongning Na: lexical tones and morphotonology*, volume 13 of *Studies in Diversity Linguistics*. Language Science Press.
- Alexis Michaud. 2018. **Na (Mosuo)-English-Chinese dictionary**. <https://halshs.archives-ouvertes.fr/halshs-01204638>, Version 1.2.
- Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013a. **Efficient estimation of word representations in vector space**. In *Proceedings of the 1st International Conference on Learning Representations (Workshop)*, Scottsdale, Arizona, USA.
- Tomas Mikolov, Quoc V. Le, and Ilya Sutskever. 2013b. **Exploiting similarities among languages for machine translation**. *CoRR*, abs/1309.4168.
- Christopher Moseley, editor. 2010. *Atlas of the World's Languages in Danger, 3rd edn*. UNESCO Publishing, Paris. Online version: <http://www.unesco.org/culture/en/endangeredlanguages/atlas>.
- Toan Nguyen and David Chiang. 2018. **Improving lexical choice in neural machine translation**. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 334–343, New Orleans, Louisiana. Association for Computational Linguistics.
- Franz Josef Och and Hermann Ney. 2003. **A systematic comparison of various statistical alignment models**. *Computational Linguistics*, 29(1):19–51.
- Razvan Pascanu, Tomas Mikolov, and Yoshua Bengio. 2013. **On the difficulty of training recurrent neural networks**. In *Proceedings of the 30th International Conference on Machine Learning, ICML 2013, Atlanta, GA, USA, 16-21 June 2013*, pages 1310–1318.
- Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. **Deep contextualized word representations**. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 2227–2237, New Orleans, Louisiana. Association for Computational Linguistics.
- Ofir Press and Lior Wolf. 2017. **Using the output embedding to improve language models**. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 157–163, Valencia, Spain. Association for Computational Linguistics.
- Ali Sabet, Prakhar Gupta, Jean-Baptiste Cordonnier, Robert West, and Martin Jaggi. 2020. **Robust cross-lingual embeddings from parallel sentences**. *ArXiv 1912.12481*.
- Holger Schwenk and Matthijs Douze. 2017. **Learning joint multilingual sentence representations with neural machine translation**. In *Proceedings of the 2nd Workshop on Representation Learning for NLP*, pages 157–167, Vancouver, Canada. Association for Computational Linguistics.
- Frank Smadja, Kathleen R. McKeown, and Vasileios Hatzivassiloglou. 1996. **Translating collocations for bilingual lexicons: A statistical approach**. *Computational Linguistics*, 22(1):1–38.
- Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. 2014. **Dropout: A simple way to prevent neural networks from overfitting**. *Journal of Machine Learning Research*, 15:1929–1958.
- Pilar M. Valenzuela. 1997. **Basic verb types and argument structures in shipibo-konibo**. Master's thesis, University of Oregon.
- Alonso Vasquez, Renzo Ego Aguirre, Candy Angulo, John Miller, Claudia Villanueva, Željko Agić, Roberto Zariquiey, and Arturo Oncevay. 2018. **Toward Universal Dependencies for Shipibo-konibo**. In *Proceedings of the Second Workshop on Universal Dependencies (UDW 2018)*, pages 151–161, Brussels, Belgium. Association for Computational Linguistics.
- Ivan Vulic and Marie-Francine Moens. 2016. **Bilingual distributed word representations from document-aligned comparable data**. *Journal of Artificial Intelligence Research*, 55(1):953–994.

- Takashi Wada, Tomoharu Iwata, and Yuji Matsumoto. 2019. [Unsupervised multilingual word embedding with limited resources using neural language models](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3113–3124, Florence, Italy. Association for Computational Linguistics.
- Jiateng Xie, Zhilin Yang, Graham Neubig, Noah A. Smith, and Jaime Carbonell. 2018. [Neural cross-lingual named entity recognition with minimal resources](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 369–379, Brussels, Belgium. Association for Computational Linguistics.
- Chao Xing, Dong Wang, Chao Liu, and Yiye Lin. 2015. [Normalized word embedding and orthogonal transform for bilingual word translation](#). In *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1006–1011. Association for Computational Linguistics.
- Marcely Zanon Boito, Antonios Anastasopoulos, Aline Villavicencio, Laurent Besacier, and Marika Lekakou. 2018. [A Small Griko-Italian Speech Translation Corpus](#). In *Proceedings of the 6th International Workshop on Spoken Language Technologies for Under-Resourced Languages*, pages 29–31, Gurugram, India. International Speech Communication Association.
- Meng Zhang, Yang Liu, Huanbo Luan, and Maosong Sun. 2017. [Adversarial training for unsupervised bilingual lexicon induction](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1959–1970, Vancouver, Canada. Association for Computational Linguistics.