

InstaHide’s Sample Complexity When Mixing Two Private Images

Baihe Huang* Zhao Song† Runzhou Tao‡ Junze Yin§ Ruizhe Zhang¶
 Danyang Zhuo||

Abstract

Training neural networks usually require large numbers of sensitive training data, and how to protect the privacy of training data has thus become a critical topic in deep learning research. InstaHide is a state-of-the-art scheme to protect training data privacy with only minor effects on test accuracy, and its security has become a salient question. In this paper, we systematically study recent attacks on InstaHide and present a unified framework to understand and analyze these attacks. We find that existing attacks either do not have a provable guarantee or can only recover a single private image. On the current InstaHide challenge setup, where each InstaHide image is a mixture of two private images, we present a new algorithm to recover all the private images with a provable guarantee and optimal sample complexity. In addition, we also provide a computational hardness result on retrieving all InstaHide images. Our results demonstrate that InstaHide is not information-theoretically secure but computationally secure in the worst case, even when mixing two private images.

1 Introduction

Collaboratively training neural networks based on sensitive data is appealing in many AI applications, such as healthcare, fraud detection, and virtual assistants. How to train neural networks without compromising data confidentiality and prediction accuracy has become an important and common research goal [SS15, RTD⁺18, AHW⁺17, MMR⁺17, KMY⁺16] both in academia and industry. [HSLA20] recently proposed an approach called InstaHide for image classification. The key idea is to train the model on a dataset where (1) each image is a mix of k_{priv} private images and k_{pub} public images, and (2) each pixel is independently sign-flipped after mixing. InstaHide shows promising prediction accuracy on the MNIST [Den12], CIFAR-10 [Kri12], CIFAR-100, and ImageNet datasets [DDS⁺09]. TextHide [HSC⁺20] applies InstaHide’s idea to text datasets and achieves promising results on natural language processing tasks.

To understand the security aspect of InstaHide in realistic deployment scenarios, InstaHide authors present an InstaHide challenge [Cha20] that involves $n_{\text{priv}} = 100$ private images, ImageNet dataset as the public images, $m = 5000$ sample images (each image is a combination of $k_{\text{priv}} = 2$ private images and $k_{\text{pub}} = 4$ public images and the sign of each pixel is randomly flipped). The challenge is to recover a private image given the set of sample images.

*baihe_huang@berkeley.edu. University of California, Berkeley.

†zsong@adobe.com. Adobe Research.

‡runzhou.tao@columbia.edu. Columbia University.

§junze@bu.edu. Boston University.

¶rzzhang@berkeley.edu. Simons Institute for the Theory of Computing.

||danyang@cs.duke.edu. Duke University.

[CLS21] is a theoretical work that formulates the InstaHide attack problem as a recovery problem. It also provides an algorithm to recover a private image, assuming each private and public image is a random Gaussian image (i.e., each pixel is an i.i.d. draw from $\mathcal{N}(0, 1)$). The algorithm shows that $O(n_{\text{priv}}^{k_{\text{priv}}-2/(k_{\text{priv}}+1)})$ sample images are sufficient to recover one private image. [CDG⁺20] provides the first practical heuristic-based attack for the InstaHide challenge ($k_{\text{priv}} = 2$), and it can generate images that are visually similar to the private images in the InstaHide challenge dataset. [LXW⁺21] provides the first heuristic-based practical attack for the InstaHide challenge ($k_{\text{priv}} = 2$) when data augmentation is enabled. [CSTZ22] studied a sub-problem of the InstaHide attack assuming that the Gram matrix can be accessed exactly, which can be regarded as the ideal case of the empirical attacks [CDG⁺20, LXW⁺21] where they used deep neural networks to estimate the Gram matrix. Under this assumption, [CSTZ22] proposed a theoretical algorithm based on tensor decomposition to recover the “significant pixels” of the private images.

Although several researchers consider the InstaHide challenge broken, the current InstaHide challenge is itself too simple, and it is unclear whether existing attacks [CDG⁺20, LXW⁺21] can still work when we use InstaHide to protect a large number of private images (large n) [Aro20]. This raises an important question:

What’s the minimal number of InstaHide images needed to recover a private image?

This question is worth considering because it is a quantitative measure of how secure InstaHide is. With the same formulation in [CLS21], we achieve a better upper bound on the number of samples needed to recover private images when $k_{\text{priv}} = 2$. Our new algorithm can recover all the private images using only $\Omega(n_{\text{priv}} \log(n_{\text{priv}}))$ samples.¹ This significantly improves the state-of-the-art theoretical results [CLS21] that requires $n_{\text{priv}}^{4/3}$ samples to recover a single private image. However, our running time is exponential in the number of private images (n_{priv}) and polynomial in the number of public images (n_{pub}), where the running time of the algorithm in [CLS21] is polynomial in n_{priv} and n_{pub} . In addition, we provide a four-step framework to compare our attacks with the attacks presented in [CDG⁺20] and [CLS21]. We hope our framework can inspire more efficient attacks on InstaHide-like approaches and can guide the design of future-generation deep learning algorithms on sensitive data.

Contributions. Our contributions can be summarized in the following ways.

- We propose an algorithm that recovers all private images using only $\Omega(n_{\text{priv}} \log(n_{\text{priv}}))$ samples in the recent theoretical framework of attacking InstaHide [HSLA20] when mixing two private images, improving the state-of-the-art result of [CLS21].
- We summarize the existing methods of attacking InstaHide in a unifying framework. By examining the functionality of each step, we identify the connection of a key step with problems in graph isomorphism. We also reveal the vulnerability of the existing method to recover all private images by showing the hardness of recovering all images.

1.1 Our result

[CLS21] formulates the InstaHide attack problem as a recovery problem that given sample access to an oracle that can generate as many as InstaHide images you want, there are two goals: 1) sample complexity, minimize the number InstaHide images that are being used, 2) running time, use those InstaHide images to recover the original images as fast as possible.

¹For the worst case distribution, $\Omega(n_{\text{priv}})$ is a trivial sample complexity lower bound.

Similar to [CLS21], we consider the case where private and public data vectors are Gaussians. Let S_{pub} be the set of public images with $|S_{\text{pub}}| = n_{\text{pub}}$, let S_{priv} denote the set of private images with $|S_{\text{priv}}| = n_{\text{priv}}$. The model that produces InstaHide image can be described as follows:

- Pick k_{pub} vectors from public data set and k_{priv} vectors from private data set.
- Normalize k_{pub} vectors by $1/\sqrt{k_{\text{pub}}}$ and normalize k_{priv} vectors by $1/\sqrt{k_{\text{priv}}}$.
- Add $k_{\text{pub}} + k_{\text{priv}}$ vectors together to obtain a new vector, then flip each coordinate of that new vector independently with probability $1/2$.

We state our results as follows:

Theorem 1.1 (Informal version of Theorem 3.1). *Let $k_{\text{priv}} = 2$. If there are n_{priv} private vectors and n_{pub} public vectors, each of which is an i.i.d. draw from $\mathcal{N}(0, \text{Id}_d)$, then as long as*

$$d = \Omega(\text{poly}(k_{\text{pub}}) \log(n_{\text{pub}} + n_{\text{priv}})),$$

there is some $m = O(n_{\text{priv}} \log n_{\text{priv}})$ such that, given a sample of m random synthetic vectors independently generated as above, one can exactly recover all the private vectors in time

$$O(dm^2 + dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1} + mn_{\text{pub}}^2) + d2^{O(m)}$$

with high probability.

1.2 Related work

Privacy Preservation for Machine Learning. Privacy preservation is an important research area in machine learning. We need to train models on sensitive data, such as healthcare and finance. In these domains, protecting the privacy of training data becomes critical. One typical approach is to use differential privacy [DMNS06, CMS11, ACG⁺16]. Specifically, in [DMNS06], privacy is proved to be preserved through calibrating the standard deviation of the noise based on the sensitivity of the general function f . To protect privacy, the true answer, namely the result of f on the database, is perturbed by adding random noise and then returned to the user. After that, [CMS11] applies this perturbation from [DMNS06] to empirical risk minimization. A new method, objective perturbation, is developed to preserve the privacy of the design of machine learning algorithms, where the objective function is perturbed before optimizing over classifiers. Under the differential privacy framework, [ACG⁺16] provides a refined analysis of the privacy costs and proposes a new algorithm for learning. However, using differential privacy in deep learning typically leads to substantially reduced model utility. [SS15] developed a collaborative learning framework that enables training across multiple parties without exposing private data. Nevertheless, it requires extensive multi-party computation. Generative adversarial networks have recently been explored for privacy as well. [XLW⁺18] proposed a differentially private Generative Adversarial Network (DPGAN) model. They provide adversarial training to prevent membership inference attacks. Privacy guarantees are supported by both their theoretical works and empirical evidence.

Federated learning is also an approach to preserve the privacy of machine learning. It distributes the training data and performs model aggregation via periodic parameter exchanges [MMR⁺17]. Recent works focus on three distinct aspects: communication expenses [IRU⁺19], variations in data [AG20], and client resilience [GKN17].

InstaHide. InstaHide [HSLA20] proposes a different approach to achieve the preservation of privacy. The key idea is to encode the training data and perform machine learning training directly on the encoded data. InstaHide demonstrates that for images, one such encoding scheme is to mix together multiple images and randomly flip pixel signs. This encoding only has a minor effect on the utility of the model. TextHide [HSC⁺20] extends this idea to natural language processing tasks. The remaining question is how secure InstaHide is, and this has become a heavily discussed topic. [CLSZ21] first formulates the theoretical sample complexity problem for InstaHide. [CDG⁺20] presents the first empirical attack on the InstaHide challenge. [HGS⁺21] evaluates InstaHide for gradient inversion attacks in the federated learning setting. [LXW⁺21] provides a practical attack for the InstaHide challenge ($k_{\text{priv}} = 2$) when there is data augmentation using a fusion-denoising network. [XH21] provides a reconstruction attack for TextHide.

Line Graph Reconstruction. In combinatorics and graph theory, there are many works [Rou73, Leh74, Lov77, PRT81, Sys82, Whi92, LT93, DS95, JKL97, Zve97, LTVM15] on reconstructing graphs (or hypergraphs) from their *line graphs*, which turns out to be equivalent to the third step in our framework: assigning encoded images to original images. Each vertex in the line graph corresponds to a synthetic image, and two images are connected if the sets of private images that give rise to them overlap. When $k_{\text{priv}} = 2$ (the graph case), Whitney’s isomorphism theorem [Whi92] characterizes which graph can be uniquely identified by its line graph, and many efficient algorithms have been proposed [Rou73, Leh74, Sys82, DS95, LTVM15]. When $k_{\text{priv}} > 2$ (the hypergraph case), line graph reconstruction turns out to be NP-hard [Lov77, PRT81, LT93, JKL97].

Organizations. In Section 2 we formulate our attack problem. In Section 3 we present our algorithm and the main results. In Section 4 we conclude our paper and discuss future directions.

Notations. For any positive integer n , we use $[n]$ to denote the set $\{1, 2, \dots, n\}$. For a set S , we use $\text{supp}(S)$ to denote the support of S , i.e., the indices of its elements. We also use $\text{supp}(w)$ to denote the support of vector $w \in \mathbb{R}^n$, i.e. the indices of its non-zero coordinates. For a vector x , we use $\|x\|_2$ to denote entry-wise ℓ_2 norm. For two vectors a and b , we use $a \circ b$ to denote a vector where i -th entry is $a_i b_i$. For a vector a , we use $|a|$ to denote a vector where the i -th entry is $|a_i|$. Given a vector $v \in \mathbb{R}^n$ and a subset $S \subset [n]$ we use $[v]_S \in \mathbb{R}^{|S|}$ to denote the restriction of v to the coordinates indexed by S .

2 Preliminaries

We use the same setup as [CLSZ21], which is stated below.

Definition 2.1 (Image matrix notation, Definition 2.2 in [CLSZ21]). *Let the image matrix $\mathbf{X} \in \mathbb{R}^{d \times n}$ be a matrix whose columns consist of vectors $x_1, \dots, x_n \in \mathbb{R}^d$ corresponding to n images, each with d pixels taking values in \mathbb{R} . It will also be convenient to refer to the rows of \mathbf{X} as $p_1, \dots, p_d \in \mathbb{R}^n$.*

We define the public set, private set, and synthetic images following the setup in [HSLA20].

Definition 2.2 (Public/private notation, Definition 2.3 in [CLSZ21]). *We will refer to $S_{\text{pub}} \subset [n]$ and $S_{\text{priv}} = [n] \setminus S_{\text{pub}}$ as the set of public and private images respectively, and given a vector $w \in \mathbb{R}^n$, we will refer to $\text{supp}(w) \cap S_{\text{pub}}$ and $\text{supp}(w) \cap S_{\text{priv}}$ as the public and private coordinates of w respectively.*

Definition 2.3 (Synthetic images, Definition 2.4 in [CLS21]). *Given sparsity levels*

$$k_{\text{pub}} \leq |S_{\text{pub}}|, k_{\text{priv}} \leq |S_{\text{priv}}|,$$

image matrix $\mathbf{X} \in \mathbb{R}^{d \times n}$ and a selection vector $w \in \mathbb{R}^n$ for which $[w]_{S_{\text{pub}}}$ and $[w]_{S_{\text{priv}}}$ are k_{pub} - and k_{priv} -sparse respectively, the corresponding synthetic image is the vector $y^{\mathbf{X},w} = |\mathbf{X}w| \in \mathbb{R}^d$ where $|\cdot|$ denotes entrywise absolute value. We say that $\mathbf{X} \in \mathbb{R}^{d \times n}$ and a sequence of selection vectors $w_1, \dots, w_m \in \mathbb{R}^n$ give rise to a synthetic dataset $\mathbf{Y} \in \mathbb{R}^{m \times d}$ consisting of the images

$$(y^{\mathbf{X},w_1}, \dots, y^{\mathbf{X},w_m})^\top.$$

We consider a Gaussian image, which is a common setting in phase retrieval [CSV13, NJS17, CLS15].

Definition 2.4 (Gaussian images, Definition 2.5 in [CLS21]). *We say that \mathbf{X} is a random Gaussian image matrix if its entries are sampled i.i.d. from $\mathcal{N}(0, 1)$.*

Distribution over selection vectors follows from variants of Mixup [ZCDLP17]. Here we ℓ_2 normalize all vectors for convenience of analysis. Since k_{priv} is a small constant, our analysis can be easily generalized to other normalizations.

Definition 2.5 (Distribution over selection vectors, Definition 2.6 in [CLS21]). *Let \mathcal{D} be the distribution over selection vectors defined as follows. To sample once from \mathcal{D} , draw random subset $T_1 \subset S_{\text{pub}}, T_2 \subseteq S_{\text{priv}}$ of size k_{pub} and k_{priv} and output the unit vector whose i -th entry is $1/\sqrt{k_{\text{pub}}}$ if $i \in T_1$, $1/\sqrt{k_{\text{priv}}}$ if $i \in T_2$, and zero otherwise.²*

For convenience we define **pub** and **priv** operators below,

Definition 2.6 (Public/private operators). *We define function **pub**(\cdot) and **priv**(\cdot) such that for vector $w \in \mathbb{R}^n$, **pub**(w) $\in \mathbb{R}^{n_{\text{pub}}}$ will be the vector which only contains the coordinates of w corresponding to the public subset S_{pub} , and **priv**(w) $\in \mathbb{R}^{n_{\text{priv}}}$ will be the vector which only contains the coordinates of w corresponding to the private subset S_{priv} .*

For subset $\tilde{S} \subset S$ we will refer to $\text{vec}(\tilde{S}) \in \mathbb{R}^n$ as the vector that

- $\text{vec}(\tilde{S})_i = 1$ if $i \in \tilde{S}$
- and $\text{vec}(\tilde{S})_i = 0$ otherwise.

We define the public and private components of \mathbf{W} and \mathbf{Y} for convenience.

Definition 2.7 (Public and private components of image matrix and selection vectors). *For a sequence of selection vectors $w_1, \dots, w_m \in \mathbb{R}^n$ we will refer to*

$$\mathbf{W} = (w_1, \dots, w_m)^\top \in \mathbb{R}^{m \times n}$$

as the mixup matrix.

²Note that any such vector does not specify a convex combination, but this choice of normalization is just to make some of the analysis later on somewhat cleaner, and our results would still hold if we chose the vectors in the support of \mathcal{D} to have entries summing to 1.

Specifically, we refer to $\mathbf{W}_{\text{pub}} \in \{0, 1\}^{m \times n_{\text{pub}}}$ as the public component of mixup matrix and $\mathbf{W}_{\text{priv}} \in \{0, 1\}^{m \times n_{\text{priv}}}$ as the private component of mixup matrix, i.e.,

$$\mathbf{W}_{\text{pub}} = \sqrt{k_{\text{pub}}} \cdot \begin{bmatrix} \text{pub}(\mathbf{W}_{1,*}) \\ \vdots \\ \text{pub}(\mathbf{W}_{m,*}) \end{bmatrix} \in \{0, 1\}^{m \times n_{\text{pub}}},$$

and

$$\mathbf{W}_{\text{priv}} = \sqrt{k_{\text{priv}}} \cdot \begin{bmatrix} \text{priv}(\mathbf{W}_{1,*}) \\ \vdots \\ \text{priv}(\mathbf{W}_{m,*}) \end{bmatrix} \in \{0, 1\}^{m \times n_{\text{priv}}}.$$

We refer to $\mathbf{X}_{\text{pub}} \in \mathbb{R}^{d \times n_{\text{pub}}}$ as public component of image matrix which only contains the columns of $\mathbf{X} \in \mathbb{R}^{d \times n}$ corresponding to the public subset S_{pub} , and $\mathbf{X}_{\text{priv}} \in \mathbb{R}^{d \times n_{\text{priv}}}$ as private component of image matrix which only contains the columns of $\mathbf{X} \in \mathbb{R}^{d \times n}$ corresponding to the private subset S_{priv} .

Furthermore we define $\mathbf{Y}_{\text{pub}} \in \mathbb{R}^{m \times d}$ as public contribution to InstaHide images and $\mathbf{Y}_{\text{priv}} \in \mathbb{R}^{m \times d}$ as private contribution to InstaHide images:

$$\mathbf{Y}_{\text{pub}} = \frac{1}{\sqrt{k_{\text{pub}}}} \mathbf{W}_{\text{pub}} \mathbf{X}_{\text{pub}}^\top, \quad \mathbf{Y}_{\text{priv}} = \frac{1}{\sqrt{k_{\text{priv}}}} \mathbf{W}_{\text{priv}} \mathbf{X}_{\text{priv}}^\top.$$

Instead of considering only one private image recovery as [CLS21], here we consider a more complicated question that requires restoring all private images.

Problem 1 (Exact Private image recovery). Let $\mathbf{X} \in \mathbb{R}^{d \times n}$ be a Gaussian image matrix. Given access to public images $\{x_s\}_{s \in S_{\text{pub}}}$ and the synthetic dataset $(y^{\mathbf{X}, w_1}, \dots, y^{\mathbf{X}, w_m})$, where $w_1, \dots, w_m \sim \mathcal{D}$ are unknown selection vectors, output a set of vectors $\{\tilde{x}_s\}_{s \in S_{\text{priv}}}$ for which there exists a one-to-one mapping ϕ from $\{\tilde{x}_s\}_{s \in S_{\text{priv}}}$ to $\{x_s\}_{s \in S_{\text{priv}}}$ satisfying $\phi(\tilde{x}_s)_j = (x_s)_j, \forall j \in [d]$.

We note that the one-to-one mapping ϕ is conceptual and only used to measure the performance of the recovery. The algorithm will not be able to learn this mapping.

3 Recovering All Private Images When $k_{\text{priv}} = 2$

In this section, we prove our main algorithmic result. Our algorithm follows the high-level procedure introduced in Section A. The detailed ideas are elaborated in the following subsections. We delay the proofs to Appendix E.

Theorem 3.1 (Main result). Let $S_{\text{pub}} \subset [n]$, and let $n_{\text{pub}} = |S_{\text{pub}}|$ and $n_{\text{priv}} = |S_{\text{priv}}|$. Let $k_{\text{priv}} = 2$. Let $k = k_{\text{priv}} + k_{\text{pub}}$. If

$$d \geq \Omega(\text{poly}(k) \log(n_{\text{pub}} + n_{\text{priv}}))$$

and

$$m \geq \Omega(n_{\text{priv}} \log n_{\text{priv}}),$$

then with high probability over \mathbf{X} and the sequence of randomly chosen selection vectors $w_1, \dots, w_m \sim \mathcal{D}$, there is an algorithm which takes as input the synthetic dataset $\mathbf{Y}^\top = (y^{\mathbf{X}, w_1}, \dots, y^{\mathbf{X}, w_m}) \in \mathbb{R}^{d \times m}$ and the columns of \mathbf{X} indexed by S_{pub} , and outputs n_{priv} images $\{\tilde{x}_s\}_{s \in S_{\text{priv}}}$ for which there exists one-to-one mapping ϕ from $\{\tilde{x}_s\}_{s \in S_{\text{priv}}}$ to $\{x_s\}_{s \in S_{\text{priv}}}$ satisfying $\phi(\tilde{x}_s)_j = (x_s)_j$ for all $j \in [d]$. Furthermore, the algorithm runs in time

$$O(m^2 d + d n_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1} + m n_{\text{priv}}^2 + 2^m \cdot m n_{\text{priv}}^2 d).$$

Algorithm 1 Recovering All Private Images when $k_{\text{priv}} = 2$

```

1: procedure RECOVERALL( $\mathbf{Y}$ )                                 $\triangleright$  Theorem 3.1, Theorem 1.1
2:                                                          $\triangleright$  InstaHide dataset  $\mathbf{Y} = (y^{\mathbf{X}, w_1}, \dots, y^{\mathbf{X}, w_m})^\top \in \mathbb{R}^{m \times d}$ 
3:                                                          $\triangleright$  Step 1. Retrieve Gram matrix
4:    $\mathbf{M} \leftarrow \frac{1}{k_{\text{priv}} + k_{\text{pub}}} \cdot \text{GRAMEXTRACT}(\mathbf{Y}, \frac{1}{2(k_{\text{pub}} + k_{\text{priv}})})$      $\triangleright$  Algorithm 1 in [CLS21]
5:                                                          $\triangleright$  Step 2. Subtract Public images from Gram matrix
6:   for  $i \in [m]$  do
7:      $S_i \leftarrow \text{LEARNPUBLIC}(\{(p_j)_{S_{\text{pub}}}, y_j^{\mathbf{X}, w_i}\}_{j \in [d]})$      $\triangleright$  Algorithm 2 in [CLS21]
8:   end for
9:    $\mathbf{W}_{\text{pub}} \leftarrow (\text{pub}(\text{vec}(S_1)), \dots, \text{pub}(\text{vec}(S_m)))^\top$      $\triangleright \mathbf{W}_{\text{pub}} \in \{0, 1\}^{m \times n_{\text{pub}}}$ 
10:   $\mathbf{M}_{\text{priv}} \leftarrow k_{\text{priv}} \cdot (\mathbf{M} - \frac{1}{k_{\text{pub}}} \mathbf{W}_{\text{pub}} \mathbf{W}_{\text{pub}}^\top)$ 
11:                                                          $\triangleright$  Step 3. Assign original images
12:   $\mathbf{W}_{\text{priv}} \leftarrow \text{ASSIGNINGORIGINALIMAGES}(\mathbf{M}_{\text{priv}}, n_{\text{priv}})$      $\triangleright$  Algorithm 2
13:                                                          $\triangleright$  Step 4. Solving system of equations.
14:   $\mathbf{Y}_{\text{pub}} = \frac{1}{\sqrt{k_{\text{pub}}}} \mathbf{W}_{\text{pub}} \mathbf{X}_{\text{pub}}^\top$      $\triangleright \mathbf{X}_{\text{pub}} \in \mathbb{R}^{d \times n_{\text{pub}}}, \mathbf{Y}_{\text{pub}} \in \mathbb{R}^{m \times d}, \mathbf{W}_{\text{pub}} \in \{0, 1\}^{m \times n_{\text{pub}}}$ 
15:   $\tilde{\mathbf{X}} \leftarrow \text{SOLVINGSYSTEMOFEQUATIONS}(\mathbf{W}_{\text{priv}}, \sqrt{k_{\text{priv}}} \mathbf{Y}_{\text{pub}}, \sqrt{k_{\text{priv}}} \mathbf{Y})$      $\triangleright$  Algorithm 3
16:  return  $\tilde{\mathbf{X}}$ 
17: end procedure

```

Theorem 3.1 improves on [CLS21] in two aspects. First, we reduce the sample complexity from $n_{\text{priv}}^{k_{\text{priv}} - 2 / (k_{\text{priv}} + 1)}$ to $n_{\text{priv}} \log n_{\text{priv}}$ when $k_{\text{priv}} = 2$ by formulating Step 3 (which is the bottleneck of [CLS21]) in Algorithm 1 as a combinatorial problem: line graph reconstruction (see Section 3.3) which can be solved more efficiently.

Second, we can recover all private images exactly instead of a single image as in [CLS21], which is highly desirable for real-world practitioners. Furthermore, fixing all public images and multiplying any private image by -1 might not keep InstaHide images unchanged. Thus, information-theoretically, we can recover all private images precisely (not only absolute values) as long as we have access to sufficient synthetic images. In fact, from the proof of Lemma 3.7 our sample complexity suffices to achieve exact recovery. We note that if we repeatedly run [CLS21]’s algorithm to recover all private images, each run will require new samples, and the overall sample complexity will blow up by a factor of n_{priv} .

Remark 3.2. *The information-theoretic lower bound on the sample complexity of exactly recovering all private images is $\Omega(n_{\text{priv}} \log(n_{\text{priv}}))$ when $k_{\text{priv}} = 2$. This can be shown by a generalized coupon-collector argument that at least $n_{\text{priv}} \log(n_{\text{priv}})$ randomly generated synthetic images are required to contain all n_{priv} private images with high probability. It indicates that our algorithm is essentially optimal with respect to the sample complexity.*

3.1 Retrieving Gram matrix

In this section, we present the algorithm for retrieving the Gram matrix.

Lemma 3.3 (Retrieve Gram matrix, [CLS21]). *Let $n = n_{\text{pub}} + n_{\text{priv}}$. Suppose $d = \Omega(\log(m/\delta)/\eta^4)$. For a random Gaussian image matrix $\mathbf{X} \in \mathbb{R}^{d \times n}$ and arbitrary $w_1, \dots, w_m \in \mathbb{S}_{\geq 0}^{d-1}$, let Σ^* be the output of GRAMEXTRACT when we set $\eta = 1/2k$. Then with probability $1 - \delta$ over the randomness of \mathbf{X} , we have $\Sigma^* = k \cdot \mathbf{W} \mathbf{W}^\top \in \mathbb{R}^{m \times m}$. Furthermore, GRAMEXTRACT runs in time $O(m^2 d)$.*

We briefly describe how this is achieved. Without loss of generality, we may assume $S_{\text{priv}} = [n]$, since once we determine the support of public images S_{pub} , we can easily subtract their contribution. Consider a matrix $\mathbf{Y} \in \mathbb{R}^{m \times d}$ whose rows are $y^{\mathbf{X}, w_1}, \dots, y^{\mathbf{X}, w_m}$. Then, it can be written as

$$\mathbf{Y} = \begin{bmatrix} |\langle p_1, w_1 \rangle| & \cdots & |\langle p_d, w_1 \rangle| \\ \vdots & \ddots & \vdots \\ |\langle p_1, w_m \rangle| & \cdots & |\langle p_d, w_m \rangle| \end{bmatrix}.$$

Since \mathbf{X} is a Gaussian matrix, we can see that each column of \mathbf{Y} is the absolute value of an independent draw of $\mathcal{N}(0, \mathbf{W}\mathbf{W}^\top)$. We define this distribution as $\mathcal{N}^{\text{fold}}(0, \mathbf{W}\mathbf{W}^\top)$, and it can be proved that the covariance matrix of $\mathcal{N}^{\text{fold}}(0, \mathbf{W}\mathbf{W}^\top)$ can be directly related $\mathbf{W}\mathbf{W}^\top$. Then, the task becomes estimating the covariance matrix of $\mathcal{N}^{\text{fold}}(0, \mathbf{W}\mathbf{W}^\top)$ from d independent samples (columns of \mathbf{Y}), which can be done by computing the empirical estimates.

3.2 Remove public images

In this section, we present the algorithm for subtracting public images from the Gram matrix. Formally, given any synthetic image $y^{\mathbf{X}, w}$ we recover the entire support of $[w]_{S_{\text{pub}}}$ (essentially $\text{supp}([w]_{S_{\text{pub}}})$).

Lemma 3.4 (Subtract public images from Gram matrix, [CLS21]). *Let $n = n_{\text{priv}} + n_{\text{pub}}$. For any $\delta \geq 0$, if*

$$d = \Omega(\text{poly}(k_{\text{pub}})/\log(n/\delta)),$$

then with probability at least $1 - \delta$ over the randomness of \mathbf{X} , we have that the coordinates output by LEARNPUBLIC are exactly equal to $\text{supp}([w]_{S_{\text{pub}}})$. Furthermore, LEARNPUBLIC runs in time

$$O(dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1}),$$

where $\omega \approx 2.373$ is the exponent of matrix multiplication [Wil12].

Note that this problem is closely related to the Gaussian phase retrieval problem. However, we can only access the public subset of coordinates for any image vector p_i . We denote these partial vectors as $\{[p_i]_{S_{\text{pub}}}\}_{i \in [d]}$. The first step is to construct a matrix $\widetilde{\mathbf{M}} \in \mathbb{R}^{n_{\text{pub}} \times n_{\text{pub}}}$:

$$\widetilde{\mathbf{M}} = \frac{1}{d} \sum_{i=1}^d ((y_i^{\mathbf{X}, w})^2 - 1) \cdot ([p_i]_{S_{\text{pub}}} [p_i]_{S_{\text{pub}}}^\top - \mathbf{I}).$$

It can be proved that when p_i 's are i.i.d standard Gaussian vectors, the expectation of $\widetilde{\mathbf{M}}$ is $\mathbf{M} = \frac{1}{2}[w]_{S_{\text{pub}}}[w]_{S_{\text{pub}}}^\top$. However, when $d \ll n$, $\widetilde{\mathbf{M}}$ is not a sufficiently good spectral approximation of \mathbf{M} , which means we cannot directly use the top eigenvector of $\widetilde{\mathbf{M}}$. Instead, with high probability $[w]_{S_{\text{pub}}}$ can be approximated by the top eigenvector of the solution of the following semi-definite programming (SDP):

$$\max_{Z \succeq 0} \langle \widetilde{\mathbf{M}}, Z \rangle \text{ s.t. } \text{tr}[Z] = 1, \sum_{i,j=1}^{n_{\text{pub}}} |Z_{i,j}| \leq k_{\text{pub}}.$$

Hence, the time complexity of this step is $O(dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1})$, where the first term is the time cost for constructing $\widetilde{\mathbf{M}}$ and the second term is the time cost for SDP [JKL⁺20, HJS⁺22].

3.3 Assigning encoded images to original images

We are now at the position of recovering $\mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}$ from private Gram matrix $\mathbf{M}_{\text{priv}} \in \mathbb{R}^{m \times m}$. Recall that $\mathbf{M}_{\text{priv}} = \mathbf{W}_{\text{priv}} \mathbf{W}_{\text{priv}}^\top \in \mathbb{R}^{m \times m}$ where $\mathbf{W}_{\text{priv}} \in \{0, 1\}^{m \times n_{\text{priv}}}$ is the mixup matrix with column sparsity k_{priv} . By recovering mixup matrix \mathbf{W} from private Gram matrix \mathbf{M} the attacker maps each synthetic image $y^{\mathbf{X}, w_i}, i \in [m]$ to two original images $x_{i_1}, \dots, x_{i_{k_{\text{priv}}}}$ (to be recovered in the next step) in the private data set, where $k_{\text{priv}} = 2$.

On the other hand, in order to recover the original image x_i from the private data set, the attacker needs to know precisely the set of synthetic images $y^{\mathbf{X}, w_i}, i \in [m]$ generated by x_i . Therefore this step is crucial to recover the original private images from InstaHide images. We provide an algorithm and certify that it outputs the private component of the mixup matrix with sample complexity $m = \Omega(n_{\text{priv}} \log n_{\text{priv}})$.

As noted by [CLS21], the intricacy of this step lies in the fact that a family of sets may not be uniquely identifiable from the cardinality of all pairwise intersections. This problem is formally stated in the following.

Problem 2 (Recover sets from cardinality of pairwise intersections). *Let $S_i \subset [n], i \in [m]$ be n sets with cardinality k . Given access to the cardinality of pairwise intersections $|S_i \cap S_j|$ for all $i, j \in [m]$, output a family of sets $\tilde{S}_i \subset [n], i \in [m]$ for which there exists a one-to-one mapping ϕ from $\tilde{S}_i, i \in [m]$ to $S_i, i \in [m]$ satisfying $\phi(\tilde{S}_j) = S_j$ for all $j \in [m]$.*

In real-world applications, attackers may not even have access to the precise cardinality of pairwise intersections $|S_i \cap S_j|$ for all $i, j \in [m]$ due to errors in retrieving the Gram matrix and public coordinates. Instead, attackers often face a harder version of the above problem, where they only know whether $|S_i \cap S_j|$ is an empty set for $i, j \in [m]$. However, for mixing two private images, the two problems are the same.

We now provide a solution to this problem. First, we define a concept closely related to the above problem.

Definition 3.5 (Distinguishable). *For matrix $\mathbf{M} \in \mathbb{R}^{m \times m}$, we say \mathbf{M} is distinguishable if there exists unique solution $\mathbf{W} = (w_1, \dots, w_m)^\top$ (up to permutation of rows) to the equation $\mathbf{W}\mathbf{W}^\top = \mathbf{M}$ such that $w_i \in \text{supp}(\mathcal{D}_{\text{priv}})$ for all $i \in [m]$.*

Lemma 3.6 (Assign InstaHide images to the original images). *When $m = \Omega(n_{\text{priv}} \log n_{\text{priv}})$, let $\mathbf{W}_{\text{priv}} = (w_1, \dots, w_m)^\top$ where $w_i, i \in [m]$ are sampled from distribution $\mathcal{D}_{\text{priv}}$ and $\mathbf{M}_{\text{priv}} = \mathbf{W}_{\text{priv}} \mathbf{W}_{\text{priv}}^\top \in \mathbb{R}^{m \times m}$. Then with high probability \mathbf{M}_{priv} is distinguishable and algorithm ASSIGNINGORIGINALIMAGES inputs private Gram matrix $\mathbf{M}_{\text{priv}} \in \{0, 1, 2\}^{m \times m}$ correctly outputs $\mathbf{W}_{\text{priv}} \in \{0, 1\}^{m \times n_{\text{priv}}}$ with row sparsity $k_{\text{priv}} = 2$ such that $\mathbf{W}_{\text{priv}} \mathbf{W}_{\text{priv}}^\top = \mathbf{M}_{\text{priv}}$. Furthermore ASSIGNINGORIGINALIMAGES runs in time $O(mn_{\text{priv}})$.*

The proof of Lemma 3.6 is deferred to Appendix C. We consider graph $G = (V, E), |V| = n_{\text{priv}}$ and $|E| = m$ where each $v_i \in V$ corresponds to an original image in private data set and each $e = (v_i, v_j) \in E$ correspond to an encrypted image generated from two original images corresponding to v_i and v_j . We define the Gram matrix of graph $G = (V, E)$, denoted by $\mathbf{M}_G \in \{0, 1, 2\}^{m \times m}$ where $m = |E|$, to be $\mathbf{M}_G = \mathbf{W}\mathbf{W}^\top - \mathbf{I}$ where $\mathbf{W} \in \{0, 1\}^{m \times n_{\text{priv}}}$ is the incidence matrix of G . That is ³

$$\mathbf{M}_G = \begin{bmatrix} |e_1 \cap e_1| & \cdots & |e_1 \cap e_m| \\ \vdots & \ddots & \vdots \\ |e_m \cap e_1| & \cdots & |e_m \cap e_m| \end{bmatrix} \in \{0, 1, 2\}^{m \times m}.$$

³With high probability, \mathbf{W} will not have multi-edge. So, most entries of \mathbf{M} will be in $\{0, 1\}$.

Algorithm 2 Assigning Original Images

```

1: procedure ASSIGNINGORIGINALIMAGES( $\mathbf{M}_{\text{priv}}, n_{\text{priv}}$ )
2:    $\triangleright \mathbf{M}_{\text{priv}} \in \mathbb{R}^{m \times m}$  is Private Gram matrix,  $n_{\text{priv}}$  is the number of private images
3:    $\mathbf{M}_G \leftarrow \mathbf{M}_{\text{priv}} - \mathbf{I}$ 
4:   if  $n_{\text{priv}} < 5$  then
5:     for  $H \in \{0, 1\}^{n_{\text{priv}} \times n_{\text{priv}}}$  do
6:        $\mathbf{M}_H \leftarrow$  adjacency matrix of the line graph of  $H$ 
7:       if  $\mathbf{M}_H = \mathbf{M}_G$  then
8:          $\widetilde{\mathbf{W}} \leftarrow \widetilde{\mathbf{W}} \cup \{\mathbf{W}_H\}$   $\triangleright \mathbf{W}_H$  is the incidence matrix of  $H$ 
9:       end if
10:    end for
11:    return  $\widetilde{\mathbf{W}}$ 
12:  end if
13:  Reconstruct  $G$  from  $\mathbf{M}_G$   $\triangleright$  By Theorem C.2
14:  return  $\mathbf{W}$   $\triangleright$  The incidence matrix of  $G$ 
15: end procedure

```

We can see that \mathbf{M}_G actually corresponds to the line graph $L(G)$ of the graph G . We similarly call a graph G distinguishable if there exists no other graph G' such that G and G' have the same Gram matrix (up to permutations of edges), namely $\mathbf{M}_G = \mathbf{M}_{G'}$ (for some ordering of edges). To put it in another word, if we know \mathbf{M}_G , we can recover G uniquely. Therefore, recovering \mathbf{W} from \mathbf{M} can be viewed as recovering graph G from its Gram matrix $\mathbf{M}_G \in \mathbb{R}^{m \times m}$, and a graph is distinguishable if and only if its Gram matrix \mathbf{M}_G is distinguishable.

This problem has been studied since the 1970s and fully resolved by Whitney [Whi92]. In fact, from a line graph $L(G)$ one can first identify a tree of the original graph G and then proceed to recover the whole graph. The proof is then completed from well-known facts in random graph theory [ER60] that G is connected with high probability when $m = \Omega(n_{\text{priv}} \log n_{\text{priv}})$. This paradigm can potentially be extended to handle $k \geq 3$ case with more information of G . Intuitively, this is achievable for a dense subgraph of G , such as the local structure identified by [CLSZ21]. It can also be achieved via a sparse Boolean matrix factorization by [CSTZ22]. More discussion can be found in Appendix C.

3.4 Solving a large system of equations

In this section, we solve Step 4, recovering all private images by solving an ℓ_2 -regression problem. Formally, given the mixup coefficients \mathbf{W}_{priv} (for private images) and contributions to InstaHide images from public images \mathbf{Y}_{pub} we recover all private images \mathbf{X}_{priv} (up to absolute value).

Lemma 3.7 (Solve ℓ_2 -regression with hidden signs). *Given $\mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}$ and $\mathbf{Y}_{\text{pub}}, \mathbf{Y} \in \mathbb{R}^{m \times d}$. For each $i \in [d]$, let $\mathbf{Y}_{*,i} \in \mathbb{R}^m$ denote the i -th column of \mathbf{Y} and similarly for $\mathbf{Y}_{\text{pub},*,i}$, the following ℓ_2 regression*

$$\min_{z_i \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{W}_{\text{priv}} z_i + \mathbf{Y}_{\text{pub},*,i} - \mathbf{Y}_{*,i}\|_2.$$

for all $i \in [d]$ can be solve by SOLVINGSYSTEMOFEQUATIONS in time $O(2^m \cdot mn_{\text{priv}}^2 \cdot d)$.

Our algorithm for solving the regression problem is given in Algorithm 3, and the proof is deferred to Appendix D.

Algorithm 3 Solving a large system of equations

```
1: procedure SOLVINGSYSTEMOFEQUATIONS( $\mathbf{W}_{\text{priv}}, \mathbf{Y}_{\text{pub}}, \mathbf{Y}$ )
2:    $\triangleright \mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}, \mathbf{Y}_{\text{pub}} \in \mathbb{R}^{m \times d}, \mathbf{Y} \in \mathbb{R}^{m \times d}$ 
3:   for  $i = 1 \rightarrow d$  do
4:      $\tilde{x}_i \leftarrow \emptyset$ 
5:     for  $\sigma \in \{-1, +1\}^m$  do
6:        $z \leftarrow \min_{z \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{W}_{\text{priv}} z + \mathbf{Y}_{\text{pub},*,i} - \sigma \circ \mathbf{Y}_{*,i}\|_2$ 
7:       if  $\text{sign}(\mathbf{W}_{\text{priv}} z + \mathbf{Y}_{\text{pub},*,i}) = \sigma$  then
8:          $\tilde{x}_i \leftarrow \tilde{x}_i \cup z$ 
9:       end if
10:    end for
11:  end for
12:   $\tilde{X} \leftarrow \{\tilde{x}_1, \dots, \tilde{x}_d\}$ 
13:  return  $\tilde{X}$ 
14: end procedure
```

Computational hardness result. We also show that ℓ_2 -regression with hidden signs is in fact a very hard problem. Although empirical methods may bypass this issue by directly applying gradient descent, real-world practitioners taking shortcuts would certainly suffer from a lack of apriori theoretical guarantees when facing a large private dataset.

Theorem 3.8 (Lower bound of ℓ_2 -regression with hidden signs, informal version of Theorem F.4.). *There exists a constant $\epsilon > 0$ such that it is NP-hard to $(1 + \epsilon)$ -approximate*

$$\min_{z \in \mathbb{R}^n} \|\mathbf{W}z - y\|_2,$$

where $\mathbf{W} \in \{0, 1\}^{m \times n}$ is row 2-sparse and $y \in \{0, 1\}^m$.

We will reduce the MAX-CUT problem to the ℓ_2 -regression. MAX-CUT is a well-known NP-hard problem [BK99]. A MAX-CUT instance is a graph $G = (V, E)$ with n vertices and m edges. The goal is to find a subset of vertices $S \subseteq V$ such that the number of edges between S and $V \setminus S$ is maximized, i.e., $\max_{S \subseteq V} |E(S, V \setminus S)|$. We can further assume G is 3-regular, that is, each vertex has degree 3.

The main idea of the proof is to carefully embed the graph into the matrix \mathbf{W} so that if this ℓ_2 -regression can be solved with high accuracy, then an approximated MAX-CUT can be extracted from the solution vector z . Therefore, based on the NP-hardness of approximating MAX-CUT, we can rule out the polynomial-time algorithm for ℓ_2 -regression with hidden signs. Furthermore, if we assume a fine-grained complexity-theoretic assumption (e.g., exponential time hypothesis (ETH) [IP01]), then we can even rule out subexponential-time algorithm for ℓ_2 -regression with only constant accuracy. The full proof is deferred to Appendix F.

We note that our lower bound is for \mathbf{W} in the worst case. It is an interesting open question to prove any average-case lower bound for this problem, i.e., can we still rule out a polynomial-time algorithm when \mathbf{W} and y are randomly sampled from some distributions?

4 Conclusion and Future Directions

We show that $\Omega(n_{\text{priv}} \log n_{\text{priv}})$ samples suffice to recover all private images under the current setup for InstaHide challenge of mixing two private images. We observe that a key step in attacking

can be formulated as line graph reconstruction and prove the uniqueness and hardness of recovery. Our approach has significantly advanced the state-of-the-art approach [CLSZ21] that requires $n_{\text{priv}}^{4/3}$ samples to recover a single private image, and the sample complexity of our algorithm indicates that under the current setup, InstaHide is not information-theoretically secure. On the other hand, our computational hardness result shows that InstaHide is computationally secure in the worst case. In addition, we present a theoretical framework to reason about the similarities and differences of existing attacks [CDG⁺20, CLSZ21] and our attack on InstaHide.

Based on our framework, there are several interesting directions for future study:

- How to generalize our results to recover all private images when mixing more than two private images?
- How to extend this framework to analyze multi-task phase retrieval problems with real-world data?
- How to relax the Gaussian distribution assumption of the dataset \mathbf{X} in this work and [CLSZ21]?

Real-world security is not a binary issue. We hope that our theoretical contributions shed light on the discussion of safety for distributed training algorithms and provide inspiration for the development of better practical privacy-preserving machine learning methods.

References

- [ACG⁺16] Martin Abadi, Andy Chu, Ian Goodfellow, H Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC conference on computer and communications security*, pages 308–318, 2016.
- [AG20] Mohammad Mohammadi Amiri and Deniz Gündüz. Federated learning over wireless fading channels. *IEEE Transactions on Wireless Communications*, 19(5):3546–3557, 2020.
- [AHW⁺17] Yoshinori Aono, Takuya Hayashi, Lihua Wang, Shiho Moriai, et al. Privacy-preserving deep learning via additively homomorphic encryption. *IEEE transactions on information forensics and security*, 13(5):1333–1345, 2017.
- [Aro20] Sanjeev Arora. How to allow deep learning on your data without revealing the data. <http://www.offconvex.org/2020/11/11/instahide/>, 2020.
- [BK99] Piotr Berman and Marek Karpinski. On some tighter inapproximability results. In *International Colloquium on Automata, Languages, and Programming*, pages 200–209. Springer, 1999.
- [CDG⁺20] Nicholas Carlini, Samuel Deng, Sanjam Garg, Somesh Jha, Saeed Mahloujifar, Mohammad Mahmoody, Shuang Song, Abhradeep Thakurta, and Florian Tramèr. An attack on instahide: Is private learning possible with instance encoding? *arXiv preprint arXiv:2011.05315*, 2020.
- [Cha20] InstaHide Challenge. Instahide challenge. <https://github.com/Hazelsuko07/InstaHideChallenge>, 2020.

- [CLS15] J Candes, Emmanuel, Xiaodong Li, and Mahdi. Soltanolkotabi. Phase retrieval via wirtinger flow: Theory and algorithms. *IEEE Transactions on Information Theory*, 61(4):1985–2007, 2015.
- [CLSZ21] Sitan Chen, Xiaoxiao Li, Zhao Song, and Danyang Zhuo. On instahide, phase retrieval, and sparse matrix factorization. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*, 2021.
- [CMS11] Kamalika Chaudhuri, Claire Monteleoni, and Anand D. Sarwate. Differentially private empirical risk minimization. *Journal of Machine Learning Research*, 12(29):1069–1109, 2011.
- [CSTZ22] Sitan Chen, Zhao Song, Runzhou Tao, and Ruizhe Zhang. Symmetric sparse boolean matrix factorization and applications. In *13th Innovations in Theoretical Computer Science Conference (ITCS 2022)*. Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2022.
- [CSV13] J Candes, Emmanuel, Thomas Strohmer, and Vladislav Voroninski. Phaselift: Exact and stable signal recovery from magnitude measurements via convex programming. *Communications on Pure and Applied Mathematics*, 66(8):1241–1274, 2013.
- [DDS⁺09] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition (CVPR)*, pages 248–255, 2009.
- [Den12] Li Deng. The mnist database of handwritten digit images for machine learning research [best of the web]. *IEEE signal processing magazine*, 29(6):141–142, 2012.
- [DMNS06] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography: Third Theory of Cryptography Conference, TCC 2006, New York, NY, USA, March 4-7, 2006. Proceedings 3*, pages 265–284. Springer, 2006.
- [DS95] Daniele Giorgio Degiorgi and Klaus Simon. A dynamic algorithm for line graph recognition. In *International Workshop on Graph-Theoretic Concepts in Computer Science*, pages 37–48. Springer, 1995.
- [ER60] Paul Erdős and Alfréd Rényi. On the evolution of random graphs. *Publ. Math. Inst. Hung. Acad. Sci*, 5(1):17–60, 1960.
- [FLP16] Dimitris Fotakis, Michael Lampis, and Vangelis Th Paschos. Sub-exponential approximation schemes for csps: From dense to almost sparse. In *33rd Symposium on Theoretical Aspects of Computer Science (STACS 2016)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2016.
- [GKN17] Robin C Geyer, Tassilo Klein, and Moin Nabi. Differentially private federated learning: A client level perspective. *arXiv preprint arXiv:1712.07557*, 2017.
- [HGS⁺21] Yangsibo Huang, Samyak Gupta, Zhao Song, Kai Li, and Sanjeev Arora. Evaluating gradient inversion attacks and defenses in federated learning. *Advances in Neural Information Processing Systems*, 34, 2021.

- [HJS⁺22] Baihe Huang, Shunhua Jiang, Zhao Song, Runzhou Tao, and Ruizhe Zhang. Solving SDP faster: A robust IPM framework and efficient implementation. In *63rd IEEE Annual Symposium on Foundations of Computer Science, FOCS 2022, Denver, CO, USA, October 31 - November 3, 2022*, pages 233–244. IEEE, 2022.
- [HSC⁺20] Yangsibo Huang, Zhao Song, Danqi Chen, Kai Li, and Sanjeev Arora. Texthide: Tackling data privacy in language understanding tasks. In *The Conference on Empirical Methods in Natural Language Processing (Findings of EMNLP)*, 2020.
- [HSLA20] Yangsibo Huang, Zhao Song, Kai Li, and Sanjeev Arora. Instahide: Instance-hiding schemes for private distributed learning. In *International Conference on Machine Learning (ICML)*, 2020.
- [IP01] Russell Impagliazzo and Ramamohan Paturi. On the complexity of k-sat. *Journal of Computer and System Sciences*, 62(2):367–375, 2001.
- [IRU⁺19] Nikita Ivkin, Daniel Rothchild, Enayat Ullah, Ion Stoica, Raman Arora, et al. Communication-efficient distributed sgd with sketching. *Advances in Neural Information Processing Systems*, 32, 2019.
- [JKL97] Michael S Jacobson, André E Kézdy, and Jenő Lehel. Recognizing intersection graphs of linear uniform hypergraphs. *Graphs and Combinatorics*, 13(4):359–367, 1997.
- [JKL⁺20] Haotian Jiang, Tarun Kathuria, Yin Tat Lee, Swati Padmanabhan, and Zhao Song. A faster interior point method for semidefinite programming. In *61st Annual IEEE Symposium on Foundations of Computer Science (FOCS)*, 2020.
- [KMY⁺16] Jakub Konečný, H Brendan McMahan, Felix X Yu, Peter Richtárik, Ananda Theertha Suresh, and Dave Bacon. Federated learning: Strategies for improving communication efficiency. *arXiv preprint arXiv:1610.05492*, 2016.
- [Kri12] Alex Krizhevsky. Learning multiple layers of features from tiny images. *University of Toronto*, 05 2012.
- [Leh74] Philippe GH Lehot. An optimal algorithm to detect a line graph and output its root graph. *Journal of the ACM (JACM)*, 21(4):569–575, 1974.
- [Lov77] L Lovász. Problem, beitrag zur graphentheorie und deren auwendungen, vorgstragen auf dem intern. koll, 1977.
- [LT93] AG Levin and Regina Iosifovna Tyshkevich. Edge hypergraphs. *Diskretnaya Matematika*, 5(1):112–129, 1993.
- [LTVM15] Dajie Liu, Stojan Trajanovski, and Piet Van Mieghem. Iliga: an efficient inverse line graph algorithm. *Journal of Mathematical Modelling and Algorithms in Operations Research*, 14(1):13–33, 2015.
- [LXW⁺21] Xinjian Luo, Xiaokui Xiao, Yuncheng Wu, Juncheng Liu, and Beng Chin Ooi. A fusion-denoising attack on instahide with data augmentation. *arXiv preprint arXiv:2105.07754*, 2021.
- [MMR⁺17] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguerre y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Artificial intelligence and statistics*, pages 1273–1282. PMLR, 2017.

- [NJS17] Praneeth Netrapalli, Prateek Jain, and Sujay. Sanghavi. Phase retrieval using alternating minimization. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 1273–1282, 2017.
- [PRT81] Svatopluk Poljak, Vojtěch Rödl, and Daniel TURZiK. Complexity of representation of graphs by set systems. *Discrete Applied Mathematics*, 3(4):301–312, 1981.
- [Rou73] Nicholas D Roussopoulos. A max $\{m, n\}$ algorithm for determining the graph h from its line graph g . *Information Processing Letters*, 2(4):108–112, 1973.
- [RTD⁺18] Theo Ryffel, Andrew Trask, Morten Dahl, Bobby Wagner, Jason Mancuso, Daniel Rueckert, and Jonathan Passerat-Palmbach. A generic framework for privacy preserving deep learning. *arXiv preprint arXiv:1811.04017*, 2018.
- [SS15] Reza Shokri and Vitaly Shmatikov. Privacy-preserving deep learning. In *Proceedings of the 22nd ACM SIGSAC conference on computer and communications security*, pages 1310–1321, 2015.
- [Sys82] Maciej M Syslo. A labeling algorithm to recognize a line digraph and output its root graph. *Information Processing Letters*, 15(1):28–30, 1982.
- [Whi92] Hassler Whitney. Congruent graphs and the connectivity of graphs. In *Hassler Whitney Collected Papers*, pages 61–79. Springer, 1992.
- [Wil12] Virginia Vassilevska Williams. Multiplying matrices faster than coppersmith-winograd. In *Proceedings of the forty-fourth annual ACM symposium on Theory of computing (STOC)*, pages 887–898. ACM, 2012.
- [XH21] Shangyu Xie and Yuan Hong. Reconstruction attack on instance encoding for language understanding. In *In Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing (EMNLP’21)*, 2021.
- [XLW⁺18] Liyang Xie, Kaixiang Lin, Shu Wang, Fei Wang, and Jiayu Zhou. Differentially private generative adversarial network. *arXiv preprint arXiv:1802.06739*, 2018.
- [ZCDLP17] Hongyi Zhang, Moustapha Cisse, Yann N. Dauphin, and David Lopez-Paz. mixup: Beyond empirical risk minimization. In *ICLR*, 2017.
- [Zve97] IE Zverovich. An analogue of the whitney theorem for edge graphs of multigraphs, and edge multigraphs. *Discrete Mathematics and Applications*, 7(3):287–294, 1997.

Appendix

Roadmap. In Section A, we present our unified framework for the InstaHide attacks. In Section B, we apply our framework to give a systematic analysis of the attack in [CDG⁺20]. In Section C, we give the missing proof of Theorem 3.6. In Section D, we give the missing proof of Lemma 3.7. In Section E, we provide the missing of Theorem 3.1. In Section F, we show a computational lower bound for the attacking problem.

A A Unified Framework to Compare With Existing Attacks

Table 1: A summary of running times in different steps between ours and [CLSZ21]. This table only compares the theoretical results. Let k_{priv} denote the number of private images we select in InstaHide image. Let d denote the dimension of the image. Let n_{pub} denote the number of images in the public dataset. Let n_{priv} denote the number of images in the private dataset. We provide a computational lower bound for Step 4 in Appendix F. There is no algorithm that solves Step 4 in $2^{o(n_{\text{priv}})}$ time under Exponential Time Hypothesis (ETH) (Theorem F.4). Let **Rec.** denote the Recover.

Refs	Rec.	k_{priv}	Samples	Step 1	Step 2	Step 3	Step 4
Chen	one	≥ 2	$m \geq n^{k_{\text{priv}}-2/(k_{\text{priv}}+1)}$	dm^2	$dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1}$	m^2	$2^{k_{\text{priv}}^2}$
Ours	all	$= 2$	$m \geq n_{\text{priv}} \log n_{\text{priv}}$	dm^2	$dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1}$	mn_{priv}	$2^m \cdot n_{\text{priv}}^2 d$

Our attack algorithm (Algorithm 1) contains four steps for $k_{\text{priv}} = 2$. We can prove $m = O(n_{\text{priv}} \log(n_{\text{priv}}))$ suffices for exact recovery. Our algorithm shares similarities with two recent attack results: one is a practical attack [CDG⁺20], and the other is a theoretical attack [CLSZ21]. In the next few paragraphs, we describe our attack algorithm in four major steps. For each step, we also give a comparison with the corresponding step in [CDG⁺20] and [CLSZ21].

- **Step 1.** Section 3.1. Recover the Gram matrix $\mathbf{M} = \mathbf{W}\mathbf{W}^\top \in \mathbb{R}^{m \times m}$ of mixup weights \mathbf{W} from synthetic images \mathbf{Y} . This Gram matrix contains all inner products of mixup weights $\langle w_i, w_j \rangle$. Intuitively this measures the similarity of each pair of two synthetic images and is a natural start of all existing attacking algorithms.
 - For this step, [CDG⁺20]’s attack uses a pre-trained neural network on the public dataset to construct the Gram matrix.
 - For this step, note that \mathbf{Y} follows folded Gaussian distribution whose covariance matrix is directly related to \mathbf{M} . We can thus solve this step by estimating the covariance of a folded Gaussian distribution. This is achieved by using Algorithm 2 in [CLSZ21]. It takes $O(m^2 d)$ time.
- **Step 2.** Section 3.2. Recover all public image coefficients and subtract the contribution of public coefficients from the Gram matrix \mathbf{M} to obtain \mathbf{M}_{priv} . This step is considered as one of the main computational obstacles for private image recovery.
 - For this step, [CDG⁺20]’s attack: 1) they treat public images as noise, 2) they don’t need to take care of the public images’ labels, since current InstaHide Challenge doesn’t provide a label for public images.
 - For this step, we invoke a paradigm in sparse phase retrieval by using a general SDP solver to approximate the principle components of the Gram matrix of public coefficients.

[CLSZ21] proved that this method exactly outputs all public coefficients. The time of this step has two parts: 1) formulating the matrix, which takes dn_{pub}^2 , 2) solving an SDP with $n_{\text{pub}}^2 \times n_{\text{pub}}^2$ size matrix variable and $O(n_{\text{pub}}^2)$ constraints, which takes $n_{\text{pub}}^{2\omega+1}$ time [JKL⁺20, HJS⁺22], where ω is the exponent of matrix multiplication.

- **Step 3.** Section 3.3. Recover private coefficients $\mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}$ from private Gram matrix \mathbf{M}_{priv} ($\mathbf{M}_{\text{priv}} = \mathbf{W}_{\text{priv}} \mathbf{W}_{\text{priv}}^\top$), this step takes $O(m \cdot n_{\text{priv}}^2)$ time.
 - For this step, [CDG⁺20]’s attack uses K -means to figure out cliques and then solves a min-cost max flow problem to find the correspondence between InstaHide image and original image (see Appendix B for detailed discussions).
 - For this step [CLSZ21] starts by finding a local structure called “floral matrix” in the Gram matrix. They prove the existence of this local structure when $m \geq n_{\text{priv}}^{k_{\text{priv}}-2/(k_{\text{priv}}+1)}$. Then [CLSZ21] can recover private coefficients within that local structure using nice combinatorial properties of the “floral matrix”.
 - For this step, we note the fact that in $k_{\text{priv}} = 2$ case the mixup matrix corresponds to the incident matrix of a graph G and the Gram matrix corresponds to its line graph $L(G)$ (while $k_{\text{priv}} \geq 3$ cases correspond to hypergraphs). We can then leverage results in graph isomorphism theory to recover all private coefficients. In particular, when $m \geq \Omega(n_{\text{priv}} \log n_{\text{priv}})$ the private coefficients are uniquely identifiable from the Gram matrix.
- **Step 4.** Section 3.4. Solve d independent ℓ_2 -regression problems to find private images X_{priv} . Given $\mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}$ and $\mathbf{Y} \in \mathbb{R}^{m \times d}$. For each $i \in [d]$, let $\mathbf{Y}_{*,i} \in \mathbb{R}^m$ denote the i -th column of \mathbf{Y} , we need to solve the following ℓ_2 regression

$$\min_{z \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{W}_{\text{priv}} z + \mathbf{Y}_{\text{pub},*} - \mathbf{Y}_{*,i}\|_2.$$

The classical ℓ_2 regression can be solved in an efficient way in both theory and practice. However, here we don’t know the random signs and we have to consider all 2^m possibilities. In fact, we show that solving ℓ_2 regression with hidden signs is NP-hard.

- For this step, [CDG⁺20]’s attack is a heuristic algorithm that uses gradient descent.
- For this step, we enumerate all possibilities of random signs to reduce it to standard ℓ_2 regressions. [CLSZ21]’s attack is doing the exact same thing as us. However, since their goal is just recovering one private image (which means $m = O(k^2)$) they only need to guess 2^{k^2} possibilities.

B Summary of the Attack by [CDG⁺20]

This section summarizes the result of Carlini et al, which is an attack of InstaHide when $k_{\text{priv}} = 2$. [CDG⁺20]. We first briefly describe the current version of InstaHide Challenge. Suppose there are n_{priv} private images, the InstaHide authors [HSLA20] first choose a parameter T , this can be viewed as the number of iterations in the deep learning training process. For each $t \in [T]$, [HSLA20] draws a random permutation $\pi_t : [n_{\text{priv}}] \rightarrow [n_{\text{priv}}]$. Each InstaHide image is constructed from a private image i , another private image $\pi_t(i)$ and also some public images. Therefore, there are $T \cdot n_{\text{priv}}$ InstaHide images in total. Here is a trivial observation: each private image shown up in exactly $2T$ InstaHide images (because $k_{\text{priv}} = 2$). The model in [CLSZ21] is a different one: each InstaHide

image is constructed from two random private images and some random public images. Thus, the observation that each private image appears exactly $2T$ does not hold. In the current version of InstaHide Challenge, the InstaHide authors create the InstaHide labels (a vector that lies in \mathbb{R}^L where the L is the number of classes in image classification task) in a way that the label of an InstaHide image is a linear combination of labels (i.e., one-hot vectors) of the private images and not the public images. This is also a major difference compared with [CLS21]. Note that [CDG⁺20] won't be confused about, for the label of an InstaHide image, which coordinates of the label vector are from the private images and which are from the public images.

- **Step 1.** Recover a similarity⁴ matrix $\mathbf{M} \in \{0, 1, 2\}^{m \times m}$.
 - Train a deep neural network based on all the public images, and use that neural network to construct the similarity matrix \mathbf{M} .
- **Step 2.** Treat public image as noise.
- **Step 3. Clustering.** This step is divided into 3 substeps.

The first substep uses the similarity matrix \mathbf{M} to construct Tn_{priv} clusters of InstaHide images based on each InstaHide image such that the images inside one cluster shares a common original image.

The second substep runs K -means on these clusters, to group clusters into n_{priv} groups such that each group corresponds to one original image.

The third substep constructs a min-cost flow graph to compute the two original images that each InstaHide image is mixed from.

- **Grow clusters.** Figure 1 illustrates an example of this step. For a subset S of InstaHide images ($S \subset [m]$), we define $\text{INSERT}(S)$ as

$$\text{INSERT}(S) = S \cup \arg \max_{i \in [m]} \sum_{j \in S} \mathbf{M}_{i,j}$$

For each $i \in [m]$, we compute set $S_i \subset [m]$ where $S_i = \text{INSERT}^{(T/2)}(\{i\})$.

- **Select cluster representatives.** Figure 1 illustrates an example of this step. Define distance between clusters as

$$\text{dist}(i, j) = \frac{|S_i \cap S_j|}{|S_i \cup S_j|}.$$

Run k -means using metric $\text{dist} : [m] \times [m] \rightarrow \mathbb{R}$ and $k = n_{\text{priv}}$. Result is n_{priv} groups $C_1, \dots, C_{n_{\text{priv}}} \subseteq [m]$. Randomly select a representative $r_i \in C_i$, for each $i \in [n_{\text{priv}}]$.

- **Computing assignments.** Construct a min-cost flow graph as Figure 2, with weight matrix $\mathbf{W} \in \mathbb{R}^{m \times n_{\text{priv}}}$ defined as follows:

$$\widetilde{\mathbf{W}}_{i,j} = \frac{1}{|S_{r_j}|} \sum_{k \in S_{r_j}} \mathbf{M}_{i,k}.$$

for $i \in [m], j \in [n_{\text{priv}}]$. After solving the min-cost flow (Figure 3), construct the assignment matrix $\mathbf{W} \in \mathbb{R}^{m \times n_{\text{priv}}}$ such that $\mathbf{W}_{i,j} = 1$ if the edge from i to j has flow, and 0 otherwise.

⁴In [CDG⁺20], they call it similarity matrix, in [CLS21] they call it Gram matrix. Here, we follow [CDG⁺20] for convenience.

- **Step 4.** Recover original image. From Step 3, we have the unweighted assignment matrix $\mathbf{W} \in \{0, 1\}^{m \times n_{\text{priv}}}$. Before we recover the original image, we need to first recover the weight of mixing, which is represented by the weighted assignment matrix $\mathbf{U} \in \mathbb{R}^{m \times n_{\text{priv}}}$. To recover weight, we first recover the label for each cluster group, and use the recovered label and the mixed label to recover the weight.

- First, we recover the label for each cluster, for all $i \in [n_{\text{priv}}]$. Let L denote the number of classes in the classification task of InstaHide application. For $j \in [m]$, let $y_j \in \mathbb{R}^L$ be the label of j .

$$\text{label}(i) = \bigcap_{j \in [m], \mathbf{W}_{j,i}=1} \text{supp}(y_j) \in [L].$$

Then, for $i \in [m]$ and $j \in [n_{\text{priv}}]$ such that $\mathbf{W}_{i,j} = 1$, define $\mathbf{U}_{i,j} = y_{i,\text{label}(j)}$ for $|\text{supp}(y_i)| = 2$ and $\mathbf{U}_{i,j} = y_{i,\text{label}(j)}/2$ for $|\text{supp}(y_i)| = 1$.

Here, $\mathbf{W} \in \{0, 1\}^{m \times n_{\text{priv}}}$ is the unweighted assignment matrix and $\mathbf{U} \in \mathbb{R}^{m \times n_{\text{priv}}}$ is the weighted assignment matrix. For $\mathbf{W}_{i,j} = 0$, let $\mathbf{U}_{i,j} = 0$.

- Second, for each pixel $i \in [d]$, we run gradient descent to find the original images. Let $\mathbf{Y} \in \mathbb{R}^{m \times d}$ be the matrix of all InstaHide images, $\mathbf{Y}_{*,i}$ denote the i -th column of \mathbf{Y} .⁵

$$\min_{z \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{U}z - \mathbf{Y}_{*,i}\|_2.$$

C Missing Proofs for Theorem 3.6

For simplicity, let \mathbf{W} denote \mathbf{W}_{priv} and \mathbf{M} denote \mathbf{M}_{priv} in this section.

C.1 A graph problem ($k_{\text{priv}} = 2$)

Theorem C.1 ([Whi92]). *Suppose G and H are connected simple graphs and $L(G) \cong L(H)$. If G and H are not K_3 and $K_{1,3}$, then $G \cong H$. Furthermore, if $|V(G)| \geq 5$, then an isomorphism of $L(G)$ uniquely determines an isomorphism of G .*

In other words, this theorem claims that given $\mathbf{M} = \mathbf{W}\mathbf{W}^\top$, if the underlying \mathbf{W} is not the incident matrix of K_3 or $K_{1,3}$, \mathbf{W} can be uniquely identified up to permutation. Theorem C.1 can also be generalized to the case when G has multi-edges [Zve97].

On the other hand, a series of work [Rou73, Leh74, Sys82, DS95, LTVM15] showed how to efficiently reconstruct the original graph from its line graph:

Theorem C.2 ([LTVM15]). *Given a graph L with m vertices and t edges, there exists an algorithm that runs in time $O(m + t)$ to decide whether L is a line graph and output the original graph G . Furthermore, if L is promised to be the line graph of G , then there exists an algorithm that outputs G in time $O(m)$.*

With Theorem C.1 and Theorem C.2, Theorem 3.6 follows immediately:

Proof of Theorem 3.6. First, since $m = \Omega(n_{\text{priv}} \log(n_{\text{priv}}))$, a well-known fact in random graph theory by Erdős and Rényi [ER60] showed that the graph G with incidence matrix \mathbf{W} will almost surely

⁵The description of the attack in [CDG⁺20] recovers original images by using gradient descent for $\min_{z \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{U}z - \mathbf{Y}_{*,i}\|_2$, which we believe is a typo.

be connected. Then, we compute $\mathbf{M}_G = \mathbf{M} - \mathbf{I}$, the adjacency matrix of the line graph $L(G)$. Theorem C.1 implies that G can be uniquely recovered from \mathbf{M}_G as long as n_{priv} is large enough. Finally, We can reconstruct G from \mathbf{M}_G by Theorem C.2.

For the time complexity of Algorithm 2, the reconstruction step can be done in $O(m)$ time. Since we need to output the matrix \mathbf{W} , we will take $O(mn_{\text{priv}})$ -time to construct the adjacency matrix of G . Here, we do not count the time for reading the whole matrix \mathbf{M} into memory. \square

C.2 General case ($k_{\text{priv}} > 2$)

The characterization of \mathbf{M} and \mathbf{W} as the line graph and incidence graph can be generalized to $k_{\text{priv}} > 2$ case, which corresponds to hypergraphs.

Suppose $\mathbf{M} = \mathbf{W}\mathbf{W}^\top$ with $k_{\text{priv}} = k > 2$. Then, \mathbf{W} can be recognized as the incidence matrix of a k -uniform hypergraph G , i.e., each hyperedge contains k vertices. $\mathbf{M}_G = \mathbf{M} - \mathbf{I}$ corresponds to adjacency matrix of the line graph of hypergraph G : $(\mathbf{M}_G)_{i,j} = |e_i \cap e_j|$ for e_i, e_j being two hyperedges. Now, we can see that each entry of \mathbf{M}_G is in $\{0, \dots, k\}$.

Unfortunately, the identification problem becomes very complicated for hypergraphs. Lovász [Lov77] stated the problem of characterizing the line graphs of 3-uniform hypergraphs and noted that Whitney’s isomorphism theorem (Theorem C.1) cannot be generalized to hypergraphs. Hence, we may not be able to uniquely determine the underlying hypergraph and we should just consider a more basic problem:

Problem C.3 (Line graph recognition for hypergraph). *Given a simple graph $L = (V, E)$ and $k \in \mathbb{N}$, decide if L is the line graph of a k -uniform hypergraph G .*

Even for the recognition problem, it was proved to be NP-complete for fixed $k \geq 3$ [LT93, PRT81]. However, Problem C.3 becomes tractable if we add more constraints to the underlying hypergraph G . First, suppose G is a linear hypergraph, i.e., the intersection of two hyperedges is at most one. If we further assume the minimum degree of G is at least 10, i.e., each vertex are in at least 10 hyperedges, there exists a polynomial-time algorithm for the decision problem. Similar result also holds for $k > 3$ [JKL97]. Let the edge-degree of a hyperedge be the number of triangles in the hypergraph containing that hyperedge. [JKL97] showed that assuming the minimum edge-degree of G is at least $2k^2 - 3k + 1$, there exists a polynomial-time algorithm to decide whether L is the line graph of a linear k -uniform hypergraph. Furthermore, in the yes case, the algorithm can also reconstruct the underlying hypergraph. We also note that without any constraint on minimum degree or edge-degree, the complexity of recognizing line graphs of k -uniform linear hypergraphs is still unknown.

D Missing Proof for Lemma 3.7

Lemma D.1 (Solve ℓ_2 -regression with hidden signs, Restatement of Lemma 3.7). *Given $\mathbf{W}_{\text{priv}} \in \mathbb{R}^{m \times n_{\text{priv}}}$ and $\mathbf{Y}_{\text{pub}}, \mathbf{Y} \in \mathbb{R}^{m \times d}$. For each $i \in [d]$, let $\mathbf{Y}_{*,i} \in \mathbb{R}^m$ denote the i -th column of \mathbf{Y} and similarly for $\mathbf{Y}_{\text{pub},*,i}$, the following ℓ_2 regression*

$$\min_{z_i \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{W}_{\text{priv}} z_i + \mathbf{Y}_{\text{pub},*,i} - \mathbf{Y}_{*,i}\|_2.$$

for all $i \in [d]$ can be solve by SOLVINGSYSTEMOFEQUATIONS in time $O(2^m \cdot mn_{\text{priv}}^2 \cdot d)$.

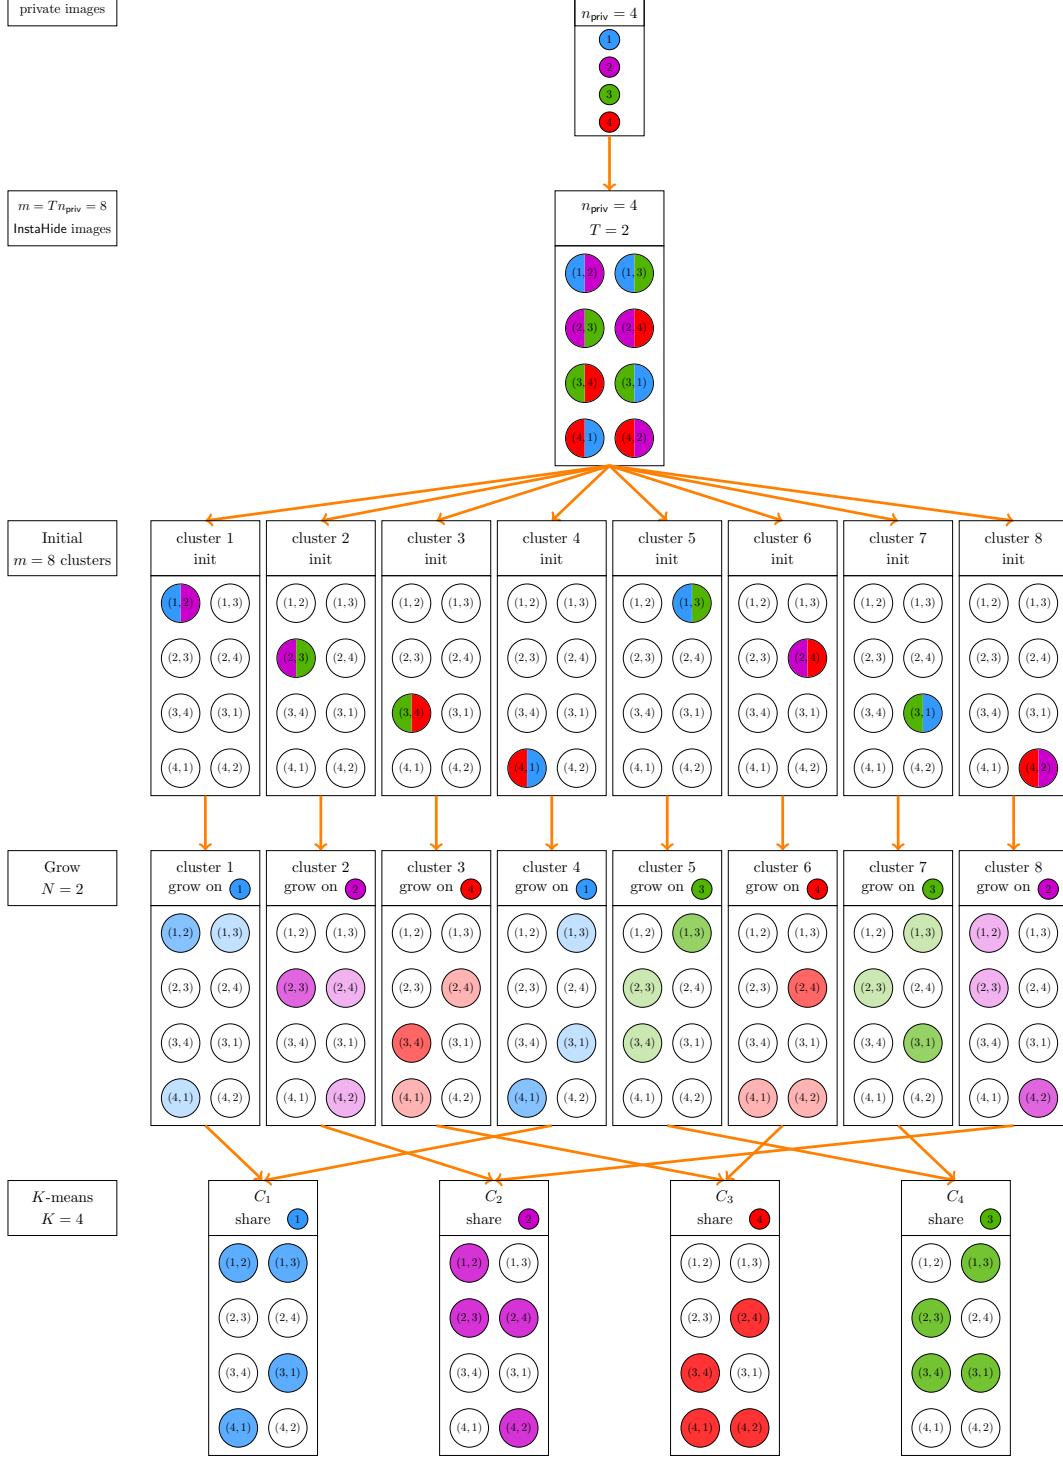


Figure 1: An example about cluster step in [CDG⁺20] for $T = 2$ and $n_{\text{priv}} = 4$. First, starting from each InstaHide image (top), the algorithm grows cluster S_i with size 3 (middle). Then, we use K -means for $K = 4$ to compute 4 groups C_1, \dots, C_4 (bottom), these groups each correspond to one original image.

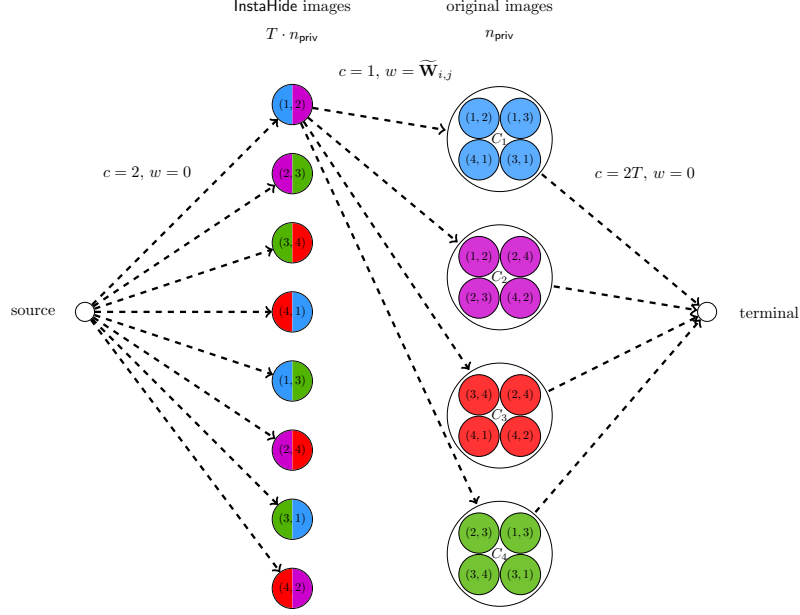


Figure 2: The construction of the graph for min-cost max flow. c denotes the flow capacity of the edge, and w denote the weight of the edge. The graph contains $T \cdot n_{\text{priv}}$ nodes for each InstaHide images, n_{priv} nodes for each original images, a source and a terminal. There are three types of edges: i) (left) from the source to each InstaHide image node, with flow capacity 2 and weight 0; ii) (middle) from each InstaHide image node i to each original image node j , with flow capacity 1 and weight $\widetilde{\mathbf{W}}_{i,j}$; iii) (right) from each original image node to the terminal, with flow capacity $2T$ and weight 0.

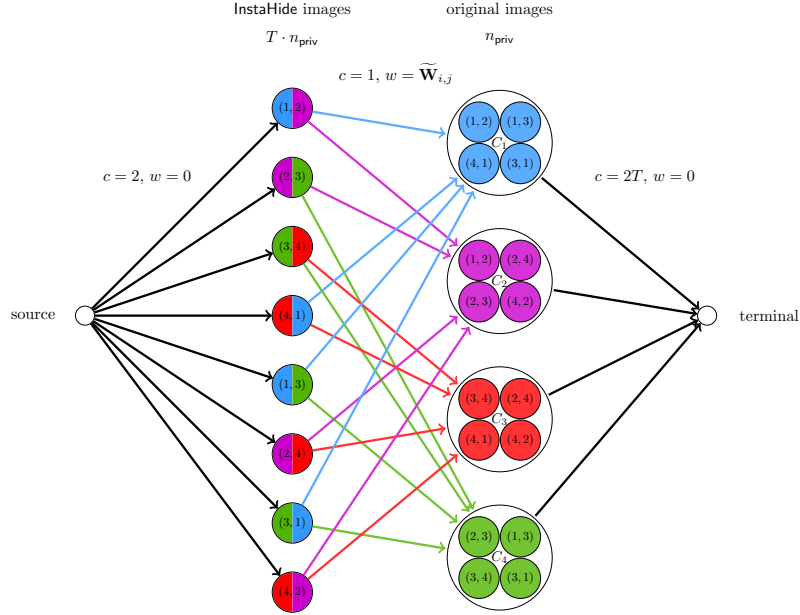


Figure 3: The result of solving the min-cost flow in Figure 2. Each InstaHide image is assigned to two clusters, which ideally correspond to two original images. In reality, a cluster may not contain all InstaHide images that share the same original image.

Proof. Suppose

$$\mathbf{W}_{\text{priv}} = \begin{bmatrix} | & | & \cdots & | \\ w_1 & w_2 & \cdots & w_m \\ | & | & \cdots & | \end{bmatrix}^\top.$$

and fix a coordinate $i \in [d]$.

Then, the ℓ_2 -regression we considered for the i -th coordinate actually minimizes

$$\begin{aligned} & \min_{z_i \in \mathbb{R}^{n_{\text{priv}}}} \sum_{j=1}^m (|w_j^\top z_i + \mathbf{Y}_{\text{pub},j,i}| - \mathbf{Y}_{j,i})^2 \\ &= \min_{z_i \in \mathbb{R}^{n_{\text{priv}}}} \sum_{j=1}^m (w_j^\top z_i + \mathbf{Y}_{\text{pub},j,i} - \sigma_j \cdot \mathbf{Y}_{j,i})^2, \end{aligned}$$

where $\sigma_j \in \{-1, 1\}$ is the sign of $w_j z_i^*$ for the minimizer z_i^* .

Therefore, in Algorithm 3, we enumerate all possible $\sigma \in \{\pm 1\}^m$. Once σ is fixed, the optimization problem becomes the usual ℓ_2 -regression, which can be solved in $O(n_{\text{priv}}^\omega + mn_{\text{priv}}^2)$ time. Since we assume $m = \Omega(n_{\text{priv}} \log(n_{\text{priv}}))$ in the previous step, the total time complexity is

$$O(2^m \cdot mn_{\text{priv}}^2).$$

If $\text{sign}(\mathbf{W}_{\text{priv}} z + \mathbf{Y}_{\text{pub},*,i}) = \sigma$ holds for

$$z = \min_{z \in \mathbb{R}^{n_{\text{priv}}}} \|\mathbf{W}_{\text{priv}} z + \mathbf{Y}_{\text{pub},*,i} - \sigma \circ \mathbf{Y}_{*,i}\|_2,$$

then

$$\sum_{j=1}^m (|w_j^\top z_i + \mathbf{Y}_{\text{pub},j,i}| - \mathbf{Y}_{j,i})^2 = 0$$

and z is the unique minimizer of the signed ℓ_2 -regression problem almost surely.

Indeed, if we have for $\sigma \neq \tilde{\sigma}$,

$$\mathbf{W}_{\text{priv}}(X_{\text{priv}}^\top)_{*,i} + \mathbf{Y}_{\text{pub},*,i} - \sigma \circ \mathbf{Y}_{*,i} = 0$$

and

$$\mathbf{W}_{\text{priv}} \tilde{z} + \mathbf{Y}_{\text{pub},*,i} - \tilde{\sigma} \circ \mathbf{Y}_{*,i} = 0$$

hold, then from direct calculations we come to

$$\mathbf{W}_{\text{priv}} \tilde{z} = \sigma \circ \tilde{\sigma} \circ (\mathbf{W}_{\text{priv}}(X_{\text{priv}}^\top)_{*,i} + \mathbf{Y}_{\text{pub},*,i}) - \mathbf{Y}_{\text{pub},*,i}.$$

This indicates that

$$\sigma \circ \tilde{\sigma} \circ (\mathbf{W}_{\text{priv}}(X_{\text{priv}}^\top)_{*,i} + \mathbf{Y}_{\text{pub},*,i}) - \mathbf{Y}_{\text{pub},*,i}$$

lies in a n_{priv} -dimensional subspace of \mathbb{R}^m . Noting that $(X_{\text{priv}}^\top)_{j,i}$ and $\mathbf{Y}_{\text{pub},j,i}$ are i.i.d sampled from Gaussian, the event above happens with probability zero since $m \gg n_{\text{priv}}$. Thus, we can repeat this process for all $i \in [d]$ and solve all z_i 's. \square

Remark D.2. From the above proof, we can see that Algorithm 3 also works for more general mixing methods:

- Suppose each synthetic image is generated by randomly picking 2 private images with k_{pub} public images and applying a function $\sigma_1 : \mathbb{R}^d \rightarrow \mathbb{R}^d$ to the linear combination of these images. If $|\sigma_1^{-1}(x)| \leq c_1$ for all $x \in \mathbb{R}^d$, then Step 4 takes $O(c_1^m \cdot mn_{\text{priv}}^2 d)$ time.
- Suppose the synthetic image is generated in the same way but applying a function $\sigma_2 : \mathbb{R} \rightarrow \mathbb{R}$ to each coordinate of the linear combination of selected images. If $|\sigma_2^{-1}(x)| \leq c_2$ for all $x \in \mathbb{R}$ (in most cases $c_2 \ll c_1$), then Step 4 takes $O(c_2^m \cdot mn_{\text{priv}}^2 d)$ time.

E Missing Proof for Theorem 3.1

In this section, we provide the proof of Theorem 3.1.

Proof. By Lemma 3.3 the matrix computed in Line 4 satisfies $\mathbf{M} = \mathbf{W}\mathbf{W}^\top$. By Lemma 3.4, Line 7 correctly computes the indices of all public coordinaes of $w_i, i \in [m]$. Therefore from

$$\begin{aligned} \mathbf{M} &= \mathbf{W}\mathbf{W}^\top \\ &= \mathbf{W}_{\text{priv}}\mathbf{W}_{\text{priv}}^\top/k_{\text{priv}} + \mathbf{W}_{\text{pub}}\mathbf{W}_{\text{pub}}^\top/k_{\text{pub}}, \end{aligned}$$

the Gram matrix computed in Line 10 satisfies

$$\mathbf{M}_{\text{priv}} = \mathbf{W}_{\text{priv}}\mathbf{W}_{\text{priv}}^\top.$$

We can now apply Lemma 3.6 to find the private components of mixup weights. Indeed, the output of Line 12 is exactly

$$\mathbf{W}_{\text{priv}} = k_{\text{priv}} \cdot \begin{bmatrix} \text{priv}(\mathbf{W}_{1,*}) \\ \vdots \\ \text{priv}(\mathbf{W}_{m,*}) \end{bmatrix} \in \{0, 1\}^{m \times n_{\text{priv}}}.$$

Based on the correctness of private weights, the output in Line 15 is exactly all private images by Lemma 3.7. This completes the proof of correctness of Algorithm 1.

By Lemma 3.3, Line 4 takes in time

$$O(m^2 d).$$

By Lemma 3.4 Line 7 runs in time

$$O(dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1}).$$

By Lemma 3.6 private weights can be computed in time

$$mn_{\text{priv}}.$$

Line 10 and Line 14 can be computed efficiently in time

$$O(m^\omega).$$

Finally Line 15 is computes in time

$$O(2^m \cdot mn_{\text{priv}}^2 \cdot d)$$

by Lemma 3.7.

Combining all these steps, the total running time of Algorithm 1 is bounded by

$$O(m^2 d + dn_{\text{pub}}^2 + n_{\text{pub}}^{2\omega+1} + mn_{\text{priv}}^2 + 2^m \cdot mn_{\text{priv}}^2 d).$$

Thus, we complete the proof. \square

F Computational Lower Bound

The goal of this section is to prove that the ℓ_2 -regression with hidden signs is actually a very hard problem, even for approximation (Theorem F.4), which implies that Algorithm 3 cannot be significantly improved. For simplicity we consider $S_{\text{pub}} = \emptyset$.

We first state an NP-hardness of approximation result for 3-regular MAX-CUT.

Theorem F.1 (Inapproximability of 3-regular MAX-CUT, [BK99]). *For every $\epsilon > 0$, it is NP-hard to approximate 3-regular MAX-CUT within a factor of $r + \epsilon$, where $r \approx 0.997$.*

If we assume the Exponential Time Hypothesis (ETH), which a plausible assumption in theoretical computer science, we can get stronger lower bound for MAX-CUT.

Definition F.2 (Exponential Time Hypothesis (ETH), [IP01]). *There exists a constant $\epsilon > 0$ such that the time complexity of n -variable 3SAT is at least $2^{\epsilon n}$.*

Theorem F.3 ([FLP16]). *Assuming ETH, there exists a constant $0 < r' < 1$ such that no $2^{o(n)}$ -time algorithm can r' -approximate the MaxCut of an n -vertex, 5-regular graph.*

With Theorem F.1 and Theorem F.3, we can prove the following inapproximability result for the ℓ_2 -regression problem with hidden signs.

Theorem F.4 (Lower bound of ℓ_2 -regression with hidden signs). *There exists a constant $\epsilon > 0$ such that it is NP-hard to $(1 + \epsilon)$ -approximate*

$$\min_{z \in \mathbb{R}^n} \|Wz - y\|_2, \quad (1)$$

where $W \in \{0, 1\}^{m \times n}$ is row 2-sparse and $y \in \{0, 1\}^m$.

Furthermore, assuming ETH, there exists a constant ϵ' such that no $2^{o(n)}$ -time algorithm can ϵ' -approximate Eq. (1).

Proof. Given a 3-regular MAX-CUT instance G , we construct an ℓ_2 -regression instance (W, y) with $W \in \{0, 1\}^{m' \times n}$ and $y \in \{0, 1\}^{m'}$ where $m' = m + cn = (1 + 3c/2)m$ and $c = 10^6$ as follows.

- For each $i \in [m]$, let the i -th edge of G be $e_i = \{u, v\}$. We set $W_{i,*}$ to be all zeros except the u -th and v -th coordinates being one. That is, we add a constraint $|z_u + z_v|$. And we set $y_i = 0$.
- For each $j \in [n]$, we set $W_{m+c(j-1)+1,*}, \dots, W_{m+cj,*}$ to be all zero vectors except the j -th entry being one. That is, we add c constraints of the form $|z_j|$. And $y_{m+c(j-1)+1} = \dots = y_{m+cj} = 1$.

Completeness. Let opt be the optimal value of max-cut of G and let S_{opt} be the optimal subset. Then, for each $u \in S_{\text{opt}}$, we set $z_u = 1$; and for $u \notin S_{\text{opt}}$, we set $z_u = -1$. For the first type constraints $|z_u + z_v|$, if u and v are cut by S_{opt} , then $|z_u + z_v| = 0$; otherwise $|z_u + z_v| = 2$. For the second type constraints $|z_j|$, all of them are satisfied by our assignment. Thus, $\|Wz - y\|_2^2 = 4(m - \text{opt})$.

Soundness. Let η be a constant such that $r < \eta < 1$, where r is the approximation lower bound in Theorem F.1. Let $\delta = \frac{1-\eta}{10c}$. We will show that, if there exists a z such that $\|Wz - y\|_2^2 \leq \delta m'$, then we can recover a subset S with cut-size ηm .

It is easy to see that the optimal solution lies in $[-1, 1]^n$. Since for $z \notin [-1, 1]^n$, we can always transform it to a new vector $z' \in [-1, 1]^n$ such that $\|Wz' - y\|_2 \leq \|Wz - y\|_2$.

Suppose $z \in \{-1, 1\}^n$ is a Boolean vector. Then, we can pick $S = \{i \in [n] : z_i = 1\}$. We have the cut-size of S is

$$\begin{aligned} |E(S, V \setminus S)| &\geq m - \delta m' / 4 \\ &= m - \delta(1 + 3c/2)m/4 \\ &= (1 - \delta/4 - 3c\delta/8)m \\ &\geq \eta m, \end{aligned}$$

where the last step follows from $\delta \leq \frac{8(1-\eta)}{2+6c}$.

For general $z \in [-1, 1]^n$, we first round z by its sign: let $\bar{z}_i = \text{sign}(z_i)$ for $i \in [n]$. We will show that

$$\|W\bar{z} - y\|_2^2 - \|Wz - y\|_2^2 \leq \frac{48}{c}m$$

which implies

$$\begin{aligned} \|W\bar{z} - y\|_2^2 &= \|Wz - y\|_2^2 + (\|W\bar{z} - y\|_2^2 - \|Wz - y\|_2^2) \\ &\leq \delta m' + \frac{48}{c}m. \end{aligned}$$

Then, we have the cut-size of S is

$$\begin{aligned} |E(S, V \setminus S)| &\geq m - (\delta m' - 48m/c)/4 \\ &= (1 - \delta/4 - 3c\delta/8 - 12/c)m \\ &\geq \eta m, \end{aligned}$$

where the last step follows from $\delta \leq \frac{8(1-\eta-12/c)}{2+6c}$.

Let $\Delta_i := |\bar{z}_i - z_i| = 1 - |z_i| \in [0, 1]$. We have

$$\begin{aligned} \|W\bar{z} - y\|_2^2 - \|Wz - y\|_2^2 &= \sum_{i=1}^m (\bar{z}_{u_i} + \bar{z}_{v_i})^2 - (z_{u_i} + z_{v_i})^2 + c \cdot \sum_{j=1}^n (|\bar{z}_j| - 1)^2 - (|z_j| - 1)^2 \\ &= \sum_{i=1}^m (\bar{z}_{u_i} + \bar{z}_{v_i})^2 - (z_{u_i} + z_{v_i})^2 - c \cdot \sum_{j=1}^n (|z_j| - 1)^2 \\ &= \sum_{i=1}^m (\bar{z}_{u_i} + \bar{z}_{v_i})^2 - (z_{u_i} + z_{v_i})^2 - c \cdot \sum_{j=1}^n \Delta_j^2 \\ &\leq \sum_{i=1}^m 4|\Delta_{u_i} + \Delta_{v_i}| - c \cdot \sum_{j=1}^n \Delta_j^2 \\ &= \sum_{i=1}^n 12\Delta_i - c\Delta_i^2 \\ &\leq \frac{72}{c}n \\ &= \frac{48}{c}m, \end{aligned}$$

where the first step follows by the construction of W and y . The second step follows from $|\bar{z}_j| = 1$ for all $j \in [n]$. The third step follows from the definition of Δ_j . The forth step follows from

$|z_{u_i} + z_{u_j}| \in [0, 2]$. The fifth step follows from the degree of the graph is 3. The fifth step follows from the minimum of the quadratic function $12x - cx^2$ in $[0, 1]$ is $\frac{72}{c}$. The last step follows from $m = 3n/2$.

Therefore, by the completeness and soundness of reduction, if we take $\epsilon \in (0, \delta)$, Theorem F.1 implies that it is NP-hard to $(1 + \epsilon)$ -approximate the ℓ_2 -regression, which completes the proof of the first part of the theorem.

For the furthermore part, we can use the same reduction for a 5-regular graph. By choosing proper parameters (c and δ), we can use Theorem F.3 to rule out $2^{o(n)}$ -time algorithm for $O(1)$ -factor approximation. We omit the details since they are almost the same as the first part. \square