

MIX : a Multi-task Learning Approach to Solve Open-Domain Question Answering

Sofian Chaybouti, Achraf Saghe, Aymen Shabou

DataLab Groupe, Crédit Agricole S.A

Montrouge, France

sofian.chaybouti@ensta-paris.fr,

{achraf.saghe, aymen.shabou}@credit-agricole-sa.fr

Abstract

In this paper, we introduce MIX : a multi-task deep learning approach to solve Open-Domain Question Answering. First, we design our system as a multi-stage pipeline made of 3 building blocks : a BM25-based Retriever, to reduce the search space; RoBERTa based Scorer and Extractor, to rank retrieved paragraphs and extract relevant spans of text respectively. Eventually, we further improve computational efficiency of our system to deal with the scalability challenge : thanks to multi-task learning, we parallelize the close tasks solved by the Scorer and the Extractor. Our system is on par with state-of-the-art performances on the squad-open benchmark while being simpler conceptually.

1 Introduction

With huge quantities of natural language documents, search engines have been essential for the time saved on information retrieval tasks. Usually, deployed search engines achieve the task of ranking documents by relevance according to a query. Recently, research has focused on the task of extracting the span of text that exactly matches the user’s query through Machine Reading Comprehension and Question Answering.

Question Answering deals with the extraction of the span of text in a short paragraph that exactly answers a natural language question. Recent deep learning models based on heavy pretrained language models like BERT achieved better than human performances on this tasks (Devlin et al., 2019).

One could try to apply QA models for the Open-Domain Question Answering paradigm which aims

to answer questions taking a big amount of documents as knowledge source. Two main issues emerge from this : first, applying 100M parameters language models to potentially millions of documents requires unreasonable GPU-resources. Then, QA models allow to compare spans of text coming exclusively from a single paragraph while in the open-domain QA paradigm, one needs to compare spans of text coming from a wide range of documents.

Our system, as done in previous work, deals with the resources issue thanks to a Retriever module, based on the BM25 algorithm, that allows to reduce the search space from millions of articles to a hundred of paragraphs. The second issue is tackled by adding a deep learning based Scorer module that re-ranks with more precision the paragraphs returned by the Retriever. Eventually, the Extractor module uses a QA deep learning model to extract the best span of text in the first paragraph returned by the Scorer. To avoid a heavy and hardly scalable pipeline consisting of two huge deep learning models, we parallelize the re-ranking and span extraction tasks thanks to multitask learning : while maintaining high performances, it allows to significantly reduce both memory requirements and inference time. Our system achieve state-of-the-art results on the open-squad benchmark.

2 Background and Previous Work

2.1 Machine Reading Comprehension

The construction of vast Question Answering datasets, particularly the SQuAD benchmark (Rajpurkar et al., 2016), has led to end-to-end deep learning models successfully solving this task, for instance (Seo et al., 2018a) is one of the first end-

to-end model achieving impressive performances. More recently, the finetuning of powerful language models like *BERT* (Devlin et al., 2019) has allowed to achieve better than human performances on this benchmark. Some researchers have adapted the pretraining task of language models to be better adapted to the extractive question answering down-stream task like *SpanBERT* (Joshi et al., 2020). Eventually, all these models rely on the same paradigm : building query-aware vector representations of the words in the context.

2.2 Open-Domain Question Answering

(Chen et al., 2017) introduce the Open-Domain Question Answering setting (figure 1) that aims to use the entire English Wikipedia as a knowledge source to answer factoid natural language questions. Considering Wikipedia as a collection of about 5 millions of textual documents without relying on its graph structure, this setting brings the challenge of building systems able to do *Machine Reading Comprehension* at scale. Most recent works ((Chen et al., 2017), (Raison et al., 2018), (Min et al., 2018)) explored the following pipeline to solve this task. First, retrieving a dozens of documents using statistical methods (bigrams, tf-idf, BM25, etc.) or similarity search on dense representations between documents and questions (Karpukhin et al., 2020), (Khattab and Zaharia, 2020) and then applying a deep learning model trained for machine reading comprehension to find the answer. Some other works have been about designing methods to re-rank documents using more sophisticated methods like deep learning or reinforcement learning ((Wang et al., 2017), (Lee et al., 2018)).

Yang et al. designed in BERTserini (Yang et al., 2019) a pipeline of 2 steps : first, reducing the search space thanks to BM25 algorithm, and then, extracting the spans of text in each document retrieved with a finetuned BERT. Eventually, the issue discussed in the introduction about scoring the relevance of spans of text coming from different paragraphs is tackled by taking the weighted average of the score from BM25 algorithm and the score of the QA model. The weight is an hyperparameter tuned manually.

Wang et al. (Wang et al., 2019) tackle the issue of comparing spans across several documents

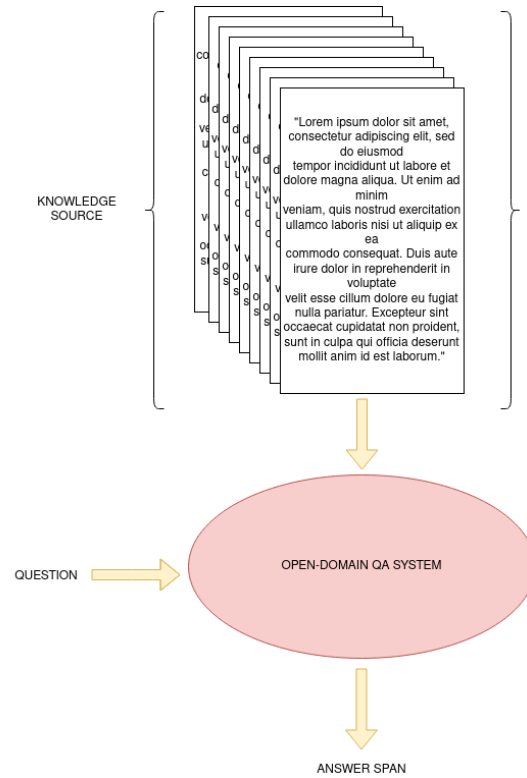


Figure 1: The open-domain QA setting.

with a more sophisticated approach with *Mutli-passage BERT*. They use a global normalization method : the retrieved passages are processed separately by the language model and eventually the *softmax* operation is applied to all the tokens from all documents to normalize the scores and allow fair comparison between spans from several passages. They also use a passage re-ranker based on another BERT model : the BM25 algorithm retrieves 100 passages that are ranked and the *softmax* normalization is applied across the top 30 passages.

Seo et al. (Seo et al., 2018b) introduced the *Phrase-Indexed Question Answering* (PIQA) benchmark in order to make machine reading comprehension scalable.

This benchmark enforces independent encoding of question and document answer candidates in order to reduce Question Answering to a simple similarity search task. Indeed, answer candidates are indexed off-line. Closing the gap between such systems and very powerful models relying on query-aware context representation would be a great step towards solving the open-domain question answer-

ing scalability challenge. The proposed baselines use LSTM-encoders trained in an end-to-end fashion. While achieving encouraging results, the performances are far from state-of-the-art attention based models.

DENSPI (Seo et al., 2019) is the current state-of-the-art model on the PIQA benchmark. This system makes use of the BERT-large language model to train a siamese network able to encode questions and indexed answer candidates independently. DENSPI is also evaluated on the squad-open benchmark. While being significantly faster than the other systems, it needs to be augmented by sparse representations of documents to be on par with them in terms of performances.

Ocean-Q (Fang et al., 2020) proposes an interesting approach to solve the Open-Domain QA task by building an *ocean* (a large set) of question-answer pairs using Question Generation and query-aware QA models. When a question is asked, the most similar question from the *ocean* is retrieved thanks to tokens similarity. This approach avoids the question-encoding step while being on par with previous models on the squad-open benchmark.

3 Model

In this section, the proposed model to solve the task is developed.

3.1 Pipeline Description

The complete MIX pipeline is shown in figure 2. It is made up of three fundamental building blocks.

When a question is asked, we first make a selection of a few paragraphs which are relevant to the question (i.e., more likely to contain the correct answer). Later, we call this step the *Retriever* module. It has to be highly efficient to tackle large corpora, with potentially several millions of paragraphs.

After that, we refine the retrieval step by re-ranking these paragraphs with a classification by relevance step, that we call the *Scorer*.

Finally, we extract from each paragraph the snippet that best answers the question. This is the *Extractor* part.

3.2 BM25 algorithm

The *Retriever* uses the BM25 algorithm, which is one of the most successful algorithms for textual

information retrieval. It evaluates the relevance of each document relative to a query written in natural language. Indeed, when a request is made, the algorithm computes a score for each document in the dataset. This score is a sum of terms over the words in the question. Each term of the sum grows with the term-frequency of the word in the document and is modulated by its inverse document frequency. paragraphs are finally sorted regarding their scores.

3.3 Scoring paragraphs

The *Scorer* allows to refine the classification of the paragraphs returned by the *Retriever*. We use deep learning to implement this step and we build a model that associates a relevance score to a pair (Question, Document) (figure 3). In this model, we use the classification token of the RoBERTa (base) (Liu et al., 2019) language model to return the relevance score.

3.4 Question Answering

The *Extractor* part of the pipeline uses a vanilla Question Answering model : the RoBERTa (base) language model finetuned to produce probability distributions on the paragraph tokens to identify the beginning and the end of the span of text answering an input question (figure 4).

3.5 Multi-task Model

As we have just seen, our system is composed of two deep learning models, one for the Scorer and the other for the Extractor. These models solve respectively the re-ranking of paragraphs and the QA tasks. This configuration can be heavy in terms of resources.

Since these two tasks are related in the sense that they require the understanding of a text in the light of a question asked, a *multitask learning* model could be designed instead. The goal is to learn both tasks by sharing part of their models parameters, allowing parallel classification of paragraphs and extraction of relevant spans of text (figure 5). This would save inference time and required memory.

The proposed multi-task model is depicted in the figure 6, where we can see that shared parameters are those of the language model (thus, the largest part of the set of parameters). We keep the layers that are specific to each task, i.e., the layer that

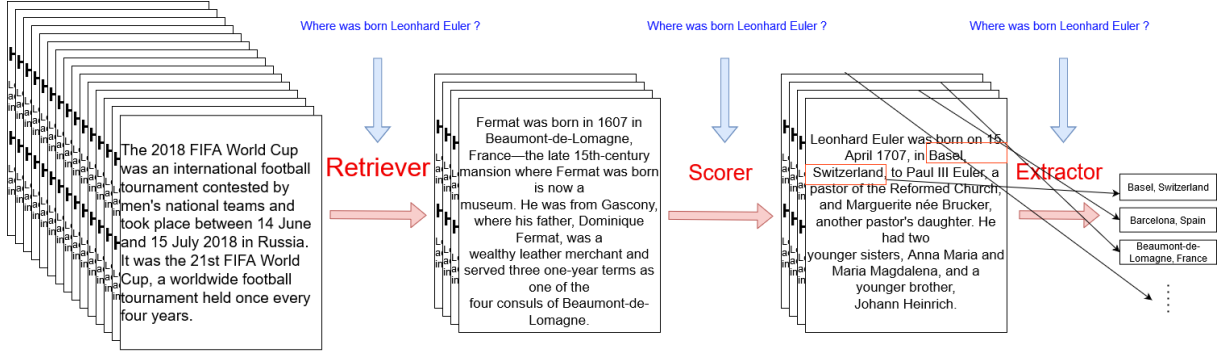


Figure 2: The proposed pipeline for the open-domain QA task resolution. In this preliminary pipeline, the search space is first reduced thanks to the *Retriever*. Secondly, the ranking of paragraphs retrieved is refined thanks to the *Scorer*. Eventually, the *Extractor* allows to highlight the most relevant spans of text in each paragraph.

takes as input the classification token in the *Scorer* and the layers of start and end positions in the *Extractor*.

Search Engines Our architecture is particularly adapted to a search engine setting where the user needs the results from different documents to be ranked by relevance according to a query. Indeed, our system is able to simultaneously extract the most relevant spans of text in a batch of paragraphs while ranking the paragraphs themselves. Thus, the ranked paragraphs with their extracted answers can be displayed to the user in an efficient fashion.

3.6 Training Objectives

3.6.1 Paragraphs Scoring

When training our model to score paragraphs, we optimize the cross-entropy of the ground truth paragraph against the other ones. This corresponds to the following loss :

$$\mathcal{L}(\Theta; Q, \mathcal{D}) = -\text{score}(d^*) + \log \left(\sum_{d \in \mathcal{D}} \exp(\text{score}(d)) \right) \quad (1)$$

with Θ the parameters of the model, Q the question, $\mathcal{D}$ the set of paragraphs returned by the Retriever and d^* the correct paragraph.

3.6.2 Question Answering

Training the model for the Question Answering task is done by minimizing the cross entropy of the start and end positions of the correct answers. Given a document D (tokenized as $D =$

$\{d_1, d_2, \dots, d_n\}$), a question Q , the answer A characterized by (s, e) its start and end positions in D , θ the model parameters, $\mathbf{P}_{start}$ the probability distribution for the start of the response and $\mathbf{P}_{end}$ the probability distribution for the end of the answer, we define the loss function $\mathcal{L}(Q, D; \theta)$ as the following (eq. 2):

$$\mathcal{L}(Q, D; \theta) = -\log(\mathbf{P}_{start}(s|Q, D; \theta)) - \log(\mathbf{P}_{end}(e|Q, D; \theta)) \quad (2)$$

4 Experiment

In this section, we show our experiments and results.

4.1 Data

SQuAD v1.1 : SQuAD v1.1 (Rajpurkar et al., 2016) is a reading comprehension dataset consisting of 100,000+ questions-answers pairs from Wikipedia paragraphs. The span extraction part of our model is trained on the train set (87599 pairs) and evaluated on the development set (10570 pairs).

squad-open : (Chen et al., 2017) introduced the squad-open benchmark to tackle the Open-Domain Question Answering setting. It uses the whole English Wikipedia as the unique source of knowledge and is evaluated on SQuAD v1.1 questions. The Wikipedia version is of 2016 and contains 5,075,182 articles.

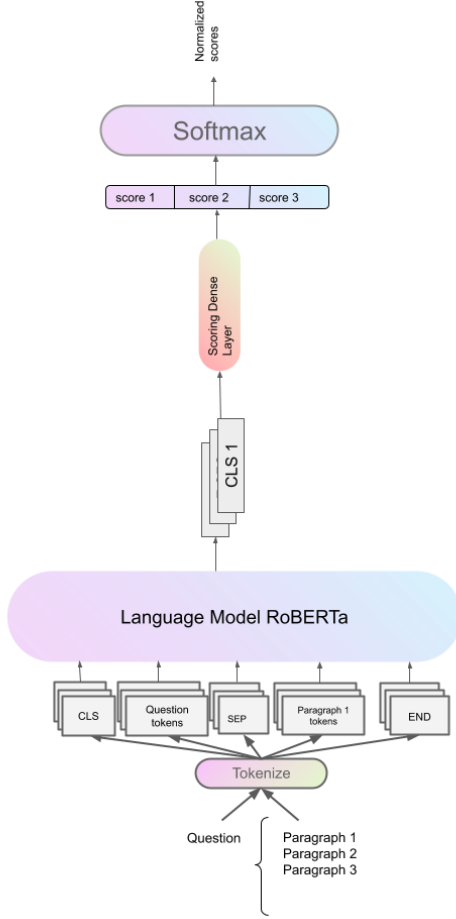


Figure 3: The proposed scoring model. An example consists of a question and several candidate paragraphs. For each paragraph the classification token embedding (CLS) is built so that it provides a representation of the given paragraph according to the question. Eventually scores of relevance are computed from these vectors and normalized by the *softmax* function.

4.2 Training and Implementation Details

4.2.1 Indexation

For document indexation, we use the Python API of Elasticsearch (Gormley and Tong, 2015). It allows us to take advantage of its native implementation of BM25 algorithm. When indexing, we first used a sliding window with a stride of 300 tokens and considered paragraphs of 400 tokens. We end up indexing around 33,6 M paragraphs. (Wang et al., 2019) found that the value of granularity (i.e. the number of tokens considered to form a paragraph) has an impact on the performances of their system. Thus, we then test different values of granularity

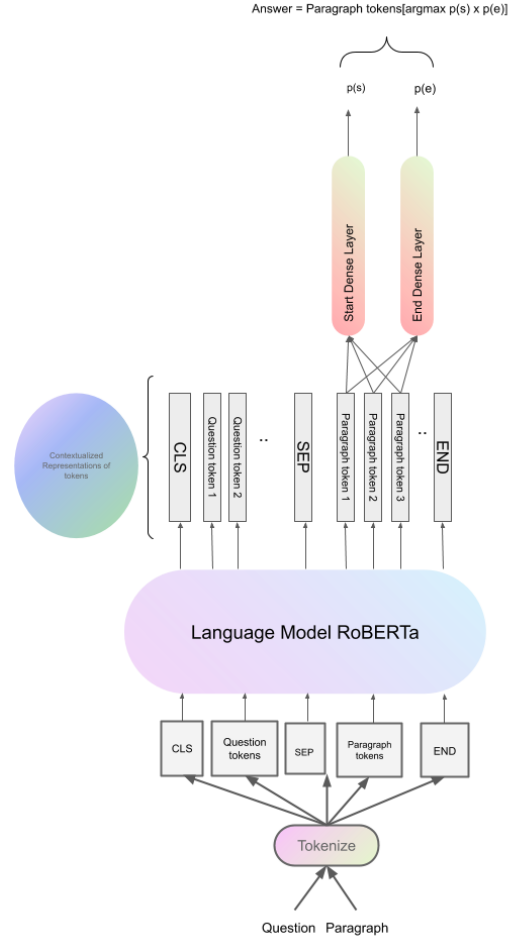


Figure 4: The proposed QA model. The question and the paragraph are processed simultaneously by the language model to build question-aware paragraph representations, then 2 dense layers allow to find the beginning and the end of the answer.

and analyse their consequences below.

We take advantage of Elasticsearch indexation to build the dataset to train the *Scorer* : we apply the BM25 algorithm for each question in the dataset to all paragraphs in SQuAD. We only retrieve **30** paragraphs for each question. Each time the paragraph containing the ground truth answer is in the retrieved paragraphs, a new example is added to the dataset. Thus, an example in this set is represented by *1 question* and a group of *30 paragraphs*. We end up with 80k+ examples for the train set. To build the development set, we apply the same procedure to SQuAD-dev and end up with 10k+ examples in our development set.

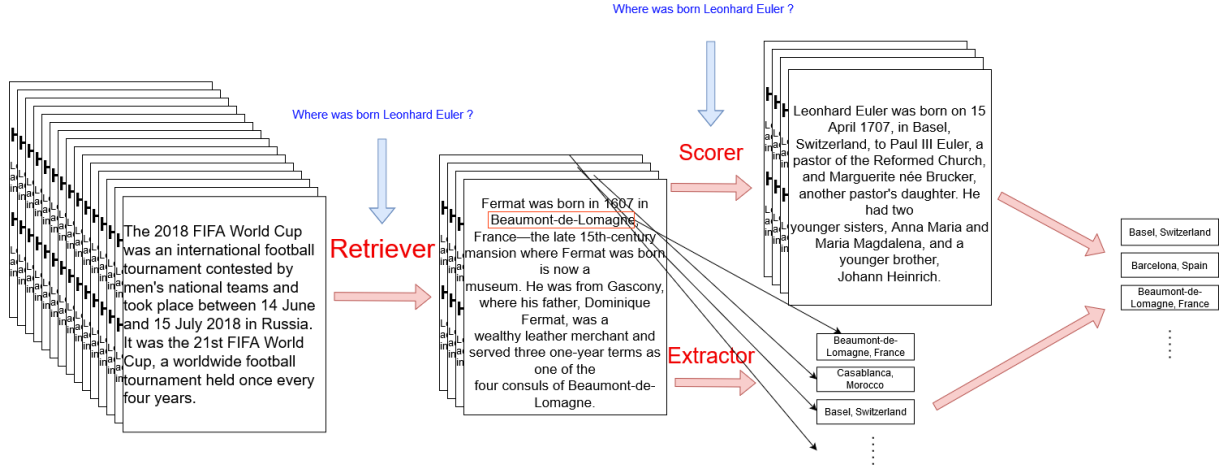


Figure 5: The proposed multi-task pipeline. As before, the search space is first reduced thanks to the *Retriever*, then the most relevant spans of text are extracted at the same time the paragraphs are re-ranked. We can see that the question is processed only twice, once by the *Retriever* and once by the multi-task model instead of three times in the previous pipeline.

4.2.2 Training

During the training, we alternate a Question Answering optimization step and a Scoring optimization step. We use *AdamW* (Loshchilov and Hutter, 2019) optimizer and learning rates of $5e - 5$ and $1e - 5$ with linear schedulers for Question Answering optimization and Scoring optimization respectively. We set a batch size of 32 examples for Question Answering and a simulated batch size of 16 examples for scoring thanks to gradient accumulation. We also used Mixed Precision training (Micikevicius et al., 2018) and the model was trained on a single 24GB GPU NVIDIA Quadro RTX 6000.

4.3 Results

4.3.1 Metrics

The performances of the QA model are evaluated thanks to classic exact-match (EM, exact overlap between ground truth span and prediction) and f1-score (F1, partial overlap between ground truth span and prediction). The performances of the Scorer are evaluated by observing if the paragraph containing the right answer is ranked first (precision @ 1).

4.3.2 Results on SQuAD

Table 1 provides results of our multitask model on the SQuAD dataset for both Question Answering

and re-ranking tasks. It shows that our model is on-par with state-of-the-art performances on Question Answering. In addition, the re-ranking task performs well as in 94.2 % of the examples the ground truth paragraph is ranked at the first place. The comparison with the finetuning of RoBERTa (Liu et al., 2019) on the only task of question answering shows that the performances of our model does not suffer from the multi-task learning.

	EM	F1	precision @ 1
RoBERTa-base (Liu et al., 2019) on SQuAD (our run)	83.0 %	90.4%	-
multi-task	83.5%	90.5%	94.2%

Table 1: Results of MIX on the QA and the scoring tasks. The vanilla Question Answering model is from a single run with learning rate of $5e-5$, linear scheduling and a batch size of 16.

4.3.3 Results on the squad-open benchmark

In this section, we present the results obtained on the benchmark squad-open. Table 2 provides the results of MIX on different numbers of paragraphs returned by the *Retriever* (100 and 200) and for top 1, top 2 and top 3 snippets returned by the *Extractor*. We observe that the model is more limited by the performance of the paragraph reclassification

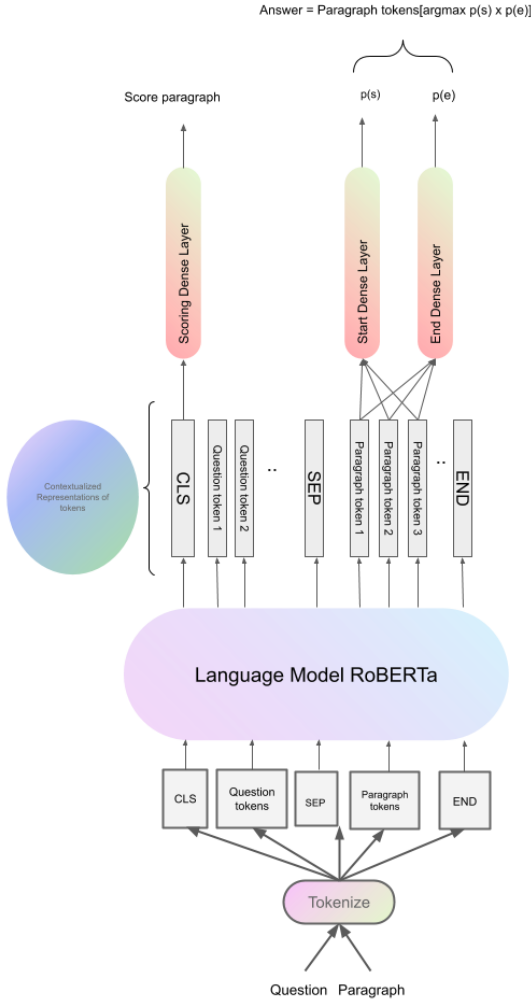


Figure 6: The proposed Multi-task model. Now the question-aware representations of the paragraph built by the language model allow to perform both paragraph Scoring (through the CLS token) and Question Answering (through the paragraph tokens).

step than by the number of paragraphs returned by BM25. Indeed, performances increase very quickly when going from top 1 to top 2 or from top 2 to top 3, while they increase less rapidly when going from 100 to 200 paragraphs.

Different levels of granularity (Wang et al., 2019) explored numerous levels of granularity when indexing paragraphs. They found out the counterintuitive result that passages of 100 tokens provided optimal performances. Thus, we test different levels of granularity as well : 100, 200, 400. Figure 7 shows that the granularity level of 100 tokens is constantly better than the other ones so it

	exact-match	f1-score
100 § / top 1	51.3	59.1
100 § / top 2	57.8	65.8
100 § / top 3	60.1	68.9
200 § / top 1	52.8	60.9

Table 2: Results on the squad-open benchmark depending on the number of paragraphs retrieved by BM25 and the top k answers returned.

confirms (Wang et al., 2019) results.

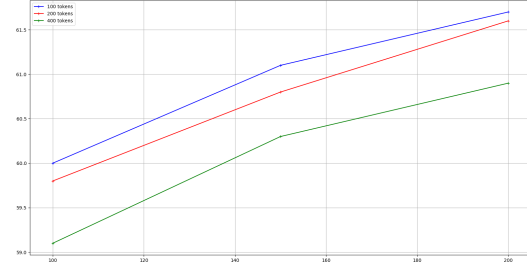


Figure 7: f1-score of the system on the squad-open benchmark as a function of granularity and number of paragraphs retrieved (100, 150 and 200). the green curve represents the performances of the 400 tokens level (stride of 300), the red curve represents the 200 hundred tokens level (stride of 100) and the blue curve the 100 tokens level (stride of 50). We see that reducing the number of tokens per paragraph significantly improves the performances of the system.

Comparison with state-of-the-art We also compare the performance of MIX to other state-of-the-art models evaluated on the squad-open benchmark (table 3). Our system obtains state-of-the-art performances, beating *Multi-Passage BERT* by 2.5 points and 2.7 points in exact-math and f1-score respectively for their BERT-base based system and by 0.8 point in both metrics for their BERT-large based system while our system is based on RoBERTa-base. These results show that our system, while being simple conceptually and using only one language model, is able to overcome the issue of comparing spans of texts across different paragraphs.

5 Conclusion

We introduced MIX, a multi-task learning approach to solve open-domain question answering, relying on the BM25 algorithm as a *Retriever* to reduce

	EM	F1
DrQA (Chen et al., 2017)	29.8	-
R ³ (Wang et al., 2017)	29.1	37.5
Paragraph ranker (Lee et al., 2018)	30.2	-
MINIMAL (Min et al., 2018)	34.7	42.5
Weaver (Raison et al., 2018)	-	42.3
Multi-step reasoner (Das et al., 2019)	31.9	39.2
BERTSERINI (Yang et al., 2019)	38.6	46.1
Multi-passage BERT (base) (Wang et al., 2019)	<u>51.2</u>	<u>59.0</u>
Multi-passage BERT (large) (Wang et al., 2019)	<u>53.0</u>	<u>60.9</u>
DENSPI (Hybrid) (Seo et al., 2019) (PIQA method)	36.2	44.4
DENSPI (Dense Only) (Seo et al., 2019) (PIQA method)	20.5	13.3
Ocean-Q (Fang et al., 2020) (PIQA method)	32.7	39.4
MIX (ours) (200 paragraphs of length 100)	53.8	61.7

Table 3: Results on the squad-open benchmark.

the search space and the powerful RoBERTa language model finetuned to achieve both paragraph re-ranking (*Scorer*) and spans of text extraction (*Extractor*). Our system achieves state-of-the-art results on the squad-open benchmark. Thus, we showed that a simple pipeline consisting of a retriever, a re-ranker and a reader is sufficient to overcome the issue of comparing 2 possible answers from different paragraphs. The novelty of our paper comes from the usage of multi-task learning to allow performing simultaneous re-ranking and reading comprehension. Our system is particularly adapted to a search engine setting where several results ranked by relevance are provided to the user. Our evaluation shows that the results are more limited by the performance of the *Scorer* than by the *Retriever* that reduces the search space of million of paragraphs to a hundred so future research might be directed to the improvement of the *Scorer* performances. Furthermore, we confirm the finding of (Wang et al., 2019), according to which shorter paragraphs allow better performances on the open-domain QA task. Eventually, further improvements might probably be achieved by using heavier language model such as RoBERTa-large.

References

Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. [Reading wikipedia to answer open-domain questions](#).

Rajarshi Das, Shehzaad Dhuliawala, Manzil Zaheer, and Andrew McCallum. 2019. [Multi-step retriever-reader interaction for scalable open-domain question answering](#). In *International Conference on Learning Representations*.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [Bert: Pre-training of deep bidirectional transformers for language understanding](#).

Yuwei Fang, Shuohang Wang, Zhe Gan, Siqi Sun, and Jingjing Liu. 2020. [Accelerating real-time question answering via question generation](#).

Clinton Gormley and Zachary Tong. 2015. *Elasticsearch: The Definitive Guide*, 1st edition. O’Reilly Media, Inc.

Mandar Joshi, Danqi Chen, Yinhan Liu, Daniel S. Weld, Luke Zettlemoyer, and Omer Levy. 2020. [Spanbert: Improving pre-training by representing and predicting spans](#).

Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#).

Omar Khattab and Matei Zaharia. 2020. [Colbert: Efficient and effective passage search via contextualized late interaction over bert](#).

Jinhyuk Lee, Seongjun Yun, Hyunjae Kim, Miyoung Ko, and Jaewoo Kang. 2018. [Ranking paragraphs for improving answer recall in open-domain question answering](#).

Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized bert pretraining approach](#).

Ilya Loshchilov and Frank Hutter. 2019. [Decoupled weight decay regularization](#).

Paulius Micikevicius, Sharan Narang, Jonah Alben, Gregory Diamos, Erich Elsen, David Garcia, Boris Ginsburg, Michael Houston, Oleksii Kuchaiev, Ganesh Venkatesh, and Hao Wu. 2018. [Mixed precision training](#).

Sewon Min, Victor Zhong, Richard Socher, and Caiming Xiong. 2018. [Efficient and robust question answering from minimal context over documents](#).

Martin Raison, Pierre-Emmanuel Mazaré, Rajarshi Das, and Antoine Bordes. 2018. [Weaver: Deep co-encoding of questions and documents for machine reading](#).

Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [Squad: 100,000+ questions for machine comprehension of text](#).

Minjoon Seo, Aniruddha Kembhavi, Ali Farhadi, and Hannaneh Hajishirzi. 2018a. [Bidirectional attention flow for machine comprehension](#).

- Minjoon Seo, Tom Kwiatkowski, Ankur P. Parikh, Ali Farhadi, and Hannaneh Hajishirzi. 2018b. [Phrase-indexed question answering: A new challenge for scalable document comprehension](#).
- Minjoon Seo, Jinhyuk Lee, Tom Kwiatkowski, Ankur Parikh, Ali Farhadi, and Hannaneh Hajishirzi. 2019. [Real-time open-domain question answering with dense-sparse phrase index](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4430–4441, Florence, Italy. Association for Computational Linguistics.
- Shuohang Wang, Mo Yu, Xiaoxiao Guo, Zhiguo Wang, Tim Klinger, Wei Zhang, Shiyu Chang, Gerald Tesauro, Bowen Zhou, and Jing Jiang. 2017. [R³: Reinforced reader-ranker for open-domain question answering](#).
- Zhiguo Wang, Patrick Ng, Xiaofei Ma, Ramesh Nallapati, and Bing Xiang. 2019. [Multi-passage bert: A globally normalized bert model for open-domain question answering](#).
- Wei Yang, Yuqing Xie, Aileen Lin, Xingyu Li, Luchen Tan, Kun Xiong, Ming Li, and Jimmy Lin. 2019. [End-to-end open-domain question answering with bertserini](#). *CoRR*, abs/1902.01718.