

Generating Adversarial Examples in Chinese Texts Using Sentence-Pieces

Linyang Li, Yunfan Shao*, Demin Song, Xipeng Qiu†, Xuanjing Huang

Shanghai Key Laboratory of Intelligent Information Processing, Fudan University

School of Computer Science, Fudan University

{linyanglei19, yfshao19, dmsong20, xpqiu, xjhuang}@fudan.edu.cn

Abstract

Adversarial attacks in texts are mostly substitution-based methods that replace words or characters in the original texts to achieve success attacks. Recent methods use pre-trained language models as the substitutes generator. While in Chinese, such methods are not applicable since words in Chinese require segmentations first. In this paper, we propose a pre-train language model as the substitutes generator using sentence-pieces to craft adversarial examples in Chinese. The substitutions in the generated adversarial examples are not characters or words but '*pieces*', which are more natural to Chinese readers. Experiments results show that the generated adversarial samples can mislead strong target models and remain fluent and semantically preserved.

1 Introduction

Adversarial attacks (Goodfellow et al., 2014; Kurakin et al., 2016; Chakraborty et al., 2018) are firstly introduced in the computer vision fields. Neural networks are vulnerable to adversarial samples with small perturbations based on gradients to the original inputs.

In the natural language processing fields, perturbations cannot be applied directly, so most methods involve strategies such as replacing, insertion or deletion (Ebrahimi et al., 2017; Alzantot et al., 2018; Jia and Liang, 2017; Jin et al., 2019). Most replacing strategies incorporate a synonym dictionary (Dong et al., 2010; Fellbaum, 1998) or use word embeddings (Pennington et al., 2014; Mrkšić et al., 2016; Jin et al., 2019).

Recently, incorporating pre-trained language models such as BERT (Devlin et al., 2018) as a substitute generator is introduced in the adversarial example generation of texts (Li et al., 2020; Garg

Text Classification : What type of this sentence is ?

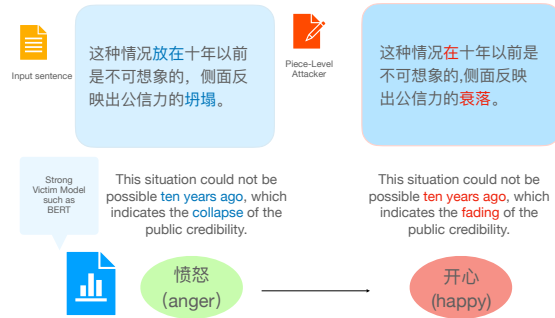


Figure 1: Example of piece-level Adversary

and Ramakrishnan, 2020). Such a process brought adversarial example generation to a higher level: using well-learned models to generate adversarial samples instead of specific rules such as entity checking or grammar checking (Jin et al., 2019).

However, in Chinese language, crafting adversarial examples are more challenging: Chinese does not contain explicit whitespace between words, so the boundaries between characters and words are vague. Therefore, current Chinese pre-trained language models are character-based, yet replacing certain characters in Chinese cannot maintain fluency and semantics.

Therefore, in this paper, we propose the idea of incorporating sentence-pieces in the Chinese tokenization in pre-trained language models, and use such a language model as a sentence-piece level substitution generator to craft high-quality adversarial examples in Chinese.

At first, we use sentence-piece tokenizer (Kudo and Richardson, 2018) to create a piece-level vocabulary based on the large-scale corpus collected online (Xu, 2019). After sentence-piece tokenization, we use this piece-level vocabulary to pre-train

*Equal Contribution.

†Corresponding author.

a masked language model as the substitution generator following the standard pre-training process of BERT. Then we use the pre-trained substitution generator to craft piece-level adversarial samples in Chinese. As seen in Fig1, we can generate character-level, word-level and phrase-level substitutions in Chinese.

We use the trained Chinese Substitution Generator to attack broadly used Chinese text classification tasks such as Sogou, Iflytek, Weibo and Law34 datasets. The experiments show that the generated adversarial samples successfully mislead target models and reserve the semantic information and fluency.

To summarize the key contribution of this paper: we use sentence-piece based tokenization to train a masked language model that can generate piece-level substitutions for Chinese adversarial examples. To our knowledge, we are the first to craft adversarial samples in Chinese that can generate multi-level substitutions.

2 Backgrounds

2.1 Adversarial Attacks in NLP

In the NLP field, adversarial attacks face a major challenge: people cannot apply gradients on the embedding space to craft adversarial samples, which is widely explored in the CV field (Goodfellow et al., 2014; Chakraborty et al., 2018). So replacing characters (Ebrahimi et al., 2017), words (Alzantot et al., 2018; Jin et al., 2019; Ren et al., 2019; Papernot et al., 2016) or paraphrasing sentences (Jia and Liang, 2017) are the main streams of generating adversarial samples in texts.

The formulation of attacking NLP models is that, given inputs $X = [w_0, \dots, w_i, \dots]$, where w_i is the target character/word, we have a candidate list $S(w_i) = [s_{i0}, \dots, s_{ij}]$, which is the potential substitutes of w_i . The goal is to find an adversarial sample $X' = [w_0, \dots, s_{id}, \dots]$ where $\text{argmax}(F(X)) \neq \text{argmax}(F(X'))$. In most cases, we assume that we know the output score of the target model, which is a black-box scenario, while in white-box attacks we know the model architecture and therefore the gradients over the inputs.

Jin et al. (2019) uses word embeddings to craft candidate list S to find substitutions while Zang et al. (2020) uses knowledge extracted from WordNet (Fellbaum, 1998). Recently Li et al. (2020); Garg and Ramakrishnan (2020); Shi et al. (2019)

uses pre-trained models to find similar tokens as the candidate list.

2.2 Masked Language Models

Pre-trained models exemplified by BERT (Devlin et al., 2018) introduces a masked-language model task to predict the masked tokens. These models (Devlin et al., 2018) use BPE-based tokenizations to avoid unknown words in English. With massive calculation, these pre-trained models have revolutionized NLP tasks.

In Chinese texts generation, a whole-word-mask strategy is introduced to predict the entire word properly (Cui et al., 2019), while the tokenization is still character-level. Therefore, such a model cannot be directly applied to generate multiple candidates as the substitution list (Li et al., 2020; Garg and Ramakrishnan, 2020) in adversarial attacks.

2.3 Sentence-Piece Tokenization

Sentence-piece tokenization (Kudo and Richardson, 2018) is derived from byte-pair encoding (Sennrich et al., 2016) and unigram language model (Kudo, 2018) with the extension of direct training from raw sentences. Different from BPE, sentence-piece is directly trained from raw texts so no word segmentation is needed. Therefore, we could create a vocabulary based on sentence-piece based tokenization in Chinese.

3 Method

In this section, we introduce mainly two parts: (1) how we train a *piece-level* masked language model as a Chinese substitution generator; (2) how we use such a model to generate adversarial samples in Chinese.

3.1 Training the Chinese Substitution Generator

To train a Chinese Substitution Generator, we follow the standard protocol of pre-training masked language models. We simply replace the vocabulary with Chinese sentence-pieces in order to generate proper substitutions.

There are only a few thousands of commonly used Chinese characters, we extend the vocabulary size to 60 thousand pieces, based on the training data collected online (Xu, 2019).

The statistics shown in Table 1 indicates that there are around 9% (5400) of pieces in the vocabulary are single characters. Most pieces are bi-char

Char	Num(%)	Examples
1	9 %	是(is),在(in),前(before)
2	44 %	但是(but),这个(this),生活(life)
3	24 %	自己的(belong to me),是不是(is or not)
4	17 %	这个问题(this problem)
5+	4 %	证券投资基金(Securities Investment Funds)

Table 1: Statistics of the vocabulary

words or tri-char words. There are also a considerable amount of pieces with more than 3 characters, which are usually phrases or continuous entities.

The pre-trained model is an architecture the same as BERT-base, with 12 layers and hidden size set to 768. We use LAMB optimizer (You et al., 2019) to pre-train our model on NVIDIA 3090 GPUs using fairseq toolkit (Ott et al., 2019).

3.2 Generating Adversarial Examples

In crafting adversarial examples, we apply a two-step algorithm which is widely used in crafting substitution-based adversarial examples (Jin et al., 2019; Li et al., 2020): (1) first we find the most vulnerable pieces by iteratively ranking the piece importance of the original input sentence. We follow Jin et al. (2019); Li et al. (2020) to measure the piece importance by masking tokens iteratively and calculate the output scores:

$$I_{w_i} = o_y(S) - o_y(S_{\setminus w_i}), \quad (1)$$

where $S_{\setminus w_i} = [w_0, \dots, w_{i-1}, [\text{MASK}], w_{i+1}, \dots]$ is the sentence after replacing w_i with [MASK] and $o_y()$ is the output score after the softmax function in the final classification layer.

Then we replace pieces with the candidates predicted by the Chinese Substitution Generator.

Following Li et al. (2020), we do not mask the original pieces so that the semantic information is preserved. We use the top- K predictions of the given pieces in the masked language model as the substitution candidates. Since the tokenization process is piece-level, the substitution candidates are flexible: candidates contain both single characters, phrases that expand the meaning of the original piece, words that have similar meanings with the original piece.

As seen in Table 2, we have different types of substitutions of a single piece: we can replace Chinese word '今天(today)' with a synonym '今日(today)', or we can find an expanded word '今天的(today's)'; also, we can replace it with a single character '今(now/)', which is a shorten version of 'today'. With the piece-level substitution generator, the generated examples could be very diversified.

pieces	candidate types	candidates list
今天	words	今日
	phrase	今天的
	character	今

Table 2: example of top-k predictions

After getting candidate list, we replace pieces by the order of the ranked word importance. In practice, the candidate list size K is 12 in all datasets. We find the most harmful piece in the candidate list as the perturbation of the current piece, if the model cannot correctly predict the classification of the sample, we return the generated adversarial sample. Otherwise, we continue to find another piece to replace until we find a proper adversarial example.

4 Experiments

4.1 Datasets and Victim Models

We use several popular Chinese text classification tasks as our attacking datasets ¹²:

Sogou : the Sogou dataset is a 12-class sentence-genre task.

IflyTek: the Iflytek dataset is part of the Chinese GLUE benchmark, and it is a 119-class sentence genre task.

Weibo : the Weibo dataset is a sentiment classification task containing 8 emotions.

Law34 : the Law34 dataset is a 34-class task predicting the court decision type of the given texts.

We fine-tune the standard BERT-base-chinese model as our victim models for the corresponding tasks ³ with huggingface transformers (Wolf et al., 2020).

We randomly select 200 examples from the development set in each dataset and craft their corresponding adversarial examples.

4.2 Evaluation of the Generated Examples

The major metric is the attack success rate, which is the percentage of successful attacks in the dataset. The second metric is the change rate of the generated adversarial samples. We intuitively believe that fewer changes could result in a less semantic shift.

Further, we run a human evaluation to measure the quality of the generated adversarial samples.

¹<https://github.com/LinyangLee/CN-TC-datasets>

²<https://github.com/CLUEbenchmark/CLUE>

³<https://github.com/google-research/bert>

Dataset	Method	Ori Acc	Atk Acc	Ptb%	Human	
					Consist %	Fluency
IflyTek	Char-R	60.0	9.0	2.7 (c)	90	4.2
	Word-R		10.0	2.5 (w)	92	4.3
	Pce-R(ours)		11.0	2.7 (pce)	94	4.5
Weibo	Char-R	92.0	27.0	9.1 (c)	88	4.0
	Word-R		30.0	8.7 (w)	89	4.0
	Pce-R(ours)		35.0	10.2 (pce)	90	4.2
Sogou	Char-R	93.5	15.0	3.2 (c)	90	3.8
	Word-R		16.0	3.0 (w)	91	3.9
	Pce-R(ours)		18.5	4.4 (pce)	93	4.2
Law34	Char-R	93.0	10.0	2.8 (c)	94	4.5
	Word-R		11.0	2.7 (w)	95	4.6
	Pce-R(ours)		12.0	4.2 (pce)	97	4.8

Table 3: Main Results of Generated Examples

We mix original samples and generated adversaries and ask human judges to predict the label and the fluency of the examples. Since there could be too much labels for human judges, we ask human judges to predict whether the given texts are the correct label or not. We also ask them to score the fluency ranging from 1-5.

4.3 Baselines

We setup a strong baseline to compare with our method:

Char-Replace: We incorporate the original Chinese BERT which is character-level to generate adversarial samples by replacing characters. The hyper-parameters are the same as our piece-level model.

Word-Replace: We use a 50-dimension word-embedding collected by Zhang and Yang (2018) and use cosine-similarity to find candidate list as done by Jin et al. (2019). Since it is a word-level attack, we use Jieba⁴ tokenization tool to tokenize the sequence. We use a threshold of the cosine-similarity to constrain the quality of the candidates. We use around 60K most-frequent words in the word-embedding.

4.4 Main Results of Generated Examples

As seen in Table 3, the generated adversarial samples successfully mislead the strong fine-tuned BERT-chinese models. Also, human judges give a high accuracy predicting whether the classification is correct, also give a high fluency score.

Compared with the character-level and word-level method, the piece-level adversarial samples can achieve similar attacking results and maintain a high fluency score. The adversarial samples should

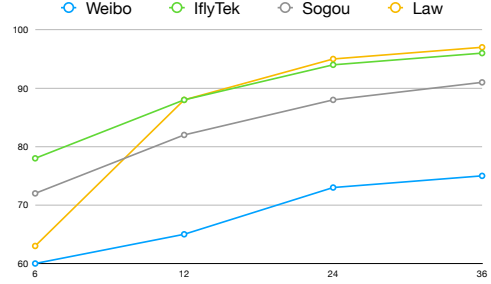


Figure 2: Trade-Off curve between K and Success

be both harmful to the target models and semantically fluent, therefore the piece-level adversarial samples generated are better adversarial samples though the success rate is lower than the character-replace and word-replace methods. The success rate could be higher when expanding the size of the candidate list according to Morris et al. (2020) therefore what matters most is the quality of the adversarial samples.

As seen in the appendix, the generated piece-level adversarial samples could make successful attacks from different aspects and remain fluent while the character-level adversarial samples are harder to comprehend. We can replace tokens with similar meaning substitutes, and we can also replace them with irrelevant but fluent and label-preserved substitutes.

4.5 Trade-off between Candidate List Size and Success Rate

A larger candidate size would result in easier attacks. Therefore we apply a trade-off curve showing that we can achieve a significantly higher attack success rate when we use a large candidate size. But it is intuitive that larger candidate size may also significantly harm the quality of the generated adversarial samples in both semantics and fluency.

Therefore we believe that **success rate is not the most important**, since maintaining the fluency and semantic is one major concern in crafting adversarial samples. While in our experiment, piece-level candidates are generally more natural to human judges.

5 Conclusion

In this paper, we propose a piece-level adversarial sample generation strategy for Chinese texts, which can fill in the blank of text adversarial sample generation for languages other than English.

⁴<https://github.com/fxsjy/jieba>

References

- Moustafa Alzantot, Yash Sharma, Ahmed Elgohary, Bo-Jhang Ho, Mani B. Srivastava, and Kai-Wei Chang. 2018. [Generating natural language adversarial examples](#). *CoRR*, abs/1804.07998.
- Anirban Chakraborty, Manaar Alam, Vishal Dey, Anupam Chattopadhyay, and Debdeep Mukhopadhyay. 2018. Adversarial attacks and defences: A survey. *arXiv preprint arXiv:1810.00069*.
- Yiming Cui, Wanxiang Che, Ting Liu, Bing Qin, Ziqing Yang, Shijin Wang, and Guoping Hu. 2019. Pre-training with whole word masking for chinese bert. *arXiv preprint arXiv:1906.08101*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. [BERT: pre-training of deep bidirectional transformers for language understanding](#). *CoRR*, abs/1810.04805.
- Zhendong Dong, Qiang Dong, and Changling Hao. 2010. HowNet and its computation of meaning. <https://www.aclweb.org/anthology/C10-3014>, pages 53–56.
- Javid Ebrahimi, Anyi Rao, Daniel Lowd, and Dejing Dou. 2017. Hotflip: White-box adversarial examples for text classification. *arXiv preprint arXiv:1712.06751*.
- Christiane Fellbaum. 1998. Wordnet: An electronic lexical database. *Bradford Books*.
- Siddhant Garg and Goutham Ramakrishnan. 2020. Bae: Bert-based adversarial examples for text classification. *arXiv preprint arXiv:2004.01970*.
- Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. 2014. Explaining and harnessing adversarial examples. *arXiv preprint arXiv:1412.6572*.
- Robin Jia and Percy Liang. 2017. Adversarial examples for evaluating reading comprehension systems. *arXiv preprint arXiv:1707.07328*.
- Di Jin, Zhijing Jin, Joey Tianyi Zhou, and Peter Szolovits. 2019. [Is BERT really robust? natural language attack on text classification and entailment](#). *CoRR*, abs/1907.11932.
- Taku Kudo. 2018. Subword regularization: Improving neural network translation models with multiple subword candidates. *arXiv preprint arXiv:1804.10959*.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Alexey Kurakin, Ian Goodfellow, and Samy Bengio. 2016. Adversarial examples in the physical world. *arXiv preprint arXiv:1607.02533*.
- Linyang Li, Ruotian Ma, Qipeng Guo, Xiangyang Xue, and Xipeng Qiu. 2020. Bert-attack: Adversarial attack against bert using bert. *arXiv preprint arXiv:2004.09984*.
- John X. Morris, Eli Lifland, Jack Lanchantin, Yangfeng Ji, and Yanjun Qi. 2020. Reevaluating adversarial examples in natural language. In *ArXiv*, volume abs/2004.14174.
- Nikola Mrkšić, Diarmuid Ó Séaghdha, Blaise Thomson, Milica Gašić, Lina Rojas-Barahona, Pei-Hao Su, David Vandyke, Tsung-Hsien Wen, and Steve Young. 2016. Counter-fitting word vectors to linguistic constraints. In *Proceedings of HLT-NAACL*.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. 2019. fairseq: A fast, extensible toolkit for sequence modeling. In *Proceedings of NAACL-HLT 2019: Demonstrations*.
- Nicolas Papernot, Patrick McDaniel, Ananthram Swami, and Richard Harang. 2016. Crafting adversarial input sequences for recurrent neural networks. In *MILCOM 2016-2016 IEEE Military Communications Conference*, pages 49–54. IEEE.
- Jeffrey Pennington, Richard Socher, and Christopher Manning. 2014. Glove: Global vectors for word representation. In *Proceedings of the conference on empirical methods in natural language processing*, pages 1532–1543.
- Shuhuai Ren, Yihe Deng, Kun He, and Wanxiang Che. 2019. Generating natural language adversarial examples through probability weighted word saliency. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1085–1097.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. [Neural machine translation of rare words with subword units](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany. Association for Computational Linguistics.
- Zhouxing Shi, Minlie Huang, Ting Yao, and Jingfang Xu. 2019. [Robustness to modification with shared words in paraphrase identification](#). *CoRR*, abs/1909.02560.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.

Bright Xu. 2019. [Nlp chinese corpus: Large scale chinese corpus for nlp](#).

Yang You, Jing Li, Jonathan Hseu, Xiaodan Song, James Demmel, and Cho-Jui Hsieh. 2019. [Reducing BERT pre-training time from 3 days to 76 minutes](#). *CoRR*, abs/1904.00962.

Yuan Zang, Fanchao Qi, Chenghao Yang, Zhiyuan Liu, Meng Zhang, Qun Liu, and Maosong Sun. 2020. Word-level textual adversarial attacking as combinatorial optimization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6066–6080.

Yue Zhang and Jie Yang. 2018. Chinese ner using lattice lstm. *ArXiv*.

A Appendices

Here we provide some of the generated adversarial samples.

As seen in Table 4, piece-level substitutions could have various types of strategies to craft adversaries:

- Synonym Replacing: Using synonyms or similar pieces as substitutions.
- Rewrite: Paraphrasing the given pieces.
- Expansion: Expand the given pieces.

Dataset		Label
Law	Ori	故意伤害 Intentional injury
	Adv	酒驾 Drunk driving
Weibo	Ori	开心(Happy)
	Adv	嫌弃(Disgust)
Iflytek	Ori	MOBA
	Adv	视频 Video

Table 4: Examples of Generated Adversaries