

Towards Modelling Coherence in Spoken Discourse

Rajaswa Patil*

IIIT Delhi, BITS Pilani

rajaswa.patil@midas.center

Yaman Kumar Singla*

IIIT Delhi, Adobe, SUNY at Buffalo

yamank@iiitd.ac.in

Rajiv Ratn Shah

IIIT Delhi

rajivrtn@iiitd.ac.in

Mika Hama

Second Language Testing Inc.

mika.hama@21ti.com

Roger Zimmermann

National University of Singapore

rogerz@comp.nus.edu.sg

Abstract

While there has been significant progress towards modelling coherence in written discourse, the work in modelling spoken discourse coherence has been quite limited. Unlike the coherence in text, coherence in spoken discourse is also dependent on the prosodic and acoustic patterns in speech. In this paper, we model coherence in spoken discourse with audio-based coherence models. We perform experiments with four coherence-related tasks with spoken discourses. In our experiments, we evaluate machine-generated speech against the speech delivered by expert human speakers. We also compare the spoken discourses generated by human language learners of varying language proficiency levels. Our results show that incorporating the audio modality along with the text benefits the coherence models in performing downstream coherence related tasks with spoken discourses.

1 Introduction

Discourse coherence is a property of the organization and semantic relationships within a structured group of written or spoken utterances. Coherence can be used as an auxiliary metric to evaluate the quality of a given discourse. Previously, discourse coherence has been used to evaluate written discourses for tasks like essay scoring and readability assessment (Miltsakaki and Kukich, 2004; Burstein et al., 2010; Mesgar and Strube, 2018). Coherence based metrics and objectives have also been used to evaluate and improve text-based artificial natural language generation systems (Lapata and Barzilay, 2005; Park and Kim, 2015; Kiddon et al., 2016) for tasks like text-summarization (Barzilay and Lapata,

2008; Nenkova and McKeown, 2011), machine-translation (Smith et al., 2016), language modelling (Iter et al., 2020; Lan et al., 2020) and conversation thread reconstruction (Joty et al., 2018). Therefore, modelling discourse coherence has become an essential task in computational linguistics with a variety of downstream applications.

Most of the previous work dealing with coherence modelling has been limited to text-based coherence (Joty et al., 2019), and there has been limited work on modelling spoken discourse coherence as a task (Wang et al., 2013). The few studies which have tried to work on spoken discourse have done so by transcribing speech and then applying text-coherence modelling methods on it (Wang et al., 2019). Modelling coherence of a spoken discourse with its text-transcriptions is an inherently lossy and challenging task (Tappe and Schilder, 1998). On the one hand, crucial cues of speech such as pauses, tonal variations, speed changes, stress, rhythm and intensity are lost while transcribing it, and on the other, the transcription is itself a cumbersome process with involved logistics and errors from automatic speech recognition (ASR) systems (Errattahi et al., 2018). Various studies in linguistics have highlighted the importance of prosody in providing a structure to the spoken discourse (Nakajima and Allen, 1993; Degand and Simon, 2009). By incorporating the audio modality along with the text-transcription of the speech, we can better model the coherence in spoken discourse. In this paper, we make the following contributions:

- We model coherence in spoken discourse with audio and text-based neural coherence models, which to the best of our knowledge, has not been previously explored.
- We perform experiments with four coherence-

*Authors (listed in alphabetical order) contributed equally.

related tasks to inspect the role of audio modality in modelling spoken discourse coherence: *Speaker Change Detection* (SCD), *Artificial Speech Evaluation* (ASE), *Topic Change Detection* (TCD) and *Speech Response Scoring* (SRS).

- We show that incorporating the audio modality from speech benefits a coherence model in capturing discourse coherence and in performing various downstream applications with human and machine-generated speech.
- We also show that the audio modality becomes significantly important while modelling coherence in the less structured and noisy spoken discourses.

2 Background

Early work in modelling discourse coherence focused on extracting features based on the Centering Theory (Grosz et al., 1995) and entity transitions in the text (Lapata and Barzilay, 2005; Elsner et al., 2007). Barzilay and Lapata (2008) introduced the entity grid representation of discourse, which was based on discourse entities and their grammatical role transitions. The entity grid model was further improved for coherence-related tasks by Elsner and Charniak (2011), Feng and Hirst (2012) and Louis and Nenkova (2012). Parallely, many works (Pitler and Nenkova, 2008; Lin et al., 2011; Feng et al., 2014) performed coherence-related tasks based on discourse relations in the text, parsed with theories like the Rhetorical Structure Theory (RST) (Thompson and Mann, 1987) and the Lexicalized Tree Adjoining Grammar for discourse (D-LTAG) (Webber, 2004) with the Penn Discourse Treebank (PDTB) (Prasad et al., 2008) styled annotations. Notably, the features based on the RST-encodings were found to be useful for modelling coherence in spoken discourse (Wang et al., 2019) and more efficient than the PDTB-encodings for modelling text coherence as well (Feng et al., 2014). Further, Guinaudeau and Strube (2013) and Mesgar and Strube (2015) proposed graph representation-based approaches to model coherence in text.

Following the advances in deep neural network architectures and distributed representations, there has been much progress towards developing neural models of discourse coherence which provide significant performance gains over the traditional feature-based models. The entity grid representa-

tion of discourse got extended with neural architectures. Tien Nguyen and Joty (2017) proposed the neural entity grid model, which performed convolutions over the entity grid representations. Further, Joty et al. (2018) lexicalized the neural entity grid model by attaching the entities to their respective grammatical roles in the entity grid embeddings.

Neural coherence models can be broadly classified into two categories: generative models and discriminative models. On the one hand, generative coherence models deal with modelling the conditional probabilities of a sentence being coherent with a given set of preceding sentences (Li and Jurafsky, 2017; Logeswaran et al., 2018). On the other hand, discriminative coherence models are trained to classify coherent and incoherent texts. It has been previously shown that modelling local coherence with discriminative models can be beneficial for capturing both the local and the global contexts of coherence with good approximation (Moon et al., 2019; Xu et al., 2019). Similarly, capturing relations and similarities between sentences at a local level with neural models can be helpful with coherence-related tasks (Li and Hovy, 2014; Mesgar and Strube, 2018). Recent work in coherence modelling has focused on building models in open-domain (Li and Jurafsky, 2017) and cross-domain (Xu et al., 2019) settings. More recently Lai and Tetreault (2018) built coherence models and datasets for real-world texts. Coherence modelling has also been beneficial for the recent breakthroughs in transformer-based language modelling (Iyer et al., 2020; Lan et al., 2020). Some recent work has also focused on building benchmarks for applying coherence models in evaluating text-based natural language generation systems (Mohiuddin et al., 2020).

Coherence deals with the *perception* of the discourse rather than the discourse content itself (Cohen et al., 2001; Wang and Guo, 2014; Li, 2017). While the perception of a written discourse is only affected by the semantic organization of its lexical content, the perception of a spoken discourse is additionally dependent on its prosodic and acoustic features (Hirschberg and Nakatani, 1996). Previous work in linguistics has highlighted the role of prosody in defining the structure for spoken discourse. Nakajima and Allen (1993) performed experiments with cooperative dialogues and demonstrated the role of prosodic information in defining the topic structure of a given spoken discourse.

Further, [Degand and Simon \(2009\)](#) introduced prosodic segmentation to define basic discourse units in speech.

Various previous studies have used prosodic attributes to perform coherence-related tasks with spoken discourse. [Nakajima and Allen \(1993\)](#) analysed the role of intonation and pause durations in modelling semantic relationships between discourse utterances at topic boundaries. Further, [Tür et al. \(2001\)](#) used duration and pitch based features to perform the task of topic segmentation, which is closely related to both the local and global coherence of spoken discourse. [Stifelman \(1995\)](#) used pitch patterns to perform emphasis detection with automated discourse segmentation. This was further used to summarize and skim through spoken discourses, a task which is highly relevant to the comprehensibility and the perception of spoken discourse.

Apart from the above mentioned tasks, automated speech scoring is another important application of modelling discourse structure and coherence. Explicitly annotated coherence based measures ([Wang et al., 2013, 2017](#)) and features extracted from discourse structures in text-transcriptions of spoken discourses ([Wang et al., 2019](#)) help in improving the performance of the automated speech scoring systems significantly. Unlike the work done with essay scoring as an auxiliary evaluation task for coherence modelling, work in speech scoring has been limited to include discourse coherence related features from the text-transcriptions of spoken discourse along with other features relevant to speech scoring.

3 Methodology

3.1 Coherence Models for Spoken Discourse

A coherence model for spoken discourse should be able to capture both the prosodic (pitch, intonation and stress) and the acoustic features (fundamental frequency, intensity and duration) of an audio sample. It is relatively easier to procure text datasets of varying levels of structure from sources like Wikipedia, social networks, and other online medium. Given the lack of such structured discourse-rich datasets for speech, the model should generalize beyond closed-domain settings ([Li and Jurafsky, 2017](#); [Xu et al., 2019](#)) and perform well on more open and cross-domain settings with limited training data ([Iter et al., 2020](#); [Mohiuddin et al., 2020](#)). This becomes more important

with spoken discourse as it has been shown that the audio modality is more vulnerable to change in data domain and background as compared to text ([Yan et al., 2020](#)). Given the above mentioned challenges and pitfalls related to modelling coherence in spoken discourse, an ideal audio-based coherence model should:

1. learn a discourse coherence signal with a limited number of training samples
2. generalize across speech samples which vary in terms of the acoustic and prosodic features of the speech audio (Ex: accent, gender, rhythm, age, speed and intonation) and differences in the background of data like recording quality, sampling frequency, background noise *etc.*
3. and, similar to the text domain, generalize across speech samples which vary in terms of the spoken discourse's topic and content.

The local discrimination algorithm proposed by [Xu et al. \(2019\)](#) is designed to maximize the local coherence scores of adjacent (positive) pairs of sentences and minimize the local coherence scores for the non-adjacent (negative) pairs of sentences in a given discourse. Unlike the older discrimination models which suffer with class-imbalance between the coherent and incoherent permutations of written discourses, this approach captures local coherence with an effective negative sampling of the incoherent non-adjacent sentences. The model takes in a pair of sentence representations as an input, which are further passed through a multi-layered perceptron with a single hidden layer (Figure 1) to obtain a local coherence score. Experiments done by [Xu et al. \(2019\)](#) show that the global aspects of coherence can be approximated by using the local coherence scores from their models with techniques like score-averaging across the discourse. Further, the local discrimination model learns to generalize in open-domain as well as cross-domain settings (as shown by their sentence-ordering and paragraph-reconstruction experiments with domain-separated Wikipedia articles), and is agnostic to the modality and background of the input data. Hence, for all our experiments, we use the local discrimination model proposed by [Xu et al. \(2019\)](#).

To incorporate the audio modality into the coherence model, we encode an audio based sentence

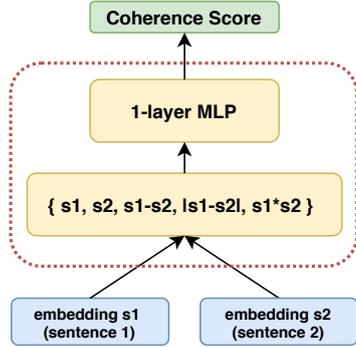


Figure 1: The local discrimination coherence model.

embedding, similar to the sentence embedding obtained from the text modality. We use a pre-trained audio language model: wav2vec (Schneider et al., 2019) to encode the audio segment of a sentence into its corresponding audio embedding as shown in Figure 2. Wav2vec is pre-trained with an unsupervised objective of next time-step prediction task for audio segments. This objective function aligns significantly with that of the local discrimination coherence model, providing rich audio representations for our task. Similarly, we use pre-trained GloVe embeddings (Pennington et al., 2014) to encode the text from the sentence into its corresponding text embedding.

In order to inspect the role of the audio modality in modelling coherence for spoken discourses, we experiment with three different learning settings (Coh-T, Coh-A and Coh-AT) for the local discrimination coherence model (Figure 2). Similar to all the previous work, with the first setting, we just use the text modality as the input to the coherence model (**Coh-T**). In the second setting, we use only the audio modality as the input to the coherence model, to establish an audio-only control setting for our experiments (**Coh-A**). Finally, in the third setting we obtain a multimodal input representation by fusing the text and audio modalities together (**Coh-AT**). In order to get a minimal trainable aggregated fusion of the two modalities, we pass the audio and the text embeddings through a bi-linear layer as shown in Figure 2. Following Xu et al. (2019)’s approach, we aggregate the coherence scores from both the forward model (*sentence-1, sentence-2*) and the backward model (*sentence-2, sentence-1*).

3.2 Datasets

We perform all our experiments with the debate speech samples from the IBM Debater dataset¹ (Lavee et al., 2019). The dataset consists of recordings of debate speeches delivered by nine expert debaters, with debate speeches on 200 distinct Wikipedia topics (such as social media, nuclear weapons, gambling, *etc.*) as the debate motions. Each motion topic is contested with two debate recordings from distinct experts, resulting in a total number of 400 unique speech samples. This makes the dataset rich with a variety of coherent speeches spread across a variety of open-domain topics, providing a high quality training signal to our coherence models. We generate new datasets² for various evaluation tasks (explained in Section 3.3) using the responses from the IBM Debater dataset. For this, we use the text-transcriptions from the debate speech recordings to synthesize artificial speech responses with a standard text-to-speech (TTS) system based on the Microsoft Speech API (SAPI5) (Microsoft, 2009). We use two distinct TTS voices across all our experiments: **S1** (US-male voice) and **S2** (US-female voice).

Task	Number of speech responses		
	Train	Validation	Test
SCD*	-	-	398
ASE*	197	78	120
TCD*	-	-	786
SRS	463	181	234

Table 1: Number of unique speech responses across the datasets for various evaluation tasks (*each unique speech response is further sampled with two TTS settings, resulting in twice as many evaluation samples).

Further, we also use another dataset of speech responses from non-native English language learners for one of the evaluation tasks. We use the speech samples delivered by human speakers to train the coherence models (task ASE and SRS), whereas the speech samples synthesized with the TTS voices are used for evaluating the models on various coherence-related tasks (task SCD, TCD, and ASE). Further details about the training and testing of coherence models on the evaluation tasks are given in Section 3.3. The statistics for all the

¹https://www.research.ibm.com/haifa/dept/vst/debating_data.shtml

²The datasets are available [here](#)

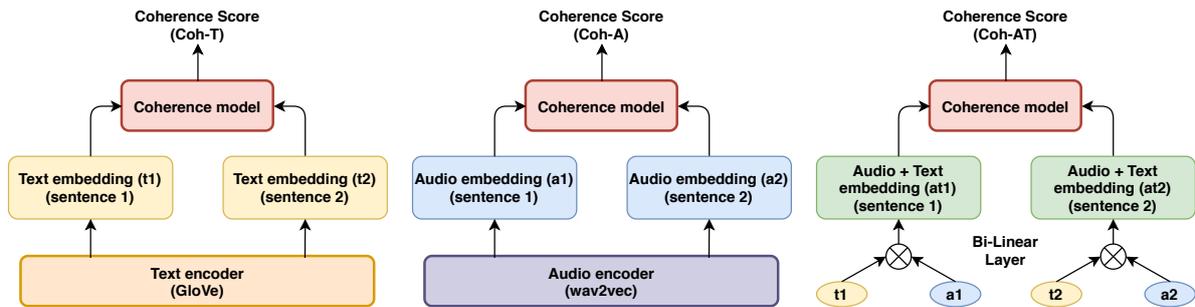


Figure 2: Model architecture across the three input settings: Coh-T, Coh-A and Coh-AT.

datasets are mentioned in Table 1.

3.3 Evaluation Tasks

Empirical results from previous work in coherence modelling for text has shown that the traditional synthetic tasks like sentence ordering do not effectively capture the models’ ability to perform downstream discourse coherence related tasks with real-world data (Lai and Tetreault, 2018; Mohiuddin et al., 2020). An ideal coherence model should perform well (assign appropriate coherence scores) for spoken discourses delivered by humans as well as machine-generated speech. Keeping this in mind, we design four tasks for evaluating coherence in spoken discourse: *Speaker Change Detection (SCD)*, *Artificial Speech Evaluation (ASE)*, *Discourse Topic Change Detection (TCD)* and *Speech Response Scoring (SRS)*. While the first three tasks focus on artificially generated speech and speech delivered by expert human speakers, the fourth task focuses on comparing the spoken discourses delivered by non-native language learners of varying proficiency levels.

Speaker Change Detection (SCD): Modelling coherence in a conversational setting is a very important task with various downstream applications (Joty et al., 2018; Vakulenko et al., 2018). To obtain a structured conversational text-transcript from a given speech audio, we first need to perform speaker diarization. Hence, speaker diarization is an important aspect of modelling conversational spoken discourse (Moattar and Homayounpour, 2012). Acoustic cues play an important role in speaker segmentation of conversational speech (Park and Georgiou, 2018). Since all the samples from the IBM Debater dataset (Lavee et al., 2019) are monologue debate speeches, we construct a new dataset for this task using these monologues. We sample a ten-sentences long segment from the mid-

dle of every response. The first five sentences from the sampled segment are synthesized with a TTS voice (S1) and the next five sentences are synthesized with another TTS voice (S2). Consequently, the overall synthesized speech response consists of a speaker change at the end of the fifth sentence, while maintaining a continuation in the discourse topic. This speaker change in the response can be detected with an audio-based coherence model, where the event of speaker change can be depicted with the least inter-sentence local coherence score. Further in a separate experiment, we reverse the order of speakers, such that the first five sentences are synthesized with TTS voice S2 and the next five sentences are synthesized with TTS voice S1.

Artificial Speech Evaluation (ASE): Following the work done in evaluating the quality of text-based natural language generation systems with coherence-based measures (Lapata and Barzilay, 2005; Park and Kim, 2015; Kiddon et al., 2016), we propose evaluating the TTS systems with coherence models of spoken discourse. TTS systems often face issues while naturalizing the synthesized speech, and continuous efforts are being made to make TTS-speech more human-like and intelligible across longer contexts (Taylor, 2009). Modelling discourse relations and coherence can benefit a TTS system in delivering expressive and intelligible speech (Delmonte and Tripodi, 2015). In this task, we evaluate and compare a TTS speech sample which lacks a certain amount of prosodic variation in terms of intonation, stress and speaking rate, to the speech from a expert human speaker. The underlying hypothesis for this particular task is that the lack of prosodic variation in the TTS sample makes it relatively incoherent as compared to the human speech, even though the delivered lexical content is same across both the samples. Given that we train the coherence models with hu-

man speech only, a direct comparison between the coherence scores of human and machine generated speech might include some biases emerging from audio-data background. To handle this, we perform the comparison using the relative difference between the mean coherence scores of the positive and negative sentence pairs of a given speech response (explained further in Section 5).

Topic Change Detection (TCD): Following the work done by Tür et al. (2001) in automatic topic segmentation with prosodic cues, we propose a coherence-based topic change detection task for spoken discourse. Since, all the samples from the IBM Debater dataset are restricted to a single topic (debate motion), we construct a new dataset for this task using the responses from the IBM Debater dataset (Lavee et al., 2019). These samples majorly evaluate the extent to which a model captures the prosodic features at topic boundaries (Nakajima and Allen, 1993). For constructing a sample, we select a five-sentences long segment from the middle of every response, so that the sampled segment represents a developed topic rather than introductory definitions or concluding statements. Subsequently, we combine it with a similarly sampled segment from a different motion topic. This results in a new ten-sentences long speech response which covers a particular topic in its first five sentences and a different topic in the next five sentences. We use a text-to-speech system to synthesize the speech audio for this newly generated response. The underlying hypothesis for this particular task is that the local inter-sentence coherence score should be the lowest for the fifth and the sixth sentence, depicting a change in discourse topic for the given speech response.

Speech Response Scoring (SRS): Coherence scores follow a monotonic relationship with the holistic language proficiency grades. Previous work in text-based coherence modelling has used essay scoring as an auxiliary evaluation task (Mitsakaki and Kukich, 2004; Mesgar and Strube, 2018). Conversely, modelling coherence has also proved to be beneficial in essay-scoring benchmarks (Tay et al., 2017; Li et al., 2018). In a like manner, coherence-based features extracted from the text-transcriptions of spoken discourses have proved to be useful in scoring speech responses from language learners and non-native English speakers (Wang et al., 2013, 2017). Following

this, we test our coherence models on a dataset of spoken discourses delivered by non-native English language learners from Philippines (Grover et al., 2020). The dataset comprises of speech responses recorded in a test environment where the candidates are asked to respond to one of the 48 distinct prompts. They are subsequently double scored by expert annotators using a holistic language proficiency level on a 6-point CEFR scale (2001). Since there is no publicly available speech dataset with explicit coherence-score annotations, these proficiency grades provide us with an approximate human evaluation of coherence. Using this data, we construct pairs of speech responses, such that every pair contains speech responses from two different speakers, for the same prompt (to eliminate prompt-based biases in the holistic proficiency grading). Given such a pair of speech responses, we hypothesize that the response graded with higher holistic proficiency level, should be assigned higher coherence scores by a coherence model.

Spoken discourse from non-native speakers is usually less structured as compared to a discourse delivered by a native expert speaker (Yan et al., 2020), making it more challenging to model discourse coherence for non-native speakers. The text-transcripts of the speech responses in the dataset are not structured with proper punctuation, which is needed to obtain sentence-level segments of the speech response. So, we punctuate the text-transcripts from the dataset with a punctuator model (Tilk and Alumäe, 2016). Given the background and the pre-processing involved, this dataset is more noisy and challenging as compared to the IBM Debater dataset. Moreover, while the discourses from the IBM Debater dataset are more argumentative and informative in nature, the responses in this dataset are more descriptive and narrative in nature. Hence, both the datasets vastly differ in terms of discourse modes (Song et al., 2017; Dhanwal et al., 2020).

4 Experimental Setup

Audio Processing: Across all our experiments, we use a speaking-rate of 150 words per minute to synthesize speech responses with the TTS systems, a value which is recognized as the average speaking rate for a native US-English speaking adult (NCVS, 2020). Unlike structured texts, there are no explicit cues to perform a sentence-level segmentation in speech. We use a pre-trained Montreal

Forced Aligner (MFA³) model (McAuliffe et al., 2017) and the punctuation from the structured text-transcriptions to get the sentence-level alignments for the speech audio files. Further, all the speech responses are resampled to a 16kHz mono-channel audio file as required by the pre-trained wav2vec model.

Coherence Modelling: Following Xu et al. (2019)’s training protocol, we sample the incoherent pair of sentences within the same speech response. This avoids the model pitfalls related to the topic and speech based features with the local discrimination setting. Further, to make the model generalize well across various domains and sources of the data, we do not fine-tune the pre-trained audio and text encoders on the training data. We train the model to optimize the local coherence scoring based margin loss objective as shown in Equation 1, where f^+ and f^- are coherence scores for the adjacent (coherent) and non-adjacent (incoherent) pairs of sentences, respectively. We use 50% of the topics in the dataset to train our model, while the rest 20% and 30% of the topics are used for validation and testing purposes, respectively. The model parameters are optimized with Adam optimizer (Kingma and Ba, 2015) with a learning rate of 0.001. We validate the models with an early stop callback on the validation loss, with a patience of two epochs. Given, the cross-domain adaptation abilities of the local discrimination model, we borrow the hyperparameter settings from Xu et al. (2019) and do not perform any extensive hyperparameter tuning during our experiments.

$$L(f^+, f^-) = \max(0, 5 - f^+ + f^-) \quad (1)$$

$$k_{change} = \min_{k \in [1, N-1]} \{f^+_k\} \quad (2)$$

$$coherence\ score = \frac{1}{N-1} \sum_{k=1}^{N-1} f^+_k \quad (3)$$

While the SCD task and TCD task are evaluated at a local level with inter-sentence coherence scores (Equation 2), the SRS task is evaluated with response-level coherence scores as shown in Equation 3, where N is the number of sentences in the speech response.

³<https://montreal-forced-aligner.readthedocs.io/>

5 Results and Discussion

Task SCD: For a ten-sentences long response, task SCD results in a nine-way classification setting. The top- k^4 ($k=1,2,3$) accuracy scores for the SCD task are shown in Table 2. As expected, the Coh-T model fails to capture the speaker change boundaries (with the accuracy scores being almost equal to that of random guessing) due to the lack of access to the acoustic information from the speech audio. The Coh-A model shows impressive accuracy for this task, consistent across both the orders of speaker-change. The model predicts almost all the speaker change boundaries for $k=3$. The Coh-AT model does not match up in performance against the Coh-A model, suggesting a difference in audio-based learning between the two input settings.

Model	Change	k=1	k=2	k=3
Coh-T	-	0.0944	0.2041	0.3138
Coh-A	S1 → S2	0.9770	0.9898	0.9949
	S2 → S1	0.9796	0.9974	1.0000
Coh-AT	S1 → S2	0.7398	0.8954	0.9311
	S2 → S1	0.5026	0.6913	0.7730

Table 2: Top-k accuracy scores for the SCD task.

Negative sampling within the same speech response restricts the model to look at audio segments from different speakers under the audio-based settings. Consequently, the model is only exposed to small prosodic and acoustic variations from the same speaker during training. This shows that the local discrimination model captures even large acoustic changes in a given conversational spoken discourse, by modelling local coherence with cues from small acoustic and prosodic variations in monologue speech.

Task ASE: Given the difference in the audio data backgrounds for expert human speakers and TTS systems, we compare their coherence by monitoring the relative difference between the mean coherence scores of the coherent (adjacent) and incoherent (non-adjacent) pairs of sentences sampled from the speech responses generated by them (Table 3). In accordance with the training objective function, the incoherent sentences are scored lesser than the

⁴here a prediction is considered to be correct if the ground-truth value lies in the first k predictions given by the model

Speaker		Coh-T	Coh-A	Coh-AT
Human Expert	f^+	0.75	0.97	0.84
	f^-	-1.14	-1.76	-2.52
	% diff	-252%	-281.40%	-400%
TTS voice (S1)	f^+	0.75	1.76	1.08
	f^-	-1.14	1.62	-0.92
	% diff	-252%	-7.90%	-185.20%
TTS voice (S2)	f^+	0.75	2.73	0.77
	f^-	-1.14	2.55	-1.39
	% diff	-252%	-6.60%	-280.50%

Table 3: Mean coherence scores of positive (adjacent) and negative (non-adjacent) pairs of sentences from the speech samples in the test set for task ASE, along with the relative difference (% diff) between them. A higher % diff value is indicative of better coherence models and more coherent spoken discourses.

coherent sentences (negative relative difference) across all the speaker and model settings. A higher relative difference between the coherence scores of coherent and incoherent pairs of sentences not only indicates the coherence model’s ability to effectively model coherence (horizontal traversal across Table 3), but it also indicates the speaker’s ability to produce more coherent discourses (vertical traversal across Table 3). While the Coh-T model gives a relative difference of -252% on the samples from human experts, the audio-based Coh-A and Coh-AT models give much higher relative differences of -281.40% and -400% , respectively. This shows that incorporating the audio modality highly benefits a coherence model to capture the difference between coherent and incoherent samples. Further, while the Coh-T model is independent of any changes in the speech audio (same mean coherence scores of 0.75 and -1.14 for all the speakers), comparing the relative differences across the speakers, we observe that the TTS voices S1 and S2 show significantly lower relative differences across both the audio-based settings (-7.90% and -6.60% for Coh-A and, -185.20% and -280.50% for Coh-AT, respectively). Hence, under the ASE task, we find that the speech synthesized by TTS systems is relatively incoherent and more difficult to perceive as compared to human-generated speech.

Task TCD: Similar to the SCD task, the TCD task comes up with a nine-way classification setting. The top-k ($k=1,2,3$) accuracy scores for the

Model	Speaker	k=1	k=2	k=3
Coh-T	-	0.2513	0.3980	0.5434
Coh-A	S1	0.1148	0.2156	0.3444
	S2	0.1135	0.2742	0.3801
Coh-AT	S1	0.2385	0.4031	0.5383
	S2	0.2449	0.4056	0.5663

Table 4: Top-k accuracy scores for the TCD task.

TCD task are shown in Table 4. The Coh-A model does not perform well on the TCD task individually, with the accuracy scores being almost equal to that of random guessing. While the Coh-T model slightly outperforms the Coh-AT model for $k=1$, the Coh-AT model shows slight improvements over the Coh-T model for $k=2$ with both the TTS voices S1 and S2. Further, for $k=3$, the Coh-AT model shows significant improvement over the Coh-T model for TTS voice S2. Even though topic segmentation is predominantly a text-based task, the slight improvements shown by Coh-AT model over the text-only settings can be explained by the presence of cues related to the prosodic patterns observed at topic boundaries (Nakajima and Allen, 1993).

	Coh-T	Coh-A	Coh-AT
Accuracy	0.4641	0.7046	0.5569

Table 5: Accuracy scores for the SRS task with non-native speech dataset.

Task SRS: For this task, we monitor the accuracy scores for the binary classification setting based on the holistic language proficiency grades, using response-level coherence scores as the proficiency measure (Table 5). While the Coh-A model performs significantly well with an accuracy score of 0.70 on the test set, the Coh-T and Coh-AT models fail to perform well. Given the lack of structure in non-native speech and the noise in the text-transcriptions of the speech-responses, text-based settings do not capture the complex holistic grades efficiently. On the other hand, the audio-based setting seems to be resistant to this lack of structure and noise in transcriptions and it effectively captures the holistic language proficiency grades.

The near-perfect performance of the Coh-A model in predicting the speaker changes suggests

that modelling coherence with the audio modality can turn out to be quite beneficial for a variety of discourse related tasks in conversational speech such as speech act detection, conversation disentanglement, etc. To further the efforts made in naturalizing the speech synthesized with text-to-speech systems, one can come up with better coherence-based objectives to train the TTS systems. Building up on the topic change detection task, coherence models for spoken discourses can be also evaluated on related downstream applications like topic-segmentation in spoken lectures, podcasts, political spoken discourses, etc. Further, the significantly higher performance of the Coh-A model on the SRS task shows that modelling coherence with audio modality can highly compensate for the lack of structure and errors in text-transcriptions of the speech. This can be quite useful while modelling coherence with data from non-native speakers, language learners or while using error-prone text-transcriptions from automatic speech recognition (ASR) systems.

6 Conclusion

In this paper, we performed experiments with four coherence-related tasks for spoken discourse. In our experiments, we compare the speech synthesized with text-to-speech systems against the expert human speakers. We also evaluate coherence in spoken discourses delivered by non-native language learners of varying language proficiency levels. Our experiments show that incorporating the audio-modality betters the coherence-modelling for spoken discourses significantly.

References

- Regina Barzilay and Mirella Lapata. 2008. [Modeling local coherence: An entity-based approach](#). *Computational Linguistics*, 34(1):1–34.
- Jill Burstein, Joel Tetreault, and Slava Andreyev. 2010. [Using entity-based features to model coherence in student essays](#). In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pages 681–684, Los Angeles, California. Association for Computational Linguistics.
- Henri Cohen, Josée Douaire, and Mayada Elsabbagh. 2001. [The role of prosody in discourse processing](#). *Brain and Cognition*, 46(1):73 – 82.
- Liesbeth Degand and Anne Catherine Simon. 2009. On identifying basic discourse units in speech: theoretical and empirical issues. *Discours. Revue de linguistique, psycholinguistique et informatique. A journal of linguistics, psycholinguistics and computational linguistics*, (4).
- Rodolfo Delmonte and Rocco Tripodi. 2015. [Semantics and discourse processing for expressive TTS](#). In *Proceedings of the First Workshop on Linking Computational Models of Lexical, Sentential and Discourse-level Semantics*, pages 32–43, Lisbon, Portugal. Association for Computational Linguistics.
- Swapnil Dhanwal, Hritwik Dutta, Hitesh Nankani, Nilay Shrivastava, Yaman Kumar, Junyi Jessy Li, Debanjan Mahata, Rakesh Gosangi, Haimin Zhang, Rajiv Ratn Shah, and Amanda Stent. 2020. [An annotated dataset of discourse modes in Hindi stories](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 1191–1196, Marseille, France. European Language Resources Association.
- Council of Europe. Council for Cultural Co-operation. Education Committee. Modern Languages Division. 2001. *Common European Framework of Reference for Languages: learning, teaching, assessment*. Cambridge University Press.
- Micha Elsner, Joseph Austerweil, and Eugene Charniak. 2007. [A unified local and global model for discourse coherence](#). In *Human Language Technologies 2007: The Conference of the North American Chapter of the Association for Computational Linguistics; Proceedings of the Main Conference*, pages 436–443, Rochester, New York. Association for Computational Linguistics.
- Micha Elsner and Eugene Charniak. 2011. [Extending the entity grid with entity-specific features](#). In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 125–129, Portland, Oregon, USA. Association for Computational Linguistics.
- Rahhal Errattahi, Asmaa El Hannani, and Hassan Ouahmane. 2018. [Automatic speech recognition errors detection and correction: A review](#). *Procedia Computer Science*, 128:32 – 37. 1st International Conference on Natural Language and Speech Processing.
- Vanessa Wei Feng and Graeme Hirst. 2012. [Extending the entity-based coherence model with multiple ranks](#). In *Proceedings of the 13th Conference of the European Chapter of the Association for Computational Linguistics*, pages 315–324, Avignon, France. Association for Computational Linguistics.
- Vanessa Wei Feng, Ziheng Lin, and Graeme Hirst. 2014. [The impact of deep hierarchical discourse structures in the evaluation of text coherence](#). In *Proceedings of COLING 2014, the 25th International Conference on Computational Linguistics: Technical Papers*, pages 940–949, Dublin, Ireland. Dublin

- City University and Association for Computational Linguistics.
- Barbara J. Grosz, Aravind K. Joshi, and Scott Weinstein. 1995. [Centering: A framework for modeling the local coherence of discourse](#). *Computational Linguistics*, 21(2):203–225.
- Manraj Singh Grover, Yaman Kumar, Sumit Sarin, Payman Vafaei, Mika Hama, and Rajiv Ratn Shah. 2020. [Multi-modal automated speech scoring using attention fusion](#).
- Camille Guinaudeau and Michael Strube. 2013. [Graph-based local coherence modeling](#). In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 93–103, Sofia, Bulgaria. Association for Computational Linguistics.
- Julia Hirschberg and Christine H. Nakatani. 1996. [A prosodic analysis of discourse segments in direction-giving monologues](#). In *34th Annual Meeting of the Association for Computational Linguistics*, pages 286–293, Santa Cruz, California, USA. Association for Computational Linguistics.
- Dan Iter, Kelvin Guu, Larry Lansing, and Dan Jurafsky. 2020. [Pretraining with contrastive sentence objectives improves discourse performance of language models](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4859–4870, Online. Association for Computational Linguistics.
- Shafiq Joty, Giuseppe Carenini, Raymond Ng, and Gabriel Murray. 2019. [Discourse analysis and its applications](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics: Tutorial Abstracts*, pages 12–17, Florence, Italy. Association for Computational Linguistics.
- Shafiq Joty, Muhammad Tasnim Mohiuddin, and Dat Tien Nguyen. 2018. [Coherence modeling of asynchronous conversations: A neural entity grid approach](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 558–568, Melbourne, Australia. Association for Computational Linguistics.
- Chloé Kiddon, Luke Zettlemoyer, and Yejin Choi. 2016. [Globally coherent text generation with neural checklist models](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 329–339, Austin, Texas. Association for Computational Linguistics.
- Diederik P. Kingma and Jimmy Ba. 2015. [Adam: A method for stochastic optimization](#). In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*.
- Alice Lai and Joel Tetreault. 2018. [Discourse coherence in the wild: A dataset, evaluation and methods](#). In *Proceedings of the 19th Annual SIGdial Meeting on Discourse and Dialogue*, pages 214–223, Melbourne, Australia. Association for Computational Linguistics.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. 2020. [Albert: A lite bert for self-supervised learning of language representations](#). In *International Conference on Learning Representations*.
- Mirella Lapata and Regina Barzilay. 2005. Automatic evaluation of text coherence: Models and representations. In *Proceedings of the 19th International Joint Conference on Artificial Intelligence, IJCAI’05*, page 1085–1090, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Tamar Lavee, Matan Orbach, Lili Kotlerman, Yoav Kantor, Shai Gretz, Lena Dankin, Michal Jacovi, Yonatan Bilu, Ranit Aharonov, and Noam Slonim. 2019. Towards effective rebuttal: Listening comprehension using corpus-wide claim mining. In *Proceedings of the 6th Workshop on Argument Mining*, pages 58–66.
- Jiwei Li and Eduard Hovy. 2014. [A model of coherence based on distributed sentence representation](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2039–2048, Doha, Qatar. Association for Computational Linguistics.
- Jiwei Li and Dan Jurafsky. 2017. [Neural net models of open-domain discourse coherence](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 198–209, Copenhagen, Denmark. Association for Computational Linguistics.
- Junyi Li. 2017. From discourse structure to text specificity: Studies of coherence preferences.
- Xia Li, Minping Chen, Jianyun Nie, Zhenxing Liu, Ziheng Feng, and Yingdan Cai. 2018. Coherence-based automated essay scoring using self-attention. In *Chinese Computational Linguistics and Natural Language Processing Based on Naturally Annotated Big Data*, pages 386–397. Springer.
- Ziheng Lin, Hwee Tou Ng, and Min-Yen Kan. 2011. [Automatically evaluating text coherence using discourse relations](#). In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 997–1006, Portland, Oregon, USA. Association for Computational Linguistics.
- Lajanugen Logeswaran, Honglak Lee, and Dragomir R Radev. 2018. Sentence ordering and coherence modeling using recurrent neural networks. In *AAAI*.

- Annie Louis and Ani Nenkova. 2012. [A coherence model based on syntactic patterns](#). In *Proceedings of the 2012 Joint Conference on Empirical Methods in Natural Language Processing and Computational Natural Language Learning*, pages 1157–1168, Jeju Island, Korea. Association for Computational Linguistics.
- Michael McAuliffe, Michaela Socolof, Sarah Mihuc, Michael Wagner, and Morgan Sonderegger. 2017. Montreal forced aligner: Trainable text-speech alignment using kaldii.
- Mohsen Mesgar and Michael Strube. 2015. [Graph-based coherence modeling for assessing readability](#). In *Proceedings of the Fourth Joint Conference on Lexical and Computational Semantics*, pages 309–318, Denver, Colorado. Association for Computational Linguistics.
- Mohsen Mesgar and Michael Strube. 2018. [A neural local coherence model for text quality assessment](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4328–4339, Brussels, Belgium. Association for Computational Linguistics.
- Microsoft. 2009. [Microsoft Speech API \(SAPI\) 5.4](#).
- E. Miltsakaki and K. Kukich. 2004. [Evaluation of text coherence for electronic essay scoring systems](#). *Nat. Lang. Eng.*, 10(1):25–55.
- Mohammad Hossein Moattar and Mohammad M Homayounpour. 2012. A review on speaker diarization systems and approaches. *Speech Communication*, 54(10):1065–1103.
- Tasnim Mohiuddin, Prathyusha Jwalapuram, Xiang Lin, and Shafiq Joty. 2020. [Coheval: Benchmarking coherence models](#).
- Han Cheol Moon, Tasnim Mohiuddin, Shafiq Joty, and Chi Xu. 2019. [A unified neural coherence model](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2262–2272, Hong Kong, China. Association for Computational Linguistics.
- Shin Nakajima and James F. Allen. 1993. A study on prosody and discourse structure in cooperative dialogues. Technical report, USA.
- NCVS. 2020. [National center for voice and speech \(ncvs\)](#).
- Ani Nenkova and Kathleen McKeown. 2011. *Automatic summarization*. Now Publishers Inc.
- Cesc C Park and Gunhee Kim. 2015. [Expressing an image stream with a sequence of natural sentences](#). In C. Cortes, N. D. Lawrence, D. D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems 28*, pages 73–81. Curran Associates, Inc.
- Tae Jin Park and Panayiotis Georgiou. 2018. [Multi-modal speaker segmentation and diarization using lexical and acoustic cues via sequence to sequence neural networks](#). *Interspeech 2018*.
- Jeffrey Pennington, Richard Socher, and Christopher D. Manning. 2014. [Glove: Global vectors for word representation](#). In *Empirical Methods in Natural Language Processing (EMNLP)*, pages 1532–1543.
- Emily Pitler and Ani Nenkova. 2008. [Revisiting readability: A unified framework for predicting text quality](#). In *Proceedings of the 2008 Conference on Empirical Methods in Natural Language Processing*, pages 186–195, Honolulu, Hawaii. Association for Computational Linguistics.
- Rashmi Prasad, Nikhil Dinesh, Alan Lee, Eleni Miltsakaki, Livio Robaldo, Aravind Joshi, and Bonnie Webber. 2008. [The Penn discourse TreeBank 2.0](#). In *LREC 2008*.
- Steffen Schneider, Alexei Baevski, Ronan Collobert, and Michael Auli. 2019. [wav2vec: Unsupervised pre-training for speech recognition](#). *Interspeech 2019*.
- Karin Sim Smith, Wilker Aziz, and Lucia Specia. 2016. [The trouble with machine translation coherence](#). In *Proceedings of the 19th Annual Conference of the European Association for Machine Translation*, pages 178–189.
- Wei Song, Dong Wang, Ruiji Fu, Lizhen Liu, Ting Liu, and Guoping Hu. 2017. [Discourse mode identification in essays](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 112–122, Vancouver, Canada. Association for Computational Linguistics.
- Lisa J Stifelman. 1995. A discourse analysis approach to structured speech.
- Heike Tappe and Frank Schilder. 1998. [Coherence in spoken discourse](#). In *COLING 1998 Volume 2: The 17th International Conference on Computational Linguistics*.
- Yi Tay, Minh C. Phan, Luu Anh Tuan, and Siu Cheung Hui. 2017. [Skipflow: Incorporating neural coherence features for end-to-end automatic text scoring](#).
- Paul Taylor. 2009. *Text-to-speech synthesis*. Cambridge university press.
- Sandra A Thompson and William C Mann. 1987. Rhetorical structure theory: A framework for the analysis of texts. *IPRA Papers in Pragmatics*, 1(1):79–105.
- Dat Tien Nguyen and Shafiq Joty. 2017. [A neural local coherence model](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1320–1330, Vancouver, Canada. Association for Computational Linguistics.

- Ottokar Tilk and Tanel Alumäe. 2016. Bidirectional recurrent neural network with attention mechanism for punctuation restoration. In *Interspeech 2016*.
- Gökhan Tür, Dilek Hakkani-Tür, Andreas Stolcke, and Elizabeth Shriberg. 2001. Integrating prosodic and lexical cues for automatic topic segmentation. *Computational Linguistics*, 27(1):31–57.
- Svitlana Vakulenko, Maarten de Rijke, Michael Cochez, Vadim Savenkov, and Axel Polleres. 2018. Measuring semantic coherence of a conversation. In *The Semantic Web – ISWC 2018*, pages 634–651, Cham. Springer International Publishing.
- Xinhao Wang, Keelan Evanini, and Klaus Zechner. 2013. Coherence modeling for the automated assessment of spontaneous spoken responses. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 814–819, Atlanta, Georgia. Association for Computational Linguistics.
- Xinhao Wang, Keelan Evanini, Klaus Zechner, and Matthew Mulholland. 2017. Modeling discourse coherence for the automated scoring of spontaneous spoken responses. In *Proc. 7th ISCA Workshop on Speech and Language Technology in Education*, pages 132–137.
- Xinhao Wang, Binod Gyawali, James V. Bruno, Hillary R. Molloy, Keelan Evanini, and Klaus Zechner. 2019. Using rhetorical structure theory to assess discourse coherence for non-native spontaneous speech. In *Proceedings of the Workshop on Discourse Relation Parsing and Treebanking 2019*, pages 153–162, Minneapolis, MN. Association for Computational Linguistics.
- Yuan Wang and Minghe Guo. 2014. A short analysis of discourse coherence. *Journal of Language Teaching and Research*, 5(2):460.
- Bonnie Webber. 2004. D-Itag: extending lexicalized tag to discourse. *Cognitive Science*, 28(5):751 – 779. 2003 Rumelhart Prize Special Issue Honoring Aravind K. Joshi.
- Peng Xu, Hamidreza Saghir, Jin Sung Kang, Teng Long, Avishek Joey Bose, Yanshuai Cao, and Jackie Chi Kit Cheung. 2019. A cross-domain transferable neural coherence model. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 678–687, Florence, Italy. Association for Computational Linguistics.
- Duanli Yan, André A Rupp, and Peter W Foltz. 2020. *Handbook of automated scoring: Theory into practice*. CRC Press.