

Multi-objective Conflict-based Search for Multi-agent Path Finding

Zhongqiang Ren¹, Sivakumar Rathinam² and Howie Choset¹

Abstract—Conventional multi-agent path planners typically compute an ensemble of paths while optimizing a single objective, such as path length. However, many applications may require multiple objectives, say fuel consumption and completion time, to be simultaneously optimized during planning and these criteria may not be readily compared and sometimes lie in competition with each other. Naively applying existing multi-objective search algorithms to multi-agent path finding may prove to be inefficient as the size of the space of possible solutions, i.e., the Pareto-optimal set, can grow exponentially with the number of agents (the dimension of the search space). This article presents an approach named Multi-objective Conflict-based Search (MO-CBS) that bypasses this so-called curse of dimensionality by leveraging prior Conflict-based Search (CBS), a well-known algorithm for single-objective multi-agent path finding, and principles of dominance from multi-objective optimization literature. We prove that MO-CBS is able to compute the entire Pareto-optimal set. Our results show that MO-CBS can solve problem instances with hundreds of Pareto-optimal solutions which the standard multi-objective A* algorithms could not find within a bounded time.

I. INTRODUCTION

Multi-agent Path Finding (MAPF) computes a set of collision-free paths for multiple agents connecting their respective start and goal locations while optimizing a scalar measure of paths. Variants of MAPFs have been widely studied in the robotics community over the last few years [23]. In this article, we investigate a natural generalization of the MAPF to include multiple objectives for multiple agents and hence the name *multi-objective multi-agent path finding* (MOMAPF). In MOMAPF, agents have to trade-off multiple objectives such as completion time, energy consumption, travel risk and other domain-specific measures (Fig. 1).

In the presence of multiple objectives, the goal of MOMAPF is to find the set of all Pareto-optimal¹ solutions rather than a single optimal solution as in MAPF. Finding this set of solutions while ensuring collision-free paths for agents in each solution is quite challenging: even though there are many multi-objective single-agent search algorithms [14], [19], [24] that can compute all Pareto-optimal solutions, a naive application of such algorithms to the MOMAPF problem may prove to be inefficient as the size of the Pareto-optimal set grows exponentially with respect to the number of agents and the dimension of the search space [20], [31].

¹ Zhongqiang Ren and Howie Choset are with Carnegie Mellon University, 5000 Forbes Ave., Pittsburgh, PA 15213, USA.

² Sivakumar Rathinam is with Texas A&M University, College Station, TX 77843-3123.

¹A solution is Pareto-optimal if there exists no other solution that will yield an improvement in one objective without causing a deterioration in at least one of the other objectives.

Among the algorithms that optimally solve the single-objective MAPF problems, Conflict-based Search (CBS) [21] has received significant attention due to its computational efficiency on average. This method has also been extended to solve several other variants of MAPF as noted in [1], [5], [11]. However, we are not currently aware of any CBS or other algorithms that can directly solve a MOMAPF to optimality. This article takes a first step in addressing this gap. By leveraging multi-objective dominance techniques [8], we propose a new algorithm named Multi-objective Conflict-based Search (MO-CBS) that is able to compute the entire Pareto-optimal set of collision-free paths with respect to multiple objectives.

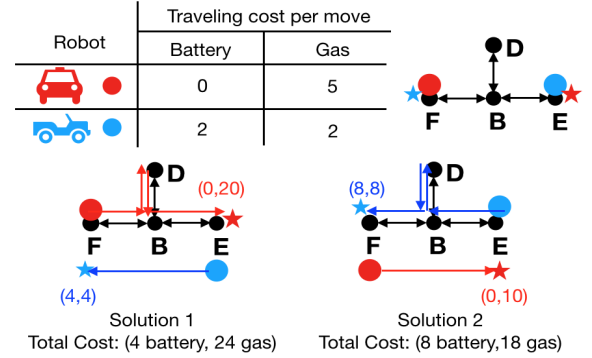


Fig. 1: A toy example of the MOMAPF problem with two objectives: minimizing total battery usage and gas costs. Red and blue robots initially locate at vertices F and E (circles) respectively and aim at switching their locations (stars). There are two Pareto-optimal solutions: either the red or blue robot circumvents the other at vertex D .

To bypass the curse of dimensionality, MO-CBS takes a similar strategy as CBS to resolve conflicts along paths of agents while extending CBS to handle multiple objectives. MO-CBS begins by computing individual Pareto-optimal paths for each agent ignoring agent-agent conflicts and letting agents follow those paths. When a conflict between agents is found along their paths, MO-CBS splits the conflict by adding constraints to either agent's individual search space and calls a multi-objective single-agent planner to compute new individual Pareto-optimal paths subject to those added constraints. In addition, MO-CBS uses dominance rules to select candidate solutions for conflict-checking and compare them until all the candidates are either pruned or identified as Pareto-optimal. To further improve the performance, we also developed an improved variant of MO-CBS named MO-CBS-t, which uses a different candidate selection strategy. Compared with existing approaches that are guaranteed to

find all Pareto-optimal solutions, such as A New Approach to Multi-Objective A* (NAMOA*) [14], the numerical results show that MO-CBS outperforms NAMOA* in terms of success rates under bounded time as well as average run time for MOMAPF in general.

II. PRIOR WORK

MAPF methods [4], [6], [12], [17], [22], [25], [28]–[31] range from centralized to decentralized, trading off completeness and optimality for scalability. Conflict-based Search (CBS) [21], a method in the middle of the spectrum, and its variants [2], [3] have been extended to many different problems [1], [5], [10], [11], to name a few.

In terms of handling multiple objectives, dominance principles from multi-objective optimization [8] have been applied to single agent path finding [14], [19], [24], [27], motion planning [26], reinforcement learning [7], [16] and others [7], [15], to name a few. One of the basic challenges in multi-objective search is to compute the entire set of multi-objective optimal solutions, the size of which grows exponentially with respect to the number of nodes in a graph in the worst case [8], [20]. To overcome this challenge, search algorithms like A* [9], as a best-first search method, are extended to multi-objective A* (MOA*) [24] and later improved in NAMOA* [14]. In addition, different multi-objective heuristic search methods are summarized and analyzed in a unified framework in [13]. Even though MOA*-based approaches can be applied to the product of the configuration spaces corresponding to the agents, numerical results in Section VII show that it is significantly less efficient compared to the proposed MO-CBS.

III. PROBLEM DESCRIPTION

Let index set $I = \{1, 2, \dots, N\}$ denote a set of N agents. All agents move in a workspace represented as a graph $G = (V, E)$ where the vertex set V represents all possible locations of agents and the edge set $E = V \times V$ denotes the set of all the possible actions that can move an agent between any two vertices in V . An edge between two vertices $u, v \in V$ is denoted as $(u, v) \in E$ and the cost of an edge $e \in E$ is a M -dimensional strictly positive real vector $cost(e) \in (R^+)^M \setminus \{0\}$ with M being a positive integer.

In this work, we use a superscript $i, j \in I$ over a variable to represent the specific agent that the variable belongs to (e.g. $v^i \in V$ means a vertex with respect to agent i). Let $\pi^i(v_1^i, v_\ell^i)$ be a path that connects vertices v_1^i and v_ℓ^i via a sequence of vertices $(v_1^i, v_2^i, \dots, v_\ell^i)$ in the graph G . Let $g^i(\pi^i(v_1^i, v_\ell^i))$ denote the M -dimensional cost vector associated with the path, which is the sum of the cost vectors of all the edges present in the path, i.e., $g^i(\pi^i(v_1^i, v_\ell^i)) = \sum_{j=1,2,\dots,\ell-1} cost(v_j^i, v_{j+1}^i)$.

All agents share a global clock. Each action, either wait or move, for any agent requires one unit of time. Any two agents $i, j \in I$ are said to be in conflict if one of the following two cases happens. The first case is a “vertex conflict” where two agents occupy the same location at the same time. The second case is an “edge conflict” where two agents swap

their adjacent vertices (both ends of an edge) at times t and $t + 1$ for some t .

Let $v_o^i, v_f^i \in V$ respectively denote the initial location and the desired destination of agent i . Without loss of generality, to simplify the notations, we also refer to a path $\pi^i(v_o^i, v_f^i)$ for agent i between its initial and final locations as simply π^i . Let $\pi = (\pi^1, \pi^2, \dots, \pi^N)$ represent a joint path for all the agents. The cost vector of this joint path is defined as the vector sum of the individual path costs over all the agents, i.e., $g(\pi) = \sum_i g^i(\pi^i)$. To compare any two joint paths or solutions to the MOMAPF, we compare the cost vectors corresponding to these solutions. Given two vectors a and b , a is said to *dominate* b if every element in a is no larger than the corresponding element in b and a is not equal to b . Formally, it is defined as:

Definition 1 (Dominance [14]): Given two vectors a and b of length M , a dominates b , notationally $a \succeq b$, if and only if $\forall m \in \{1, 2, \dots, M\}, a(m) \leq b(m)$, and $a \neq b$. If a does not dominate b , this non-dominance is denoted as $a \not\succeq b$. Any two solutions are non-dominated if the corresponding cost vectors do not dominate each other. The set of all non-dominated solutions is called the *Pareto-optimal set*.

All the agents start their paths at time $t = 0$. The goal of the MOMAPF problem is to find all the conflict-free, non-dominated solutions with unique cost vectors, where the path for every agent $i \in I$ in each solution starts at v_o^i and reaches v_f^i at some later time.

IV. A BRIEF REVIEW OF CONFLICT-BASED SEARCH

A. Conflicts and Constraints

Let (i, j, v^i, v^j, t) represent a *conflict* between agent $i, j \in I$, with $v^i, v^j \in V$ representing the vertex of agent i, j at time t . In addition, to represent a vertex conflict, v^i is required to be the same as v^j and they both represent the location where vertex conflict happens. To represent an edge conflict, v^i, v^j denote the adjacent vertices that agent i, j swap at time t and $t + 1$. Given a pair of individual paths π^i, π^j of agent $i, j \in I$, to detect a conflict, let $\Psi(\pi^i, \pi^j)$ represent a conflict checking function that returns either an empty set if there is no conflict along π^i, π^j , or the first conflict detected along π^i, π^j .

A conflict (i, j, v^i, v^j, t) can be avoided by putting a corresponding constraint on the path of either agent i or agent j . Specifically, let $\omega^i = (i, u_a^i, u_b^i, t), u_a^i, u_b^i \in V$ represent a *constraint* generated from conflict (i, j, v^i, v^j, t) that belongs to agent i with $u_a^i = v^i, u_b^i = v^j$ and the following specifications.

- If $u_a^i = u_b^i$, ω^i forbids agent i from entering u_a^i at time t and is named as a *vertex constraint* as it corresponds to a vertex conflict.
- If $u_a^i \neq u_b^i$, ω^i forbids agent i from moving from u_a^i to u_b^i between time t and $t + 1$ and is named as an *edge constraint* as it corresponds to an edge conflict.

Given a set of constraints Ω , let $\Omega^i \subseteq \Omega$ represent the subset of all constraints in Ω that belong to agent i (i.e.,

$\Omega = \bigcup_{i \in I} \Omega^i$). A path π^i is *consistent* with respect to Ω if π^i satisfies every constraint in Ω^i . A joint path π is consistent with respect to Ω if every individual path $\pi^i \in \pi$ is consistent.

B. Two Level Search

CBS is a two level search algorithm. The low level search in CBS is a single-agent optimal path planner that plans an optimal and consistent path for an agent i with respect to a set of constraints Ω^i . If there is no consistent path for agent i given Ω^i , low level search reports failure.

For the high level search, CBS constructs a search tree \mathcal{T} with each tree node P containing:

- $\pi = (\pi^1, \pi^2, \dots, \pi^N)$, a set of individual paths that connect start and goal vertices of agents respectively,
- g , a scalar cost value associated with path π and
- a set of constraints Ω .

The root node P_o of \mathcal{T} has an empty set of constraints $\Omega_o = \emptyset$ and the corresponding joint path π_o is constructed by the low level search for every agent respectively with an empty constraint set.

To process a high level search node $P_k = (\pi_k, g_k, \Omega_k)$, where subscript k identifies a specific node, conflict checking $\Psi(\pi_k^i, \pi_k^j)$ is computed for any pair of individual paths in π_k with $i, j \in I, i \neq j$. If there is no conflict detected, a solution is found and the algorithm terminates. If there is a conflict (i, j, v^i, v^j, t) detected, to resolve the detected conflict, CBS conducts the following procedures.

- CBS *splits* the detected conflict to generate two constraints $\omega^i = (i, u_a^i = v^i, u_b^i = v^j, t)$ and $\omega^j = (j, u_a^j = v^j, u_b^j = v^i, t)$.
- CBS generates two corresponding nodes $P_{li} = (\pi_{li}, g_{li}, \Omega_{li}), P_{lj} = (\pi_{lj}, g_{lj}, \Omega_{lj})$, where $\Omega_{li} = \Omega_k \cup \{\omega^i\}$ and $\Omega_{lj} = \Omega_k \cup \{\omega^j\}$.
- CBS updates individual path π^i in joint path π_{li} (and π^j in π_{lj}) by calling the low level search for agent i (and j) with a set of constraints Ω_{li} (and Ω_{lj} respectively). If low level search fails to find a consistent path for i (or j), the corresponding node P_{li} (or P_{lj}) is discarded.

After conflict resolving, CBS inserts generated nodes into OPEN, which is a priority queue containing all candidate high level nodes. CBS optimally solves a (single-objective) MAPF problem by iteratively selecting candidate node from OPEN with the smallest g cost, detect conflicts, and then either claims success (if not conflict detected) or resolves the detected conflict which generates new candidate nodes.

Intuitively, from the perspective of the search tree \mathcal{T} constructed by CBS, OPEN contains all leaf nodes in \mathcal{T} . In each round of the high-level search, a leaf node P_k is selected and checked for conflict. CBS either claims success if paths in P_k are conflict-free or generates new leaf nodes.

V. MULTI-OBJECTIVE CONFLICT-BASED SEARCH

Multi-objective Conflict-based Search (MO-CBS), as described in Alg. 1, follows a similar workflow as CBS by selecting candidate nodes from OPEN, detecting conflicts

and resolving them. MO-CBS generalizes CBS to a multi-objective setting with several key differences as described in the following sections.

Algorithm 1 Pseudocode for MO-CBS, MO-CBS-t

```

1: Initialization()
2:  $\mathcal{S} \leftarrow \emptyset$ 
3: while OPEN not empty do
4:    $P_k = (\pi_k, \vec{g}_k, \Omega_k) \leftarrow \text{OPEN.pop}()$ 
5:   //  $P_k = (\pi_k, \vec{g}_k, \Omega_k) \leftarrow \text{OPEN.pop-tree-by-tree}()$ 
6:   if no conflict detected in  $\pi_k$  then
7:     FilterSolution( $P_k$ )
8:     add  $P_k$  to  $\mathcal{S}$ 
9:     FilterOpen( $P_k$ )
10:    continue
11:    $\Omega \leftarrow \text{Split detected conflict}$ 
12:   for all  $\omega^i \in \Omega$  do
13:      $\Omega_l = \Omega_k \cup \{\omega^i\}$ 
14:      $\Pi_*^i \leftarrow \text{LowLevelSearch}(i, \Omega_l)$ 
15:     for all  $\pi_*^i \in \Pi_*^i$  do
16:        $\pi_l \leftarrow \pi_k$ 
17:       Replace  $\pi_l^i$  (in  $\pi_l$ ) with  $\pi_*^i$ 
18:        $g_l \leftarrow \text{compute path cost } \pi_l$ 
19:       if NonDom( $g_l$ ) then
20:          $P_l = (\pi_l, \vec{g}_l, \Omega_l)$ 
21:         add  $P_l$  to OPEN
22: return  $\mathcal{S}$ 

```

A. Initialization

In MO-CBS, to initialize OPEN (line 1 in Alg. 1), a single-agent multi-objective planner (e.g. NAMOA* [14]) is used for each agent $i \in I$ separately to compute a Pareto-optimal set of paths, Π_o^i , for agent i . A set of joint paths Π_o is generated by finding the Cartesian product of all the paths in the Pareto-optimal sets in $\{\Pi_o^i, i \in I\}$, i.e. $\Pi_o = \{\pi_o | \pi_o = (\pi_o^1, \pi_o^2, \dots, \pi_o^N), \pi_o^i \in \Pi_o^i, \forall i \in I\}$. Clearly, the size of Π_o is $|\Pi_o| = |\Pi_o^1| \times |\Pi_o^2| \times \dots \times |\Pi_o^N|$. For each $\pi_o \in \Pi_o$, a high level node containing π_o , a cost vector associated with π_o and an empty constraint set is generated and added into OPEN². The cost vector is denoted as \vec{g} in MO-CBS to differentiate from the scalar g cost in CBS. Intuitively, while the original CBS initializes a single root node and a single search tree \mathcal{T} , MO-CBS initializes a number of $R = |\Pi_o|$ root nodes and a “search forest” $\mathcal{T}_r, r = \{1, 2, \dots, R\}$ where each tree \mathcal{T}_r corresponds to a root node.

B. Finding a Solution

For every iteration in MO-CBS, a high level node $P_k = (\pi_k, \vec{g}_k, \Omega_k)$ with a non-dominated cost vector \vec{g}_k in OPEN is popped and processed. If π_k is conflict-free, a solution is identified, and P_k is inserted into \mathcal{S} , a set of high level nodes where each node contains conflict-free paths for the agents. Besides, two additional procedures need to be conducted when finding a solution.

Procedure FilterSolution(P_k) uses the cost vector in P_k to filter all previously found solutions in \mathcal{S} . For every node $P_l = (\pi_l, \vec{g}_l, \Omega_l) \in \mathcal{S}$, \vec{g}_l is compared with \vec{g}_k in P_k and

²Set Π_o can be filtered by removing joint paths with dominated cost vectors. Only for those remaining joint paths (with non-dominated cost vectors), corresponding nodes are generated and inserted into OPEN.

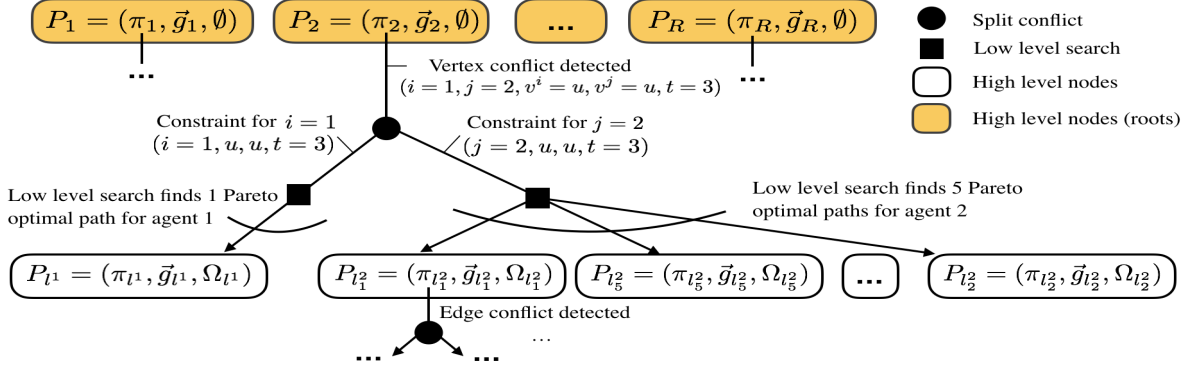


Fig. 2: An illustration of the MO-CBS with R root nodes initialized. MO-CBS selects candidate nodes with non-dominated cost vectors, splits detected conflicts to generate constraints, conducts low level search subject to those constraints, and generates new candidate nodes.

if $\vec{g}_k \succeq \vec{g}_l$ (or $\vec{g}_k = \vec{g}_l$), then P_l is removed from \mathcal{S} . The necessity of this procedure is rooted at the difference that a search forest $\mathcal{T}_r, r = \{1, 2, \dots, R\}$, rather than a single search tree, is constructed by MO-CBS. While each node P_l in \mathcal{S} is guaranteed to be Pareto-optimal with respect to the search tree that contains it (see Section VI for a proof), P_l is not guaranteed to be Pareto-optimal with respect to other search trees. When a solution P_k is identified in some tree \mathcal{T}_k , $\text{FilterSolution}(P_k)$ removes solution nodes with dominated cost vectors that are found in other trees $\mathcal{T}_l, l \neq k$. As a result, \mathcal{S} is guaranteed to be a set of Pareto-optimal solutions among all search trees when the algorithm terminates.

In addition, to filter nodes with dominated cost vectors in OPEN, procedure FilterOpen is called when a solution is found. As $P_k = (\pi_k, \vec{g}_k, \Omega_k)$ contains a conflict-free joint path, any candidates node $P_l = (\pi_l, \vec{g}_l, \Omega_l)$ in OPEN with a dominated cost vector \vec{g}_l (i.e. $\vec{g}_k \succeq \vec{g}_l$) can not lead to a Pareto-optimal solution and is thus removed from OPEN.

While CBS terminates when the first solution is identified, MO-CBS continues to search when a solution is identified and terminates only when OPEN is empty in order to identify all Pareto-optimal solutions.

C. Conflict Resolution

When a node $P_k = (\pi_k, \vec{g}_k, \Omega_k)$ is popped from OPEN, if π_k contains a conflict, just as in CBS, the detected conflict is split into two constraints and a new set of constraints Ω_l is generated correspondingly. Given an agent i and a constraint set Ω_l , the low level search (which is explained next) is called to compute consistent paths with respect to Ω_l for agent i .

Given a set of constraints Ω_l and an agent i , while in CBS, only one individual optimal path for agent i (that is consistent with Ω_l) is computed, in MO-CBS, there can be multiple consistent non-dominated individual paths for agent i . To identify all those consistent non-dominated individual paths, the low level search uses NAMOA* [14] algorithm to search over a time-augmented graph $G^t = (V^t, E^t) = G \times \{0, 1, \dots, T\}$ where each vertex in $v \in V^t$ is defined as $v = (u, t), u \in V, t \in \{0, 1, \dots, T\}$ and T is a pre-defined time horizon (a large positive integer). Edges within G^t is represented as $E^t = V^t \times V^t$ where $(u_1, t_1), (u_2, t_2)$

is connected in G^t if $(u_1, u_2) \in E$ and $t_2 = t_1 + 1$. Wait in place is also allowed in G^t , i.e. $(u, t_1), (u, t_1 + 1), u \in V$ is connected in G^t . In addition, all vertices and edges in G^t that correspond to vertex constraints and edge constraints in $\Omega_l^i \subseteq \Omega_l$ are removed from G^t .

This NAMOA*-based low level search guarantees to return a set of consistent, non-dominated individual paths Π_*^i for agent i subject to the given constraint set. For each path $\pi_*^i \in \Pi_*^i$ computed by the low level search, a corresponding joint path π_l is generated by first copy from π_k and then update the individual path π_l^i in π_l with π_*^i (line 16-17 in Alg. 1). If the cost vector corresponding to π_l is not dominated (nor equalized) by any solutions found so far, a new node $P_l = (\pi_l, \vec{g}_l, \Omega_l)$ is generated and inserted into OPEN.

Thus far, we have discussed the key features of the MO-CBS algorithm. In the next subsection, we revisit the part of the algorithm where a high level search node is selected and popped from OPEN, discuss its advantages and drawbacks and propose a different expansion strategy.

D. Tree-by-tree Expansion

In MO-CBS, a node with a non-dominated cost vector is selected from OPEN and expanded (conflict checking and splitting). This expansion strategy has two drawbacks. First of all, it requires the generation of all root nodes at initialization so that a non-dominated one can be selected for expansion. Considering an example with ten agents and each agent has ten individual Pareto-optimal paths, in this case, MO-CBS needs to generate 10^{10} root nodes and put them into OPEN. Generating such a huge number of high level search nodes are computationally prohibitive.

Another disadvantage of this expansion strategy is that nodes are selected in a “breadth-first” manner in the sense that selected nodes can belong to different trees. As the number of agents (or objectives) increases, as one can expect, this expansion strategy may lead to a large number of nodes expanded before finding the first solution.

Based on those observations, we propose a new expansion strategy. Let candidate nodes in OPEN be sorted by the tree \mathcal{T}_r they belong to, and let OPEN_r denote the open list that contains only candidate nodes in tree $\mathcal{T}_r, r \in \{1, 2, \dots, R\}$.

Clearly, $\text{OPEN} = \bigcup_{r=1,2,\dots,R} \text{OPEN}_r$. Instead of selecting an arbitrary non-dominated node in OPEN as MO-CBS does, initially, only nodes in OPEN_1 are selected for expansion. The selected node is then expanded in the same manner as MO-CBS. Since any newly generated nodes also belong to \mathcal{T}_1 , those nodes must be inserted into OPEN_1 . When OPEN_1 depletes, the algorithm then selects nodes from OPEN_2 (and then OPEN_3 , and so on) for expansion. The algorithm terminates when OPEN_R is depleted.

We denote MO-CBS with such a “tree-by-tree” node selection strategy as MO-CBS-t, where “-t” stands for tree-by-tree. An immediate advantage of MO-CBS-t over MO-CBS is that all root nodes are not required to be generated before the search starts. Instead, generation of root nodes can be deferred: only when OPEN_r depletes, root of tree \mathcal{T}_{r+1} is then generated for search.

In addition, MO-CBS-t performs a “depth-first” like search by exhaustively examining one tree after another which makes MO-CBS-t identify the first feasible solution potentially earlier than MO-CBS. Note that those identified feasible solutions are only Pareto-optimal within the tree it belongs to and is not guaranteed to be Pareto-optimal across all trees. \mathcal{S} is guaranteed to be Pareto-optimal only when the algorithm terminates. However, numerical results in Sec. VII show that the cost vector of the first solution computed by MO-CBS-t is exactly or very “close” to the Pareto-optimal front.

VI. ANALYSIS

Let $\mathcal{T}_r, r \in \{1, 2, \dots, R\}$ represent a set of search trees where \mathcal{T}_r corresponds to the r -th root node created in the initialization step. Let $\mathcal{T}(P_k)$ denote the search tree that node P_k belongs to.

Definition 2 (CV set): Given a high level node $P_k = (\pi_k, \vec{g}_k, \Omega_k)$, let $CV(P_k)$ be a set of high level nodes in $\mathcal{T}(P_k)$ where each node $P_l = (\pi_l, \vec{g}_l, \Omega_l) \in CV(P_k)$ satisfies the following requirements: π_l is consistent with Ω_k , and π_l is conflict-free (*i.e.* valid).

In addition, if $P_l = (\pi_l, \vec{g}_l, \Omega_l) \in CV(P_k)$, we say P_k permits π_l .

Lemma 1: Given a node $P_k = (\pi_k, \vec{g}_k, \Omega_k)$, none of the nodes in $CV(P_k)$ has a cost vector that dominates \vec{g}_k , *i.e.* $\vec{g}_l \not\leq \vec{g}_k, \forall P_l = (\pi_l, \vec{g}_l, \Omega_l) \in CV(P_k)$.

Proof: Every individual path in $\pi_k^i \in \pi_k, \forall i \in I$ is computed by the low level planner, which guarantees π_k^i is a non-dominated individual path that is consistent with $\Omega_k^i \subseteq \Omega_k$, the subset of constraints that belongs to agent i . Since $\Omega_k = \bigcup_{i \in I} \Omega_k^i$, π_k is a non-dominated joint path among all joint paths consistent with Ω_k . Assume that there exists a node $P_l = (\pi_l, \vec{g}_l, \Omega_l) \in CV(P_k)$ with $\vec{g}_l \leq \vec{g}_k$. Since for any node $P_l = (\pi_l, \vec{g}_l, \Omega_l) \in CV(P_k)$, we have $\Omega_k \subseteq \Omega_l$. Thus, every individual path $\pi_l^i \in \pi_l$ is also a consistent path for $\Omega_k^i, \forall i \in I$. This implies that π_l is also consistent with Ω_k with \vec{g}_l dominating \vec{g}_k which contradicts. ■

Lemma 2: Let Π_* denote the set of Pareto-optimal joint paths for a MOMAPF problem. For each $\pi_* \in \Pi_*$, there is always a candidate node in OPEN that permits π_* .

Proof: This lemma can be shown by induction. Initially, every root node contains an empty set of constraints and permits all conflict-free Pareto-optimal paths. Assume this lemma holds for the k -th iteration and let P_k be a node in OPEN that permits some $\pi_* \in \Pi_*$. Then in the $(k+1)$ -th iteration, P_k is expanded and two new nodes P_{li}, P_{lj} are generated. π_* must be contained in a node that belongs to either $CV(P_{li})$ or $CV(P_{lj})$ because any conflict-free joint path must satisfy either of the constraints. Therefore, for $(k+1)$ -th iteration, either P_{li} or P_{lj} permits π_* . ■

Theorem 1: MO-CBS finds all $\pi_* \in \Pi_*$.

Proof: From Lemma 1, every identified solution $P_k = (\pi_k, \vec{g}_k, \Omega_k)$ must be Pareto-optimal within $\mathcal{T}(P_k)$ since none of the nodes in $CV(P_k)$ can have a cost vector that dominates \vec{g}_k . With FilterSolution procedure, \mathcal{S} is guaranteed to contain only Pareto-optimal solutions over all search trees $\mathcal{T}_r, r = 1, 2, \dots, R$. From Lemma 2, nodes in OPEN permits all $\pi_* \in \Pi_*$ and MO-CBS terminates when OPEN depletes. Therefore, MO-CBS finds all $\pi_* \in \Pi_*$ at termination. ■

Algorithm MO-CBS-t, as a variant of MO-CBS, is also able to find all Pareto-optimal solutions and the above proof also applies to MO-CBS-t.

VII. NUMERICAL RESULTS

We implemented MO-CBS, MO-CBS-t and NAMOA* [14] in Python and NAMOA* serves as a baseline approach, which is applied to the the joint graph corresponding to agents to search for all Pareto-optimal solutions. All algorithms are compared on a computer with an Intel Core i7 CPU and 16GB RAM. To test the algorithms, we selected four maps (grids) from different categories in [23] and generated an un-directed graph G by making each grid four-connected. To assign cost vectors to edges in G , we first assigned every agent a cost vector $a^i, \forall i \in I$ of length M (the number of objectives) and assigned every edge e in G a scaling vector $b(e)$ of length M , where each element in both a^i and b were randomly sampled from integers in $[1, 10]$. The cost vector for agent i going through an edge e is the element-wise product of a^i and $b(e)$. If agent i wait in place, the cost vector incurred is a^i . We tested the algorithms with different number of objectives M and different number of agents N within a computational time limit of **five minutes**.

A. MO-CBS vs NAMOA* with Different M

Without loss of generality, we first limited our focus to the grid “empty-16-16” in [23], which is a 16 by 16 grids without obstacles. Fig. 3 and Fig. 4 shows the results with $N = 2$ and $N = 4$ (fixed N) respectively, against the metrics of (1) success rates of finding all Pareto-optimal solutions, (2) average number of solutions found, (3) average number of states (NAMOA*) or high-level nodes (for MO-CBS) expanded and (4) average run time, over all test instances. From Fig. 3, we find that NAMOA* has a higher success rates and shorter run time than MO-CBS, which is obvious when $M = 2, 3$. However, from Fig. 4, with four agents ($N = 4$), MO-CBS achieves higher success rates and shorter run time than NAMOA* with all $M = 1, 2, 3, 4$.

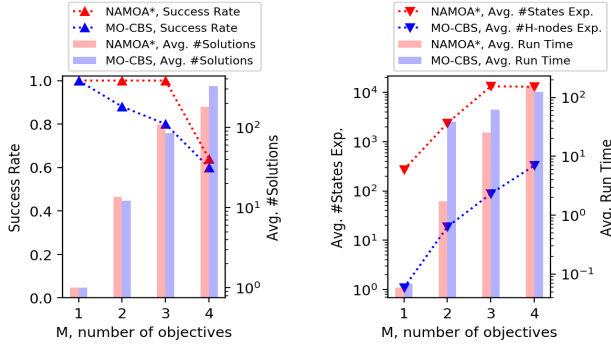


Fig. 3: Comparing NAMOA* and MO-CBS with $N = 2$ against different metrics as functions of M .

In addition, from both figures, the number of solutions increases as M increases and this trend indicates the difficulty of the MOMAPF problem. Note that, when $M = 1$, the MOMAPF problem with a single objective is the same as the conventional MAPF problem and the algorithm terminates when identifying the first optimal solution with the optimal cost value (since all candidate nodes in OPEN are pruned when compared with the identified optimal solution).

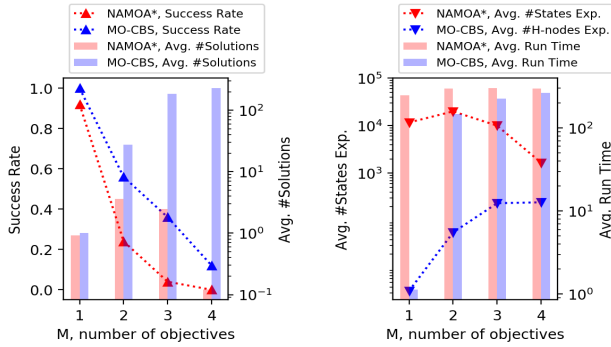


Fig. 4: Comparing NAMOA* and MO-CBS with $N = 4$ against different metrics as functions of M .

B. MO-CBS with Different Numbers of Agents

Fig. 5 reports the performance of MO-CBS and MO-CBS-t in terms of (1) success rates of finding all Pareto-optimal solutions, (2) success rates of finding one feasible solution, (3) average numbers of high-level nodes expanded and (4) average run time, in three different types of grids with varying numbers of agents while $M = 2$ (fixed). It is obvious that in different grids, the algorithms behave differently. We note that in general, MO-CBS-t outperforms MO-CBS in terms of identifying the first solution, since MO-CBS-t searches in a tree-by-tree manner and is more likely to identify solutions earlier when the open list for the first tree depletes. The sub-optimality of the first identified solution is discussed next.

C. Sub-optimality of the First Solution Found by MO-CBS-t

To estimate the sub-optimality of the first solution computed by MO-CBS-t before termination, we recorded the cost vector x of the first solution found by MO-CBS-t. For

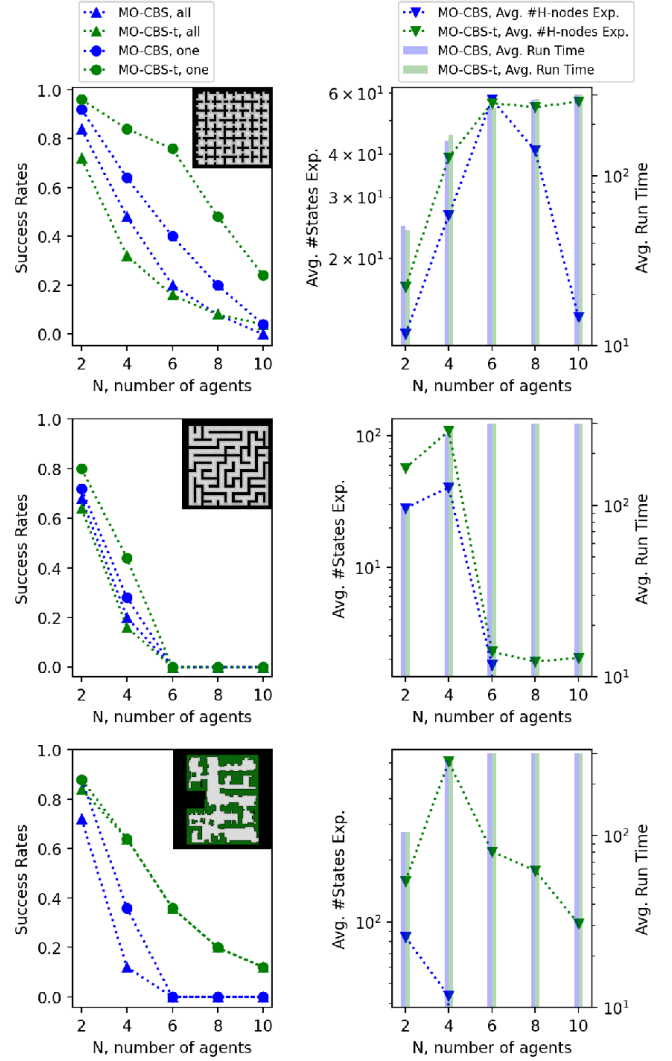


Fig. 5: Comparison between MO-CBS and MO-CBS-t with varying N in different grids (room, maze, den312d) from [23].

the instances where MO-CBS-t successfully finds all Pareto-optimal solutions, let X^* denote the set of Pareto-optimal cost vectors. We first computed $d(x, X^*) = \inf_{x^* \in X^*} \|x - x^*\|_2$ [18], the distance of the cost vector x to a set of vectors X^* with Euclidean norm. We then computed a measure of sub-optimality in percentage by dividing $d(x, X^*)$ with the averaged Euclidean norm of all vectors in X^* . The results show that for all three grids shown in Fig. 5, this percentage is on average less than 1%, maximally less than 3% and minimally zero. It indicates, empirically, the first solution found by MO-CBS-t is exactly Pareto-optimal or very “close” to be Pareto-optimal.

VIII. CONCLUSION

New algorithms, MO-CBS and its variant MO-CBS-t, were presented for a multi-objective, multi-agent path finding problem. We showed that the algorithm is able to find the entire Pareto-optimal set. Numerical results showed the proposed approach outperforms the baseline approach against different metrics in general.

REFERENCES

- [1] Anton Andreychuk, Konstantin Yakovlev, Dor Atzmon, and Roni Stern. Multi-agent pathfinding with continuous time. In *International Joint Conference on Artificial Intelligence (IJCAI)*, pages 39–45, 2019.
- [2] Max Barer, Guni Sharon, Roni Stern, and Ariel Felner. Suboptimal variants of the conflict-based search algorithm for the multi-agent pathfinding problem. In *Seventh Annual Symposium on Combinatorial Search*, 2014.
- [3] Eli Boyarski, Ariel Felner, Roni Stern, Guni Sharon, David Tolpin, Oded Betzalel, and Eyal Shimony. Icbs: improved conflict-based search algorithm for multi-agent pathfinding. In *Twenty-Fourth International Joint Conference on Artificial Intelligence*, 2015.
- [4] Michal Čáp, Jiří Vokřínek, and Alexander Kleiner. Complete decentralized method for on-line multi-robot trajectory planning in well-formed infrastructures. In *Twenty-Fifth International Conference on Automated Planning and Scheduling*, 2015.
- [5] Liron Cohen, Tansel Uras, TK Satish Kumar, and Sven Koenig. Optimal and bounded-suboptimal multi-agent motion planning. In *Twelfth Annual Symposium on Combinatorial Search*, 2019.
- [6] Boris de Wilde, Adriaan W ter Mors, and Cees Witteveen. Push and rotate: cooperative multi-agent path planning. In *Proceedings of the 2013 international conference on Autonomous agents and multi-agent systems*, pages 87–94. International Foundation for Autonomous Agents and Multiagent Systems, 2013.
- [7] Kalyanmoy Deb. *Multi-objective optimization using evolutionary algorithms*, volume 16. John Wiley & Sons, 2001.
- [8] Matthias Ehrgott. *Multicriteria optimization*, volume 491. Springer Science & Business Media, 2005.
- [9] P. E. Hart, N. J. Nilsson, and B. Raphael. A formal basis for the heuristic determination of minimum cost paths. *IEEE Transactions on Systems Science and Cybernetics*, 4(2):100–107, 1968.
- [10] Wolfgang Hönl, Scott Kiesel, Andrew Tinka, Joseph Durham, and Nora Ayanian. Conflict-based search with optimal task assignment. In *Proceedings of the International Joint Conference on Autonomous Agents and Multiagent Systems*, 2018.
- [11] Jiaoyang Li, Pavel Surynek, Ariel Felner, Hang Ma, TK Satish Kumar, and Sven Koenig. Multi-agent path finding for large agents. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 7627–7634, 2019.
- [12] Ryan J Luna and Kostas E Bekris. Push and swap: Fast cooperative path-finding with completeness guarantees. In *Twenty-Second International Joint Conference on Artificial Intelligence*, 2011.
- [13] Lawrence Mandow and JL Pérez de la Cruz. Multicriteria heuristic search. *European Journal of Operational Research*, 150(2):253–280, 2003.
- [14] Lawrence Mandow, JL Pérez De la Cruz, et al. A new approach to multiobjective a* search. In *IJCAI*, volume 8. Citeseer, 2005.
- [15] Justin Montoya, Sivakumar Rathinam, and Zachary Wood. Multi-objective departure runway scheduling using dynamic programming. *IEEE Transactions on Intelligent Transportation Systems*, 15(1):399–413, 2013.
- [16] Diederik M Roijers, Peter Vamplew, Shimon Whiteson, and Richard Dazeley. A survey of multi-objective sequential decision-making. *Journal of Artificial Intelligence Research*, 48:67–113, 2013.
- [17] Malcolm Ryan. Constraint-based multi-robot path planning. pages 922 – 928, 06 2010.
- [18] Oliver Schutze, Xavier Esquivel, Adriana Lara, and Carlos A Coello Coello. Using the averaged hausdorff distance as a performance measure in evolutionary multiobjective optimization. *IEEE Transactions on Evolutionary Computation*, 16(4):504–522, 2012.
- [19] Antonio Sedeño-Noda and Marcos Colebrook. A biobjective dijkstra algorithm. *European Journal of Operational Research*, 276(1):106–118, 2019.
- [20] Paolo Serafini. Some considerations about computational complexity for multi objective combinatorial problems. In *Recent advances and historical development of vector optimization*, pages 222–232. Springer, 1987.
- [21] Guni Sharon, Roni Stern, Ariel Felner, and Nathan R Sturtevant. Conflict-based search for optimal multi-agent pathfinding. *Artificial Intelligence*, 219:40–66, 2015.
- [22] David Silver. Cooperative pathfinding. pages 117–122, 01 2005.
- [23] Roni Stern, Nathan Sturtevant, Ariel Felner, Sven Koenig, Hang Ma, Thayne Walker, Jiaoyang Li, Dor Atzmon, Liron Cohen, TK Kumar, et al. Multi-agent pathfinding: Definitions, variants, and benchmarks. *arXiv preprint arXiv:1906.08291*, 2019.
- [24] Bradley S. Stewart and Chelsea C. White. Multiobjective a*. *J. ACM*, 38(4):775–814, October 1991.
- [25] Pavel Surynek, Ariel Felner, Roni Stern, and Eli Boyarski. Modifying optimal sat-based approach to multi-agent path-finding problem to suboptimal variants. 07 2017.
- [26] Matthew Tesch, Jeff Schneider, and Howie Choset. Expensive multiobjective optimization for robotics. In *2013 IEEE International Conference on Robotics and Automation*, pages 973–980. IEEE, 2013.
- [27] Carlos Hernández Ulloa, William Yeoh, Jorge A Baier, Han Zhang, Luis Suazo, and Sven Koenig. A simple and fast bi-objective search algorithm. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 30, pages 143–151, 2020.
- [28] Jur P Van Den Berg and Mark H Overmars. Prioritized motion planning for multiple robots. In *2005 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 430–435. IEEE, 2005.
- [29] Ko-Hsin Cindy Wang, Adi Botea, et al. Fast and memory-efficient multi-agent pathfinding. In *ICAPS*, pages 380–387, 2008.
- [30] Adam Wiktor, Dexter Scobee, Sean Messenger, and Christopher Clark. Decentralized and complete multi-robot motion planning in confined spaces. In *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1168–1175. IEEE, 2014.
- [31] Jingjin Yu and Steven M LaValle. Structure and intractability of optimal multi-robot path planning on graphs. In *Twenty-Seventh AAAI Conference on Artificial Intelligence*, 2013.