
TOWARDS APPROXIMATE QUERY ENUMERATION WITH SUBLINEAR PREPROCESSING TIME

ISOLDE ADLER AND POLLY FAHEY

University of Leeds, School of Computing, Leeds, UK
e-mail address: i.m.adler@leeds.ac.uk

University of Leeds, School of Computing, Leeds, UK
e-mail address: mm11pf@leeds.ac.uk

ABSTRACT. This paper aims at providing extremely efficient algorithms for approximate query enumeration on sparse databases, that come with performance and accuracy guarantees. We introduce a new model for approximate query enumeration on classes of relational databases of bounded degree. We first prove that on databases of bounded degree any *local* first-order definable query that has a sufficiently large answer set can be enumerated approximately with constant delay after a preprocessing phase with *constant* running time. We extend this, showing that on databases of bounded tree-width and bounded degree, every query that is expressible in first-order logic and has a sufficiently large answer set can be enumerated approximately with constant delay after a preprocessing phase with *sublinear* (more precisely, *polylogarithmic*) running time.

Durand and Grandjean (ACM Transactions on Computational Logic 2007) proved that *exact* enumeration of first-order queries on databases of bounded degree can be done with constant delay after a preprocessing phase with running time *linear* in the size of the input database. Hence we achieve a significant speed-up in the preprocessing phase. Since sub-linear running time does not allow reading the whole input database even once, sacrificing some accuracy is inevitable for our speed-up. Nevertheless, our enumeration algorithm comes with guarantees: With high probability, (1) only tuples are enumerated that are answers to the query or ‘close’ to being answers to the query, and (2) if the proportion of tuples that are answers to the query is sufficiently large, then all answers will be enumerated. Here the notion of ‘closeness’ is a tuple edit distance in the input database. For local first-order queries, only actual answers are enumerated, strengthening (1). Moreover, both the ‘closeness’ and the proportion required in (2) are controllable. Our algorithms only access the input database by sampling local parts, in a distributed fashion.

While our preprocessing phase is simpler than the preprocessing phase for the exact algorithm, our enumeration phase is more involved, as we push parts of the computation into the enumeration phase, allowing us to keep on enumerating answers.

We combine methods from property testing of bounded degree graphs with logic and query enumeration, which we believe can inspire further research.

Key words and phrases: Query Enumeration, Sublinear Time Algorithms, Constant Delay, Logic and Databases, Property Testing.

1. INTRODUCTION

Given the ubiquity and sheer size of stored data nowadays, there is an immense need for highly efficient algorithms to extract information from the data. When the input data is huge, many algorithms that are traditionally classified as ‘efficient’ become impractical. Hence in practice often heuristics are used, at the price of losing control over the quality of the computed information. In many application areas however, such as aviation, security, medicine, and research, accuracy guarantees regarding the computed output are crucial.

We address this by taking a step towards foundations for Approximate Query Processing [8]. We provide a new model for *approximately* enumerating the set of answers to queries on relational databases. This enables us to decrease the running time significantly compared to traditional algorithms while providing probabilistic accuracy guarantees.

Query enumeration. Query evaluation plays a central role in databases systems, and in the past decades it has received huge attention both from practical and theoretical perspectives. One of the central problems is *query enumeration*. Here we are given a database \mathcal{D} and a query q , and the goal is to compute the set $q(\mathcal{D})$ of all answers to q on \mathcal{D} . However, the set $q(\mathcal{D})$ could be exponential in the number of free variables of q , and even bigger than \mathcal{D} , hence the total running time required to enumerate all answers may not be a meaningful complexity measure. Taking this into account, models for query enumeration distinguish two phases, a *preprocessing phase*, and an *enumeration phase*. Typically, in the preprocessing phase some form of data structure is computed from \mathcal{D} and q , in such a way that in the enumeration phase all answers in $q(\mathcal{D})$ can be enumerated (without repetition) with only a small delay between any two consecutive answers. We focus on data complexity, i.e. we regard the query as being fixed, and the database being the input. *Efficiency* is measured both in terms of the running time of the preprocessing phase and the *delay*, i.e. the maximum time between the output of any two consecutive answers. For the delay we can hope for constant time at best, independent of the size of the database. For the preprocessing phase, the best we can hope for regarding exact algorithms is linear time.

Recent research has been very successful in providing exact enumeration algorithms for first-order queries on *sparse* relational databases. In 2007, Durand and Grandjean showed that on relational databases of bounded degree, every first-order query can be enumerated with constant delay after a linear time preprocessing phase [11]. This result triggered a number of papers [17, 12, 23], culminating in Schweikardt, Segoufin and Vigny’s result that on *nowhere dense* databases, first-order queries can be enumerated with constant delay after a pseudo-linear time preprocessing phase [22].

Our contributions. In this paper we aim at *sublinear time* preprocessing and constant delay in the enumeration phase. We consider databases \mathcal{D} of bounded degree d , i.e. every element of the domain appears in at most d tuples in relations of \mathcal{D} , and we identify conditions under which first-order definable queries can be enumerated approximately with constant delay after a sublinear preprocessing phase. We consider two different categories of first-order definable queries, *local* and *general* (including *non-local*) queries. A first-order query is *local* if, given any bounded degree database and tuple, it can be decided by only looking at the local (fixed radius) neighbourhood around the tuple whether the tuple is an answer to the query for the database. We show the following.

On input databases of bounded degree, every (fixed) local first-order definable query can be enumerated approximately with constant delay after a constant time preprocessing phase (Theorem 4.4).

On input databases of bounded degree and bounded tree-width, every (fixed) first-order definable query can be enumerated approximately with constant delay after a sublinear time preprocessing phase (Theorem 5.5).

We also give generalisations of the two theorems above (Theorems 4.5, 5.6 and 7.4) and applications of our approach to further computational problems on databases (Theorems 7.6 and 7.8), which we will discuss below.

First, let us give some more details. For any local first-order query q , bounded degree database \mathcal{D} and tuple \bar{a} from \mathcal{D} it can be decided in constant time whether \bar{a} is an answer to q on \mathcal{D} (Lemma 3.5). Using this fact, we show that for any fixed local first-order definable query $q(\bar{x})$ with $|\bar{x}| =: k$ and $\gamma \in (0, 1)$, there exists an enumeration algorithm with constant preprocessing time and constant delay, that is given a bounded degree database \mathcal{D} with domain of size n as input and does the following. It enumerates a set of tuples that are answers to q on \mathcal{D} , and with high probability it enumerates *all* answers to q on \mathcal{D} if the size of the answer set of q on \mathcal{D} is larger than γn^k (i.e. the number of answers to the query is larger than a fixed fraction of the total possible number of answers).

Towards reducing the minimum size of the answer set required to enumerate *all* answers to the query, we show we actually only require size γn^c , where c is the maximum number of connected components in the neighbourhood (of some fixed radius) of an answer to q (Theorem 4.5). We argue that in practice, c can be expected to be low for natural queries.

If a first-order query q is non-local, then for a database \mathcal{D} and a tuple \bar{a} , we can no longer decide in constant time whether \bar{a} is an answer to q on \mathcal{D} . However, using Hanf-locality of first-order logic [15] and a result from the area of property testing, we can approximately enumerate any first-order definable query on bounded degree and bounded tree-width databases with polylogarithmic preprocessing time and constant delay (Theorem 5.5). Let us now explain our notion of approximation, which is based on neighbourhood types.

For $d \in \mathbb{N}$, let \mathbf{C} be a class of databases of degree at most d over a fixed finite schema. Let $\mathcal{D} \in \mathbf{C}$, let $r \in \mathbb{N}$ and let a be an element of the domain of \mathcal{D} . The r -neighbourhood type of a in \mathcal{D} is the isomorphism type of the sub-database of \mathcal{D} induced by all elements of the domain whose distance to a (in the underlying graph of \mathcal{D}) is at most r , expanded by a . The element a is called the *centre*. This can be extended to define the r -neighbourhood type of a tuple \bar{a} in \mathcal{D} , by considering the isomorphism type of the sub-database induced by the union of the r -neighbourhoods of all components of \bar{a} , expanded by \bar{a} . We call such an isomorphism type an r -type (with $|\bar{a}|$ centres). Given a database query $q(\bar{x})$ with $|\bar{x}| =: k$ and a database \mathcal{D} with domain of size n we say that a tuple \bar{a} from \mathcal{D} is ϵ -close to being an answer of q on \mathcal{D} and \mathbf{C} , if \mathcal{D} can be modified with tuple modifications (insertions and deletions) into a database $\mathcal{D}' \in \mathbf{C}$ with at most ϵdn modifications, such that \bar{a} is an answer of q on \mathcal{D}' and \bar{a} has the same r -neighbourhood type (for some r) in \mathcal{D}' and \mathcal{D} . We let $q(\mathcal{D}, \mathbf{C}, \epsilon)$ be the set of k -tuples \bar{a} of elements of \mathcal{D} that are ϵ -close to being an answer of q on \mathcal{D} and \mathbf{C} . Note that for any local first-order query q , $q(\mathcal{D}, \mathbf{C}, \epsilon) = q(\mathcal{D})$.

We say that the enumeration problem $\text{Enum}_{\mathbf{C}}(q)$ for q on \mathbf{C} can be solved *approximately* with preprocessing time $H(n)$ and constant delay for answer threshold function $f(n)$, if for every $\epsilon \in (0, 1]$, there exists an algorithm, which is given oracle access to an input database $\mathcal{D} \in \mathbf{C}$ (for each given element of the domain, the tester can query the oracle for tuples in

any of the relations containing the element, and we assume that oracle queries are answered in constant time), and is given the number n of elements of the domain, and proceeds in two phases. First, a preprocessing phase that runs in time $H(n)$, followed by an enumeration phase where a set S of pairwise distinct tuples is enumerated, with constant delay between any two consecutive tuples. In addition, we require that with probability at least $2/3$, (1) $S \subseteq q(\mathcal{D}) \cup q(\mathcal{D}, \mathbf{C}, \epsilon)$, and (2) if $|q(\mathcal{D})| \geq f(n)$, then $q(\mathcal{D}) \subseteq S$.

We consider database queries that are expressible in first-order logic. Note that our notion of approximation is designed specifically for first-order queries and sparse databases and for other classes of queries and input databases alternative models may be necessary. We prove that for every first-order query $q(\bar{x})$ with $|\bar{x}| = k$ the problem $\text{Enum}_{\mathbf{C}_d^t}(q)$ (where \mathbf{C}_d^t is the class of all databases of d -bounded degree and t -bounded tree-width) can be solved approximately with polylogarithmic preprocessing time and constant delay with answer threshold function $f(n) = \gamma n^k$ for any $\gamma \in (0, 1)$ (Theorem 5.5). As with local queries, we further prove that we can actually reduce the answer threshold function to $f(n) = \gamma n^c$ where $c \leq k$ is the maximum number of connected components in the neighbourhood (of some fixed radius) of an answer to q (Theorem 5.6). We also identify a condition that is based on Hanf-locality of first-order logic [15], which we call *Hanf-sentence testability*, and we prove a general theorem (Theorem 7.4), that for every first-order query $q(\bar{x})$ with $|\bar{x}| = k$ that is Hanf-sentence testable on \mathbf{C} in time $H(n)$, the problem $\text{Enum}_{\mathbf{C}}(q)$ can be solved approximately with preprocessing time $\mathcal{O}(H(n))$ and constant delay for answer threshold function $f(n) = \gamma n^c$ as above.

We illustrate our model throughout the paper with a running example which can be motivated by the problems of subgraph matching and inexact subgraph matching in social and biological networks (e.g. [26, 24]). We show that our running example is Hanf-sentence testable on the class of all bounded degree graphs in constant time, and hence by Theorem 7.4 it can be approximately enumerated with constant preprocessing time.

Our notion of approximation is based on ‘structural’ closeness and therefore our algorithms are aimed at applications where structural similarity is essential. For example, when given a new huge dataset (such as biological datasets or social networks), a first exploration of the approximate structure with some accuracy guarantees may be desirable to obtain initial insights quickly. These insights could then e.g. be used to make decisions regarding more time consuming analysis in a follow-up stage.

Property testing. Before sketching the proof idea of Theorem 5.5, let us give some background on property testing. Property testing aims at providing highly efficient algorithms that derive *global* information on the structure of the input by only exploring a small number of *local* parts of it. These algorithms are randomised and allow for a small error. Nevertheless, they come with guarantees regarding both the quality of the solution and efficiency. Typically, the algorithms only look at a constant number of small parts of the input, and they run in constant or sublinear time. Even for problems that allow linear time exact algorithms, such as graph connectivity, reducing the running time (while sacrificing some accuracy) may become crucial if the networks are huge. Property testing can be seen as solving *relaxed decision problems*. Instead of deciding whether a given input has a certain property, the goal is to determine with high probability correctly, whether the input has the property or is far from having it. Formally, a *property* \mathbf{P} is an isomorphism closed class of relational databases. For example, each Boolean database query q defines a property \mathbf{P}_q , the class of all databases satisfying q . A *property testing algorithm* (*tester*, for short) for

\mathbf{P} determines whether a given database \mathcal{D} has property \mathbf{P} (i.e. whether \mathcal{D} is a member of \mathbf{P}) or is ϵ -far from having \mathbf{P} . Testers are randomised and allow for a small constant error probability. The algorithms are parameterised by a distance measure ϵ , where the distance measure depends on the model.

Property testing was first introduced in [21], in the context of Programme Checking. In this paper we build on the model for property testing on relational databases of *bounded degree* of [1], which is a generalisation of the bounded degree graph model [14]. This model assumes a uniform upper bound d on the degree of the input databases. For $\epsilon \in [0, 1]$, a database \mathcal{D} with domain of size n is ϵ -close to satisfying \mathbf{P} , if we can make \mathcal{D} isomorphic to a member of \mathbf{P} by editing (inserting or removing) at most ϵdn tuples in relations of \mathcal{D} (i.e. at most an ‘ ϵ -fraction’ of the maximum possible number dn of tuples in relations). Otherwise, \mathcal{D} is called ϵ -far from \mathbf{P} . An ϵ -tester receives the size n of the domain of the input, and has oracle access to the database.

Techniques. To give a flavour of our techniques, we sketch the proof idea of Theorem 5.5. Let $\phi(\bar{x})$ be a first-order formula with $|\bar{x}| = k$ and let \mathcal{D} be an input database from the class of databases \mathbf{C}_d^t with bounded degree and bounded tree-width over a fixed finite schema. In the preprocessing phase, we first compute a formula χ that is equivalent to ϕ on \mathbf{C}_d^t , and χ is in a special type of Hanf normal form that groups the Hanf-sentences and sphere formulas together (Lemma 3.2). We then run property testers on the sentence parts of χ and compute a set T of r -types (where r is the Hanf locality radius of ϕ), that with high probability for any $\mathcal{D} \in \mathbf{C}_d^t$ and $\bar{a} \in D^k$, if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T . In the remainder of the preprocessing phase we randomly sample a constant number of k -tuples of elements of \mathcal{D} and check whether their r -type is in T . Assuming that $|\phi(\mathcal{D})|$ is sufficiently large, with high probability we will have sampled at least one tuple whose r -type is in T , and we start the enumeration phase by enumerating this tuple. To keep the enumeration going, after each tuple that is enumerated, we sample a constant number of tuples from the input database. To avoid outputting duplicates we keep a record of which tuples we have already seen by using an array that can be updated and read in constant time. Finally, with high probability we will see every possible k -tuple of elements of \mathcal{D} .

Further related research. So far, only a small number of results in database theory make use of models from property testing. Chen and Yoshida [10] study the testability of homomorphism inadmissibility in a model which is close to the general graph model (cf. e.g. [3]). Ben-Moshe et al. [5] study the testability of near-sortedness (a property of relations that states that most tuples are close to their place in some desired order). Our model differs from both of these, as it relies on a degree bound and uses a different type of oracle access. A *conjunctive query* (CQ) is a first-order formula constructed from atomic formulas using conjunctions and existential quantification only. CQ evaluation is closely related to solving constraint satisfaction problems (CSPs) [18]. CSPs have been studied under different models from property testing ([9, 25, 2]). Our work, however, is relevant for more complex queries, as enumerating CQs in our model basically amounts to sampling.

Our work is a step towards approximate enumeration on sparse databases. It would be interesting to study approximate enumeration on databases of bounded *average degree*. However, this would require different techniques.

Organisation. In Section 2 we introduce notions used throughout the paper. In Section 3 we give some useful normal forms of first-order queries along with some results on local first-order queries. In Sections 4 and 5 we prove our main theorems on the enumeration of local and general first-order queries respectively. In Section 6, in an attempt to push the boundaries further, we prove strengthened versions of the theorems proved in Sections 4 and 5, showing how the required answer threshold can be reduced. Finally, in Section 7 we prove a generalisation of our main theorem on approximate enumeration of general first-order queries showing that the assumption of bounded tree-width can be replaced with the weaker assumption of Hanf-sentence testability. We also provide results on approximate membership testing and approximate counting.

2. PRELIMINARIES

We let \mathbb{N} be the set of natural numbers including 0, and $\mathbb{N}_{\geq 1} = \mathbb{N} \setminus \{0\}$. For each $n \in \mathbb{N}_{\geq 1}$, we let $[n] = \{1, 2, \dots, n\}$.

Databases. A *schema* is a finite set $\sigma = \{R_1, \dots, R_{|\sigma|}\}$ of relation names, where each $R \in \sigma$ has an *arity* $\text{ar}(R) \in \mathbb{N}_{\geq 1}$. The *size* of a schema, denoted by $\|\sigma\|$, is the sum of the arities of its relation names. A *database* \mathcal{D} of schema σ (σ -db for short) is of the form $\mathcal{D} = (D, R_1^{\mathcal{D}}, \dots, R_{|\sigma|}^{\mathcal{D}})$, where D is a finite set, the set of *elements* of \mathcal{D} , and $R_i^{\mathcal{D}}$ is an $\text{ar}(R_i)$ -ary relation on D . The set D is also called the *domain* of \mathcal{D} . An (*undirected*) *graph* \mathcal{G} is a tuple $\mathcal{G} = (V(\mathcal{G}), E(\mathcal{G}))$ where $V(\mathcal{G})$ is a set of *vertices* and $E(\mathcal{G})$ is a set of 2-element subsets of $V(\mathcal{G})$ (the *edges* of \mathcal{G}). For an edge $\{u, v\} \in E(\mathcal{G})$ we simply write uv . For a graph \mathcal{G} with $uv \in E(\mathcal{G})$ we let $\mathcal{G} \setminus uv$ denote the graph obtained from \mathcal{G} by removing the edge uv from $E(\mathcal{G})$. An undirected graph can be seen as a $\{E\}$ -db, where E is a binary relation name, interpreted by a symmetric, irreflexive relation.

We assume that all databases are linearly ordered or, equivalently, that $D = [n]$ for some $n \in \mathbb{N}$ (similar to [17]). We extend this linear ordering to a linear order on the relations of \mathcal{D} via lexicographic ordering. The *Gaifman graph* of a σ -db \mathcal{D} is the undirected graph $\mathcal{G}(\mathcal{D}) = (V, E)$, with vertex set $V := D$ and an edge between vertices a and b whenever $a \neq b$ and there is an $R \in \sigma$ and a tuple $(a_1, \dots, a_{\text{ar}(R)}) \in R^{\mathcal{D}}$ with $a, b \in \{a_1, \dots, a_{\text{ar}(R)}\}$. The *degree* $\deg(a)$ of an element a in a database \mathcal{D} is the total number of tuples in all relations of \mathcal{D} that contain a . We say the *degree* $\deg(\mathcal{D})$ of a database \mathcal{D} is the maximum degree of its elements. A class of databases \mathbf{C} has *bounded degree*, if there exists a constant $d \in \mathbb{N}$ such that for all $\mathcal{D} \in \mathbf{C}$, $\deg(\mathcal{D}) \leq d$. (We always assume that classes of databases are closed under isomorphism.) Let us remark that the $\deg(\mathcal{D})$ and the (graph-theoretic) degree of $\mathcal{G}(\mathcal{D})$ only differ by at most a constant factor (cf. e. g. [11]). Hence both measures yield the same classes of relational structures of bounded degree. We define the *tree-width* of a database \mathcal{D} as the tree-width of its Gaifman graph. (See e. g. [13] for a discussion of tree-width in this context.) A class \mathbf{C} of databases has *bounded tree-width*, if there exists a constant $t \in \mathbb{N}$ such that all databases $\mathcal{D} \in \mathbf{C}$ have tree-width at most t . Let \mathcal{D} be a σ -db, and $M \subseteq D$. The sub-database of \mathcal{D} *induced by* M is the database $\mathcal{D}[M]$ with domain M and $R^{\mathcal{D}[M]} := R^{\mathcal{D}} \cap M^{\text{ar}(R)}$ for every $R \in \sigma$.

Database queries. Let \mathbf{var} be a countable infinite set of *variables*, and fix a relational schema σ . The set $\text{FO}[\sigma]$ is built from *atomic formulas* of the form $x_1 = x_2$ or $R(x_1, \dots, x_{\text{ar}(R)})$, where $R \in \sigma$ and $x_1, \dots, x_{\text{ar}(R)} \in \mathbf{var}$, and is closed under Boolean connectives ($\neg, \vee, \wedge, \rightarrow, \leftrightarrow$) and existential and universal quantifications (\exists, \forall). The set $\text{FO}[\{E\}]$ is the set of first-order formulas for undirected graphs. We let $\text{FO} := \bigcup_{\sigma \text{ schema}} \text{FO}[\sigma]$. We use $\exists^{\geq m} x \phi$ (and $\exists^=m x \phi$, respectively) as a shortcut for the FO formula expressing that the number of witnesses x satisfying ϕ is at least m (exactly m , resp.). A *free variable* of an FO formula is a variable that does not appear in the scope of a quantifier. For a tuple \bar{x} of variables and a formula $\phi \in \text{FO}$, we write $\phi(\bar{x})$ to indicate that the free variables of ϕ are exactly the variables in \bar{x} . An FO formula without free variables is called a *sentence*. An FO *query* (of arity $k \in \mathbb{N}$) is an FO formula $\phi(\bar{x})$ (with $|\bar{x}| = k$). Let \mathcal{D} be a database and \bar{a} be a tuple of elements of \mathcal{D} of length $|\bar{x}|$. We write $\mathcal{D} \models \phi(\bar{a})$, if ϕ is true in \mathcal{D} when we replace the free variables of ϕ with \bar{a} , and we say that \bar{a} is an *answer* for ϕ on \mathcal{D} . We let $\phi(\mathcal{D}) := \{\bar{a} \in D^{|\bar{a}|} \mid \mathcal{D} \models \phi(\bar{a})\}$ be the set of all answers for ϕ on \mathcal{D} . Two formulas $\phi(\bar{x}), \psi(\bar{x}) \in \text{FO}[\sigma]$, where $|\bar{x}| = k$, are *d-equivalent* (written $\phi(\bar{x}) \equiv_d \psi(\bar{x})$) if for all σ -dbs \mathcal{D} with degree at most d and all $\bar{a} \in D^k$, $\mathcal{D} \models \phi(\bar{a})$ iff $\mathcal{D} \models \psi(\bar{a})$. The *quantifier rank* of a formula ϕ , denoted by $qr(\phi)$, is the maximum nesting depth of quantifiers that occur in ϕ . The *size of a formula* ϕ , denoted by $\|\phi\|$, is the length of ϕ as a string over the alphabet $\sigma \cup \mathbf{var} \cup \{\exists, \forall, \neg, \vee, \wedge, \rightarrow, \leftrightarrow, =\} \cup \{\{, \}, \}\cup \{(,)\}$.

Enumeration problems. Let σ be a relational schema, let \mathbf{C} be a class of σ -dbs and let $\phi(\bar{x}) \in \text{FO}[\sigma]$. The *enumeration problem of ϕ over \mathbf{C}* denoted by $\text{Enum}_{\mathbf{C}}(\phi)$ is, given a database $\mathcal{D} \in \mathbf{C}$, to output the elements of $\phi(\mathcal{D})$ one by one with no repetition. An *enumeration algorithm* for the enumeration problem $\text{Enum}_{\mathbf{C}}(\phi)$ with input database $\mathcal{D} \in \mathbf{C}$ proceeds in two phases, a preprocessing phase and an enumeration phase. The enumeration phase outputs all the elements of $\phi(\mathcal{D})$ with no duplicates. Furthermore, the enumeration phase has full access to the output of the preprocessing phase but can use only a constant total amount of extra memory.

The *delay* of an enumeration algorithm is the maximum time between the start of the enumeration phase and the first output (or the ‘end of enumeration message’ if there are no answers), two consecutive outputs, and the last output and the ‘end of enumeration message’.

Neighbourhoods and Hanf normal form. For a σ -db \mathcal{D} and $a, b \in D$, the *distance* between a and b in \mathcal{D} , denoted by $\text{dist}_{\mathcal{D}}(a, b)$, is the length of a shortest path between a and b in $\mathcal{G}(\mathcal{D})$. The *distance* between two tuples $\bar{a} = (a_1, \dots, a_m)$ and $\bar{b} = (b_1, \dots, b_l)$ of \mathcal{D} is the $\min\{\text{dist}_{\mathcal{D}}(a_i, b_j) \mid 1 \leq i \leq m, 1 \leq j \leq l\}$. Let $r \in \mathbb{N}$. For a tuple $\bar{a} \in D^{|\bar{a}|}$, we let $N_r^{\mathcal{D}}(\bar{a})$ denote the set of all elements of \mathcal{D} that are at distance at most r from \bar{a} . The *r-neighbourhood* of \bar{a} in \mathcal{D} , denoted by $\mathcal{N}_r^{\mathcal{D}}(\bar{a})$, is the tuple $(\mathcal{D}[N_r^{\mathcal{D}}(\bar{a})], \bar{a})$ where the elements of \bar{a} are called *centres*. We omit the superscript and write $N_r(\bar{a})$ and $\mathcal{N}_r(\bar{a})$, if \mathcal{D} is clear from the context. Two r -neighbourhoods, $\mathcal{N}_r(\bar{a})$ and $\mathcal{N}_r(\bar{b})$, are *isomorphic* (written $\mathcal{N}_r(\bar{a}) \cong \mathcal{N}_r(\bar{b})$) if there is an isomorphism between $\mathcal{D}[N_r(\bar{a})]$ and $\mathcal{D}[N_r(\bar{b})]$ which maps \bar{a} to \bar{b} . An \cong -equivalence-class of r -neighbourhoods with k centres is called an *r-neighbourhood type* (or *r-type* for short) with k centres. We let $T_r^{\sigma, d}(k)$ denote the set of all r -types with k centres and degree at most d , over schema σ . Note that for fixed d and σ , the cardinality

$|T_r^{\sigma,d}(k)| =: c(r, k)$ is a constant, only depending on r and k . We say that tuple $\bar{a} \in D^{|\bar{a}|}$ has r -type τ , if $\mathcal{N}_r^{\mathcal{D}}(\bar{a}) \in \tau$.

Let $r \in \mathbb{N}$ and $k \in \mathbb{N}_{\geq 1}$. A *sphere-formula*, denoted by $\text{sph}_r(\bar{x})$ (where $|\bar{x}| = k$), is an FO formula which expresses that the r -type of \bar{x} is τ , where τ is some r -type with k centres, and r is called the *locality radius* of the sphere-formula. A *Hanf-sentence* is a sentence of the form $\exists^{\geq m} x \text{sph}_r(x)$, where τ is an r -type with one centre, and r is the *locality radius* of the Hanf-sentence. An FO formula is in *Hanf normal form* if it is a Boolean combination of Hanf-sentences and sphere-formulas. The *Hanf locality radius* of an FO formula ϕ in Hanf normal form is the maximum of the locality radii of the Hanf-sentences and sphere-formulas of ϕ . A well-known theorem by Hanf states that on databases of bounded degree, every FO formula can be transformed into an equivalent formula in Hanf normal form [15]. This theorem was subsequently refined as follows.

Theorem 2.1 ([7]). *For any $\phi(\bar{x}) \in \text{FO}$ and $d \in \mathbb{N}_{\geq 1}$, there exists a d -equivalent formula $\psi(\bar{x})$ in Hanf normal form with the same free variables as ϕ , and ψ can be computed in time $2^{d^2 \mathcal{O}(\|\phi\|)}$ from ϕ . Furthermore, the Hanf locality radius of ψ is at most $4^{qr(\phi)}$.*

For each FO formula ϕ , we fix a formula ψ (that is computed by Theorem 2.1) that is d -equivalent to ϕ and is in Hanf normal form. We then fix the Hanf locality radius of ϕ to be the Hanf locality radius of ψ (and so we can then refer to the Hanf locality radius of an FO formula).

Local and non-local first-order queries. We call an $\text{FO}[\sigma]$ formula $\phi(\bar{x})$ (with k free variables) *local* if there exists some $r \in \mathbb{N}$ such that for any σ -dbs \mathcal{D}_1 and \mathcal{D}_2 and tuples $\bar{a}_1 \in D_1^k$ and $\bar{a}_2 \in D_2^k$, if $\mathcal{N}_r^{\mathcal{D}_1}(\bar{a}_1) \cong \mathcal{N}_r^{\mathcal{D}_2}(\bar{a}_2)$ then, $\mathcal{D}_1 \models \phi(\bar{a}_1)$ if and only if $\mathcal{D}_2 \models \phi(\bar{a}_2)$. We call r the *locality radius* of ϕ . If an FO formula is not local we say it is *non-local*. We highlight that this notion of locality differs from that of Hanf locality and Gaifman locality of FO and should not be confused.

Proviso. *For the rest of the paper, we fix a schema σ and numbers $d, t \in \mathbb{N}$ with $d \geq 2$. From now on, all databases are σ -dbs and have degree at most d , unless stated otherwise. We use \mathbf{G}_d to denote the class of all graphs with degree at most d , \mathbf{C}_d to denote the class of all σ -dbs with degree at most d , \mathbf{C}_d^t to denote the class of all σ -dbs with degree at most d and tree-width at most t and finally we use \mathbf{C} to denote a class of σ -dbs with degree at most d .*

Property Testing. First, we note that we only use methods from property testing from Section 5 onwards. We use the model of property testing for bounded degree databases introduced in [1], which is a straightforward extension of the model for bounded degree graphs [14]. Property testing algorithms do not have access to the whole input database. Instead, they are given access via an *oracle*. Let \mathcal{D} be an input σ -db on n elements. A property testing algorithm receives the number n as input, and it can make *oracle queries*¹ of the form (R, i, j) , where $R \in \sigma$, $i \leq n$ and $j \leq \deg(\mathcal{D})$. The answer to (R, i, j) is the j^{th} tuple in $R^{\mathcal{D}}$ containing the i^{th} element² of D (if such a tuple does not exist then it returns \perp). We assume oracle queries are answered in constant time.

¹Note that an oracle query is not a database query.

²According to the assumed linear order on D .

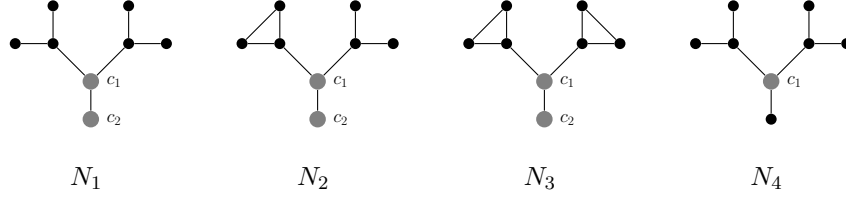


Figure 1: The four 2-types of Examples 2.2 and 5.2. The vertices labelled ‘ c_1 ’ and ‘ c_2 ’ are the centres.

Let $\mathcal{D}, \mathcal{D}'$ be two σ -dbs, both having n elements. The *distance* between \mathcal{D} and \mathcal{D}' , denoted by $\text{dist}(\mathcal{D}, \mathcal{D}')$, is the minimum number of tuples that have to be inserted or removed from relations of \mathcal{D} and \mathcal{D}' to make \mathcal{D} and \mathcal{D}' isomorphic. For $\epsilon \in [0, 1]$, we say \mathcal{D} and \mathcal{D}' are ϵ -close if $\text{dist}(\mathcal{D}, \mathcal{D}') \leq \epsilon dn$, and are ϵ -far otherwise. A *property* is simply a class of databases. Note that every FO sentence ϕ defines a property $\mathbf{P}_\phi = \{\mathcal{D} \mid \mathcal{D} \models \phi\}$. We call $\mathbf{P}_\phi \cap \mathbf{C}$ the property *defined by ϕ on \mathbf{C}* . A σ -db \mathcal{D} is ϵ -close to a property \mathbf{P} if there exists a database $\mathcal{D}' \in \mathbf{P}$ that is ϵ -close to \mathcal{D} , otherwise \mathcal{D} is ϵ -far from \mathbf{P} .

Let $\mathbf{P} \subseteq \mathbf{C}$ be a property and $\epsilon \in (0, 1]$ be the proximity parameter. An ϵ -tester for \mathbf{P} on \mathbf{C} is a probabilistic algorithm which is given oracle access to a σ -db $\mathcal{D} \in \mathbf{C}$ and it is given $n := |\mathcal{D}|$ as auxiliary input. The algorithm does the following.

- (1) If $\mathcal{D} \in \mathbf{P}$, then the tester accepts with probability at least $2/3$.
- (2) If \mathcal{D} is ϵ -far from \mathbf{P} , then the tester rejects with probability at least $2/3$.

The *query complexity* of a tester is the maximum number of oracle queries made. A tester has *constant* query complexity, if the query complexity does not depend on the size of the input database. We say a property $\mathbf{P} \subseteq \mathbf{C}$ is *uniformly testable* in time $f(n)$ on \mathbf{C} , if for every $\epsilon \in (0, 1]$ there exists an ϵ -tester for \mathbf{P} on \mathbf{C} which has constant query complexity and whose running time on databases on n elements is $f(n)$. Note that this tester must work for all n . We give an example below, which is also the basis of our running example.

Example 2.2. On the class \mathbf{G}_d , consider the isomorphism types τ_2 and τ_4 of the 2-neighbourhoods $(N_2, (c_1, c_2))$ and $(N_4, (c_1))$ where N_2 and N_4 are the graphs shown in Figure 1 with centres (c_1, c_2) and (c_1) . Let ϕ be the FO $\{E\}$ -formula $\phi = \exists x \exists y \text{sph}_{\tau_2}(x, y) \wedge \neg \exists z \text{sph}_{\tau_4}(z)$. Consider the property $\mathbf{P} := \mathbf{P}_\phi$. We show that on the class \mathbf{G}_d , $\mathbf{P} \cap \mathbf{G}_d$ is uniformly testable with constant time. For this, let $\epsilon \in (0, 1]$. Given oracle access to a graph $\mathcal{G} \in \mathbf{G}_d$ and $|V(\mathcal{G})| = n$ as an input, the ϵ -tester proceeds as follows:

- (1) If $n < 24d^3/\epsilon$, do a full check of \mathcal{G} and decide if $\mathcal{G} \in \mathbf{P}$.
- (2) Otherwise uniformly and independently sample $\alpha = \log_{1-\epsilon d/3} 1/3$ vertices from $[n]$.
- (3) For each sampled vertex, compute its 2-neighbourhood.
- (4) If a vertex is found with 2-type τ_4 then the tester rejects. Otherwise it accepts.

Claim 2.3. *The above ϵ -tester accepts with probability at least $2/3$ if $\mathcal{G} \in \mathbf{P}$ and rejects with probability at least $2/3$ if \mathcal{G} is ϵ -far from \mathbf{P} . Furthermore, the ϵ -tester has constant query complexity and runs in constant time.*

Proof: Note that in τ_4 , every vertex has 1 or 3 neighbours. For showing correctness, first assume $\mathcal{G} \in \mathbf{P}$. Then the tester will always accept as there exists no vertex with 2-type τ_4 .

Now assume \mathcal{G} is ϵ -far from \mathbf{P} . Then at least ϵdn edge modifications are necessary to make \mathcal{G} isomorphic to a graph in \mathbf{P} . If $n < 24d^3/\epsilon$ then the tester will reject so assume

otherwise. Inserting a copy of τ_2 requires at most $8(d+1)$ modifications (pick 8 vertices and remove all incident edges then add the 8 edges to make an isolated copy of τ_2). Removing an edge uv from \mathcal{G} will change the 2-type of any vertex in the set $N_2^{\mathcal{G}}(u) \cap N_2^{\mathcal{G}}(v)$. Lemma 3.2 (a) of [6] states that $|N_2^{\mathcal{G}}(u)| \leq d^{2+1}$ and $|N_2^{\mathcal{G}}(v)| \leq d^{2+1}$. Therefore, $|N_2^{\mathcal{G}}(u) \cap N_2^{\mathcal{G}}(v)| \leq d^3$ and inserting a copy of τ_2 could add at most $8d^4$ many copies of τ_4 . After inserting a copy of τ_2 we need to remove all copies of τ_4 . Let $v \in V(\mathcal{G})$ be a vertex with 2-type τ_4 . Let u be the neighbour of v with degree 1. If we remove the edge $uv \in E(\mathcal{G})$, v 's 2-type is no longer τ_4 . Note that v has exactly 2 neighbours and u has 0 neighbours in $\mathcal{G} \setminus uv$. Moreover, we claim that by removing uv , we have introduced no new vertices with 2-type τ_4 . To see this, observe that deleting uv will only affect the 2-types of vertices in $N_1^{\mathcal{G}}(v)$. But each vertex $x \in N_1^{\mathcal{G}}(v)$ will have a vertex with exactly two neighbours in its 2-neighbourhood in $\mathcal{G} \setminus uv$. Hence the new 2-type of x is not τ_4 . This shows that there are at least $\epsilon dn - 8(d+1) - 8d^4$ vertices with 2-type τ_4 . As $n \geq 24d^3/\epsilon$ and $d \geq 2$, then $8(d+1) \leq 8d^4 \leq \epsilon dn/3$. The probability that we sample a vertex with 2-type τ_4 is therefore at least $\epsilon dn/3n = \epsilon d/3$. Hence the probability that none of the α sampled vertices have 2-type τ_4 is at most $(1 - \epsilon d/3)^\alpha = 1/3$. Therefore with probability at least $2/3$ the tester rejects.

For the running time, if $n < 24d^3/\epsilon$ then we can do a full check of the input graph in time only dependent on d and ϵ . Otherwise, note that the tester samples only a constant number of vertices in (2), and for each of the sampled vertices, the tester needs to make a constant number of oracle queries only to calculate its 2-neighbourhood in (3), because the degree is bounded. Therefore the tester has constant query complexity and constant running time. \blacksquare

Adler and Harwath showed that, on the class of all databases with bounded degree and tree-width, every property definable in monadic second-order logic with counting (CMSO) is uniformly testable in polylogarithmic running time [1]. (Where a function is *polylogarithmic* in n , if it is a polynomial in $\log n$.) The logic CMSO is an extension of FO and we, therefore, get the following result which will be used as a subroutine in Section 5.

Theorem 2.4 ([1]). *Each property $\mathbf{P} \subseteq \mathbf{C}_d^t$ definable in FO is uniformly testable on \mathbf{C}_d^t in polylogarithmic running time.*

Model of Computation. We use Random Access Machines (RAMs) and a uniform cost measure when analysing our algorithms, i.e. we assume all basic arithmetic operations including random sampling can be done in constant time, regardless of the size of the numbers involved. We assume that if we initialise an array, all entries are set to 0 and this can be done in constant time for any length or dimension array. This is achieved by using the lazy array initialisation technique (cf. e.g. [19]) where entries are only actually stored when they are first needed. We use one-based indexing for arrays. Let \mathbf{A} be a 1-dimensional array. We assume that for a number $a \in \mathbb{N}_{\geq 1}$, the entry $\mathbf{A}[a]$ can be accessed in constant time.

3. PROPERTIES OF FIRST-ORDER QUERIES ON BOUNDED DEGREE

In this section, we shall give some useful normal forms of FO queries. We shall then give a characterisation and some results for local FO queries.

3.1. General first-order queries. We make use of the following lemma to simplify Boolean combinations of sphere-formulas. We shall use this result to show we can write FO queries in a special type of Hanf normal form that groups the Hanf-sentences and the sphere-formulas in a convenient way.

Lemma 3.1 ([6]). *Let $r, k, d \in \mathbb{N}$ with $k \geq 1$, $d \geq 2$ and let σ be a schema. For every Boolean combination $\phi(\bar{x})$ of sphere-formulas of degree at most d and radius at most r , there exists an $I \subseteq T_r^{\sigma, d}(k)$ such that $\phi(\bar{x})$ is d -equivalent to $\bigvee_{\tau \in I} \text{sph}_\tau(\bar{x})$.*

Furthermore, given $\phi(\bar{x})$, the set I can be computed in time $\text{poly}(\|\phi\|) \cdot 2^{(kd^{r+1})^{\mathcal{O}(\|\sigma\|)}}$.

In the following lemma, we show that we can write any FO query as a disjunction of conjunctions of a sphere-formula and a boolean combination of Hanf-sentences. This normal form will be used in Lemma 5.4.

Lemma 3.2. *Let $\phi(\bar{x}) \in \text{FO}$ and $|\bar{x}| = k$. Let r be the Hanf locality radius of ϕ . For every $d \in \mathbb{N}$ with $d \geq 2$ there exists a computable, d -equivalent formula to ϕ of the form*

$$\chi(\bar{x}) = \bigvee_{i \in [m]} \left(\text{sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s \right) \quad (3.1)$$

for some $m \in \mathbb{N}$, where for all $i \in [m]$, τ_i is an r -type with k centres and ψ_i^s is a conjunction of Hanf-sentences and negated Hanf-sentences. For each $\phi(\bar{x}) \in \text{FO}$, we fix such a d -equivalent formula to ϕ (so we can refer to the d -equivalent formula of ϕ in the form (3.1)).

Proof. From ϕ we can construct a formula in the required form as follows. Firstly, by Theorem 2.1 we construct a d -equivalent formula in Hanf normal form. Next, we write the resulting formula in DNF to obtain a formula of the form

$$\chi(\bar{x})' = \bigvee_{i \in [l]} \left(\psi_i^f(\bar{x}) \wedge \psi_i^s \right)$$

for some $l \in \mathbb{N}$, where for $i \in [l]$, $\psi_i^f(\bar{x})$ is a conjunction of sphere-formulas and ψ_i^s is a conjunction of Hanf-sentences and negated Hanf-sentences. Then, by Lemma 3.1, we can replace each $\psi_i^f(\bar{x})$ with a d -equivalent formula $\bigvee_{t \in \lambda_i} \text{sph}_t(\bar{x})$ where λ_i is a set of r -types with k centres. Finally, we replace each $\bigvee_{t \in \lambda_i} \text{sph}_t(\bar{x}) \wedge \psi_i^s$ with $\bigvee_{t_i \in \lambda_i} (\text{sph}_{t_i}(\bar{x}) \wedge \psi_i^s)$. The resulting formula is in the required form. \square

In Theorems 4.5 and 5.6, we reduce the minimum size of the answer set required to enumerate all answers to the query ϕ in our approximate enumeration algorithms. We show we only actually require an answer set of size γn^c , where $c := \text{conn}(\phi, d)$ is the maximum number of connected components in the r -neighbourhood (where r is the Hanf-locality radius of ϕ) of an answer to ϕ . We define $\text{conn}(\phi, d)$ below.

Definition 3.3 ($\text{conn}(\phi, d)$). Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ where $|\bar{x}| = k$ and let $\chi(\bar{x})$ be the formula in the form (3.1) of Lemma 3.2 that is d -equivalent to ϕ . We define $\text{conn}(\phi, d)$ as the maximum number of connected components of the neighbourhood types that appear in the sphere-formulas of χ . Note that $\text{conn}(\phi, d) \leq k$.

Recall that we fix a formula χ in the form (3.1) of Lemma 3.2 for each FO formula ϕ , and hence $\text{conn}(\phi, d)$ is well defined.

3.2. Local first-order queries. We shall start by showing that for any local FO query ϕ we can compute a set of r -types T (where r is the locality radius) such that for any σ -db \mathcal{D} and tuple \bar{a} , \bar{a} is an answer to ϕ on \mathcal{D} if and only if the r -type of \bar{a} is in T .

Lemma 3.4. *There is an algorithm that, given a local query $\phi(\bar{x}) \in \text{FO}[\sigma]$ with k free variables and given the locality radius r of ϕ , computes a set of r -types T with k centres such that for any σ -db \mathcal{D} and tuple $\bar{a} \in D^k$, $\bar{a} \in \phi(\mathcal{D})$ if and only if the r -type of \bar{a} in \mathcal{D} is in T .*

Proof. Let T be an empty list. For each r -type τ with k centres we do the following. Let \mathcal{D}_τ be the fixed representative σ -db of τ where \bar{c} is the centre tuple, then if $\mathcal{D}_\tau \models \phi(\bar{c})$ add τ to T . Then since ϕ is local and r is the locality radius of ϕ , for every σ -db \mathcal{D} and tuple $\bar{a} \in D^k$, $\mathcal{D} \models \phi(\bar{a})$ if and only if the r -type of \bar{a} in \mathcal{D} is in T . \square

Using the previous lemma we shall show that for any local FO query, σ -db \mathcal{D} and tuple \bar{a} from \mathcal{D} it can be decided in constant time whether \bar{a} is an answer to ϕ on \mathcal{D} . We will use this when approximately enumerating answers to local FO queries.

Lemma 3.5. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ be a local query with k free variables. There is an algorithm that, given a σ -db \mathcal{D} and a tuple $\bar{a} \in D^k$, decides whether $\bar{a} \in \phi(\mathcal{D})$ in constant time.*

Proof. Let r be the locality radius of ϕ . First let us compute the set of r -types T as in Lemma 3.4. We shall then compute the r -type τ of \bar{a} in \mathcal{D} . By Lemma 3.4 if $\tau \in T$ then $\bar{a} \in \phi(\mathcal{D})$ and if $\tau \notin T$ then $\bar{a} \notin \phi(\mathcal{D})$.

Since r does not depend on \mathcal{D} , the r -type of \bar{a} in \mathcal{D} can be computed in constant time. Furthermore, computing the set T does not depend on \mathcal{D} , and hence it can be decided in constant time whether $\bar{a} \in \phi(\mathcal{D})$. \square

We shall finish this section with the following characterisation of local FO queries. We do not make use of this characterisation but we include it to aid intuition. The proof of the observation is straightforward but we shall give it for completeness.

Observation 3.6. Let $\phi(\bar{x}) \in \text{FO}[\sigma]$. Then ϕ is local if and only if ϕ is d -equivalent to a boolean combination of sphere-formulas.

Furthermore, for any local FO query ϕ , the locality radius of ϕ is equal to the Hanf locality radius of ϕ . Therefore, since the Hanf locality radius of an FO query is computable by Theorem 2.1, the locality radius of a local FO query is also computable.

Proof. We will give a proof of the first part of the observation only. Let $|\bar{x}| = k$. First let us assume that ϕ is d -equivalent to a FO formula χ that is a boolean combination of sphere-formulas. Let r be the Hanf locality radius of χ . Then since χ contains no Hanf-sentences, for any σ -dbs \mathcal{D}_1 and \mathcal{D}_2 and tuples $\bar{a}_1 \in D_1^k$ and $\bar{a}_2 \in D_2^k$, if $\mathcal{N}_r^{\mathcal{D}_1}(\bar{a}_1) \cong \mathcal{N}_r^{\mathcal{D}_2}(\bar{a}_2)$ then, $\mathcal{D}_1 \models \phi(\bar{a}_1)$ if and only if $\mathcal{D}_2 \models \phi(\bar{a}_2)$. Hence ϕ is local and r is the locality radius of ϕ .

Now let us assume that ϕ is local. Let T be the set of r -types as constructed in Lemma 3.4. Therefore ϕ is d -equivalent to the formula $\bigvee_{\tau \in T} \text{sph}_\tau(\bar{x})$ which is in the required form. \square

4. ENUMERATING ANSWERS TO LOCAL FIRST-ORDER QUERIES

Assume q is a local FO query with k free variables and \mathcal{D} is a σ -db, such that the set $q(\mathcal{D})$ is larger than a fixed proportion of all possible k -tuples, i.e. $|q(\mathcal{D})| \geq \mu|D|^k$ for some fixed $\mu \in (0, 1)$. It is easy to construct an algorithm that enumerates the set $q(\mathcal{D})$ with amortized constant delay, i.e. the average delay between any two outputs is constant. For each tuple $\bar{a} \in D^k$ (processed in, say, lexicographical order), the algorithm tests if \bar{a} is in $q(\mathcal{D})$ (which can be done in constant time by Lemma 3.5 as q is local) and outputs \bar{a} if $\bar{a} \in q(\mathcal{D})$. Since we are assuming that $|q(\mathcal{D})|$ is larger than a fixed proportion of all possible tuples, the overall running time of the algorithm is $\mathcal{O}(|D|^k)$ and hence the algorithm has constant amortized delay. In this section we prove that we can de-amortize this algorithm using random sampling.

We begin this section by showing that there exists a randomised algorithm which does the following. The input is a set V which is partitioned into two sets V_1 and V_2 . We assume that the algorithm can test in constant time if a given element from V is in V_1 or V_2 . After a constant time preprocessing phase, the algorithm enumerates a set S of elements with $S \subseteq V_1$, with constant delay. Furthermore, we show that if $|V_1|$ is large enough then with high probability $S = V_1$. We then use this result to prove our main theorem of this section (Theorem 4.4) on the approximate enumeration of the answers to a local query. In Theorem 4.5 we show that the relative size of the answer set can be reduced whilst still guaranteeing that with high probability we enumerate all answers to the query.

Lemma 4.1. *Fix $\mu \in (0, 1)$ and $\delta \in (0, 1)$. There exists a randomised algorithm which does the following. The input is a set V which is partitioned into two sets V_1 and V_2 . We assume that the algorithm is given access to the size of V and can decide in constant time whether a given element from V is in V_1 or V_2 . The algorithm outputs a set $S \subseteq V_1$ such that if $|V_1| \geq \mu|V|$ then, with probability at least δ , $S = V_1$.*

The algorithm has constant preprocessing time and enumerates S with no duplicates and constant delay between any two consecutive outputs.

Proof. Let $|V| = n$ and let us assume that V comes with a linear order over its elements, or equivalently that $V = [n]$. If V does not come with a linear order over its elements then we use the linear order induced by the encoding of V . Let $q = \min((1 - \mu(1 - \mu))^2, (1 - \delta)^2/9)$. The preprocessing phase proceeds as follows:

- (1) Initialise an array \mathbf{B} of length n . The array \mathbf{B} contains one entry for each element in $[n]$ and it is used to record sampled elements. For an element $a \in [n]$, the entry $\mathbf{B}[a]$ is 1 if a has previously been sampled and it is 0 otherwise.
- (2) Initialise an empty queue \mathbf{Q} , to store tuples to be enumerated.

As discussed in Section 2 an array of any size can be initialised in constant time using lazy initialisation and hence the preprocessing phase runs in constant time.

Moving on to the enumeration phase, between each output the algorithm will sample a constant number of elements as well as going through a constant number of the elements in $[n]$ in order. The enumeration phase proceeds as follows:

- (1) Sample $\alpha = \lceil \log_{1-\mu(1-\mu)} q \rceil$ many elements uniformly and independently from $[n]$ and let t be a list of these elements.
- (2) Add the next $\lceil 1/\mu^2 \rceil$ elements from $[n]$ to t . If there are less than $\lceil 1/\mu^2 \rceil$ elements remaining just add all the remaining elements to t .

- (3) For each element a in t , if $\mathbf{B}[a] = 1$, skip this element. Otherwise, set $\mathbf{B}[a] = 1$ and if a is in V_1 add a to \mathbf{Q} .
- (4) If $\mathbf{Q} \neq \emptyset$, output the next element from \mathbf{Q} ; stop otherwise.
- (5) Repeat Steps 1-4 until there is no element to output in Step 4.

In Steps 1 and 2 a list of elements is created which is of constant size. For each element in this list, in Step 3, the algorithm can check whether it is in V_1 in constant time and the arrays \mathbf{Q} and \mathbf{B} can be read and updated in constant time. Hence, each enumeration step can be done in constant time. This concludes the analysis of the running time. We now prove correctness.

Clearly, no duplicates will be enumerated due to the use of the array \mathbf{B} and the only elements enumerated are those that are in V_1 . Let S be the set of elements that are enumerated. We need to show that with probability at least $2/3$ if $|V_1| \geq \mu|V|$, then $S = V_1$. In each enumeration step we take the next $\lceil 1/\mu^2 \rceil$ elements from $[n]$. Assuming $|V_1| \geq \mu|V|$, after $\lceil n \cdot \mu^2 \rceil \leq \lceil \mu|V_1| \rceil$ enumeration steps the algorithm will have checked every element in $[n]$ and therefore $S = V_1$. Let us find a bound on the probability that we do at least $\lceil \mu|V_1| \rceil$ enumeration steps.

Claim 4.2. For all $q \in [0, 1)$ and $m \in \mathbb{N}_{\geq 1}$, $\prod_{i=1}^m (1 - q^{\frac{i+1}{2}}) \geq 1 - 3q^{\frac{1}{2}}$.

Proof: First let us prove that

$$\prod_{i=1}^m (1 - q^{\frac{i+1}{2}}) \geq 1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+2}{2}}$$

by induction on m .

For the base case, let $m = 1$, then

$$\prod_{i=1}^1 (1 - q^{\frac{i+1}{2}}) = 1 - q \geq 1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{3}{2}}$$

as required.

Now for the inductive step. Let us assume the claim is true for m and we shall show the claim is true for $m+1$. We have

$$\prod_{i=1}^{m+1} (1 - q^{\frac{i+1}{2}}) = \left(\prod_{i=1}^m (1 - q^{\frac{i+1}{2}}) \right) \cdot (1 - q^{\frac{m+2}{2}}) \geq (1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+2}{2}}) (1 - q^{\frac{m+2}{2}})$$

by the inductive hypothesis.

$$\begin{aligned} (1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+2}{2}}) (1 - q^{\frac{m+2}{2}}) &= 1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+3}{2}} + q^{\frac{m+4}{2}} + q^{\frac{m+5}{2}} - q^{m+2} \\ &\geq 1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+3}{2}}, \end{aligned}$$

as $q^{(m+4)/2} + q^{(m+5)/2} - q^{m+2} \geq 0$.

Therefore,

$$\prod_{i=1}^m (1 - q^{\frac{i+1}{2}}) \geq 1 - q^{\frac{1}{2}} - q - q^{\frac{3}{2}} + q^{\frac{m+2}{2}} \geq 1 - 3q^{\frac{1}{2}}$$

as required ■

Claim 4.3. Assume that $|V_1| \geq \mu n$. The probability that at least $\lceil \mu|V_1| \rceil$ distinct elements from V_1 are enumerated is at least $1 - 3q^{\frac{1}{2}}$.

Proof: We shall start by showing that for $j \in \mathbb{N}$, where $1 \leq j \leq \lceil \mu|V_1| \rceil$, the probability that at least j distinct elements from V_1 are enumerated is at least $\prod_{i=1}^j (1 - q^{(i+1)/2})$.

We shall prove this by induction on j . For the base case, let $j = 1$. If an element from V_1 is sampled in the first enumeration step, then at least one element from V_1 will be enumerated. An element that is in V_1 is sampled with probability

$$\frac{|V_1|}{n} \geq \frac{\mu n}{n} = \mu \geq \mu(1 - \mu).$$

The probability that out of the α elements sampled in the first enumeration step there is none from V_1 is at most $(1 - \mu(1 - \mu))^\alpha \leq q$ as $\alpha = \lceil \log_{1-\mu(1-\mu)} q \rceil \geq \log_{1-\mu(1-\mu)} q$. Therefore with probability at least $1 - q$ at least one element from $|V_1|$ is enumerated and hence we have proved the base case.

For the inductive step, assume that the claim is true for j , where $1 \leq j < \lceil \mu|V_1| \rceil$, we shall show it is true for $j + 1$. Let us assume j distinct elements from V_1 have already been enumerated, and a total of at least $(j + 1)\alpha$ elements have been sampled (of which at least j are from V_1). The probability an element from V_1 that was not already enumerated is sampled is $(|V_1| - j)/n$. Therefore, the probability that exactly j unique elements from V_1 have been sampled is at most

$$\left(1 - \frac{|V_1| - j}{n}\right)^{(j+1)\alpha-j} < (1 - \mu(1 - \mu))^{(j+1)\alpha-j},$$

as $|V_1| - j > |V_1| - \mu|V_1| \geq \mu n(1 - \mu)$. Then

$$(1 - \mu(1 - \mu))^{(j+1)\alpha-j} \leq \frac{q^{j+1}}{(1 - \mu(1 - \mu))^j} \leq \frac{q^{j+1}}{(q^{\frac{1}{2}})^j} = q^{\frac{j+2}{2}},$$

as $\alpha = \lceil \log_{1-\mu(1-\mu)} q \rceil \geq \log_{1-\mu(1-\mu)} q$ and as $q \leq (1 - \mu(1 - \mu))^2$. Therefore, the probability that there are at least $j + 1$ elements from V_1 in these sampled tuples is at least $1 - q^{(j+2)/2}$. Then by the inductive hypothesis, the probability that at least $j + 1$ elements from V_1 are enumerated is at least

$$\left(\prod_{i=1}^j (1 - q^{\frac{i+1}{2}})\right) \cdot (1 - q^{\frac{j+2}{2}}) = \prod_{i=1}^{j+1} (1 - q^{\frac{i+1}{2}})$$

as required.

Finally, by Claim 4.2, the probability that at least $\lceil \mu|V_1| \rceil$ many distinct elements from V_1 are enumerated is at least

$$\prod_{i=1}^{\lceil \mu|\phi(\mathcal{D})| \rceil} (1 - q^{\frac{i+1}{2}}) \geq 1 - 3q^{\frac{1}{2}}.$$

By Claim 4.3 the probability that $S = V_1$ if $|V_1| \geq \mu n$ is at least $(1 - 3q^{\frac{1}{2}}) \geq \delta$ by the choice of q . This completes the proof. ■

We now use Lemma 4.1 to prove the following theorem.

Theorem 4.4. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ be a local query with k free variables and let $\gamma \in (0, 1)$. There exists an algorithm that is given a σ -db \mathcal{D} as an input, that after a constant time preprocessing phase, enumerates a set S (with no duplicates) with constant delay between any two consecutive outputs, such that:*

- (1) $S \subseteq \phi(\mathcal{D})$, and
- (2) if $|\phi(\mathcal{D})| \geq \gamma|D|^k$ (i.e. the number of answers to the query is larger than a fixed fraction of the total possible number of answers), then with probability at least $2/3$, $S = \phi(\mathcal{D})$.

Proof. Given a tuple $\bar{a} \in |D|^k$ we can test in constant time whether $\bar{a} \in \phi(\mathcal{D})$ or $\bar{a} \notin \phi(\mathcal{D})$ by Lemma 3.5. We can partition the set D^k into two sets based on whether a tuple is in $\phi(\mathcal{D})$ or not. Therefore the algorithm from Lemma 4.1 (with $\delta = 2/3$, $\mu = \gamma$, $V = |D|^k$, $V_1 = \phi(\mathcal{D})$ and $V_2 = |D|^k \setminus \phi(\mathcal{D})$) meets the requirements in the theorem statement. \square

In our algorithms, in order to achieve constant preprocessing time and constant delay we require the number of answers to the query to be some fixed fraction of the total possible number of answers. Otherwise, with high probability the algorithm would not sample an answer in the enumeration phase and the algorithm would stop.

It seems natural to expect that for queries occurring in practice, the elements of an answer tuple are within a small distance of each other in the input database (i.e. the r -neighbourhood of the answer has few connected components). In such scenarios, we can strengthen our main theorem by reducing the number of answers required to output all answers to the query with high probability.

Theorem 4.5. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ be a local query with locality radius r and let $\gamma \in (0, 1)$. Let $c := \text{conn}(\phi, d)$, i.e. the maximum number of connected components in the r -neighbourhood of a tuple $\bar{a} \in \phi(\mathcal{D})$ for any σ -db \mathcal{D} . There exists an algorithm that, given a σ -db \mathcal{D} as input, after a constant time preprocessing phase enumerates a set S (with no duplicates) with constant delay between any two consecutive outputs, such that the following hold.*

- (1) $S \subseteq \phi(\mathcal{D})$, and
- (2) if $|\phi(\mathcal{D})| \geq \gamma|D|^c$, then with probability at least $2/3$, $S = \phi(\mathcal{D})$.

We defer the proof of Theorem 4.5 to Section 6.

5. ENUMERATING ANSWERS TO GENERAL FIRST-ORDER QUERIES

We now shift our focus to enumerating answers to general FO queries, now they can be non-local in the sense that we can not check if a tuple is an answer to the query by only looking at its neighbourhood. We are aiming at sublinear preprocessing time hence we cannot read the whole input database and therefore will need to sacrifice some accuracy. We allow our algorithms to enumerate ‘close’ answers as well as actual answers. We start this section by defining our notion of approximation before proving our main result.

5.1. Our Notion of Approximation. We shall start by defining our notion of closeness.

Definition 5.1 (ϵ -close answers to FO queries). Let $\mathcal{D} \in \mathbf{C}$ be a σ -db and let $\epsilon \in (0, 1]$. Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ be a query with k free variables and Hanf locality radius r . A tuple $\bar{a} \in D^k$ is ϵ -close to being an answer of ϕ on \mathcal{D} and \mathbf{C} if \mathcal{D} can be modified (with tuple insertions and deletions) into a σ -db $\mathcal{D}' \in \mathbf{C}$ with at most $\epsilon d|D|$ modifications (i.e. $\text{dist}(\mathcal{D}, \mathcal{D}') \leq \epsilon d|D|$) such that $\bar{a} \in \phi(\mathcal{D}')$ and the r -type of \bar{a} in \mathcal{D}' is the same as the r -type of \bar{a} in \mathcal{D} .

We denote the set of all tuples that are ϵ -close to being an answer of ϕ on \mathcal{D} and \mathbf{C} as $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$. Note that $\phi(\mathcal{D}) \subseteq \phi(\mathcal{D}, \mathbf{C}, \epsilon)$.

We shall illustrate Definition 5.1 in the following example.

Example 5.2. On the class \mathbf{G}_d , consider the isomorphism types τ_1 , τ_2 and τ_3 of the 2-neighbourhoods $(N_1, (c_1, c_2))$, $(N_2, (c_1, c_2))$ and $(N_3, (c_1, c_2))$ shown in Figure 1. Let $\phi \in \text{FO}[\{E\}]$ be given by $\phi(x, y) := \text{sph}_{\tau_1}(x, y) \vee (\text{sph}_{\tau_2}(x, y) \wedge \neg(\exists z \exists w \text{sph}_{\tau_1}(z, w)))$. This formula might be useful in scenarios where ideally we want to return pairs of vertices with a specific 2-type τ_1 but if there is no such pair then returning vertex pairs with a similar 2-type will suffice.

Let $\mathcal{G} \in \mathbf{G}_d$ be a graph on n vertices and $\epsilon \in (0, 1]$. First observe that for any pair $(u, v) \in V(\mathcal{G})^2$ with 2-type τ_1 , $(u, v) \in \phi(\mathcal{G})$ and hence $(u, v) \in \phi(\mathcal{G}, \mathbf{G}_d, \epsilon)$.

Assume $(u, v) \in V(\mathcal{G})^2$ has 2-type τ_2 . Then $(u, v) \in \phi(\mathcal{G})$ if and only if \mathcal{G} contains no vertex pair of 2-type τ_1 . The pair (u, v) is in $\phi(\mathcal{G}, \mathbf{G}_d, \epsilon)$ if and only if \mathcal{G} can be modified (with edge modifications) into a graph $\mathcal{G}' \in \mathbf{G}_d$ with at most ϵdn modifications such that $(u, v) \in \phi(\mathcal{G}')$ and the 2-type of (u, v) in \mathcal{G}' is still τ_2 .

For example if \mathcal{G} is at distance at most $\epsilon dn - 4d - 6$ (assuming that n is large enough such that $\epsilon dn - 4d - 6 > 0$) from a graph $\mathcal{G}'' \in \mathbf{G}_d$ such that $\mathcal{G}'' \models \exists x \exists y \text{sph}_{\tau_2}(x, y) \wedge \neg(\exists z \exists w \text{sph}_{\tau_1}(z, w))$ then $(u, v) \in \phi(\mathcal{G}, \mathbf{G}_d, \epsilon)$. To see this let us assume that such a graph \mathcal{G}'' exists. Note that as \mathbf{G}_d is closed under isomorphism we can assume that \mathcal{G} and \mathcal{G}'' are on the same vertices. Then if (u, v) has 2-type τ_2 in \mathcal{G}'' , $(u, v) \in \phi(\mathcal{G}, \mathbf{G}_d, \epsilon)$ since $\epsilon dn - 4d - 6 \leq \epsilon dn$. So let us assume that (u, v) does not have 2-type τ_2 in \mathcal{G}'' . Let $(u_1, v_1) \in V(\mathcal{G}'')^2$ have 2-type τ_2 (we know one exists). Then we remove every edge that has u, v, u_1 or v_1 as an endpoint (there are at most $2d + 3$ such edges), and then for each edge we removed we insert the same edge back in but swapping any endpoint u to u_1 and v to v_1 and vice versa (this requires at most $2(2d + 3)$ many edge modifications in total). By doing this we have essentially just swapped the labels of the vertices u and u_1 and v and v_1 . Hence in the resulting graph \mathcal{G}' , (u, v) has 2-type τ_2 and \mathcal{G}' still contains no pair of vertices with 2-type τ_1 . Therefore $(u, v) \in \phi(\mathcal{G}')$, and the distance between \mathcal{G} and \mathcal{G}' is at most $\epsilon dn - 4d - 6 + 2(2d + 3) = \epsilon dn$.

Finally, for any pair $(u, v) \in V(\mathcal{G})^2$ with 2-type τ_3 , $(u, v) \notin \phi(\mathcal{G})$ and $(u, v) \notin \phi(\mathcal{G}, \mathbf{G}_d, \epsilon)$ as for every $\mathcal{G}' \in \mathbf{G}_d$ there does not exist a pair with 2-type τ_3 that is in $\phi(\mathcal{G}')$.

The set $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$ contains all tuples that are ϵ -close to being answers to ϕ . A tuple $\bar{a} \in D^k$ is in $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$ if only a relatively small (at most ϵdn) number of modifications to \mathcal{D} are needed to make \bar{a} an answer to ϕ without changing \bar{a} 's neighbourhood type. This can be seen as a notion of *structural* approximation. One might be tempted to define $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$ differently, namely as the set of tuples that can be turned into an answer to ϕ on \mathcal{D} (without necessarily preserving the neighbourhood type) with at most ϵdn modifications to \mathcal{D} . However, if $\phi(\mathcal{D}) \neq \emptyset$, say, $\bar{a} \in \phi(\mathcal{D})$, then we can turn any tuple $\bar{b} \in D^k$ into an answer for ϕ on \mathcal{D} with only a constant number of modifications. This can be done by exchanging \bar{b} 's r -neighbourhood with \bar{a} 's, for some r depending on ϕ . This is not meaningful.

Let χ be as in (3.1) of Lemma 3.2 for ϕ . Note that only tuples with a neighbourhood type that appears in χ can be in the set $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$. Nevertheless, the difference $|\phi(\mathcal{D}, \mathbf{C}, \epsilon)| - |\phi(\mathcal{D})|$ can be unbounded. The following example demonstrates this.

Example 5.3. Let ϕ , τ_1 and τ_2 be as in Example 5.2. For $m \in \mathbb{N}_{\geq 1}$, let $\mathcal{G}_{1,m}$ be the graph that contains m disjoint copies of τ_2 and 1 disjoint copy of τ_1 . Note that $\mathcal{G}_{1,m}$ has $n = 8(m + 1)$ vertices. The graph $\mathcal{G}_{1,m}$ can be modified with one edge modification to form a graph which satisfies $\exists x \exists y \text{sph}_{\tau_2}(x, y) \wedge \neg(\exists z \exists w \text{sph}_{\tau_1}(z, w))$ without modifying the 2-type of any pair $(u, v) \in V(\mathcal{G}_{1,m})^2$ with 2-type τ_2 in $\mathcal{G}_{1,m}$. Therefore if $1 \leq \epsilon dn$ then every pair

$(u, v) \in V(\mathcal{G}_{1,m})^2$ with 2-type τ_2 is in $\phi(\mathcal{G}_{1,m}, \mathbf{G}_d, \epsilon)$. Hence, assuming $1 \leq \epsilon dn$ we have $|\phi(\mathcal{G}_{1,m}, \mathbf{G}_d, \epsilon)| - |\phi(\mathcal{G}_{1,m})| = m + 1 - 1 = \Theta(n)$.

While $\phi(\mathcal{D}, \mathbf{C}, \epsilon)$ is a *structural* approximation of $\phi(\mathcal{D})$, Example 5.3 illustrates that it may not be a *numerical* approximation. However, in scenarios where the focus lies on structural closeness, this might not be an issue.

We say that the problem $\text{Enum}_{\mathbf{C}}(\phi)$ can be *solved approximately* with $\mathcal{O}(H(n))$ preprocessing time and constant delay for answer threshold function $f(n)$, if for every parameter $\epsilon \in (0, 1]$, there exists an algorithm, which is given oracle access to an input database $\mathcal{D} \in \mathbf{C}$ and $|\mathcal{D}| = n$ as an input, that proceeds in two steps.

- (1) A preprocessing phase that runs in time $\mathcal{O}(H(n))$, and
- (2) an enumeration phase that enumerates a set S of distinct tuples with constant delay between any two consecutive outputs.

Moreover, we require that with probability at least $2/3$, $S \subseteq \phi(\mathcal{D}) \cup \phi(\mathcal{D}, \mathbf{C}, \epsilon)$ and, if $|\phi(\mathcal{D})| \geq f(n)$, then $\phi(\mathcal{D}) \subseteq S$. The algorithm can make oracle queries of the form (R, i, j) as discussed in Section 2 which allows us to explore bounded radius neighbourhoods in constant time. We call such an algorithm an ϵ -*approximate enumeration algorithm*.

5.2. Main Results. Before proving our main result of this section on the approximate enumeration of general first-order queries, we start by proving the following lemma. In this lemma, we show that for a given database \mathcal{D} and FO query ϕ we can compute a set of neighbourhood types in polylogarithmic time, that with high probability only contains the neighbourhood types of tuples that are answers or close to being answers to ϕ on \mathcal{D} . To compute this set we write ϕ in the form (3.1) as in Lemma 3.2 and then run property testers on the sentence parts to determine with high probability whether tuples with the corresponding r -type (the r -type that appears in the sphere-formula) are answers to ϕ on the input database or are far from being an answer to ϕ on the input database.

Lemma 5.4. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ with $|\bar{x}| = k$ and Hanf locality radius r and let $\epsilon \in (0, 1]$. There exists an algorithm \mathbb{A}_ϵ , which, given oracle access to a σ -db $\mathcal{D} \in \mathbf{C}_d^t$ as input along with $|\mathcal{D}| = n$, computes a set T of r -types with k centres such that with probability at least $5/6$, for any $\bar{a} \in D^k$,*

- (1) *if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and*
- (2) *if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T .*

Furthermore, \mathbb{A}_ϵ runs in polylogarithmic time.

Proof. If $n < 8k/\epsilon$ then we do a full check of \mathcal{D} and form the set T exactly. Otherwise, \mathbb{A}_ϵ starts by computing the formula $\chi(\bar{x})$ that is d -equivalent to ϕ and is in the form (3.1) as in Lemma 3.2. Let m be as in Lemma 3.2. By Theorem 2.4, any sentence definable in FO is uniformly testable on \mathbf{C}_d^t in polylogarithmic time. Hence for every $i \in [m]$ there exists an $\epsilon/2$ -tester that runs in polylogarithmic time and with probability at least $2/3$ accepts if the input satisfies $\exists \bar{x} \text{sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ and rejects if the input is $\epsilon/2$ -far from satisfying $\exists \bar{x} \text{sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$. We can amplify this probability to $(5/6)^{1/m}$ by repeating the tester a constant number of times and we denote the resulting $\epsilon/2$ -tester as π_i . Next, \mathbb{A}_ϵ computes the set T as follows.

- (1) Let $T = \emptyset$.
- (2) For each $i \in [m]$, run π_i with \mathcal{D} as input, and if π_i accepts, then add τ_i to T .

By Lemma 3.2, $\chi(\bar{x})$ can be computed in constant time (only dependent on d , $\|\phi\|$ and $\|\sigma\|$). Moreover, each $\epsilon/2$ -tester π_i runs in polylogarithmic time. Since m is a constant, \mathbb{A}_ϵ runs in polylogarithmic time.

It now only remains to prove correctness. Let $\bar{a} \in D^k$ and let τ be the r -type of \bar{a} in \mathcal{D} . Let us assume that each π_i correctly accepts if \mathcal{D} satisfies $\exists \bar{x} \text{ sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ and correctly rejects if \mathcal{D} is $\epsilon/2$ -far from satisfying $\exists \bar{x} \text{ sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$, which happens with probability at least $(5/6)^{(1/m) \cdot m} = 5/6$.

First let us assume that $\bar{a} \in \phi(\mathcal{D})$. We shall show that $\tau \in T$. Since $\mathcal{D} \models \phi(\bar{a})$, there exists at least one $i \in [m]$ such that $\mathcal{D} \models \text{sph}_{\tau_i}(\bar{a}) \wedge \psi_i^s$ (as ϕ is d -equivalent to $\chi(\bar{x}) = \bigvee_{i \in [m]} (\text{sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s)$). Hence, $\mathcal{D} \models \exists \bar{x} \text{ sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ and as we are assuming π_i correctly accepted, the r -type τ_i will have been added to T . Since $\mathcal{D} \models \text{sph}_{\tau_i}(\bar{a})$, $\tau_i = \tau$, and therefore $\tau \in T$.

Now let us assume that $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$. We shall show that $\tau \notin T$. For a contradiction let us assume that $\tau \in T$ and hence there must exist some $i \in [m]$ such that \mathcal{D} is $\epsilon/2$ -close to satisfying $\exists \bar{x} \text{ sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ on \mathbf{C}_d^t and $\tau_i = \tau$. By definition there exists a σ -db $\mathcal{D}' \in \mathbf{C}_d^t$ such that $\mathcal{D}' \models \exists \bar{x} \text{ sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ and $\text{dist}(\mathcal{D}, \mathcal{D}') \leq \epsilon dn/2$. Since any property defined by a FO sentence on \mathbf{C}_d^t is closed under isomorphism we can assume that \mathcal{D}' can be obtained from \mathcal{D} with at most $\epsilon dn/2$ tuple modifications. If in \mathcal{D}' the r -type of \bar{a} is no longer τ then we can modify \mathcal{D}' with at most $4dk$ tuple modifications into a σ -db $\mathcal{D}'' \in \mathbf{C}_d^t$ such that the r -type of \bar{a} is τ in \mathcal{D}'' and $\mathcal{D}'' \cong \mathcal{D}'$ (and hence $\bar{a} \in \phi(\mathcal{D}'')$). To do this we choose a tuple \bar{b} whose r -type is τ in \mathcal{D}' and for any tuple that contains an element from \bar{a} or \bar{b} , delete it and add back the same tuple but with the elements from \bar{a} exchanged for the corresponding elements from \bar{b} and vice versa. This requires at most $4dk$ tuple modifications. Hence $\text{dist}(\mathcal{D}, \mathcal{D}'') \leq \epsilon dn/2 + 4dk \leq \epsilon dn$ if $n \geq 8k/\epsilon$ (which we can assume as otherwise we do a full check of \mathcal{D} and compute T exactly) and so by definition $\bar{a} \in \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$ which is a contradiction. Therefore $\tau \notin T$.

Hence with probability at least $5/6$, for every $\bar{a} \in D^k$, if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T . \square

We now use Lemmas 4.1 and 5.4 to prove our main result of this section (Theorem 5.5).

Theorem 5.5. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ where $|\bar{x}| = k$. Then $\text{Enum}_{\mathbf{C}_d^t}(\phi)$ can be solved approximately with polylogarithmic preprocessing time and constant delay for answer threshold function $f(n) = \gamma n^k$ for any parameter $\gamma \in (0, 1)$.*

Proof. Let $\mathcal{D} \in \mathbf{C}_d^t$ with $|D| = n$, let $\epsilon \in (0, 1]$ and let $\gamma \in (0, 1)$. We shall construct an ϵ -approximate enumeration algorithm for $\text{Enum}_{\mathbf{C}_d^t}(\phi)$ that has answer threshold function $f(n) = \gamma n^k$, polylogarithmic preprocessing time and constant delay.

In the preprocessing phase, the algorithm starts by running the algorithm from Lemma 5.4 on \mathcal{D} to compute a set T of r -types with k centres. Then the algorithm from the proof of Lemma 4.1 with $\mu = \gamma$, $\delta = 5/6$, $V = D^k$, $V_1 = \{\bar{a} \in D^k \mid \text{the } r\text{-type of } \bar{a} \text{ in } \mathcal{D} \text{ is in } T\}$ and $V_2 = D^k \setminus V_1$ is run.

By Lemma 5.4, the set T is computed in polylogarithmic time. Hence as the preprocessing phase from the proof of Lemma 4.1 runs in constant time, the whole preprocessing phase runs in polylogarithmic time. By Lemma 4.1 there is constant delay between any two consecutive outputs. This concludes the analysis of the running time. We now prove correctness.

Let S be the set of tuples enumerated. By Lemma 4.1 no duplicates are enumerated and $S \subseteq V_1 = \{\bar{a} \in D^k \mid \text{the } r\text{-type of } \bar{a} \text{ is in } T\}$. By Lemma 5.4, with probability at least $5/6$, for every $\bar{a} \in D^k$, if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T . Therefore with probability at least $5/6$, $\phi(\mathcal{D}) \subseteq V_1$ and $V_1 \subseteq \phi(\mathcal{D}, \mathbf{C}, \epsilon)$. Hence with probability at least $5/6 > 2/3$, $S \subseteq \phi(\mathcal{D}) \cup \phi(\mathcal{D}, \mathbf{C}, \epsilon)$ as required. As previously discussed with probability at least $5/6$, $\phi(\mathcal{D}) \subseteq V_1$. Note that if $\phi(\mathcal{D}) \subseteq V_1$, then $|V_1| \geq |\phi(\mathcal{D})|$. If we assume that $\phi(\mathcal{D}) \subseteq V_1$ and $|\phi(\mathcal{D})| \geq \gamma n^k = \gamma|V|$, then $|V_1| \geq \gamma|V|$ and by Lemma 4.1 with probability at least $5/6$, $S = V_1$ and hence $\phi(\mathcal{D}) \subseteq S$. Therefore the probability that $\phi(\mathcal{D}) \subseteq S$ if $|\phi(\mathcal{D})| \geq \gamma n^k$ is at least $(5/6)^2 > 2/3$ as required. This completes the proof. \square

As discussed in Section 4, it is natural for us to expect that for queries that occur in practice, the neighbourhood of the answer tuple has few connected components. We saw that for local FO queries, in such scenarios we can reduce the number of answers required to output all answers to the query with high probability (Theorem 4.5). The following theorem shows how we can reduce the answer threshold function for general FO queries.

Theorem 5.6. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ and let $c := \text{conn}(\phi, d)$. Then the problem $\text{Enum}_{\mathbf{C}_d^t}(\phi)$ can be solved approximately with polylogarithmic preprocessing time and constant delay for answer threshold function $f(n) = \gamma n^c$ for any parameter $\gamma \in (0, 1)$.*

We defer the proof of Theorem 5.6 to Section 6.

6. PROOFS OF THEOREMS 4.5 AND 5.6

Before we prove Theorems 4.5 and 5.6 we start with some definitions (which are based on those introduced by Kazana and Segoufin in [17]) and some lemmas.

For each type $\tau \in T_r^{\sigma, d}(k)$ we fix a representative for the corresponding r -type and fix a linear order among its elements (where, for technical reasons, the centre elements always come first). This way, we can speak of the first, second, \dots , element of an r -type. Let \mathcal{D} be a σ -db and let \bar{a} be a tuple in \mathcal{D} with r -type τ . For technical reasons, if there are multiple isomorphism mappings from the r -neighbourhood of \bar{a} to the fixed representative of τ , we use the isomorphism mapping which is of smallest lexicographical order (recall that we assume that \mathcal{D} comes with a linear ordering on its elements). The cardinality of τ , denoted as $|\tau|$, is the number of elements in its representative.

Let \mathcal{D} be a σ -db and \bar{a} be a tuple of elements from \mathcal{D} . We say that \bar{a} is r -connected if the r -neighbourhood of \bar{a} in \mathcal{D} is connected.

Let $s \in \mathbb{N}$, let $F = (\alpha_2, \dots, \alpha_m)$ be a sequence of elements from $[d^{s+1}]$ (recall that the maximum size of an s -neighbourhood is d^{s+1}), and let $\bar{x} = (x_1, \dots, x_m)$ be a tuple. We write $\bar{x} = F(x_1)$ for the fact that, for $j \in \{2, \dots, m\}$, x_j is the α_j -th element of the s -neighbourhood of x_1 . We call each such F an s -binding of \bar{x} . Given s -type τ , we say that an s -binding F of \bar{x} is r -good for τ if $F(x_1)$ is r -connected for every x_1 with type τ .

For a given tuple $\bar{x} = (x_1, \dots, x_k)$, an r -split of \bar{x} is a set of triples

$$C = \{(C_1, F_1, \tau_1), \dots, (C_\ell, F_\ell, \tau_\ell)\} \text{ where for each } i \in [\ell]$$

- $\emptyset \neq C_i \subseteq \bar{x}$, $C_i \cap C_j = \emptyset$ for $i \neq j \in [\ell]$ and $\bigcup_{1 \leq i \leq \ell} C_i = \{x_1, \dots, x_k\}$,
- τ_i is a $3rk$ -type with 1 centre, and
- $F_i = (\alpha_2, \dots, \alpha_{|C_i|})$ is a $3rk$ -binding of a tuple with $|C_i|$ elements such that for each $j \in \{2, \dots, |C_i|\}$, $\alpha_j \in [|\tau_i|]$ and F_i is r -good for τ_i .

We write \bar{x}^i to represent the variables from C_i , x_1^i to represent the most significant variable from C_i (i.e the variable in C_i which appears first in the tuple \bar{x}), x_2^i to represent the second most significant variable from C_i (i.e the variable in C_i which appears second in the tuple \bar{x}) and so on. We define the formula

$$\text{Split}_r^C(\bar{x}) := \bigwedge_{1 \leq i \neq j \leq \ell} (N_r(\bar{x}^i) \cap N_r(\bar{x}^j) = \emptyset) \wedge \bigwedge_{(C_i, F_i, \tau_i) \in C} (\bar{x}^i = F_i(x_1^i) \wedge \text{sph}_{\tau_i}(x_1^i)).$$

We let $S_r^{\sigma, d}(k)$ denote the set of r -splits of tuples with k elements for σ -dbs with degree at most d . We denote the cardinality of $S_r^{\sigma, d}(k)$ as $s(r, k)$.

Remark 6.1. For any $r, k \in \mathbb{N}$, σ -db \mathcal{D} and tuple $\bar{a} \in D^k$ there exists exactly one r -split C such that $\mathcal{D} \models \text{Split}_r^C(\bar{a})$.

Let \mathcal{D} be a σ -db, let $r, k, c \in \mathbb{N}$ where $c \leq k$ and let C be an r -split for a tuple with k elements. For tuples $\bar{a} \in D^c$ and $\bar{b} \in D^k$ we say that \bar{b} is *found* from \bar{a} and C , if $c = |C|$, $\mathcal{D} \models \text{Split}_r^C(\bar{b})$ and for every $i \in [c]$, the element b_1^i (from \bar{b}) according to C , is equal to a_i . Intuitively, \bar{a} consists of the most significant elements from \bar{b} according to C .

Remark 6.2. Let \mathcal{D} be a σ -db and let $r, k \in \mathbb{N}$. For any $\bar{b} \in D^k$ there exists exactly one r -split C (of a tuple with k elements) and tuple \bar{a} from \mathcal{D} such that \bar{b} is found from \bar{a} and C .

Lemma 6.3. *Let $r, k, c \in \mathbb{N}$ where $c \leq k$. There exists an algorithm which, given a σ -db \mathcal{D} , a tuple $\bar{a} \in D^c$ and an r -split C of a tuple with k elements as input, returns a tuple $\bar{b} \in D^k$ that is found from \bar{a} and C if one exists and returns false otherwise. Furthermore if such a \bar{b} exists then it is unique.*

The running time of the algorithm depends only on $r, |C|, k, \sigma$ and d .

Proof. Let \mathcal{D} be a σ -db, let $\bar{a} \in D^c$ and let C be an r -split of a tuple with k elements. The following algorithm returns a tuple $\bar{b} \in D^k$ that is found from \bar{a} and C if one exists and returns false otherwise.

- (1) If $|C| \neq c$ or $\mathcal{D} \not\models \bigwedge_{(C_i, F_i, \tau_i) \in C} \text{sph}_{\tau_i}(a_i)$ then return false.
- (2) For each $i \in [c]$, let \bar{b}^i be the tuple whose first element is a_i such that $\mathcal{D} \models (\bar{b}^i = F_i(a_i))$. Then let \bar{b} be the tuple found by combining all the \bar{b}^i according to C .
- (3) If $\mathcal{D} \models \bigwedge_{1 \leq i \neq j \leq c} (N_r(\bar{b}^i) \cap N_r(\bar{b}^j) = \emptyset)$, return \bar{b} . Otherwise, return false.

The $3rk$ -neighbourhood of an element can be computed in time only dependent on r, k, σ and d . Hence Steps 1 and 2 runs in time dependent only on r, k, σ, d and $|C|$ since each \bar{b}^i can be found by exploring the $3rk$ -neighbourhood of a_i . In Step 3, for every $i \in [c]$, $N_r(\bar{b}^i)$ can be computed in time only dependent on $r, |\bar{b}^i| \leq k, \sigma$ and d and hence the running time of Step 3 depends only on r, k, σ, d and $|C|$ also. Therefore the overall running time of the algorithm depends only on r, k, σ, d and $|C|$ as required.

Assume a tuple \bar{b} is returned by the above algorithm from C and \bar{a} . Then clearly $c = |C|$, $\mathcal{D} \models \text{Split}_r^C(\bar{b})$ and each b_1^i according to C is equal to a_i . Therefore \bar{b} is found from \bar{a} and C .

Now assume that there does exist a tuple $\bar{b} \in D^k$ that is found from \bar{a} and C . Then \bar{b} is unique as there is only one way to choose each tuple \bar{b}^i such that $\mathcal{D} \models (\bar{b}^i = F_i(a_i))$. Furthermore, it is easy to see that \bar{b} will be outputted by the above algorithm. \square

Lemma 6.4. *Let $T \subseteq T_r^{\sigma,d}(k)$. We can compute a set of r -splits S for $\bar{x} = (x_1, \dots, x_k)$ such that the following holds: For any σ -db \mathcal{D} and tuple $\bar{a} \in D^k$, $\mathcal{D} \models \bigvee_{\tau \in T} \text{sph}_\tau(\bar{a})$ if and only if $\mathcal{D} \models \bigvee_{C \in S} \text{Split}_r^C(\bar{a})$.*

Proof. The algorithm proceeds as follows. Let S be an empty set. For each possible r -split $C = \{(C_1, F_1, \tau_1), \dots, (C_\ell, F_\ell, \tau_\ell)\}$ of the tuple \bar{x} do the following. Let \mathcal{D}_0 be the disjoint union of the fixed representatives of each τ_i . Let $\bar{b} \in D_0^k$ be a tuple such that $\mathcal{D}_0 \models \text{Split}_r^C(\bar{b})$ (note that such a tuple exists by the definition of an r -split). Then if \bar{b} 's r -type in \mathcal{D}_0 is in T , add C to S .

Towards correctness let \mathcal{D} be a σ -db and let $\bar{a} \in D^k$. Let $C = \{(C_1, F_1, \tau_1), \dots, (C_\ell, F_\ell, \tau_\ell)\}$ be the r -split such that $\mathcal{D} \models \text{Split}_r^C(\bar{a})$ (note that C is unique by Remark 6.1). Let \mathcal{D}' be the disjoint union of the fixed representatives of each $3rk$ -type that appears in C and let $\bar{b} \in D'^k$ be a tuple such that $\mathcal{D}' \models \text{Split}_r^C(\bar{b})$. It remains to show that $\mathcal{N}_r^{\mathcal{D}}(\bar{a}) \cong \mathcal{N}_r^{\mathcal{D}'}(\bar{b})$. This completes the proof because by the construction of S , it implies that $C \in S$ if and only if the r -type of \bar{a} in \mathcal{D} is in T (i.e. $\mathcal{D} \models \bigvee_{\tau \in T} \text{sph}_\tau(\bar{a})$ if and only if $\mathcal{D} \models \bigvee_{C \in S} \text{Split}_r^C(\bar{a})$). Recall that we use a_j^i and b_j^i to represent the elements from \bar{a} and \bar{b} respectively that are the elements from C_i that appear j -th in the tuples \bar{a} and \bar{b} respectively. As $\mathcal{D} \models \text{Split}_r^C(\bar{a})$ and $\mathcal{D}' \models \text{Split}_r^C(\bar{b})$, by the definition of the formula $\text{Split}_r^C(\bar{x})$, it follows that $\mathcal{N}_{3rk}^{\mathcal{D}}(a_1^i) \cong \mathcal{N}_{3rk}^{\mathcal{D}'}(b_1^i)$ for every $i \in [\ell]$. For every $i \in [\ell]$ and $j \in [|C_i|]$, a_j^i is at distance at most $(2r+1)(|C_i|-1) \leq (2r+1)(k-1) \leq 3rk-r$ from a_1^i in \mathcal{D} , and b_j^i is at distance at most $(2r+1)(|C_i|-1) \leq (2r+1)(k-1) \leq 3rk-r$ from b_1^i in \mathcal{D}' (since each F_i is r -good for τ_i). Therefore for every $i \in [\ell]$, the r -neighbourhoods of \bar{a}_i and \bar{b}_i are contained in the $3rk$ -neighbourhoods of a_1^i and b_1^i respectively and hence $\mathcal{N}_r^{\mathcal{D}}(\bar{a}_i) \cong \mathcal{N}_r^{\mathcal{D}'}(\bar{b}_i)$. Then since $\mathcal{N}_r^{\mathcal{D}}(\bar{a}_i) \cap \mathcal{N}_r^{\mathcal{D}}(\bar{a}_j) = \emptyset$ and $\mathcal{N}_r^{\mathcal{D}'}(\bar{b}_i) \cap \mathcal{N}_r^{\mathcal{D}'}(\bar{b}_j) = \emptyset$ (as $\mathcal{D} \models \text{Split}_r^C(\bar{a})$ and $\mathcal{D}' \models \text{Split}_r^C(\bar{b})$), it follows that $\mathcal{N}_r^{\mathcal{D}}(\bar{a}) \cong \mathcal{N}_r^{\mathcal{D}'}(\bar{b})$. \square

Let us first prove Theorem 5.6.

Proof of Theorem 5.6. Let $\mathcal{D} \in \mathbf{C}_d^t$ with $|D| = n$, let $\epsilon \in (0, 1]$ and let $\gamma \in (0, 1)$. We shall construct an ϵ -approximate enumeration algorithm for $\text{Enum}_{\mathbf{C}_d^t}(\phi)$ that has answer threshold function $f(n) = \gamma n^c$, polylogarithmic preprocessing time and constant delay.

In the preprocessing phase, the algorithm starts by running the algorithm from Lemma 5.4 on \mathcal{D} to compute a set T of r -types with k centres. The algorithm then computes the set of r -splits S from T as in Lemma 6.4. An empty queue \mathbf{Q} is then initialised which will store tuples to be outputted in the enumeration phase.

Let $V = \bigcup_{1 \leq i \leq c} D^i$. Let V_1 be the set that contains all $\bar{a} \in V$ such that there exists a $C \in S$ and $\bar{b} \in D^k$ where \bar{b} is found from \bar{a} and C . Finally let $V_2 = V \setminus V_1$. Note that by Lemma 6.3, given a tuple $\bar{a} \in V$ it can be decided in constant time whether $\bar{a} \in V_1$.

The algorithm from Lemma 4.1 is then run with $\mu = \gamma/(c \cdot s(r, k))$, $\delta = 4/5$ and V , V_1 and V_2 as defined above. Once the enumeration phase of the algorithm from Lemma 4.1 starts we do the following.

- (1) Each time a tuple \bar{a} is enumerated from the algorithm from Lemma 4.1, for each $C \in S$: run the algorithm from Lemma 6.3 with \bar{a} and C and if a tuple is returned add it to \mathbf{Q} .
- (2) If $\mathbf{Q} \neq \emptyset$, output the next tuple from \mathbf{Q} ; stop otherwise.
- (3) Repeat Steps 1-2 until there is no tuple to output in step 2.

From Lemma 5.4 the set T can be computed in polylogarithmic time. The set S can be constructed in constant time as $|T|$ is a constant and the number of possible r -splits

for a k -tuple is also a constant. Then as the preprocessing phase from the algorithm from Lemma 4.1 runs in constant time the overall running time of the preprocessing phase is polylogarithmic.

In the enumeration phase, by Lemma 4.1 there is constant delay between the outputs of the tuples \bar{a} used in Step 1. For every such tuple, by the definition of the set V_1 , there exists at least one r -split in S that leads to a tuple being added to \mathbf{Q} . Then as $|S|$ is a constant and the algorithm from Lemma 6.3 runs in constant time, the enumeration phase has constant delay as required. This concludes the analysis of the running time. Let us now prove correctness.

By Lemma 4.1 in Step 1 of the enumeration phase no duplicate tuples \bar{a} will be considered. Since for every tuple $\bar{b} \in D^k$ there exists exactly one r -split C and tuple \bar{a} from \mathcal{D} such that \bar{b} is found from C and \bar{a} (Remark 6.2), no duplicates will be enumerated.

Now let us assume that the set of r -types T were computed correctly (i.e. for any $\bar{a} \in D^k$, if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T) which happens with probability at least $5/6$ by Lemma 5.4. Let $\bar{b} \in D^k$ have r -type τ in \mathcal{D} and let $C \in S_r^{\sigma, d}(k)$ be such that $\mathcal{D} \models \text{Split}_r^C(\bar{b})$.

If $\bar{b} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, $\tau \notin T$ and hence by Lemma 6.4, $C \notin S$ and so \bar{b} will not be enumerated. Therefore with probability at least $5/6$ only tuples from $\phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$ will be enumerated.

If $\bar{b} \in \phi(\mathcal{D})$, then $\tau \in T$ and hence by Lemma 6.4, $C \in S$. Let \bar{a} be the tuple such that \bar{b} is found from \bar{a} and C . Note that as the maximum number of connected components in the r -neighbourhood of \bar{b} in \mathcal{D} is c , $|\bar{a}| \leq c$ and hence $\bar{a} \in V$. Then by definition $\bar{a} \in V_1$. Hence if every tuple from V_1 is considered in Step 1 of the enumeration phase, every tuple in $\phi(\mathcal{D})$ will be enumerated. By Lemma 4.1 with probability at least δ if $|V_1| \geq \mu|V|$, every tuple from V_1 will be considered in Step 1. We know that $|V_1| \geq |\phi(\mathcal{D})|/s(r, k)$ as every $\bar{a} \in V_1$ leads us to at most $|S| \leq s(r, k)$ many tuples from $\phi(\mathcal{D})$ (since by Lemma 6.3 for any r -split $C \in S$ there is at most one tuple that is found from \bar{a} and C). If $|\phi(\mathcal{D})| \geq \gamma n^c$ then $|V_1| \geq \gamma n^c / s(r, k) \geq \gamma |V| / (c \cdot s(r, k)) = \mu |V|$ as $|V| = \sum_{i=1}^c n^i \leq cn^c$ and by the choice of μ . Hence if $|\phi(\mathcal{D})| \geq \gamma n^c$ with probability at least $\delta \cdot 5/6 = 2/3$ every tuple from $\phi(\mathcal{D})$ will be enumerated. This completes the proof. \square

We now prove Theorem 4.5 which is similar to the proof of Theorem 5.6.

Proof of Theorem 4.5. First let us note that if ϕ is local then by Lemma 3.4 we can compute a set T of r -types (where r is the locality radius of ϕ) in constant time such that for any σ -db \mathcal{D} and tuple \bar{a} from \mathcal{D} , the r -type of \bar{a} in \mathcal{D} is in T if and only if $\bar{a} \in \phi(\mathcal{D})$.

Then to construct an algorithm as in the theorem statement we can just use the algorithm from the proof of Theorem 5.6 but change it in two ways. Firstly we allow the input class to be any class of bounded degree σ -dbs and secondly, we construct T as discussed above. The only part of the algorithm from the proof of Theorem 5.6 that runs in non-constant time is the construction of T and hence our algorithm has the required running times.

To prove correctness first note that in the proof of Theorem 5.6 the only reason the input class was \mathbf{C}_d^t was to allow the set T to be computed efficiently and with high probability correctly. Now T is computed exactly and since the algorithm will only enumerate tuples that have r -type in T , only tuples that are answers to the query for the input database will be enumerated as required. The proof of (2) from the theorem statement is then very

similar to the last paragraph in the proof of Theorem 5.6 (the only difference is that now for local queries this happens with higher probability as T is computed exactly every time). \square

7. FURTHER RESULTS

In this section, we start by generalising our result on approximate enumeration of general FO queries (Theorem 5.6). We identify a condition that we call *Hanf-sentence testability*, which is a weakening of the bounded tree-width condition, under which we still get approximate enumeration algorithms with the same probabilistic guarantees as before. Finally, we discuss approximation versions of query membership testing and counting.

7.1. Generalising Theorem 5.6. We first introduce Hanf-sentence testability, which is based on the Hanf normal form of a formula. It allows us to compute the set of r -types as in Lemma 5.4 efficiently. Theorem 7.4 below is the generalisation of Theorem 5.6, and Example 7.5 illustrates the use of this generalisation.

Definition 7.1 (Hanf-sentence testable). Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ and $\chi(\bar{x})$ be the formula in the form (3.1) of Lemma 3.2 that is d -equivalent to ϕ . Let m be the number of conjunctive clauses in χ . We say that ϕ is *Hanf-sentence testable on \mathbf{C} in time $H(n)$* if for every $i \in [m]$, the formula $\exists \bar{x} \text{sph}_{\tau_i}(\bar{x}) \wedge \psi_i^s$ is uniformly testable on \mathbf{C} in time at most $H(n)$.

We shall illustrate Hanf sentence testability in the following example.

Example 7.2. Let ϕ be as in Example 5.2 and let $\mathcal{G} \in \mathbf{G}_d$. If there exists $(u, v) \in V(\mathcal{G})^2$ with 2-type τ_1 then there exists a vertex with 2-type τ_4 (where τ_4 is as in Example 2.2) and vice versa. Hence, ϕ can be easily transformed into the form (3.1) of Lemma 3.2 by replacing the subformula $\neg(\exists z \exists w \text{sph}_{\tau_1}(z, w))$ with $\neg \exists^{\geq 1} z \text{sph}_{\tau_4}(z)$. The resulting formula then has two conjunctive clauses, $\text{sph}_{\tau_2}(x, y) \wedge \neg \exists^{\geq 1} z \text{sph}_{\tau_4}(z)$ and $\text{sph}_{\tau_1}(x, y)$. We saw in Example 2.2 that $\exists x \exists y \text{sph}_{\tau_2}(x, y) \wedge \neg \exists^{\geq 1} z \text{sph}_{\tau_4}(z)$ is uniformly testable on \mathbf{G}_d in constant time. The formula $\exists x \exists y \text{sph}_{\tau_1}(x, y)$ is trivially testable in constant time on \mathbf{G}_d since we can insert a copy of τ_1 into a graph $\mathcal{G} \in \mathbf{G}_d$ with at most $8d + 7$ modifications and therefore if $8d + 7 \leq \epsilon d |V(\mathcal{G})|$ we can always accept and otherwise (i.e. if $|V(\mathcal{G})| < (8d + 7)/\epsilon d$) we can just do a full check of the graph for a copy of τ_1 in constant time. Hence, ϕ is Hanf-sentence testable on \mathbf{G}_d in constant time.

Note that any FO query is Hanf sentence testable on \mathbf{C}_d^t in polylogarithmic time. We shall now prove a result that is similar to Lemma 5.4 but works for any class \mathbf{C} and FO query ϕ where ϕ is Hanf-sentence testable on \mathbf{C} . This will then be used to show we can replace bounded tree-width with Hanf sentence testability and still obtain enumeration algorithms with the same probabilistic guarantees.

Lemma 7.3. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ with $|\bar{x}| = k$ and Hanf locality radius r and let $\epsilon \in (0, 1]$. If ϕ is Hanf-sentence testable on \mathbf{C} in time $H(n)$ then there exists an algorithm \mathbb{B}_ϵ that runs in time $\mathcal{O}(H(n))$, which, given oracle access to a σ -db $\mathcal{D} \in \mathbf{C}$ as input along with $|D| = n$, computes a set T of r -types with k centres such that with probability at least $5/6$, for any $\bar{a} \in D^k$,*

- (1) *if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and*
- (2) *if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T .*

Proof. The algorithm \mathbb{B}_ϵ is nearly identical to the algorithm \mathbb{A}_ϵ from Lemma 5.4. The only difference being is we replace the input class \mathbf{C}_d^t with \mathbf{C} . The $\epsilon/2$ -testers π_i used now have input class \mathbf{C} (rather than \mathbf{C}_d^t) and as ϕ is Hanf-sentence testable on \mathbf{C} in time $H(n)$ each π_i runs in time $\mathcal{O}(H(n))$ (rather than polylogarithmic). As all other parts of the algorithm \mathbb{A}_ϵ run in constant time, it follows that \mathbb{B}_ϵ runs in time $\mathcal{O}(H(n))$ as required. The proof of the correctness of \mathbb{B}_ϵ is then identical to the proof of the correctness of \mathbb{A}_ϵ (but with the input class \mathbf{C}_d^t replaced with \mathbf{C}). \square

We shall now show that if a FO query ϕ is Hanf-sentence testable on a class \mathbf{C} in time $H(n)$ then $\text{Enum}_{\mathbf{C}}(\phi)$ can be solved approximately with preprocessing time $\mathcal{O}(H(n))$ and constant delay. Note we are still able to reduce the answer threshold function.

Theorem 7.4. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$ and let $c := \text{conn}(\phi, d)$. If ϕ is Hanf-sentence testable on \mathbf{C} in time $H(n)$, then $\text{Enum}_{\mathbf{C}}(\phi)$ can be solved approximately with preprocessing time $\mathcal{O}(H(n))$ and constant delay for answer threshold function $f(n) = \gamma n^c$ for any $\gamma \in (0, 1)$.*

Proof. Let $\epsilon \in (0, 1]$, let $\gamma \in (0, 1)$ and let us assume that ϕ is Hanf-sentence testable on \mathbf{C} in time $H(n)$. If we take the ϵ -approximate enumeration algorithm for $\text{Enum}_{\mathbf{C}_d^t}(\phi)$ with answer threshold function $f(n) = \gamma n^c$ given in the proof of Theorem 5.6, which we shall denote by $\mathbb{E}_{\phi, \mathbf{C}_d^t, \epsilon}$, and make the following changes: replace the input class \mathbf{C}_d^t with \mathbf{C} , and use Lemma 7.3 instead of Lemma 5.4 to compute the set of r -types T . Then we argue that the resulting algorithm $\mathbb{E}_{\phi, \mathbf{C}, \epsilon}$ is an ϵ -approximate enumeration algorithm for $\text{Enum}_{\mathbf{C}}(\phi)$ with preprocessing time $\mathcal{O}(H(n))$ and constant delay for answer threshold function $f(n) = \gamma n^c$.

In the preprocessing phase of $\mathbb{E}_{\phi, \mathbf{C}_d^t, \epsilon}$ the only part that runs in non-constant time is the construction of the set T (which takes polylogarithmic time). In $\mathbb{E}_{\phi, \mathbf{C}, \epsilon}$ it takes $\mathcal{O}(H(n))$ time to compute T and hence $\mathbb{E}_{\phi, \mathbf{C}, \epsilon}$ has preprocessing time $\mathcal{O}(H(n))$. Since $\mathbb{E}_{\phi, \mathbf{C}_d^t, \epsilon}$ has constant delay, $\mathbb{E}_{\phi, \mathbf{C}, \epsilon}$ also has constant delay.

Since the only differences in Lemma 5.4 and Lemma 7.3 is the running times and the input class, the proof of the correctness of $\mathbb{E}_{\phi, \mathbf{C}, \epsilon}$ is the same as the proof of the correctness of $\mathbb{E}_{\phi, \mathbf{C}_d^t, \epsilon}$ but with the input class \mathbf{C}_d^t replaced with \mathbf{C} . \square

We shall now return to our running example where we discuss an FO query and input class, which previous theorems did not give us an approximate enumeration algorithm for, but by Theorem 7.4 can now be approximately enumerated.

Example 7.5. Let ϕ be the formula as in Example 5.2. We saw in Example 7.2 that ϕ is Hanf-sentence testable on \mathbf{G}_d in constant time and that the formula in the form (3.1) of Lemma 3.2 that is d -equivalent to ϕ is $\chi(x, y) = \text{sph}_{\tau_1}(x, y) \vee (\text{sph}_{\tau_2}(x, y) \wedge \neg \exists^{\geq 1} z \text{sph}_{\tau_4}(z))$. The maximum number of connected components of the neighbourhood types that appear in the sphere-formulas of χ is one. Hence, by Theorem 7.4, $\text{Enum}_{\mathbf{G}_d}(\phi)$ can be solved approximately with constant preprocessing time and constant delay for answer threshold function $f(n) = \gamma n$ for any parameter $\gamma \in (0, 1)$.

7.2. Approximate query membership testing. The *query membership testing problem* for $\phi(\bar{x}) \in \text{FO}[\sigma]$ over \mathbf{C} is the computational problem where, for a database $\mathcal{D} \in \mathbf{C}$, we ask whether a given tuple $\bar{a} \in D^k$ satisfies $\bar{a} \in \phi(\mathcal{D})$. We call \bar{a} the *dynamical input* and the answer (‘true’ or ‘false’) the *dynamical answer*. Similar to query enumeration, the goal is to obtain an algorithm, that, after a preprocessing phase, can answer membership queries

for dynamical inputs very efficiently. The preprocessing phase should also be very efficient. Kazana [16] shows that the query membership testing problem for any $\phi(\bar{x}) \in \text{FO}[\sigma]$ over \mathbf{C} can be solved by an algorithm with a linear time preprocessing phase, and an answering phase that, for a given dynamical input, computes the dynamical answer in constant time.

Given a local FO query, by Lemma 3.5, for any σ -db \mathcal{D} and tuple \bar{a} from \mathcal{D} we can test in constant time whether $\bar{a} \in \phi(\mathcal{D})$. Hence in this section we shall focus on general queries.

We introduce an approximate version of the query membership testing problem. We say that the query membership testing problem for $\phi(\bar{x}) \in \text{FO}[\sigma]$ over \mathbf{C} can be *solved approximately* with an $\mathcal{O}(H(n))$ -time preprocessing phase and constant-time answering phase if for any $\epsilon \in (0, 1]$, there exists an algorithm, which is given oracle access to a database $\mathcal{D} \in \mathbf{C}$ and $|\mathcal{D}| = n$ as an input, and proceeds in two phases.

- (1) A preprocessing phase that runs in time $\mathcal{O}(H(n))$.
- (2) An answer phase where, given dynamical input $\bar{a} \in D^k$, the following is computed in constant time.
 - If $\bar{a} \in \phi(\mathcal{D})$, the algorithm returns ‘true’, with probability at least $2/3$, and
 - if $\bar{a} \notin \phi(\mathcal{D}, \mathbf{C}, \epsilon)$, the algorithm returns ‘false’, with probability at least $2/3$.

The following follows from the proof of Lemma 5.4.

Theorem 7.6. *The query membership testing problem for $\phi(\bar{x}) \in \text{FO}[\sigma]$ (where $|\bar{x}| = k$) over \mathbf{C}_d^t can be solved approximately with a polylogarithmic preprocessing phase and constant-time answering phase.*

Proof. Let r be the Hanf locality radius of ϕ . In the preprocessing phase a set T of r -types as in Lemma 5.4 is computed. Then in the answer phase, given a tuple $\bar{a} \in D^k$, the r -type τ of \bar{a} is computed. If $\tau \in T$ then the algorithm returns ‘true’, otherwise it returns ‘false’. By Lemma 5.4 the set T can be computed in polylogarithmic time and it takes constant time to calculate τ . By Lemma 5.4 with probability at least $5/6 > 2/3$, if $\bar{a} \in \phi(\mathcal{D})$, then the r -type of \bar{a} in \mathcal{D} is in T , and if $\bar{a} \in D^k \setminus \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)$, then the r -type of \bar{a} in \mathcal{D} is not in T . Therefore with probability at least $2/3$ if $\bar{a} \in \phi(\mathcal{D})$ the algorithm outputs ‘true’ and if $\bar{a} \notin \phi(\mathcal{D}, \mathbf{C}, \epsilon)$ the algorithm outputs ‘false’ as required. \square

Note that we can get a similar result for Hanf sentence testable FO queries over any class of bounded degree graphs.

7.3. Approximate counting. The *counting problem* for $\phi(\bar{x}) \in \text{FO}[\sigma]$ over \mathbf{C} is the problem of, given a database $\mathcal{D} \in \mathbf{C}$, compute $|\phi(\mathcal{D})|$. It was shown in [4] that the counting problem for any $\phi(\bar{x}) \in \text{FO}[\sigma]$ over \mathbf{C} can be solved in linear time.

Lemma 5.1 in [20], allows approximating the distribution of the r -types with one centre of an input graph by looking at a constant number of vertices. We can easily extend this to databases and neighbourhood types with multiple centres.

We fix an enumeration $\tau_1, \dots, \tau_{c(r,k)}$ of the r -types in $T_r^{\sigma,d}(k)$. For a σ -db \mathcal{D} with $|\mathcal{D}| = n$, the k centre r -neighbourhood distribution of \mathcal{D} is the vector $\text{dv}_{r,k}(\mathcal{D})$ of length $c(r,k)$ whose i -th component (denoted by $\text{dv}_{r,k}(\mathcal{D})[i]$) contains the number $t(i)/n^k$, where $t(i) \in \mathbb{N}$ is the number of elements of \mathcal{D} whose r -type is τ_i .

We let $\text{EstimateFrequencies}_{r,s,k}$ be an algorithm with oracle access to an input database $\mathcal{D} \in \mathbf{C}$, that samples s tuples from D^k uniformly and independently and explores their r -neighbourhoods. $\text{EstimateFrequencies}_{r,s,k}$ returns the distribution vector \bar{v} of the r -types of

this sample. $\text{EstimateFrequencies}_{r,s,k}$ has constant running time, independent of $|D|$, and comes with the following guarantees.

Lemma 7.7. *Let $\mathcal{D} \in \mathbf{C}$ be a database on n elements, $\lambda \in (0, 1)$ and $r, k \in \mathbb{N}$. If $s \geq c(r, k)^2 / \lambda^2 \cdot \ln(20c(r, k))$, with probability at least $9/10$ the vector \bar{v} returned by $\text{EstimateFrequencies}_{r,s,k}$ on input \mathcal{D} satisfies $\|\bar{v} - \text{dv}_{r,k}(\mathcal{D})\|_1 \leq \lambda$.*

By combining Lemmas 5.4 and 6.4 and Lemma 7.7 we get the following result.

Theorem 7.8. *Let $\phi(\bar{x}) \in \text{FO}[\sigma]$, let $\epsilon \in (0, 1]$, let $\lambda \in (0, 1)$ and let $c := \text{conn}(\phi, d)$. There exists an algorithm, which, given oracle access to $\mathcal{D} \in \mathbf{C}_d^t$ and $|D| = n$ as an input, returns an estimate of $|\phi(\mathcal{D})|$ such that with probability at least $2/3$ the estimate is within the range $[|\phi(\mathcal{D})| - \lambda cn^c, |\phi(\mathcal{D}) \cup \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)| + \lambda cn^c]$. Furthermore, the algorithm runs in polylogarithmic time in n .*

We shall only give the proof idea of Theorem 7.8. To estimate $|\phi(\mathcal{D})|$ we can do the following. We will start by computing a set of r -types T as in Lemma 5.4 and then use Lemma 6.4 to compute the set of r -splits S from T . Then using Lemma 7.7, for every $i \in [c]$ we can compute an estimate to the vector $\text{dv}_{3rk,i}(\mathcal{D})$. For every $i \in [c]$, we can also compute a vector \bar{v}_i which has a component corresponding to each $3rk$ -type τ with i centres. The component in \bar{v}_i that corresponds to the $3rk$ -type τ is the number of r -splits $C \in S$ such that for any tuple \bar{a} in \mathcal{D} with $3rk$ -type τ there will exist exactly one tuple that is found from \bar{a} and C . We can then estimate $|\phi(\mathcal{D})|$ using the estimates to the vectors $\text{dv}_{3rk,i}(\mathcal{D})$ and the vectors \bar{v}_i . By Lemmas 5.4 and 7.7 this estimate can be computed in polylogarithmic time.

For correctness, first note that by Remark 6.2 for any tuple \bar{b} in \mathcal{D} there exists exactly one tuple \bar{a} from \mathcal{D} and one r -split C such that \bar{b} is found from \bar{a} and C . Therefore we will not double count any tuple. By Lemmas 5.4 and 6.4 and the construction of the vectors \bar{v}_i , with high probability we will get an estimation to the number of tuples in $\phi(\mathcal{D})$. By looking at the two extreme cases, where T contains only r -types of tuples in $\phi(\mathcal{D})$, and T contains all r -types of tuples in $\phi(\mathcal{D}) \cup \phi(\mathcal{D}, \mathbf{C}, \epsilon)$, it is easy to see that the returned estimate will be within the desired range.

The obvious limitation of Theorem 7.8 is that $|\phi(\mathcal{D}) \cup \phi(\mathcal{D}, \mathbf{C}_d^t, \epsilon)|$ can be much larger than $|\phi(\mathcal{D})|$, as discussed in Example 5.3. Nevertheless, in application where the focus is on structural closeness and very efficient running time, this might be tolerable.

Acknowledgement. We would like to thank Benny Kimelfeld for inspiring discussions during early stages of this work.

REFERENCES

- [1] Isolde Adler and Frederik Harwath. Property testing for bounded degree databases. In *35th Symposium on Theoretical Aspects of Computer Science (STACS 2018)*, volume 96, page 6. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2018.
- [2] Noga Alon, W Fernandez De La Vega, Ravi Kannan, and Marek Karpinski. Random sampling and approximation of max-csps. *Journal of computer and system sciences*, 67(2):212–243, 2003.
- [3] Noga Alon, Tali Kaufman, Michael Krivelevich, and Dana Ron. Testing triangle-freeness in general graphs. *SIAM Journal on Discrete Mathematics*, 22(2):786–819, 2008.
- [4] Guillaume Bagan, Arnaud Durand, Etienne Grandjean, and Frédéric Olive. Computing the j th solution of a first-order query. *RAIRO-Theoretical Informatics and Applications*, 42(1):147–164, 2008.

- [5] Sagi Ben-Moshe, Yaron Kanza, Eldar Fischer, Arie Matsliah, Mani Fischer, and Carl Staelin. Detecting and exploiting near-sortedness for efficient relational query evaluation. In *Proceedings of the 14th International Conference on Database Theory*, pages 256–267. ACM, 2011.
- [6] Christoph Berkholz, Jens Keppeler, and Nicole Schweikardt. Answering $\text{fo}+$ mod queries under updates on bounded degree databases. *ACM Transactions on Database Systems (TODS)*, 43(2):7, 2018.
- [7] Benedikt Bollig and Dietrich Kuske. An optimal construction of hanf sentences. *Journal of Applied Logic*, 10(2):179–186, 2012.
- [8] Surajit Chaudhuri, Bolin Ding, and Srikanth Kandula. Approximate query processing: No silver bullet. In *Proceedings of the 2017 ACM International Conference on Management of Data*, pages 511–519. ACM, 2017.
- [9] Hubie Chen, Matt Valeriote, and Yuichi Yoshida. Constant-query testability of assignments to constraint satisfaction problems. *SIAM Journal on Computing*, 48(3):1022–1045, 2019.
- [10] Hubie Chen and Yuichi Yoshida. Testability of homomorphism inadmissibility: Property testing meets database theory. In *Proceedings of the 38th ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems*, pages 365–382. ACM, 2019.
- [11] Arnaud Durand and Etienne Grandjean. First-order queries on structures of bounded degree are computable with constant delay. *ACM Transactions on Computational Logic (TOCL)*, 8(4):21, 2007.
- [12] Arnaud Durand, Nicole Schweikardt, and Luc Segoufin. Enumerating answers to first-order queries over databases of low degree. In Richard Hull and Martin Grohe, editors, *Proceedings of the 33rd ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems, PODS’14, Snowbird, UT, USA, June 22-27, 2014*, pages 121–131. ACM, 2014. doi:10.1145/2594538.2594539.
- [13] Jörg Flum and Martin Grohe. *Parameterized Complexity Theory (Texts in Theoretical Computer Science. An EATCS Series)*. Springer-Verlag, Berlin, Heidelberg, 2006.
- [14] Oded Goldreich and Dana Ron. Property testing in bounded degree graphs. *Algorithmica*, 32(2):302–343, 2002.
- [15] William Hanf. *The Theory of Models*, chapter Model-theoretic methods in the study of elementary logic, pages 132–145. North Holland, 1965.
- [16] Wojciech Kazana. *Query evaluation with constant delay*. PhD thesis, École normale supérieure de Cachan, Paris, France, 2013.
- [17] Wojciech Kazana and Luc Segoufin. First-order query evaluation on structures of bounded degree. *Logical Methods in Computer Science*, 7(2), 2011. doi:10.2168/LMCS-7(2:20)2011.
- [18] Phokion G Kolaitis and Moshe Y Vardi. Conjunctive-query containment and constraint satisfaction. *Journal of Computer and System Sciences*, 61(2):302–332, 2000.
- [19] Bernard M. E. Moret and Henry D. Shapiro. *Algorithms from P to NP (Vol. 1): Design and Efficiency*. Benjamin-Cummings Publishing Co., Inc., Redwood City, CA, USA, 1991.
- [20] Ilan Newman and Christian Sohler. Every property of hyperfinite graphs is testable. *SIAM Journal on Computing*, 42(3):1095–1112, 2013.
- [21] Ronitt Rubinfeld and Madhu Sudan. Robust characterizations of polynomials with applications to program testing. *SIAM Journal on Computing*, 25(2):252–271, 1996.
- [22] Nicole Schweikardt, Luc Segoufin, and Alexandre Vigny. Enumeration for FO queries over nowhere dense graphs. In Jan Van den Bussche and Marcelo Arenas, editors, *Proceedings of the 37th ACM SIGMOD-SIGACT-SIGAI Symposium on Principles of Database Systems, Houston, TX, USA, June 10-15, 2018*, pages 151–163. ACM, 2018. doi:10.1145/3196959.3196971.
- [23] Luc Segoufin and Alexandre Vigny. Constant delay enumeration for FO queries over databases with local bounded expansion. In Michael Benedikt and Giorgio Orsi, editors, *20th International Conference on Database Theory, ICDT 2017, March 21-24, 2017, Venice, Italy*, volume 68 of *LIPICs*, pages 20:1–20:16. Schloss Dagstuhl - Leibniz-Zentrum fuer Informatik, 2017. doi:10.4230/LIPICs.ICDT.2017.20.
- [24] Hanghang Tong, Christos Faloutsos, Christos Faloutsos, Brian Gallagher, and Tina Eliassi-Rad. Fast best-effort pattern matching in large attributed graphs. In *Proceedings of the 13th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 737–746. ACM, 2007.
- [25] Yuichi Yoshida. Optimal constant-time approximation algorithms and (unconditional) inapproximability results for every bounded-degree csp. In *Proceedings of the forty-third annual ACM symposium on Theory of computing*, pages 665–674. ACM, 2011.

- [26] Shijie Zhang, Shirong Li, and Jiong Yang. Gaddi: distance index based subgraph matching in biological networks. In *Proceedings of the 12th International Conference on Extending Database Technology: Advances in Database Technology*, pages 192–203. ACM, 2009.