

Unambiguously coded shifts

Marie-Pierre Béal  and Dominique Perrin and Antonio Restivo

April 1, 2022

Abstract

We study the coded shifts introduced by Blanchard and Hansel [9]. We give several constructions which allow one to represent a coded shift as an unambiguous one.

1 Introduction

Coded shifts were introduced in [9] as a generalization of irreducible sofic shifts. A shift space X is said to be coded by a prefix code C if the factors of X are the factors of C^* (more explicit definitions are given below). Recently some interest has appeared for those coded shifts which are unambiguously coded in [20] and [10]. To be unambiguously coded by C means that every infinite sequence of the shift X has at most one factorization $\cdots c_{-1}c_0c_1\cdots$ with $c_n \in C$.

We investigate this notion and prove several results. First of all, it follows from the work of Doris and Ulf-Rainer Fiebig [14] that every coded shift is unambiguously coded (Theorem 40). This answers a question raised in [10]. Actually, only a weaker result is proved explicitly in [14], namely that every coded shift can be recognized by a countable deterministic and co-deterministic automaton [14, Theorem 1.7]. We reproduce here this result and its proof as Theorem 31. We are indebted to Ulf-Rainer Fiebig for providing us a complete proof of the stronger result, which is indicated without proof in [14, Remark 1.8]. It is stated here as Theorem 34 and proved in full.

Unambiguously coded shifts can also be defined by automata having the property of strong unambiguity. We connect the notion of strong unambiguity with that of recognizable morphism, which is central in the study of shifts defined by morphisms (see [22] or the more recent paper [6]). We develop this aspect in a second paper [4].

We also investigate synchronized shifts, which are defined by synchronized prefix codes. We prove directly (that is, without using Theorem 34) that every synchronized shift is unambiguously coded (Theorem 40). This allows us to prove that every irreducible sofic shift is unambiguously coded by a rational prefix code (Corollary 41).

We would like to thank Ulf-Rainer Fiebig for his contribution and Francesco Dolce for reading the manuscript and founding several mistakes.

2 Languages and shift spaces

Let A be a finite alphabet. We denote by A^* the set of words on A and by ε the empty word. The *length* of a word u is denoted $|u|$. A word u is a *factor* of v if $v = pus$ for some words p, s . It is a *prefix* of v if $v = us$. It is a *proper prefix* if s is nonempty (that is, $u \neq v$).

A *language* on the alphabet A is a set of words on A . For a language U , we denote by U^* the set of (possibly empty) words $u_1 \cdots u_n$ with $u_i \in U$ and $n \geq 0$. A language is *rational* if it can be obtained from the subsets of $A \cup \{\varepsilon\}$ by a finite number of unions, set products and stars.

An *automaton* \mathcal{A} on the alphabet A is a graph on a set Q of vertices, called the *states* of \mathcal{A} with edges labeled by A . Given two sets I, T of states called respectively the sets of *initial* and *terminal* states, the language *recognized* by \mathcal{A} is the set of labels of paths from an element of I to an element of T . We denote $\mathcal{A} = (Q, i, T)$.

A *deterministic automaton* on the alphabet A is a set Q with a partial map $(q, a) \mapsto q \cdot a$ from $Q \times A$ to Q . This map is extended to $(q, w) \mapsto q \cdot w$ by associativity, that is $q \cdot wa = (q \cdot w) \cdot a$. Thus a deterministic automaton can be considered as a particular case of automaton with edges $p \xrightarrow{a} q$ whenever $p \cdot a = q$.

A co-deterministic automaton is obtained from a deterministic one by reverting the edges.

Given $i \in Q$ and $T \subset Q$, the deterministic automaton *recognizes* the language $L = \{w \in A^* \mid i \cdot w \in T\}$.

An automaton is *unambiguous* if for every word w and every pair of states p, q , there is at most one path labeled w from p to q . A deterministic automaton is unambiguous.

A *code* on the alphabet A is a set $C \subset A^+$ such that every word on A has at most one factorizations in words of C . Formally, for every $n, m \geq 0$ and every $x_1, \dots, x_n, y_1, \dots, y_m$ in C , the equality

$$x_1 \cdots x_n = y_1 \cdots y_m$$

implies $n = m$ and $x_i = y_i$ for $i = 1, \dots, n$. The following well-known result relates unambiguous automata and codes. A path from i to i in an automaton is *simple* if it does not pass by i except at the origin and end of the path. The following result is well known (see [5]).

Theorem 1 *Let $\mathcal{A} = (Q, i, i)$ be a strongly connected automaton and let C be the set of labels of simple paths from i to i . Then \mathcal{A} is unambiguous if and only if C is a code.*

An automaton is *strongly unambiguous* if the labelling of bi-infinite paths is injective, that is, it has at most one bi-infinite path with a given bi-infinite label. A strongly connected automaton which is strongly unambiguous is also unambiguous but the converse is not true, as shown by the following example.




Figure 1: An unambiguous automaton.

Example 2 Let \mathcal{A} be the automaton represented in Figure 1. The automaton is unambiguous since it is deterministic. It is not strongly unambiguous because there are two bi-infinite paths labeled with letters b .

The property of being strongly unambiguous can easily be tested on a finite automaton because of the following property. For an automaton \mathcal{A} on the alphabet A with Q as set of states, its square is the automaton $\mathcal{A} \times \mathcal{A}$ with $Q \times Q$ as set of states and edges $(p, q) \xrightarrow{a} (r, s)$ if $p \xrightarrow{a} r$ and $q \xrightarrow{a} s$ are edges of \mathcal{A} . Its non-diagonal part is the restriction to the states of the form (p, q) with $p \neq q$. A strongly connected component of an automaton is trivial if its set of edges is empty.

Proposition 3 *An unambiguous automaton \mathcal{A} is strongly unambiguous if and only if the strongly connected components of the non-diagonal part of $\mathcal{A} \times \mathcal{A}$ are trivial.*

Proof. Let $p_n \xrightarrow{a_n} p_{n+1}$ and $q_n \xrightarrow{a_n} q_{n+1}$ be two distinct bi-infinite paths with the same label. Let $E = \{n \in \mathbb{Z} \mid p_n \neq q_n\}$. Since \mathcal{A} is unambiguous, the set E is infinite. Since Q is finite, there exist $n, m \in E$ with $n < m$ such that $(p_n, q_n) = (p_m, q_m)$. Thus, $\mathcal{A} \times \mathcal{A}$ contains a cycle $(p_n, q_n) \xrightarrow{a_n \cdots a_{m-1}} (p_m, q_m)$. The converse is clear. ■

Example 4 Let \mathcal{A} be the automaton of Example 2. The non-diagonal part of the automaton $\mathcal{A} \times \mathcal{A}$ is shown in Figure 2. It is strongly connected in agreement with the fact that \mathcal{A} is not strongly unambiguous.




Figure 2: The square of \mathcal{A} .

A language is *recognizable* if it can be recognized by a finite automaton. By Kleene's Theorem, a language is recognizable if and only if it is rational (on all these notions, see [5] or any textbook on formal languages).

For every language L , the *minimal automaton* of L is the deterministic automaton $\mathcal{A}(L)$ obtained as follows. For $u \in A^*$, denote $u^{-1}L = \{v \in A^* \mid$

$uv \in L\}$. The set Q is the family of nonempty sets $u^{-1}L$. Next, for $q = u^{-1}L$ and $a \in A$, we define $q \cdot a = (ua)^{-1}L$ provided the right hand side is nonempty. Then $\mathcal{A}(L)$ recognizes L with the choice of $i = L$ and T the family of sets $u^{-1}L$ containing ε . A language is recognizable if and only if its minimal automaton is finite (actually, the minimal automaton has the least possible number of states among all deterministic automata recognizing L).

We consider the set $A^{\mathbb{Z}}$ of infinite two-sided sequences of elements of A . It is a compact metric space for the distance $d(x, y) = 1/r(x, y)$ with

$$r(x, y) = \min\{|n| \mid n \in \mathbb{Z}, x_n \neq y_n\}.$$

The *shift transformation* on $A^{\mathbb{Z}}$ is the map $S : A^{\mathbb{Z}} \rightarrow A^{\mathbb{Z}}$ defined by $y = Sx$ if $y_n = x_{n+1}$ for all $n \in \mathbb{Z}$.

For a word $u = u_0 \dots u_{p-1} \in A^*$ of length $p \geq 1$, we denote by u^∞ the two-sided infinite sequence $x \in A^{\mathbb{Z}}$ defined by $x_n = u_i$ whenever $i = n \bmod p$. Such an element of $A^{\mathbb{Z}}$ is said to be a *periodic point*. For a sequence $(u_n)_{n \in \mathbb{Z}}$ of nonempty words, we denote by

$$\dots u_{-1} \cdot u_0 u_1 \dots$$

the two-sided infinite sequence x such that

$$\begin{aligned} \dots x_{-2} x_{-1} &= \dots u_{-2} u_{-1} \\ x_0 x_1 \dots &= u_0 u_1 \dots \end{aligned}$$

We also denote w^ω the one-sided infinite word $www \dots$, which is an element of $A^{\mathbb{N}}$ and by ${}^\omega w$ the sequence $\dots www$, which is an element of $A^{-\mathbb{N}}$.

A *shift space* is a set X of two-sided infinite sequences on a finite alphabet A which is closed and invariant by the shift (see [19] for the basic definitions of symbolic dynamics).

A shift space is a particular case of a *dynamical system* which is a pair (X, T) formed of a compact metric space X and a continuous invertible map $T : X \rightarrow X$.

If X is a shift space, we denote by $\mathcal{L}(X)$ the *language* of X , which is the set of finite factors of the elements of X . It follows from the definition that a shift space is defined by its language. We denote by $\mathcal{L}_n(X)$ the set of words of length n in $\mathcal{L}(X)$.

The language of a shift space X is *factorial* (that is, it contains the factors of its elements) and *extendable* (that is, for every $w \in \mathcal{L}(X)$, there are letters $a, b \in A$ such that $awb \in \mathcal{L}(X)$). Conversely, for every factorial extendable language L , there is a shift space X such that $L = \mathcal{L}(X)$.

A shift space X on the alphabet A is a *shift of finite type* if there is a finite set W of words on A , such that $\mathcal{L}(X)$ is the set of words without factor in W .

Example 5 The set of sequences on $A = \{a, b\}$ without factor bb is a shift space X called the *golden mean shift*. One has $\mathcal{L}(X) = \{a, ba\}^* \{\varepsilon, b\}$.

A shift space X is *irreducible* if for every $u, v \in \mathcal{L}(X)$ there exists a word w such that $uwv \in \mathcal{L}(X)$. It is *minimal* if it does not contain properly a nonempty shift space. A minimal shift is irreducible but the converse is false. For example, the golden mean shift is irreducible, but not minimal since it contains $a^{\mathbb{Z}}$.

A shift space X is called *sofic* if $\mathcal{L}(X)$ is a rational language. As an equivalent definition, X is sofic if it is recognized by a finite automaton \mathcal{A} , that is, it is the set of labels of two-sided infinite paths in \mathcal{A} .



Figure 3: The golden mean shift and the even shift.

Example 6 The golden mean shift is sofic and it is recognized by the finite automaton of Figure 3 on the left.

The set X of two-sided sequences on $\{a, b\}$ such that the number of consecutive b between two a is even is an irreducible sofic shift. This shift space, called the *even shift*, is also recognized by the automaton of Figure 3 on the right. We have $\mathcal{L}(X) = \{a, bb\}^* \{\varepsilon, b\}$. The minimal automaton of $\mathcal{L}(X)$ is shown in Figure 4 (the state 0 is initial and all states are terminal).

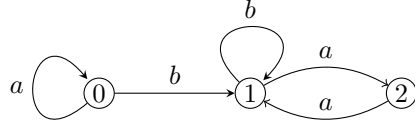


Figure 4: The minimal automaton of $\mathcal{L}(X)$.

For any finite graph G , the *edge shift* X_G on G is the set of biinfinite paths in G . It is a shift of finite type. Conversely, every shift of finite type is the set of labels of bi-infinite paths in a strongly unambiguous automaton \mathcal{A} .

Let X, Y be shift spaces on alphabets A, B respectively. Given $m, n \geq 0$, a map $f : \mathcal{L}_{n+m+1}(X) \rightarrow B$ is called a $n+m+1$ -*block map*. The *sliding block code* defined by f is the map $\varphi : X \rightarrow B^{\mathbb{Z}}$ defined by $y = \varphi(x)$ if $y_i = f(x_{i-m} \cdots x_{i+n})$ for all $i \in \mathbb{Z}$. The simplest case corresponds to $n = m = 0$. Such a code is called a 1-block code. A *factor map* $f : X \rightarrow Y$ is a map defined by a sliding block code from X onto Y .

A factor map $\varphi : X \rightarrow Y$ which is one-to-one is called a *conjugacy*.

Example 7 Consider the golden mean shift X . Let $f : \mathcal{L}_2(X) \rightarrow \{a, b\}$ be the block map $aa \rightarrow a, ab \rightarrow b, ba \rightarrow b$. The sliding block code defined by f is a factor map from X onto the even shift.

Let X be a shift space on A . Recall that a point $x \in X$ is *periodic* if $S^n(x) = x$ for some $n \geq 1$. Otherwise, it is *aperiodic*. A shift is aperiodic if it does not contain periodic points. For a minimal shift, being aperiodic is equivalent to being infinite.

3 Morphisms

Let $\varphi : A^* \rightarrow A^*$ be a morphism. The *language* of φ , denoted $\mathcal{L}(\varphi)$, is the set of factors of the words $\varphi^n(a)$ for $n \geq 0$ and $a \in A$. The *shift* generated by φ , denoted $X(\varphi)$ is the set of sequences with all their factors in $\mathcal{L}(\varphi)$.

Example 8 The morphism $\varphi : a \mapsto ab, b \mapsto a$ is called the *Fibonacci morphism*. The corresponding shift $X(\varphi)$ is called the *Fibonacci shift*.

A morphism $\varphi : A^* \rightarrow A^*$ is *primitive* if there is an $n \geq 1$ such that every $a \in A$ appears in every $\varphi^n(b)$ for $b \in A$.

The following result is well known (see [22] for example).

Theorem 9 *For every primitive morphism φ , the shift $X(\varphi)$ is minimal.*

The automaton $\mathcal{A}(\varphi)$ associated to a morphism $\varphi : B^* \rightarrow A^*$ is a bouquet of circles (that is, a union of cycles sharing all the same vertex) labeled $\varphi(b)$ for $b \in B$. It has vertices

$$\{(b, i) \mid b \in B, 0 < i < |\varphi(b)|\} \cup \{\omega\}$$

where ω is the vertex common to all cycles and edges

$$E(\varphi) = \{[b, i] \mid b \in B, 0 \leq i < |\varphi(b)|\}.$$

The label of the edge $[b, i]$ is a_i if $\varphi(b) = a_0 \cdots a_k$. Its source is

$$s([b, i]) = \begin{cases} (b, i) & \text{if } i \neq 0 \\ \omega & \text{otherwise.} \end{cases}$$

Its range is

$$r([b, i]) = \begin{cases} (b, i+1) & \text{if } i+1 < |\varphi(b)| \\ \omega & \text{otherwise.} \end{cases}$$

Example 10 The automaton associated with the Thue-Morse morphism is the automaton of Figure 7.




Figure 5: The automaton associated with the Fibonacci shift.

Example 11 The automaton associated with the Fibonacci morphism is the golden mean automaton of Figure 5 on the left.

A morphism $\varphi : B^* \rightarrow A^*$ is *circular* if it is injective and if for every $u, v \in A^*$

$$uv, vu \in \varphi(B^*) \Rightarrow u, v \in \varphi(B^*).$$

The set $\varphi(B)$ is called a *circular code*. There is a close connection between strong unambiguity and circular morphisms as shown by the following result (see [24] for (i) \Leftrightarrow (ii) and [23] for (i) \Leftrightarrow (iii)).

Theorem 12 *Let $\varphi : B^* \rightarrow A^*$ be an injective morphism. The following conditions are equivalent.*

- (i) φ is circular.
- (ii) The automaton $\mathcal{A}(\varphi)$ is strongly unambiguous.
- (iii) The closure under the shift of $\varphi(B^{\mathbb{Z}})$ is of finite type.

Example 13 The Fibonacci morphism is circular. Accordingly, the automaton $\mathcal{A}(\varphi)$ represented in Figure 3 is strongly unambiguous. The closure under the shift of $\varphi(\{a, b\}^{\mathbb{Z}})$ is the golden mean shift.

4 Relative unambiguity

Let \mathcal{A} be a finite automaton on A with Q as set of states. Let $\Pi(\mathcal{A}) = \{(p_n, a_n, p_{n+1}) \mid n \in \mathbb{Z}, p_n \xrightarrow{a_n} p_{n+1}, p_n \in Q, a_n \in A\}$ be the set of two-sided infinite paths in \mathcal{A} . The set $\Pi(\mathcal{A})$ is a shift of finite type on the alphabet E formed by the edges of \mathcal{A} . Let X be a subshift of $\Pi(\mathcal{A})$. The automaton is *unambiguous* on the shift X if for every sequence $y \in A^{\mathbb{Z}}$ there is at most one path in X labeled y . Thus a strongly unambiguous automaton is the same as an automaton unambiguous on the shift $\Pi(\mathcal{A})$. The following statement shows that it is decidable whether an automaton is unambiguous on a sofic shift.

Proposition 14 *Let \mathcal{A} be a finite automaton on A and let X be a sofic shift contained in $\Pi(\mathcal{A})$. Let \mathcal{B} be an automaton recognizing X . Let \mathcal{C} be the graph with edges $(p, q, r, s) \rightarrow (p', q', r', s')$ where*

- (i) $p \xrightarrow{e} p'$ and $q \xrightarrow{f} q'$ are edges of \mathcal{B} ,
- (ii) e, f are edges of \mathcal{A} of the form $r \xrightarrow{a} s$ and $r' \xrightarrow{a} s'$ for the same label $a \in A$.

Then \mathcal{A} is unambiguous on X if and only if there is no biinfinite path in \mathcal{C} containing a vertex of the form (p, q, r, s) with $r \neq s$.

Proof. Assume that \mathcal{A} is ambiguous on X . Let $x = (e_n)$ and $y = (f_n)$ be two distinct elements of X with the same label and thus such that $e_n : r_n \xrightarrow{a_n} r_{n+1}$ and $f_n : s_n \xrightarrow{a_n} s_{n+1}$ in \mathcal{A} . Let $p_n \xrightarrow{e_n} p_{n+1}$ and $q_n \xrightarrow{f_n} q_{n+1}$ be paths in \mathcal{B} . Since $x \neq y$, there is some n_0 such that $r_{n_0} \neq s_{n_0}$. Thus there is a biinfinite path (p_n, q_n, r_n, s_n) in \mathcal{C} containing the vertex $(p_{n_0}, q_{n_0}, r_{n_0}, s_{n_0})$. The converse is clear. ■

The previous construction takes a simpler form in the case of a shift of finite type. For an automaton \mathcal{A} denote by $\lambda_{\mathcal{A}}(e)$ the label of the edge e .

Proposition 15 *Let \mathcal{A} be a finite automaton on A with E as set of edges. Let X be a shift of finite type contained in $\Pi(\mathcal{A})$. Let \mathcal{B} be a strongly unambiguous automaton recognizing X . Then \mathcal{A} is unambiguous on X if and only if the automaton \mathcal{C} obtained from \mathcal{B} by replacing every label $e \in E$ by $\lambda_{\mathcal{A}}(e)$ is strongly unambiguous.*

Proof. Assume that \mathcal{C} is strongly unambiguous. Since \mathcal{B} is strongly unambiguous, two distinct elements of X are the labels of distinct paths in \mathcal{B} . Thus, they cannot have the same label in \mathcal{A} . The converse is clear. ■

Example 16 Let \mathcal{A} be the automaton of Figure 3 on the right. Set $e = (0, a, 0)$, $f = (0, b, 1)$ and $g = (1, b, 0)$. Let X be the shift of finite type recognized by the automaton \mathcal{B} of Figure 6 on the left. The automaton \mathcal{C} obtained by replacing e, f, g by their labels is represented on the right. It is strongly unambiguous and thus \mathcal{A} is unambiguous on X .

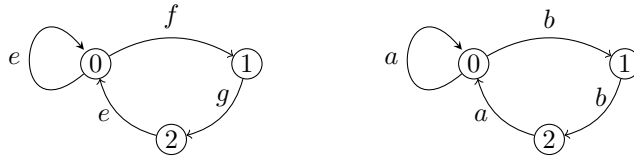


Figure 6: A shift of finite type.

Let now $\varphi : B^* \rightarrow A^*$ be a morphism. We will show that for every shift space X on B there is a dynamical system (X^φ, T) and a shift space $\alpha(X^\varphi)$ which is contained in the shift $\Pi(\mathcal{A})$ of paths in the automaton $\mathcal{A} = \mathcal{A}(\varphi)$. Let for this

$$X^\varphi = \{(x, i) \mid x \in X, 0 \leq i < |\varphi(x_0)|\}. \quad (1)$$

We may consider on the space X^φ the transformation

$$T(x, i) = \begin{cases} (x, i + 1) & \text{if } i + 1 < |\varphi(x_0)| \\ (S(x), 0) & \text{otherwise.} \end{cases}$$

In this way, (X^φ, T) is a dynamical system. This system can actually be identified to a subshift of $\Pi(\mathcal{A})$. Indeed, there is a unique map $\alpha : X^\varphi \rightarrow E(\varphi)^\mathbb{Z}$ such that

$$(\alpha(x, i))_0 = [x_0, i] \quad (2)$$

and

$$\alpha \circ T = S \circ \alpha. \quad (3)$$

Note that the map α is a 1-block code. It is a homeomorphism from X^φ into $\Pi(\mathcal{A})$ and (3) shows that it identifies (X^φ, T) with a subshift of $\Pi(\mathcal{A})$.




Figure 7: An automaton unambiguous on the Thue-Morse shift

Example 17 Let $\varphi : a \mapsto ab, b \mapsto ba$ be the Thue-Morse morphism. The shift $X = X(\varphi)$ is called the *Thue-Morse shift*. The automaton $\mathcal{A}(\varphi)$ is represented in Figure 7. It is unambiguous on the shift $\alpha(X^\varphi)$. Indeed, every word of length 5 in $\mathcal{L}(\varphi)$ contains aa or bb and there is only one path labeled aa or bb .

Let X be a shift space on B . A morphism $\varphi : B^* \rightarrow A^*$ is said to be *recognizable on X* if for every $y \in A^\mathbb{Z}$, there is at most one pair (x, k) with $x \in X$ and $0 \leq k < |\varphi(x_0)|$ such that $y = S^k \varphi(x)$.

Thus, in terms of the system (X^φ, T) , the morphism φ is recognizable on X if and only if the map

$$\hat{\varphi} : (x, k) \mapsto S^k \varphi(x)$$

is injective from X^φ into $A^\mathbb{Z}$.

This definition can also be formulated in terms of the unambiguity of the automaton $\mathcal{A}(\varphi)$ using the map α defined in Equation (2).

Proposition 18 *The morphism $\varphi : B^* \rightarrow A^*$ is recognizable on X if and only if the automaton $\mathcal{A}(\varphi)$ is unambiguous on $\alpha(X^\varphi)$.*

Proof. This follows from the fact that for every $y \in A^\mathbb{Z}$, and $(x, k) \in X^\varphi$, one has $y = S^k \varphi(x)$ if and only if y is the label of $\alpha(x, k)$. ■

The following important result plays a central role in the study of shifts defined by morphisms (see [22] or [13]). A morphism is called *aperiodic* if the shift $X(\varphi)$ is aperiodic.

Theorem 19 (Mossé, 1992) *A primitive aperiodic morphism φ is recognizable on the shift $X(\varphi)$.*

Example 20 The Fibonacci morphism is recognizable on $\{a, b\}^{\mathbb{Z}}$.

Example 21 The Thue-Morse morphism is recognizable on the Thue-Morse shift.

Mosse's Theorem has been generalized to non primitive morphisms, as we shall see now.

An automaton is unambiguous on X for aperiodic points if for every aperiodic $x \in X$ there is at most one path labeled x . A morphism $\varphi : B^* \rightarrow A^*$ is recognizable on X for aperiodic points if the automaton $\mathcal{A}(\varphi)$ is unambiguous on X for aperiodic points. The following result is from [6]. It generalizes Mosse's Theorem since, for an aperiodic morphism φ , the shift $X(\varphi)$ does not contain periodic points.

Theorem 22 (Berthé et al., 2019) *A morphism $\varphi : A^* \rightarrow A^*$ is recognizable on $X(\varphi)$ for aperiodic points.*

The notion of a recognizable morphism on $A^{\mathbb{Z}}$ for aperiodic points can be formulated as a problem of combinatorics on words. Indeed, $\varphi : B^* \rightarrow A^*$ is recognizable on $A^{\mathbb{Z}}$ for aperiodic points if the restriction of φ to B is injective and every aperiodic sequence $x \in A^{\mathbb{Z}}$ has a unique factorization in words of $\varphi(B)$.

A morphism $\varphi : B^* \rightarrow A^*$ is *indecomposable* if for every $\alpha : C^* \rightarrow A^*$ and $\beta : B^* \rightarrow C^*$ such that $\varphi = \alpha \circ \beta$, one has $\text{Card}(C) \geq \text{Card}(B)$. In particular, if φ is recognizable, one has $\text{Card}(A) \geq \text{Card}(B)$.

Example 23 A morphism $\varphi : A^* \rightarrow A^*$ with $A = \{a, b\}$ is indecomposable unless both words $\varphi(a), \varphi(b)$ are powers of the same word. In particular, the Thue-Morse morphism is indecomposable.

The following result appears (using a different terminology) in [17].

Theorem 24 *An indecomposable morphism $\varphi : B^* \rightarrow A^*$ is recognizable on $A^{\mathbb{Z}}$ for aperiodic points.*

Example 25 The Thue-Morse morphism is recognizable on $A^{\mathbb{Z}}$ for aperiodic points. Actually, the only periodic points with more than one factorization are $(ab)^{\infty}$ and $(ba)^{\infty}$.

Example 26 The morphism $a \mapsto ab, b \mapsto aa$ is the *period-doubling morphism*. It is recognizable on $A^{\mathbb{Z}}$ for aperiodic points. The only point with more than one factorization is $a^{\mathbb{Z}}$.

5 Coded shifts

The following definition appears in [9]. A *coded shift* is a shift space X such that $\mathcal{L}(X)$ is the set of factors of C^* for some language C . We say that X is *defined* or *coded* by C .

Actually, a coded shift is defined in [9] for a language C which is a *prefix code*, that is such that C does not contain any proper prefix of one its elements. It is proved in [9, Proposition 2.5] that this is not a restriction, in the sense that any coded shift X is defined by a prefix code C .

As an equivalent definition, a shift space is a coded shift if there is a countable strongly connected graph G with edges labeled by A such that X is the closure of the set of labels of bi-infinite paths in G (see [9] proposition 2.1). Such a graph is thus an automaton \mathcal{A} with all states initial and final and we also say that \mathcal{A} recognizes X .

A countable automaton on a finite alphabet is sometimes called a countable state *Markov shift* (see [15]).

When C is a prefix code, the automaton can be taken to be the minimal automaton $\mathcal{A}(C^*)$ of the set C^* . For this automaton, the set of terminal states is reduced to $\{i\}$.

Example 27 The even shift is a coded shift defined by the finite prefix code $C = \{b, aa\}$.

A coded shift is irreducible. Indeed, if $u, v \in \mathcal{L}(X)$, we have $puq, rvs \in X^*$ for some words p, q, r, s . Then $puqrsvs \in C^*$ and thus $uvw \in \mathcal{L}(X)$ with $w = qr$.

A coded shift contains a dense set of periodic points. Indeed, if X is coded by C , then u^∞ belongs to X for every $u \in C^*$. As a consequence a coded shift cannot be minimal unless it is periodic (that is equal to the shifts of a periodic point).

Let X be the coded shift defined by C . For every sequence $(c_n)_{n \in \mathbb{Z}}$ of elements of C , the sequence $\cdots c_{-1} \cdot c_0 c_1 \cdots$ belongs to X . Note that X will contain in general other points.

The following result is well-known.

Proposition 28 *A factor of a coded shift is a coded shift.*

Proof. Let X be a coded shift on the alphabet A and let \mathcal{A} be a countable strongly connected automaton with set of states Q recognizing X . Let $\varphi : X \rightarrow Y$ be a factor map from X onto Y defined by a block map $f : \mathcal{L}_{n+1}(X) \rightarrow B$. Let \mathcal{B} be the automaton on the set of states $Q \times \mathcal{L}_n(X)$ with edges $(p, bu) \xrightarrow{c} (q, ua)$ for all edges $p \xrightarrow{a} q$ of \mathcal{A} and $bua \in \mathcal{L}_{n+1}(X)$ with $a, b \in A$ and $c = f(bua)$. Then \mathcal{B} is a countable strongly connected automaton which recognizes Y . ■

The same proof shows the well-known fact that a factor of a sofic shift is sofic.

Example 29 Let us apply the proof of Proposition 28 to the factor map of Example 7. We start from the automaton of Figure 8 on the left recognizing

the golden mean shift. We obtain as a result the automaton of Figure 8 on the right which is identical to the automaton of the even shift of Figure 3 on the right.



Figure 8: The golden mean shift and the even shift.

Corollary 30 *The class of coded shifts is closed under conjugacy.*

An interesting class of coded shifts is formed by the β -shifts. Let us recall briefly the definition (see [16] or also [8] for a detailed presentation). Let β be a real number with $\beta > 1$. We define for every real number $t \in [0, 1]$ its β -expansion as the sequence $d_\beta(t) = (x_n)_{n \geq 1}$ of integers $< \beta$ such that

$$t = \sum_{n \geq 1} x_n \beta^{-n}$$

which is lexicographically maximal. Thus x_n is obtained by setting $x_1 = \lfloor \beta t \rfloor$ (with $\lfloor x \rfloor$ denoting the integer part of x) with $r_1 = \beta t - x_1$ and recursively $x_n = \lfloor \beta r_{n-1} \rfloor$ with $r_n = \beta r_{n-1} - x_n$.

For example, if $\beta = (1 + \sqrt{5})/2$ is the golden mean, the β -expansion of 1 is $d_\beta(1) = 110000 \dots$.

The β -shift X_β defined by β is the closure of the set of expansions of all numbers in $[0, 1]$. The β -shift is a coded shift recognized by the automaton of Figure 9 where the sequence g_n , called the generating sequence of β , is either the expansion of 1 if it is not eventually 0, or the sequence $(x_1 \dots x_{k-1}(x_k - 1))^\omega$ if $d_\beta(1) = x_1 \dots x_k 00 \dots$ with $x_k \neq 0$. Note that for the case where β is the

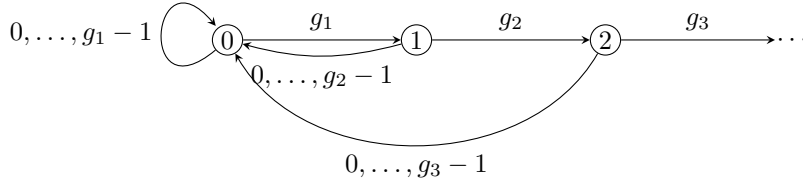


Figure 9: An automaton recognizing the β -shift.

golden mean, we obtain the automaton of Figure 10 which recognizes the golden mean shift.

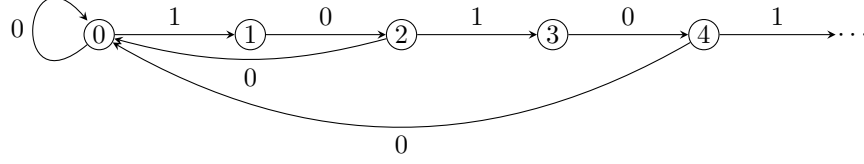


Figure 10: An automaton recognizing the golden mean shift.

A automaton is called *reversible* if it is both deterministic and co-deterministic. Note that the set labels of simple paths around a state in a reversible automaton is not only a prefix code, but actually a bifix code, that is such that its reversal is also a prefix code.

The following result is from [14] (Theorem 1.7).

Theorem 31 *For every coded shift X , the set $\mathcal{L}(X)$ is recognized by a countable strongly connected automaton which is reversible.*

Proof. Since X is a coded shift, the set $\mathcal{L}(X)$ is recognized by a countable strongly connected automaton. Let p be a state of this automaton. Let us assume that all infinite paths starting at p have the same label. Then since the automaton is strongly connected, the shift X is coded by a code containing a single word and the result is trivial. Thus we may assume that there are finite words ya and yb , where a, b are letters with $a \neq b$, labelling paths starting at p . Without loss of generality, we may assume that the paths labeled ya, yb share the same initial part labeled y . Similarly there are finite words ct, dt , where c, d are letters with $c \neq d$, labelling paths ending in p . We may also assume that the paths labeled ct, dt share the same final part. Since the automaton is strongly connected there are words u_1, u_2 such that $ya u_1 ct, yb u_2 dt$ are labels of cycling paths around p . (see Figure 11).

Let $(w_i)_{i \in \mathbb{Z}}$ be an enumeration of the labels of all finite paths from p to p . Let $w'_i = tw_i y$ and $x = (x_i)_{i \in \mathbb{Z}}$ denote the bi-infinite word

$$\cdots au_1 cw'_{-n} \cdots au_1 cw'_{-1} au_1 c \cdot w'_0 au_1 cw'_1 \cdots au_1 cw'_n \cdots .$$

By construction the orbit of x in X is dense. We define a new enumerable strongly connected automaton as follows. We start with the set of states \mathbb{Z} and edges $(i, x_i, i + 1)$ (see Figure 12). Let p_n be the state obtained after reading w'_n and q_n the state before reading w'_{-n} . We add to the automaton a path labelled by $bu_2 d$ from p_n to q_n (see Figure 13). By construction the automaton is strongly connected, deterministic and co-deterministic. The set of labels of its finite paths is $\mathcal{L}(X)$. ■

The above proof builds an automaton which is always infinite. An important observation is that for some sofic shifts, such automaton has to be infinite.

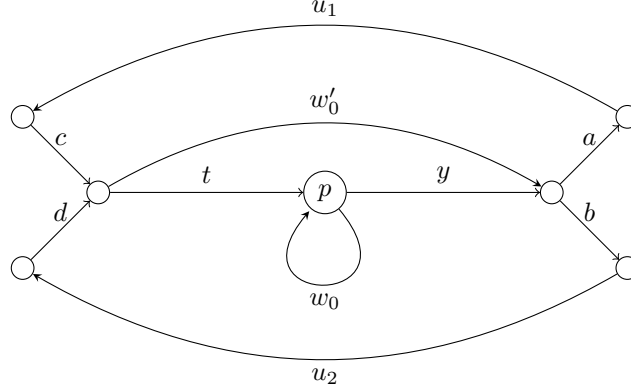


Figure 11: The words u_1, u_2 .




Figure 12: The new automaton.

Indeed, the languages L recognized by reversible finite automata belong to a particular class of recognizable languages characterized by the condition that for every $u, v, w \in A^*$, one has

$$uvv^*w \subset L \Rightarrow uw \in L$$

(see [21]). For example, the golden mean shift X cannot be recognized by a finite reversible automaton since $\mathcal{L}(X)$ obviously does not satisfy this condition.

6 Unambiguously coded shifts

A set $C \subset A^*$ is called a *strong code* if for every $x \in A^{\mathbb{Z}}$ there exists at most one pair of a sequence $(c_n)_{n \in \mathbb{Z}}$ and an integer k with $0 \leq k < |c_0|$ such that

$$x = S^k(\cdots c_{-1} \cdot c_0 c_1 \cdots).$$

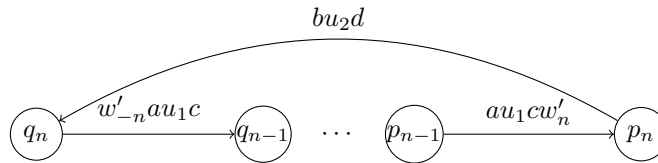


Figure 13: Adding paths to the new automaton.

As an equivalent formulation, C is a strong code if for every $x \in A^{\mathbb{Z}}$ there is at most pair of a sequence $(c_n)_{n \in \mathbb{Z}}$ and a factorization $c_0 = ps$ with s nonempty such that

$$x = \cdots c_{-2}c_{-1}p \cdot sc_1c_2 \cdots$$

In particular, the set C has to be a circular code. The following example, due to [12] shows that an infinite circular code need not be a strong code (in the same paper, it is shown that the result is true however if the set is recognizable).

Example 32 The set $C = \{ab\} \cup \{ab^n ab^{n+1} \mid n \geq 1\}$ is a circular code. It is not a strong code since ${}^\omega(ab) \cdot ab^2 ab^3 ab^4 \cdots$ has two factorizations.

A shift space X is said to be an *unambiguously coded shift* if it is coded by some strong code C . In this case, we also say that X is *unambiguously coded* by C .

This notion appears in [20] (where C is called uniquely decipherable when X is unambiguously coded by C) and also in [10] (where X is called uniquely representable if it is unambiguously coded by some C).

Example 33 The even shift is unambiguously coded. This is not true for $C = \{a, bb\}$ since the sequence $x = b^\infty$ has two factorizations. But it becomes true if we choose the prefix code $C' = (b^2)^*a$.

The following result, which is stronger than Theorem 31, is from [14] (Remark 1.8). The proof is not given there but was kindly provided to us by Ulf-Rainer Fiebig, from the notes of Doris Fiebig. Theorem 31 is a consequence of Theorem 34 but we have stated and proved it before, because its proof is much easier.

Theorem 34 *For every coded shift X , the set $\mathcal{L}(X)$ is recognized by a countable strongly connected automaton which is strongly unambiguous as well as reversible.*

Proof. Since X is a coded shift, the set $\mathcal{L}(X)$ is recognized by an countable strongly connected automaton. The proof begins as that of Theorem 31. We may assume that there are finite words ya and yb , where a, b are letters with $a \neq b$, labelling paths starting at some state q of the automaton. Similarly there are finite words ct , dt , where c, d are letters with $c \neq d$, labelling paths ending in q . Since the automaton is strongly connected there are words u_1, u_2 such that yau_1ct , ybu_2dt are labels of cycling paths around q (see Figure 14). We now choose an enumeration $(w'_i)_{i \geq 1}$ of the labels of all finite paths from q to q with nonnegative indices, instead of arbitrary ones. Let $w_{-i} = tw'_i y$, $w = ty$, $u = au_1c$ and $v = bu_2d$. Note that the first and last letter of u and v are distinct.

Inductively, we choose $m_i > 0$ such that

- the length of $(uw)^{m_i-1}$ is at least twice the length of $s_1 = vw_{-1}v$,

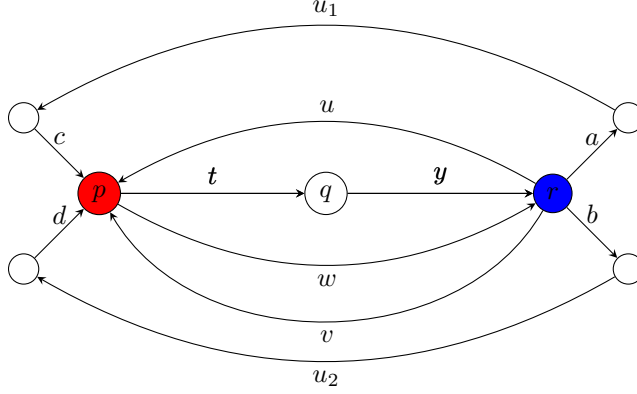


Figure 14: The words u_1, u_2, u, v, w .

- the length of $(uw)^{m_2-1}$ is at least twice the length of $s_2 = vw_{-2}(uw)^{m_1}s_1$,
- the length of $(uw)^{m_3-1}$ is at least twice the length of $s_3 = vw_{-3}(uw)^{m_2}s_2$,
- and so on, where one always adds a word $vw_{-i-1}(uw)^{m_i}$ to the left.

We denote by $x = (x_i)_{i \in \mathbb{Z}}$ the bi-infinite word

$$\dots (uw)^{m_3}vw_{-3}(uw)^{m_2}vw_{-2}(uw)^{m_1}vw_{-1}u \cdot (wu)^\infty,$$

where x_0 is equal to the first symbol of the right infinite periodic sequence $(wu)^\infty$. It is the label in the graph of a path shown below

$$\dots p \xrightarrow{w_{-2}} r \xrightarrow{(uw)^{m_1}} r \xrightarrow{v} p \xrightarrow{w_{-1}} r \xrightarrow{u} p \xrightarrow{wu} p \dots$$

By construction the orbit of x in X is dense.

We define a new countable strongly connected automaton as follows. We start with the set of states \mathbb{Z} and edges $(i, x_i, i+1)$ (see Figure 15). Let $N_i < 0$




Figure 15: The new automaton.

be the terminal vertex of the first u in the factor $(uw)^{m_i}vw_{-i}$ of x . We choose an increasing sequence of integers $k_1 < k_2 < k_3 < \dots$ with $k_1 = m_1$. For each $i > 0$ we add a finite path labeled by v from the positive terminal vertex M_i of the path labeled by $(wu)^{k_i}w$ starting at the vertex 0 to the vertex N_i on the negative side (see Figure 16). By construction the new automaton is strongly connected, deterministic and co-deterministic. The set of labels of its finite paths is $\mathcal{L}(X)$.

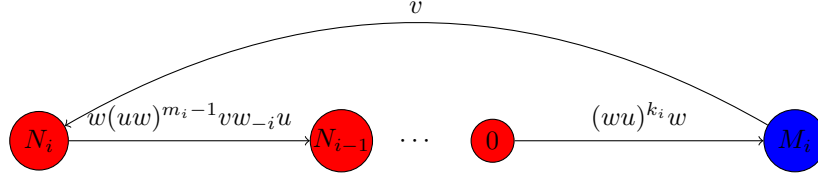


Figure 16: Adding paths to the new automaton.

We now show that the automaton is strongly unambiguous, that is, that it has at most one bi-infinite path with a given label.

For later use, we record the following results.

- (1a) The word $uw b$ does not occur as a factor of $uwuw$ at any position. Indeed, inside $uwuw$ pairs of symbols at distance $|uw|$ agree. But the first symbol of u is $a \neq b$.
- (1b) For the same reason the word dwu cannot occur as a factor of $uwuw$ at any position.

For later use, we also note the following result.

- (2) The label of every path starting at N_i begins with $w(uw)^{m_i-1}$ and there is no path starting at a vertex k with $N_i < k < 0$ whose label begins with $w(uw)^{m_i-1}$. This is due to (1a), (1b) and the definition of m_i ensuring that $w(uw)^{m_i-1}$ is long enough.

We now show that the automaton is strongly unambiguous. Let us assume that there are two bi-infinite paths of the automaton $z \neq \bar{z}$ with the same label.

Then

- (3) One has $z_i \neq \bar{z}_i$ for all $i \in \mathbb{Z}$ since the automaton is deterministic and co-deterministic.

By the construction of the automaton, there is $i \in \mathbb{Z}$ such that $t(z_i) = 0$ where $t(z_i)$ denotes the terminal state of the edge z_i . Thus $t(\bar{z}_i) \neq 0$ by (3).

We will show that $t(z_i) = 0$ and $t(\bar{z}_i) \neq 0$ implies:

- (4a) $t(\bar{z}_i) \in \{\dots, -2, -1\}$.
- (4b) There is an $s > 0$ with $t(z_{i+s}) = 0$ and $t(\bar{z}_{i+k}) \neq 0$ for all $k \in \{0, \dots, s\}$.

Repeating the argument (4b) implies that $t(\bar{z}_{i+k}) \neq 0$ for all $k \geq 0$. This leads to a contradiction since (4a) and the graph structure forces $t(\bar{z}_{i+k})$ to be the vertex 0 for some $k \geq 0$. This proves that the automaton is strongly unambiguous.

We now prove (4a) and (4b). Without loss of generality we may assume that $i = 0$. Thus the label of $\dots z_{-1}z_0$ is v and the label of $z_1z_2\dots$ is $(wu)^{k_1}w$ with $k_1 = m_1$. The same holds for \bar{z} .

If $t(\bar{z}_0) \in \{1, 2, \dots\}$, then

- either $d w u$ (the label of $\bar{z}_0 \bar{z}_1 \dots$) is a factor of some $u w u u$ at the positive vertices, which is impossible by (1b),
- or $u w b$ (the labels of the first edge of a connecting v -path plus the edges connecting previous positive vertices) is a factor of $u w u w$ inside $(w u)^{k_1}$, which is impossible by (1a).

If $t(\bar{z}_0)$ is a vertex inside some v -path connecting the positive to the negative vertices, then $d w u$ (the labels of the last edge of the connecting v -path plus the following ones connecting the negative vertices) is a factor of $u w u u$ inside $(w u)^{k_1}$ since $k_1 = m_1$ is large, contradicting (1b). Thus $t(\bar{z}_0) \in \{-1, -2, \dots\}$ which proves (4a).

We now prove (4b). By (4a) we know that $t(\bar{z}_0) \in \{-1, -2, \dots\}$. The label of $\bar{z}_1 \bar{z}_2 \dots$ starts with $(w u)^{k_1}$ since the label of $z_1 z_2 \dots$ does. By $k_1 = m_1$ and (2) we have $t(\bar{z}_0) \leq N_1$. Since the labels to the left of 0 are $u w v w_{-1} v$, by (1) the label of $\bar{z}_1 \bar{z}_2 \dots$ have to leave the sequence $(w u)^\infty$ at some time n , at the latest when \bar{z} reaches the edge of the first symbol of v in $v w_{-1} v$. Thus, at time n the path \bar{z} is still on the negative vertices and at least $|w_{-1} v|$ steps from the vertex 0. At the same time n the path z has to start a v -path connecting the positive and negative vertices. Let N_i be the terminal vertex of this v -path. Since $|v| < |w_{-1} v|$, at the time z reaches N_i the path \bar{z} is still on the negative vertices. After the vertex N_i the path z has to read the word $w(u w)^{m_i-1}$. By (2) this shows that at this time the path \bar{z} is not only on the negative vertices but in fact in a vertex less or equal to N_i . By (3) it must be a vertex strictly less than N_i . This show that \bar{z} is "to the left of" z , that is, when z eventually reaches vertex 0 (which it must since there is no path starting in a negative vertex and avoiding 0), the path \bar{z} will not have reached 0. This proves (4b). ■

The question of whether any coded shift can be unambiguously coded is raised in [10]. We obtain easily a positive answer using Theorem 34.

Corollary 35 *Every coded shift is unambiguously coded.*

Proof. Every coded shift is recognized by a deterministic, co-deterministic and strongly unambiguous automaton by the previous theorem. The set of first returns to some state q of this automaton (that is, the labels of paths from q to itself which do not pass by q inbetween) defines a prefix code C such that the shift is unambiguously coded by C . ■

This result can be used to compute the topological entropy of a coded shift or its topological pressure (see [10] and [20]).

7 Synchronized shifts

A word $w \in C^*$ is *synchronizing* for a prefix code C if for every $u, v \in A^*$, one has

$$uvw \in C^* \Rightarrow uw, v \in C^*. \quad (4)$$

A prefix code C on the alphabet A is *synchronized* if there is a synchronizing word. For an introduction to the notions concerning codes, see [5]. A shift space is said to be a *synchronized coded shift* if it can be defined by a synchronizing prefix code.

As a closely related notion, a word w is a *constant* for a language L if it is a factor of L and if for every $u, v, u', v' \in A^*$, one has

$$uvw, u'wv' \in L \Leftrightarrow uwv', u'wv \in L.$$

Thus a word of C^* is a constant for C^* if and only if it is synchronizing. A word w is a constant for L if and only if there is a path labeled w in the minimal automaton of L and if all these paths end in the same state.

When L is a factorial language, the definition of a constant takes a simpler form. Indeed, w is a constant if and only if

$$uw, wv \in L \Rightarrow uwv \in L \quad (5)$$

for every $u, v \in A^*$. Indeed it is clear that a constant satisfies (5). Conversely, if w satisfies (5) for all $u, v \in A^*$, assume that $uvw, u'wv' \in L$. Since L is factorial, we have also $uw, wv' \in L$ and thus $uwv' \in L$ by (5). The proof that $u'wv \in L$ is similar. Condition (5) is the one used to define *intrinsically synchronizing words* for shift spaces (see [19, Exercise 3.3.4]).

The following property gives a characterization of synchronized shifts independent of the prefix code used to code the shift. A deterministic automaton $\mathcal{A} = (Q, i, i)$ is synchronized if it is strongly connected and there exists a word w such that $\text{Card}\{p \cdot w \mid p \in Q\} = 1$.

A strongly connected component $R \subset Q$ of an automaton \mathcal{A} is said to be *maximal* if for every edge $r \xrightarrow{a} s$ with $r \in R$, one has $s \in R$. The following statement is proved in [14].

Proposition 36 *An irreducible shift space X is a synchronized coded shift if and only if the minimal automaton of $\mathcal{L}(X)$ has a unique maximal strongly connected component which is synchronized.*

Proof. Let $\mathcal{A} = (Q, i, T)$ be the minimal automaton of $\mathcal{L}(X)$. Assume first that X is coded by a synchronizing prefix code C . Let $w \in C^*$ be a synchronizing word for C . Since X is irreducible, for every $u \in \mathcal{L}(X)$ there is a word v such that $uvw \in \mathcal{L}(X)$. Let us show that $i \cdot uvw = i \cdot w$. Indeed, note first that since $uvw \in \mathcal{L}(X)$, there exist words p, s such that $puvws \in C^*$. Since w is synchronizing, this implies that $puvw \in C^*$. Assume now that $uwv \in \mathcal{L}(X)$. Then $wt \in \mathcal{L}(X)$. Conversely, if $wt \in \mathcal{L}(X)$, there are words q, r such that $qwtr \in C^*$. Since w is synchronizing, we have $tr \in C^*$. Thus $(puvw)(tr)$ is in

C^* and thus $uvwt \in \mathcal{L}(X)$. This shows that the strongly connected component of $i \cdot w$ is the unique maximal strongly connected component of \mathcal{A} and also that it is a synchronized automaton.

Conversely, if \mathcal{A} has a unique maximal strongly connected component $M \subset Q$ which is synchronized, let q be an element of M and let C be the set of labels of paths from q to q which do not pass by q in between. Let w be a synchronizing word for M such that all paths labeled w end in q . It is easy to see that w can be extended in a synchronizing word for C . ■

The following statement is well known (see [19, Proposition 3.3.16]).

Proposition 37 *Every irreducible sofic shift is a synchronized coded shift.*

The proof relies on the following statement.

Lemma 38 *A deterministic strongly connected automaton $\mathcal{A} = (Q, i, i)$ is synchronized if and only if there exists a word w such that the set $I(w) = \{q \in Q \mid p \xrightarrow{w} q\}$ is finite and nonempty.*

Proof. Let R be the set of finite nonempty subsets of Q of the form $I(wu)$ for $wu \in A^*$ which are of finite nonzero minimal cardinality. By assumption, this set is not empty. For every $I = I(wu) \in R$ and every $x \in \mathcal{L}(X)$, there is a word v such that $wuvx \in \mathcal{L}(X)$ and consequently $I \cdot vx = I(wuvx) \in R$. Thus $\mathcal{L}(X)$ is the set of labels of paths in the automaton $\mathcal{A}' = (R, I(w), I(w))$. Since \mathcal{A}' is a synchronized automaton, this completes the proof. ■

Proposition 37 is an easy consequence of Lemma 38.

Example 39 The code $C = \{a, bb\}$ is synchronized because a is a synchronizing word. This shows that the even shift is a synchronised coded shift.

The following statement is a particular case of Theorem 34. We give an independent proof with a different and substantially simpler construction. Instead of building an entirely new automaton, as in the proof of Theorem 34, we modify the automaton in a way that preserves its structure (for example, if the first automaton is finite, the new automaton is also finite).

Theorem 40 *Every synchronized coded shift is unambiguously coded.*

Proof. Let X be a coded shift defined by a synchronized prefix code C . Since there are synchronizing words for C , there are constants for C^* . Let $w \in A^*$ be a constant for C^* and let n be the length of w .

We consider the following automaton \mathcal{A} . The set of states Q is the set of pairs (u, p) formed of a word u of length n in $\mathcal{L}(X)$ and an element p of the set P of states of the minimal automaton of C^* . Next, set $(u, p) \cdot a = (v, p \cdot a)$ where v is such that $ua = bv$ for some $b \in A$. Since w is a constant, there is a state (w, q_w) in Q such that a path ends in (w, q_w) if and only if its label ends with w .

Let C' be the set of labels of simple paths from (w, q_w) to itself (such a path is simple if it does not pass by (w, q_w) in between). Then X is coded by C' . Indeed, let u, v be words with u ending with w such that there is a path $i \xrightarrow{u} q_w \xrightarrow{v} i$ where i is the initial and terminal state of $\mathcal{A}(C^*)$. If $c \in C'^*$, then $q_w \xrightarrow{v} i \xrightarrow{cu} q_w$ and thus $vcu \in C'^*$. Conversely, if $c \in C'^*$, it is the label of path in $\mathcal{A}(C^*)$ and thus is a factor of C^* . Thus the factors of C^* and C'^* are the same.

Consider an infinite path $\cdots q_{-1} \xrightarrow{a_{-1}} q_0 \xrightarrow{a_0} q_1 \cdots$ with label $x = \cdots a_{-1}a_0a_1 \cdots$ in G . We have $q_i = (w, q_w)$ if and only if the left infinite sequence $\cdots a_{i-2}a_{i-1}$ ends with w .

It follows that X is unambiguously coded by C' since the sequence $c = (c_n)$ corresponds to the labels of the paths between consecutive occurrences of (w, q_w) , with c_0 ending at the least $q_i = (q, q_w)$ with $i \geq 1$. The unique exponent k with $0 \leq k < |c_0|$ such that $x = \varphi^k(c)$ is then $k = |c_0| - i$. ■

We note the following corollary.

Corollary 41 *Every irreducible sofic shift is unambiguously coded by a rational prefix code.*

Indeed, if X is an irreducible sofic shift, it is synchronized by Proposition 37. The prefix code C' build in the proof of Theorem 40 is rational.

We illustrate the proof on two examples.

Example 42 Let X be the even shift, which is coded by $C = \{a, bb\}$. The letter a is synchronizing for C and the prefix code $C' = (bb)^*a$ of Example 33 is the result of the construction in the proof of Theorem 40.

Example 43 Consider the shift coded by $C = \{ab, ba\}$. The minimal automaton of C^* is represented in Figure 17. The word $w = bb$ is a constant since all




Figure 17: The minimal automaton of $\{ab, ba\}^*$.

paths labeled bb end in 2. The automaton \mathcal{A} built in the proof is represented in Figure 18.

The code C' of first returns to $(bb, 2)$ is

$$C' = a(ba)^*ab(ab)^*b.$$

A code C on the alphabet A is *circular* if for every $u, v \in A^*$ one has

$$uv, vu \in C^* \Rightarrow u, v \in C^*. \quad (6)$$

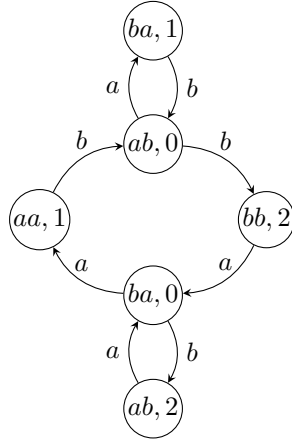


Figure 18: The automaton \mathcal{A} .

If the shift X coded by C is unambiguously coded, then C is a circular code. Indeed, if uv, vu are in C^* although u, v are not, the bi-infinite sequence $(uv)^\infty$ has two factorizations in words of C . To see this in more detail, set $uv = c_1 \cdots c_n$ and $vu = d_1 \cdots d_m$ with $c_i, d_i \in C$. Then we have a factorization $c_i = ps$ with p nonempty such that $v = sc_{i+1} \cdots c_n$ and $u = c_1 \cdots c_{i-1}p$. Then the equality

$$(c_i c_{i+1} \cdots c_n c_1 \cdots c_{i-1})^\infty = S^k(vu)^\infty$$

with $k = |p|$ forces $k = 0$ and thus $u, v \in C^*$.

The fact that every irreducible sofic shift is coded by a circular code is proved in [3]. By the above remark, this follows from Theorem 40.

It is possible to prove Theorem 40 with a different construction using the notion of *state splitting* (see [1, Proposition 2.4]). We do not develop this proof but we show its steps on the shift of Example 43.

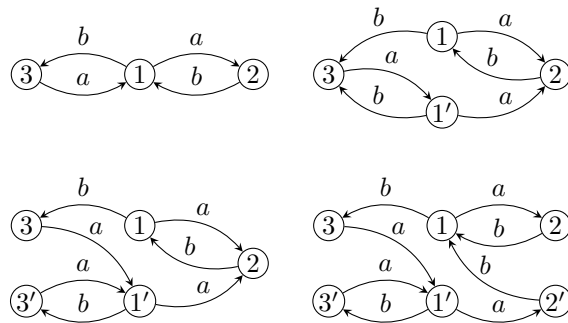


Figure 19: The state splitting.

Example 44 Set $C = \{ab, ba\}$ as in Example 43. We start with the minimal automaton of C^* shown in Figure 19 on the left. We split state 1 into two states 1 and 1' having the same output but 1 receives the input edge from 2 and 1' the input edge from 3. The result is shown in Figure 19 at the top on the right. Then, we split state 3 into states 3 and 3' as indicated in Figure 19 at the bottom on the left. As a result, a path ends at state 3 if and only if its label ends with bb . Finally, we split 2 into 2 and 2'. The result is the same as in Example 43.

There exist coded shifts which are unambiguously coded by a prefix code C although C is not synchronized, as shown by the following example.

Example 45 Let $A = \{a, b, \bar{a}, \bar{b}\}$ and let D be the unique language on A such that

$$D = aD^*\bar{a} \cup bD^*\bar{b}$$

The prefix code D is not synchronized. Indeed, for every $d \in D^*$, one has $ad\bar{a} \in D$ although \bar{a} is not in D^* . The coded shift defined by D is unambiguously coded. Indeed, no proper nonempty suffix of an element of D can be a prefix of an element of D^* . This coded shift is known as a *Dyck shift* (see [18] or [2]). The fact that D is a circular code is proved in [11].

A code C is *very thin* if there is a word $c \in C^*$ such that c is not a factor of C . Every rational code is very thin (see [5, Theorem 9.4.1]). The prefix code D of Example 45 is not very thin. Indeed, every $d \in D^*$ is a factor of $ad\bar{a} \in D$.

Theorem 46 *A coded shift defined by a very thin prefix code is synchronized.*

Proof. Assume that X is coded by a very thin prefix code C . Let $\mathcal{A} = (Q, i, i)$ be the minimal automaton of C^* . For $w \in A^*$, set

$$I(w) = \{q \in Q \mid p \cdot w = q \text{ for some } p \in Q\}.$$

Let $w \in C^*$ be a word which is not a factor of C . Then the set $I(w)$ is finite. Indeed, assume that $p \cdot w = q$. Let u, v be such that $i \cdot u = p$ and $q \cdot v = i$. Then $uwv \in C^*$ forces $w = rs$ with $ur, sv \in C^*$ and thus $p \cdot w = i \cdot s$. This shows that $I(w)$ is contained in the finite set $\{i \cdot s \mid s \text{ is a suffix of } w\}$.

By Lemma 38, this implies that X is synchronized. ■

Example 47 A β -shift X_β is synchronized if and only if the orbit of $d_\beta(1)$ is not dense in X_β . One of the implications of this result, due to [7], can be proved easily using Theorem 46. Indeed, let C be the prefix code formed by the labels of simple paths from 0 to 0 in the automaton of Figure 9. Let w be a word in $\mathcal{L}(X_\beta)$ which does not appear in $d_\beta(1)$, and let a be a letter such that $wa \in \mathcal{L}(X_\beta)$. Then wa is a factor of C^* but not a factor of C and thus C is very thin.

References

- [1] Marie-Pierre Béal. *Codage symbolique*. Masson, 1993.
- [2] Marie-Pierre Béal. Sofic-Dyck shifts. *Theoretical Computer Science*, 609:226 – 244, 2016.
- [3] Marie-Pierre Béal and Dominique Perrin. Une caractérisation des ensembles sofiques. *Comptes rendus de l'Académie des sciences. Série I, Mathématique*, 303(6):255–257, 1986.
- [4] Marie-Pierre Béal, Dominique Perrin, and Antonio Restivo. Recognizability of morphisms. 2021. in preparation.
- [5] Jean Berstel, Dominique Perrin, and Christophe Reutenauer. *Codes and Automata*. Cambridge University Press, 2009.
- [6] Valérie Berthé, Wolfgang Steiner, Jörg M. Thuswaldner, and Reem Yassawi. Recognizability for sequences of morphisms. *Ergodic Theory Dynam. Systems*, 39(11):2896–2931, 2019.
- [7] Anne Bertrand-Mathis. Développement en base θ , répartition modulo un de la suite $(x\theta^n)$, $n \geq 0$, langages codés et θ -shift. *Bulletin de la Société Mathématique de France*, 114:271–323, 1986.
- [8] François Blanchard. β -expansions and symbolic dynamics. *Theoretical Computer Science*, 65(2):131–141, 1989.
- [9] François Blanchard and Georges Hansel. Systèmes codés. *Theoret. Comput. Sci.*, 44(1):17–49, 1986.
- [10] Michael Burr, Suddhasattwa Das, Christian Wolf, and Yun Yang. Computability of topological pressure on compact shift spaces beyond finite type, 2020.
- [11] Aldo de Luca and Antonio Restivo. On some properties of very pure codes. *Theor. Comput. Sci.*, 10:157–170, 1980.
- [12] Jeanne Devolder and E. Timmerman. Finitary codes for biinfinite words. *RAIRO - Theoretical Informatics and Applications - Informatique Théorique et Applications*, 26(4):363–386, 1992.
- [13] Fabien Durand and Dominique Perrin. *Dimension groups and dynamical systems*. Cambridge University Press, 2021. to appear.
- [14] Doris Fiebig and Ulf-Rainer Fiebig. Covers for coded systems. In Peter Walters, editor, *Symbolic Dynamics and its Applications*, volume 136 of *Contemporary Mathematics*. Amer. Math. Soc., 01 1992.
- [15] Doris Fiebig and Ulf-Rainer Fiebig. Compact factors of countable state markov shifts. *Theoretical Computer Science*, 270(1):935–946, 2002.

- [16] Christiane Frougny and Jacques Sakarovitch. Number representation and finite automata. In Valérie Berthé and Michel Rigo, editors, *Combinatorics Automata and Number Theory*. Cambridge University Press, 2010.
- [17] Juhani Karhumäki, Ján Maňuch, and Wojciech Plandowski. A defect theorem for bi-infinite words. *Theoretical Computer Science*, 292(1):237–243, 2003. Selected Papers in honor of Jean Berstel.
- [18] Wolfgang Krieger. On the uniqueness of the equilibrium state. *Mathematical systems theory*, 8:97–104, 1974.
- [19] Douglas Lind and Brian Marcus. *An Introduction to Symbolic Dynamics and Coding*. Cambridge Mathematical Library. Cambridge University Press, 2 edition, 2021.
- [20] Ronnie Pavlov. On entropy and intrinsic ergodicity of coded subshifts. *Proc. Amer. Math. Soc.*, 148:4717–4731, 2020.
- [21] Jean-Eric Pin. On reversible automata. In *LATIN '92 (São Paulo, 1992)*, volume 583 of *Lecture Notes in Comput. Sci.*, pages 401–416. Springer, Berlin, 1992.
- [22] Martine Queffélec. *Substitution Dynamical Systems—Spectral Analysis*, volume 1294 of *Lecture Notes in Mathematics*. Springer-Verlag, Berlin, second edition, 2010.
- [23] Antonio Restivo. On a question of McNaughton and Pappert. *Inform. and Control*, 25:1, 1974.
- [24] Antonio Restivo. A combinatorial property of codes having finite synchronization delay. *Theoret. Comput. Sci.*, 1:95–101, 1975.