

Representation Learning for Weakly Supervised Relation Extraction

Zhuang Li

Master Of Computing(Advanced)
The Australian National University

October 2015

© Zhuang Li

Except where otherwise indicated, this thesis is my own original work.

Zhuang Li

To my parents, for all their love and blessings.

Acknowledgments

I would like to express my special appreciation to my supervisor, Dr. Lizhen Qu who supervised me patiently when I was in trouble and confusion. My sincere thanks would also go to Dr. Gabriela for her expert advice, Convenor John Slaney for the consultant of this project. I thank my friend, Qiongkai Xu, for his proofreading within limited time frame. Last but not the least, I would like to thank my parents, Xianlan Yang and Taiping Li, for their selfless supporting through my life.

Abstract

Recent years have seen a rapid development in Information Extraction, as well as its subtask, Relation Extraction.

Relation Extraction is able to detect semantic relations between entities in sentences. Currently, many efficient approaches have been applied on relation extraction task. Supervised learning approaches especially have the good performance. However, there are still many difficult challenges. One of the most serious problems is that manually labelled data is difficult to acquire. In most cases, limited data for supervised approaches equals lousy performance. Thus here, under the situation with only limited training data, we focus on how to improve the performance of our supervised baseline system with unsupervised pre-training.

Feature is one of the key components in improving the supervised approaches. Traditional approaches usually apply hand-crafted features, which requires expert knowledge and expensive human labor. However, this type of feature might suffer from data sparsity: when training set size is small, the model parameters might be poorly estimated. In this thesis, we present several novel unsupervised pre-training models to learn the distributed text representation features, which are encoded with rich syntactic-semantic patterns of relation expressions.

The experiments have demonstrated that this type of features, combine with the traditional hand-crafted features, could improve the performance of logistic classification model for relation extraction, especially on the classification of relations with only minor training instances.

Contents

Acknowledgments	vii
Abstract	ix
1 Introduction	1
1.1 Objectives	1
1.2 Contributions	2
1.3 Dissertation Organization	2
2 Relation Extraction	3
2.1 Information Extraction	3
2.2 Knowledge Base	3
2.2.1 Concept of Knowledge Base	4
2.2.2 Ontology	4
2.2.2.1 Classes	4
2.2.2.2 Named Entity	5
2.2.2.3 Named Entity Mention	5
2.2.2.4 Relation	5
2.2.2.5 Resource Description Framework	6
2.2.3 Related Work	6
2.2.3.1 Freebase and YAGO	6
2.2.3.2 Storage Management	6
2.3 Concepts of Relation Extraction	7
2.4 Approaches	7
2.4.1 Supervised Approaches	7
2.4.1.1 Concept	7
2.4.1.2 Discussion	8
2.4.1.3 Evaluation	8
2.4.2 Unsupervised Approaches and Semi-supervised Approaches . .	9
2.4.2.1 Unsupervised Approaches	9
2.4.2.2 Semi-supervised Approaches	9
2.4.2.3 Discussion	10
2.4.2.4 Evaluation	10
Rand Index	10
2.4.3 Distant Supervision Approach	11
2.4.3.1 Concept	11
2.4.3.2 Discussion	11

2.4.3.3	Evaluation	11
2.4.4	Hand-crafted Features of Relation Extraction	12
2.4.4.1	Part of Speech Tag	12
2.4.4.2	Named Entity Tag	12
2.4.4.3	Context Words	12
2.4.4.4	Dependency Path	12
2.5	Summary	12
3	Text Representation for Relation Extraction Learning	15
3.1	Neural Network	15
3.1.1	Artificial Neuron	15
3.1.2	Neural Network Architecture	16
3.1.2.1	Recurrent Neural Network	17
3.1.2.2	Gradient Vanishing	17
3.1.2.3	Long-short Term Memory	18
3.1.3	Neural Network Representation for Conceptual Knowledge	20
3.1.3.1	Local Representation	20
3.1.3.2	Distributed Representation	20
3.1.4	Neural Network Model Training	20
3.1.4.1	Forward Propagation	20
3.1.4.2	Loss Function	21
3.1.4.3	Backward Propagation	21
3.1.4.4	Model Parameters Learning	22
	Regularization	22
	AdaGrad	23
3.1.5	Unsupervised Pre-training and Supervised Fine-tuning	23
3.2	Word Representation	24
3.2.1	One-hot Word Representation	24
3.2.2	Distributed Representation of Word	25
3.2.2.1	Skip-gram Model	25
	Negative Sampling	25
3.2.2.2	Summary	26
3.3	Representation of Phrase and Sentence	27
3.3.1	One-hot Representation of Phrase and Sentence	27
3.3.2	Distributed Representation of Phrase and Sentence	27
3.3.2.1	Distributed Representation of Phrase and Sentence Learning with LSTM	27
3.3.2.2	Typical Approaches	28
	Average Vectors	28
	Concatenate Vectors	28
	Skip-gram Model for Learning Phrase	28
3.4	Summary	28

4	Models for Extracting Relations	29
4.1	Baseline System with Hand-crafted Features	29
4.1.1	Overview	29
4.1.2	Feature Selection	29
4.2	Novel Representation Learning Model	30
4.2.1	Motivation	31
4.2.2	Shortest Dependency Path LSTM	31
4.2.2.1	Tree LSTM	32
	Discussion	33
4.2.2.2	Shortest Dependency Path	33
	Discussion	34
4.2.3	Architecture of Novel System	34
4.2.4	Model Parameters Learning	35
4.2.4.1	Word and Entity Representations Initialization	35
4.2.4.2	Pre-training	36
	Entity Prediction Loss Function	36
	Word Prediction Loss Function	38
	Options for Parameters Learning	38
4.2.4.3	Fine-tuning	39
5	Experiments	41
5.1	Dataset Description	41
5.1.1	Pre-processing Steps	41
5.1.2	Datasets Analysis	43
5.2	Hyperparameter Tuning	44
5.2.1	Hyperparameter Tuning for Pre-training	44
5.2.2	Hyperparameter Tuning for Fine-tuning	44
5.3	Experiment Settings	46
5.3.1	Baseline	46
5.3.1.1	Invariants	46
5.3.1.2	Variants	46
5.3.2	Representation Learning Models	46
5.3.2.1	Invariants	46
5.3.2.2	Variants	47
5.4	Results	47
5.4.1	Overall Comparison	48
5.4.2	Evaluation of Baseline	50
5.4.3	Influence of Entity Prediction Loss	50
5.4.4	Influence of Word Prediction Loss	51
5.4.5	Influence of Updating Entity Vector	52
5.4.6	Influence of Updating Word Vector	53
5.4.7	Summary	54

6	Conclusion	55
6.1	Contributions	55
6.2	Future Work	55
6.2.1	Pre-training on Different Dataset	55
6.2.2	Choice of Expression	55
A	Appendix A	57
A.1	Results of Experiments	57
	References	67

List of Figures

2.1	A snippet of freebase dump.	5
2.2	A dependency tree of a sentence generated by Stanford Core NLP on-line demo ¹	13
3.1	This is a single neuron ²	16
3.2	Neural Network Architecture	17
3.3	Left: Input processing part of a recurrent neural network. Right: Same seen but an unfolded graph[Bengio et al., 2015].	18
3.4	A simple LSTM cell which has input, output and forget gate[Hochreiter and Schmidhuber, 1997].	19
3.5	This is an example plot of word representation ³	26
4.1	Architecture of Baseline System with Hand-crafted Features.	30
4.2	Expression grouped by its relation.	31
4.3	Top: a traditional chain LSTM structure. Bottom: a tree LSTM structure[Tai et al., 2015].	32
4.4	This is a dependency tree parsed by Stanford Core NLP online demo ⁴	33
4.5	Shortest dependency path to LSTM tree.	34
4.6	The process of fine-tuning.	35
5.1	Distribution of Relations in Stanford Dataset.	42
5.2	Distribution of Relations in Google Dataset.	42
5.3	Performance of the Baselines and Models based on Representation Learning	48
5.4	Comparison of the $A - B$ and $A - M$ when number of training instances is 19963.	49
5.5	Comparison of the average performance $A - B$ and $A - M$ on the relation " <i>no_relation</i> ".	50
5.6	Performance of the Baselines	51
5.7	Compare the performance of $B - H$, $B - HL$, $A - M$ and $M - E - L$	51
5.8	Compare the performance of $A - M$, $M - E - L$ and $M - EW - L$	52
5.9	Performance of the Updating Entity Vector	53
5.10	Performance of the Updating Word Vector	53

List of Tables

5.1	Tuning Results for Weights on LSTM	45
5.2	Tuning Results for Model Parameters of Logistic Regression	45
5.3	Tuning Results for Model Parameters of LSTM	45
A.1	Performance of $B - H$	58
A.2	Performance of $B - HL$	59
A.3	Performance of $M - E - L$	60
A.4	Performance of $M - E - LUE$	61
A.5	Performance of $M - E - LUEW$	62
A.6	Performance of $M - EW - L$	63
A.7	Performance of $M - EW - LUE$	64
A.8	Performance of $M - EW - LUEW$	65

Introduction

There is vast amount of unstructured text data on the World Wide Web, sources of which are like email, blogs, website documents and etc. However this kind of unstructured data is usually difficult for machine or human to analysis. There is a common way to solve this problem, Relation Extraction. Relation extraction is a technique that let computers automatically extract relations we are interested in from text. Then the structured data can be stored in the structural database and easily analysed by machine or human.

Basically, there are four approaches for relation extraction, supervised learning approaches, unsupervised learning approaches, semi-supervised learning approaches and distant supervision approaches. Supervised approaches usually have a better performance if with enough training data.

However, there are two major limitations of this method.

1. The labelled data is resource consuming and difficult to acquire. Usually we need a lot of human and time resources to annotate the corpus.
2. Hand-crafted feature of text, such as unigrams and bigrams, usually do not perform well when training data size is small.

For solving these two problems, a technique named **Text Representation Learning** can be used to acquire a new kind of distributed representation features. This kind of feature is able to help improve the performance of the supervised approaches especially under the situations with only limited data.

1.1 Objectives

The goal of this thesis is to have a thorough study of text representation learning application on relation extraction issues. The specific objectives are:

- Apply text representation learning techniques and acquire a new feature of distributed representations.
- Combine distributed representation feature and traditional hand-crafted feature to improve the performance of baseline relation extraction system.

To achieve these objectives, the procedures are as follows:

1. Build the baseline relation extraction systems.
2. Design text representation learning models.
3. Combine baseline and text representation learning models to implement a new system.
4. Design a series of experiments with different variations.
5. Observe and analysis the results.

1.2 Contributions

Major contributions of the work are as follows:

1. The novel models based on representation learning techniques outperform state-of-art baseline systems on extracting relations of interests.
2. We conducted extensive experiments to study the performance of new models in comparison of baseline systems.

1.3 Dissertation Organization

This thesis is structured as follows. Chapter 1 is the general introduction of this thesis. Chapter 2 introduces basic concepts of relation extraction and its related works. Chapter 3 covers the most common and popular text representation learning techniques along with the preliminaries for text representation learning techniques in this thesis. Chapter 4 describes baseline system using hand-crafted feature, our models for learning text representations, our motivations behind and the architecture of the new system using both hand-crafted features and text representation features. Chapter 5 places details of a series of experiments that we have designed, including the description of dataset, the settings of hyperparameters and the results of the experiments. Chapter 6 concludes the project and proposes the future work.

Relation Extraction

Recent years have seen an rapid development of automatic knowledge base construction along with information extraction. As a part of Information Extraction, relation extraction is being paid attention as well. This chapter is to introduce relation extraction from a comprehensive perspective. Since relation extraction is a subtask of information extraction(IE), we will give a brief explanation of information extraction first. Then knowledge base, which is an important preliminary concept in relation extraction, will be introduced. In section 2.3, we will offer rough ideas about relation extraction. Last section places some current common machine learning techniques and their application on relation extraction tasks.

2.1 Information Extraction

It is known that there is a vast amount of unstructured text on the Internet that is not machine-readable and difficult to search in. This results in the "grown need for efficient techniques on text analysing and discovering valuable information"[Piskorski and Yangarber, 2013] with the structure of our interest automatically. Basically, information extraction is the technique to turn the unstructured data to the structured form. Then in further,the data can be easily processed and understood by machines or human. Currently there are several major subtasks of IE which are named entity recognition, coreference resolution, terminology extraction and, of course, relation extraction.

Recent years have seen a growing development in information extraction since 1980s. It has been widely used in many areas. For example, named entity recognition has been applied on Travel-Related Search Queries[Cowan et al., 2015] and relation extraction, major research area in our project, has been applied on question answering[Ravichandran and Hovy, 2002] and gene-disease relations[JUN'ICHI, 2006].

2.2 Knowledge Base

Knowledge base plays an pivotal role in relation extraction. Just as its name, it offers the "knowledge" for the relation extraction. The section provides an overview of knowledge base and the fundamental preliminaries for relation extraction.

2.2.1 Concept of Knowledge Base

Knowledge base is an abstract concept. It is a universal database used to store collection of represented knowledge from specific domains in the form of logic statements. Currently, there are many implementations of knowledge base. For example, one implementation of knowledge base, Freebase, represents fact using the first-logic form, "*<subject> <predicate> <object>*", to define the entities and the relations between them.

Some implementations of knowledge bases, like Freebase, are constructed by communities manually. And others are extracted automatically from knowledge source. For instance, YAGO is generally automatically extracted from Wikipedia, WordNet and GeoNames.

Knowledge base can be regarded as the input and output source of relation extraction task. Relation extraction use the knowledge representation from the knowledge base and the knowledge representation relation extraction task extracted from text or corpus can also be used to enrich the number of facts in the knowledge base.

2.2.2 Ontology

Ontology is originally a philosophy concept which means the nature of beings, their categories and relations among the categories. In computer science, Tom Gruber defined it first as:

An ontology is a specification of a conceptualization. [Guber, 1993]

This definition is difficult to understand. Let's explain it in detail. In knowledge base, an ontology is the object model with entities in specific domains and the relations hold among them. So the ontology can define the entities, the classes(types) of entities and the relations. This property of ontology gives it the ability to reason about the relationships among entities and build corresponding knowledge graph. There are many representation format which can be used to describe ontology. In the early, people like to use ontology language like Cycl and KIF. Currently, the most popular data model is Resource Description Framework(RDF). Data in Freebase and YAGO database are all stored in RDF format.

2.2.2.1 Classes

"Classes"(also called types, defined by different communities, for example, Freebase use "types" while YAGO use "classes"), are abstract groups which can be used to classify individuals. In Freebase, it defines "*A type denotes an IS A relationship about a Topic.*" For example, if we define *Bill Gates* topic in *Person* topic, we can say *Bill Gates IS A person*. The type system is usually hierarchical. In Freebase, all the topics are the subtypes of */common/topic*. In YAGO, every entity is an instance of one or

```

<http://rdf.freebase.com/ns/g.11vjz1ynm> <http://rdf.freebase.com/ns/measurement_unit.dated_percentage.
date> "2001-02"^^<http://www.w3.org/2001/XMLSchema#gYearMonth> .
<http://rdf.freebase.com/ns/g.11vjz1ynm> <http://rdf.freebase.com/ns/measurement_unit.dated_percentage.
source> <http://rdf.freebase.com/ns/g.11x1gf2m6> .
<http://rdf.freebase.com/ns/g.11vjz1ynm> <http://rdf.freebase.com/ns/type.object.type> <http://rdf.
freebase.com/ns/measurement_unit.dated_percentage> .
<http://rdf.freebase.com/ns/g.11vjz1ynm> <http://rdf.freebase.com/ns/measurement_unit.dated_percentage.
rate> 4.5 .
<http://rdf.freebase.com/ns/g.11vjz1ynm> <http://www.w3.org/1999/02/22-rdf-syntax-ns#type> <http://rdf.
freebase.com/ns/measurement_unit.dated_percentage> .

```

Figure 2.1: A snippet of freebase dump.

multiple classes. Every subclass, except root class, belongs to one or multiple classes as well.

2.2.2.2 Named Entity

The term "Named Entity" comes from the Sixth Message Understanding Conference(MUC-6),1996[Grishman and Sundheim, 1996]. For convenience, we call it "entity" in the next. They are the information units with entity types like names of person, location or organization and numeric values like time, date ,money[Nadeau and Sekine, 2007]. Of course, there are more types. For instance, in our project, we extract types from Freebase which is a knowledge base hold by Google. As concluded, there are 26507 types of Freebase in August, 2015. Usually, the task to detect the entity in text is called "Named Entity Recognition(NER)". It is also a subtask of IE.

2.2.2.3 Named Entity Mention

The "Named Entity Mention" is the mention in the text, reference of which is a "Named Entity". Similarly, we call it "mention" in short. For example, the name "Bill Gates" has several forms like "Bill" or "Gates" which can all possibly point to one entity "Bill Gates". Linking mentions with entities needs a knowledge base like Freebase. And because of difference of the context around the mention, the link might be different. We need to know how the mentions link to entities without ambiguity. So this derived a new task named "Named Entity Disambiguation(NED)". In our project, we also used "Named Entity Disambiguation" to transform our data from YAGO format from Freebase format.

2.2.2.4 Relation

A "Relation" is "defined in the form of a tuple $t = (e_1, e_2, e_3, \dots, e_n)$ where e_i are entities in a relation r within document D "bach2007review. The relation is usually binary, which means the relation only exists between two entities. But it also can be higher-order. Two examples are presented below:

- I. Jenny and her husband Richard spoiled themselves on a mutual day off work by having dinner at Les Bistronomes. After that they went directly back to their

hotel Hyatt.

- II. At codons 12, the occurrence of point mutations from G to T were observed[Bach and Badaskar, 2007].

The expected outcomes for the first example sentence would be : marriedTo(Jenny, Richard), dineIn(Jenny, Les Bistronomes), dineIn(Richard, Les Bistronomes), visitHotel(Jenny, Hotel Hyatt), visitHotel(Richard, Hotel Hyatt).

The expected outcomes for the second example sentence would be : pointMutation(codon, 12, G, T).

It can be seen that in the first example, all the relations are binary while in the second example there is an 4-ary relation. Here in this project, we only focus on binary relations, which means we will only annotate corpus with the forms like marriedTo(Jenny, Richard) and dineIn(Jenny, Les Bistronomes) but not pointMutation(codon, 12, G, T).

2.2.2.5 Resource Description Framework

"Resource Description Framework" was originally created in 1999 on the top of Extensible Markup Language (XML) as a data model for meta data. Although there are many implementations, the model, in general, is in the *<subject> <predicate> <object>* triple form. *<subject>* denotes the resources and *<predicate>* denotes the relationship between *<subject>* and *<object>*. For example, the concept "*The man is a billionaire*". If we use RDF to represent it, *<subject>* denotes "*man*", *<predicate>* denotes relationship "*is-A*" and *<object>* denotes "*billionaire*".

As noticed, with RDF, it is pretty easy for RDF to represent an ontology.

2.2.3 Related Work

2.2.3.1 Freebase and YAGO

Freebase and YAGO are two well-known implementations of knowledge base.

Freebase are extracted from Wikipedia and manually updated by communities while YAGO are automatically extracted from Wikipedia, WordNet and GeoNames. They both use RDF format to store data. Currently, Freebase has more than 23 million entities and YAGO has more than 10 million. There are cross sections in these entities because some part of them are all derived from Wikipedia. In our project, we utilized this cross section to map the entities from YAGO to Freebase.

2.2.3.2 Storage Management

For later use and the consistency of data, it should be stored in a proper database. Unlike the other kind of data, RDF data is usually stored in triple store instead of traditional relational database. Some triple store like Apache Jena is built on top of

relational database. It stores data in three columns, one for "subject", one for "predicate" and one for "object". Jena use a query language named "SPARQL", which is a RDF query language similar to SQL, to query data. Other triple store are built on their own system. For instance, Freebase is built by Metaweb using their own graph model.

2.3 Concepts of Relation Extraction

Relation extraction, as a subtask of IE, is to turn the unstructured data to structured data. However compared with other subtasks of information extraction, relation retraction focus on the relations between entities. Basically, relation extraction is a task to automatically detect and classify semantic relations between entities in text or document.

In relation extraction task, there are two important elements, the input of the task and approaches to get the detection and classification functions. The input of the annotation task, as introduced above, is classes, named entity, named entity mention and relations. And the source of input is knowledge base. As mentioned above, in our project we use Freebase and YAGO to get the knowledge representation.

Currently there are four approaches to build the annotation model, supervised approaches, unsupervised approaches, semi-supervised approaches, distant supervision. They will be introduced in section 2.4.

2.4 Approaches

In this section, we will introduce the four approaches mentioned above. Section 2.4.1 will introduce supervised approaches. Unsupervised approaches and semi-supervised approaches will be seen in section 2.4.2.1. In section 2.4.3, we will introduce distant supervision approaches.

2.4.1 Supervised Approaches

2.4.1.1 Concept

The relation extraction can be seen as a classification task. The classifier can be trained using features extracted from the sentence with two entities and decide whether the entities are in relations or not.

$$C(F(S)) = \begin{cases} 0 \\ 1 \\ 2 \\ \dots \end{cases}$$

S is the sentence that contains entities, $F(\cdot)$ is the function to extract a set of features from sentence S involving the relation extraction tasks. $C(\cdot)$ is the classifier function to map the feature functions to different labels corresponding to relations.

The classifiers are usually constructed with discriminative classifiers like Softmax Regression, Support Vector Machine (SVM) or Neural Network.

2.4.1.2 Discussion

In most cases, supervised approaches can achieve high performance. However there are some serious limitations as well.

1. The man labelled data is labor-consuming, resulting that the scalability of supervised approaches is not quite well. This is also the main reason we want to build a system that can handle the relation extraction task with limited data.
2. It is difficult to extend the new entity-relation types for needs of labelled data[Bach and Badaskar, 2007].

2.4.1.3 Evaluation

Supervised approaches use Precision , Recall, F-measure and Accuracy to evaluate system performance.

$$\begin{aligned}
 \text{Precision} &= \frac{\text{Corrected extracted relations}}{\text{Total number of extracted relations}} \\
 \text{Recall} &= \frac{\text{Corrected extracted relations}}{\text{Total number of relations in dataset}} \\
 \text{F-measure} &= 2 \cdot \frac{\text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}}
 \end{aligned} \tag{2.1}$$

And the evaluation can also be categorized as Micro- and Macro-average of Precision, Recall and F-Measure. Macro-average gives equal weight to each relation class, while Micro-average gives equal weight to each per-relation classification decision[Van Asch, 2013].

For example, if there are two relations r_1 and r_2 .

$$\begin{aligned}
 \text{Micro-Precision} &= \frac{\text{Corrected extracted relation } r_1+r_2}{\text{Total number of extracted relations } r_1+r_2} \\
 \text{Macro-Precision} &= \left(\frac{\text{Corrected extracted relation } r_1}{\text{Total number of extracted relations } r_1} + \frac{\text{Corrected extracted relation } r_2}{\text{Total number of extracted relations } r_2} \right) / 2
 \end{aligned} \tag{2.2}$$

It can be seen Macro-precision simply divides summation of precision of r_1 and precision of r_2 by two while Micro-precision sum precision of r_1 and r_2 with different weights corresponding the number of their data points.

One thing should be noted that if the relation extraction task involves more than two relations, the micro-precision, recall and F-measure are the same thing. They are

called the "Accuracy". The accuracy is:

$$\text{Accuracy} = \frac{\text{Corrected extracted relations}}{\text{Total number of all data points}} \quad (2.3)$$

2.4.2 Unsupervised Approaches and Semi-supervised Approaches

Since these two approaches have a lot in common, we will introduce them together.

2.4.2.1 Unsupervised Approaches

Sometimes we have no training data and relations. In this situation, unsupervised approaches can be applied to extract new relations. There are various ways of unsupervised relation extraction. Some use clustering algorithms. Some use regular expression patterns to extract new relations. Here we present a method as a typical example described in paper [Banko et al., 2007].

This paper proposed a method named "TextRunner". It has three important modules, "Self-Supervised Learner", "Single-Pass Extractor", "Redundancy-Based Assessor".

- I. The Self-Supervised Learner firstly parse the sentence in corpus and then label the entity pairs (e_i, e_j) as positive if the parse structure between e_i and e_j meets the certain constraints. This procedure will output a classifier that labels candidate extraction as "trustworthy" or not.
- II. Single-Pass Extractor extracts all possible relations and send them to classifier. In this step, only positive ones are retained.
- III. Redundancy-Based Assessor is used to rank retained relations based on a probabilistic model of redundancy in text.

It can be seen that in this method, new relations in corpus are extracted without any hand-tagged training data and pre-defined relations. All the relations are extracted automatically.

2.4.2.2 Semi-supervised Approaches

Semi-supervised approach is the combination of supervised approach and unsupervised approach.

In some cases, we only have few training relation tuples mentioned in 2.2.2.4. So tuples can be seeds and expand them to find new relations which have similar patterns with these seeds. The pattern can be generated by regular expressions or the NLP parse structure features like context words or the POS tag. And clusters can be applied here to group similar patterns. There are several well-known algorithms such as Bootstrapping[Hearst, 1992] and the algorithms based on Bootstrapping like Dual Iterative Pattern Relation Extraction(DIPRE)[Brin, 1999] and Snowball[Agichtein and Gravano, 2000].

As a typical algorithm, DIPRE will be an example algorithm to explain semi-supervised algorithm.

Algorithm 1 DIPRE[Brin, 1999]

- 1: Start with a small sample tuples of target relations R' .
 - 2: Find all occurrences of R' in document.
 - 3: Generate patterns P based on the occurrences.
 - 4: Apply patterns to data and get more relation tuples.
 - 5: When R' is large enough, return. Else, go back to step 2.
-

2.4.2.3 Discussion

Unsupervised and semi-supervised approaches are in fact the most popular relation system in industry currently. Because their scalability is impressive. Compared with supervised approaches, they don't need much hand-tagged training data that is hard to acquire. However they also have some shortages.

1. For DIPRE, the pattern is difficult to be matched because it use regular expressions as patterns. So in many cases, even one punctuation can fail one match.
2. TextRunner and Snowball have no such a problem, but they highly rely on the NER and dependency so it will be difficult for them to extend new entities and relations[Bach and Badaskar, 2007].
3. The three of them have one common limitation which is that they could not find the relations across multiple sentences but supervised approaches could.

2.4.2.4 Evaluation

For unsupervised and semi-supervised relation extraction, we can't not compute the precision and recall. We don't know which relation is correct and which relation is missing because relations are new. However the precision could be estimated only if we draw samples randomly from the result and check precision manually.

$$\text{Precision} = \frac{\text{Corrected extracted relations(estimated)}}{\text{Total number of extracted relations}} \quad (2.4)$$

We can still not compute the recall value because the missing ones can't be estimated. The F-measure, of course, can't be computed.

Rand Index Rand index can be used to evaluate the similarity between two clusters. So if we have part of the data labelled, we can use Rand Index to measure how well our clusters fit the ground truth.

Given a data set of n elements $S = o_1, o_2, \dots, o_n$ and two partitions of S . $X = X_1, X_2, \dots, X_r$ is a partition of r subsets. $Y = Y_1, Y_2, \dots, Y_s$ is a partition of s subsets. Then define:

a is the number of data points in the same set in X and in the same set in Y

b , the number of data points in different set in X and in different set in Y

Rand index R is:

$$R = \frac{a + b}{\binom{n}{2}} \quad (2.5)$$

2.4.3 Distant Supervision Approach

2.4.3.1 Concept

Distant Supervision Approach is the combination of bootstrapping and the supervised approach. It, instead of using few samples as seeds, use knowledge base to acquire a large set of seeds. Then it use those seeds to create features and use supervised method to train a classifier. Here we introduce the method in [Mintz et al., 2009].

In [Mintz et al., 2009], the author express the intuition of his distant supervision approach is "*any sentence that contains a pair of entities that participate in a known Freebase relation is likely to express that relation in some way*".

We can see this Distant Supervision method highly relies on Freebase. In training phase, entities are detected by Named Entity Recognition(NER). Then if one sentence contains two entities and the entities are all instances in Freebase, the feature will be extracted from sentence and added to feature vectors. Then this algorithm will train an logistic regression. In testing phase, it relies on a logistic regression classifier to predict a relation for every entity pair based on the feature vectors acquired in training phase. The features adopted in this paper are lexical features including POS tag, a sequence words between entities, syntactic features including dependency path between two entities and the named entity tag.

2.4.3.2 Discussion

Distant Supervision Approach has both features of supervised and unsupervised approaches. It requires a lot of features and manually created knowledge similarly with supervised approaches and use very large amount of unlabelled data like unsupervised approaches. However, it doesn't need to iteratively expand patterns and it is not sensitive to genre issues in training corpus[Jurafsky, 2014].

2.4.3.3 Evaluation

In the paper *Distant supervision for relation extraction without labelled data*, the author offered two evaluation ways, Held-out evaluation and Human evaluation[Mintz et al., 2009]. Held-out evaluation means holding out part of Freebase relation instance and

compare the newly found relations with them. Human evaluation simply means letting human check if the relation exists in two entities. The latter one is much more expensive meanwhile it is more accurate.

2.4.4 Hand-crafted Features of Relation Extraction

As we mentioned above, features are the input of learning models. There are usually two kinds of features, hand-crafted features and distributed representation features. Hand-crafted features are features extracted from text with expert knowledge. They are usually in comparison with distributed representation features, which are learned with neural networks. Here, we only introduce some typical hand-crafted features and leave the introduction of distributed representation features to the next chapter.

2.4.4.1 Part of Speech Tag

Part of the speech is the tag which can mark the categories of the words. For example, in sentence *He is a man*. Word "He" is a personal pronoun and its pos tag is "PRP". "is" is a verb, 3rd person singular present. So its pos tag is "VBZ".

2.4.4.2 Named Entity Tag

As introduced in 2.2.2.2, named entity has types which can be regarded as features in relation extraction task.

2.4.4.3 Context Words

Context words are the words around the mentions.

For instance, in sentence *"Jenny and her husband Richard spoiled themselves on a mutual day off work by having dinner at Les Bistronomes. After that they went directly back to their hotel Hyatt"*. In this sentence, *Jenny* and *Richard* are entities. If the size of context window is two, we can extract two words preceding and following entities as context words features. Here they are six words *and, her, her, husband, spoiled, themselves*.

2.4.4.4 Dependency Path

Dependency path is the path between words in the dependency tree of the sentence. For example, as in figure 2.2, the path between "He" and "man" is "He" <- "man" and the dependency tag between "He" and "man" is "nsubj". Both words and tags on the path can be features of relation extraction task.

2.5 Summary

In this chapter, we introduced the rough idea about relation extraction from a broader perspective. The concepts of information extraction were presented. We also intro-

²<http://nlp.stanford.edu:8080/corenlp/process>

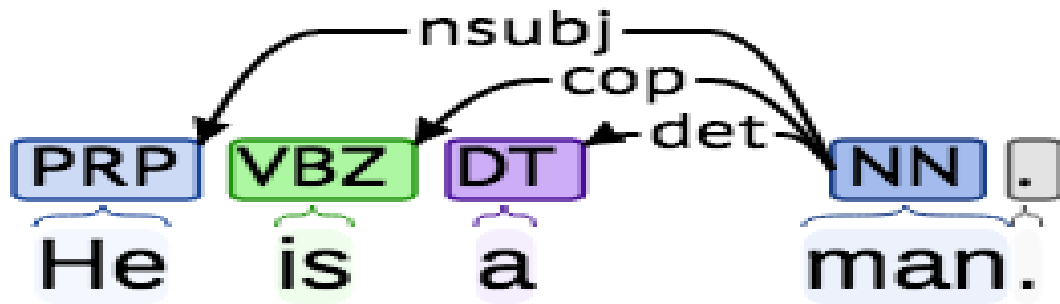


Figure 2.2: A dependency tree of a sentence generated by Stanford Core NLP online demo².

duced knowledge base, the input source of relation extraction. At last, four different approaches, along with the features in relation extraction task, to build models for relation extraction tasks are also described.

Text Representation for Relation Extraction Learning

In this chapter, text representation, as a key concept in improving the performance of our baseline relation extraction system will be introduced. Because several neural network models are pretty popular in training text representation, in section 3.1, some key points in neural network system will be explained. We will also introduce Long-short term memory(LSTM), one kind of neural network model. Then in section 3.2, the word representation including the one-hot presentation of word and distributed representation of word will be discussed. Followed is the introduction for phrase representation and sentence representation. And how phrase and sentence representation are trained by LSTM will be explained as well.

3.1 Neural Network

Artificial neural networks are a family of machine learning models used to estimate functions. In this chapter, we will introduce from a single neuron to the architecture of neural network. Then in 3.1.3, how the information will be encoded in neural work will be stated. After, training approach in a neural network will be explained. At last, we will introduce some important techniques in training neural network like pre-training and fine-tuning.

3.1.1 Artificial Neuron

Neural networks are inspired by biological neural network. Thus similarly with biological neural networks, they are composite functions composed of many single artificial neurons. An artificial neuron (also called function node) is a computation unit which can take several inputs and map them to output, $h_{W,b}(x) = f(z) = f(\sum_{i=1}^3 W_i x_i + b)$ where $f : \mathbb{R} \mapsto \mathbb{R}$, x_i is the input, W_i is the weight on the edge, b as the bias and $z = W_i x_i + b$ [Ng et al., 2012].

There are many forms of z . For example ,sometimes bias is added in z and sometimes bias is not necessary.

The function f in this formula is called the activation function. There are many

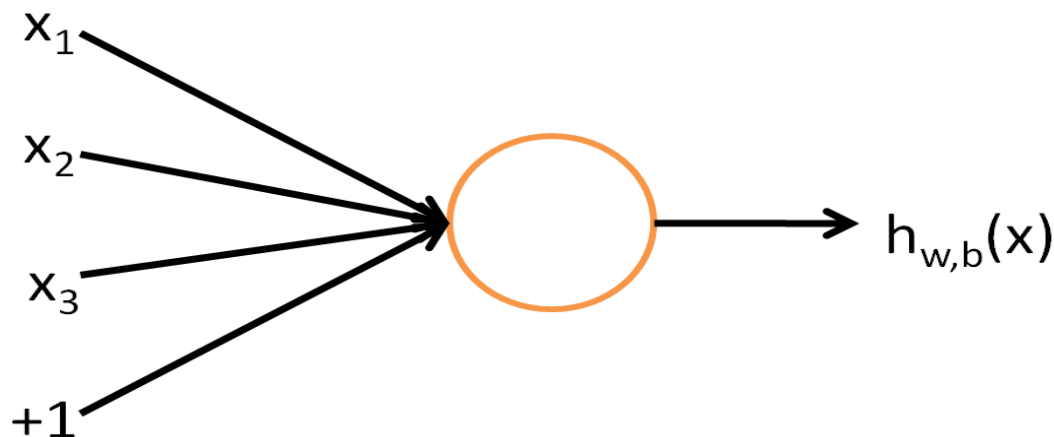


Figure 3.1: This is a single neuron¹.

choices of activation as well. For instance, one people often use is sigmoid function:

$$f(z) = \frac{1}{1 + \exp(-z)} \quad (3.1)$$

The characteristic of sigmoid is that it can map input to a value to $[0, 1]$, which can be used to estimate the probability. So it is often applied in logistic regression as well. The other activations include tanh functions, rectify functions or just linear functions. Depending on different situations, we choose different activation functions.

3.1.2 Neural Network Architecture

Not only the activation functions, the structure of the neural network also varies. Usually the structure can be regarded as a tree. Different tree structures can create different neural network model. Currently, the most simple and common one is the feed-forward neural network which means the tree of the neural network has no directed cycles. If having enough hidden units, two layers neural network is capable of approximate any continuous functions to an arbitrary accuracy[Webers, 2015].

As it can be seen in figure 3.2(a), this is a simple feed-forward neural network model composed of 9 neuron units. There are three layers. The layer leftmost is called input layer, the layer in the mid is called hidden layer and the layer rightmost is called the output layer.

There are other architectures like recurrent neural network as well. On the contrary with feed-forward neural network, the tree of neural network has directed cycles. Recurrent neural network derived a lot of different kinds of neural networks. As in the figure 3.2(b), it is an Elman and Jordan networks, also known as "simple recurrent

¹<http://deeplearning.stanford.edu/wiki/images/3/3d/SingleNeuron.png>

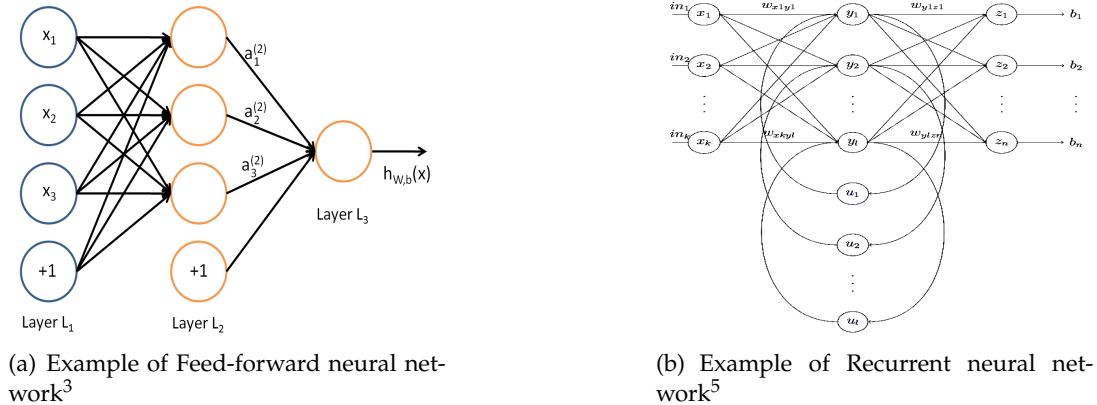


Figure 3.2: Neural Network Architecture

networks" (SRN). And one recurrent neural network, Long short-term memory and its variants, play a pivotal role in learning text representation.

3.1.2.1 Recurrent Neural Network

Recurrent neural network(RNN), as I mentioned, in 3.1.2 is the neural network with directed cycles. RNN has quite good performance on modelling sequence data because it takes the advantage of its ability of *sharing parameter* across different parts of the model.

For example, as the figure illustrated in 3.3, $s_t = f_\theta(s_{t-1}, x_t)$. The state s_t now contains all the past sequence. The same parameters are shared over all the sequence. Since the parameter is shared over the sequence, we don't need to set different parameter for different part of the model. So the model can be generalized to different form like the length of sequence [Bengio et al., 2015].

Similar with feed forward neural network, any function computable by a Turing machine can be computed by a recurrent network of a finite size[Bengio et al., 2015].

3.1.2.2 Gradient Vanishing

As noted above, RNN is capable of making model generalize to different sequence forms. As our sentences in text are not with fixed length. Recurrent neural network has a good performance on dealing with this situation. However there is a serious problem named "**gradient vanishing**" which will influence training result of sentence representation. For example, still considering the figure 3.3, let's say:

³<http://deeplearning.stanford.edu/wiki/images/9/99/Network331.png>

⁵https://en.wikipedia.org/wiki/Recurrent_neural_network/media/File:Elman_srnn.png

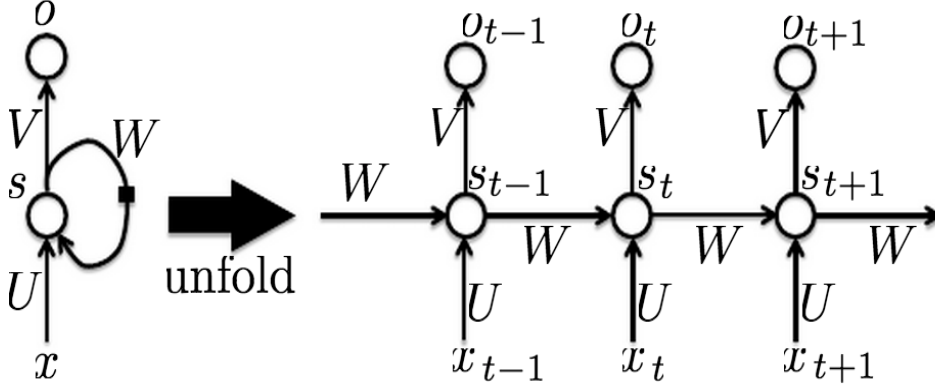


Figure 3.3: Left: Input processing part of a recurrent neural network. Right: Same seen but an unfolded graph[Bengio et al., 2015].

$$\begin{aligned}
 s_t &= \theta \phi(s_{t-1}) + \theta_x x_t \\
 o_t &= \theta_o \phi(h_t) \\
 \frac{\partial E}{\partial \theta} &= \sum_{t=1}^S \frac{\partial E_t}{\partial \theta}
 \end{aligned} \tag{3.2}$$

Then in the back propagation, the chain rule is like: $\frac{\partial E}{\partial \theta} = \sum_{k=1}^t \frac{\partial E_t}{\partial o_t} \frac{\partial o_t}{\partial \theta_k} \frac{\partial \theta_k}{\partial \theta}$, and $\frac{\partial o_t}{\partial \theta_k} = \prod_{k+1}^t \frac{\partial o_i}{\partial o_{i-1}} = \prod_{k+1}^t \theta^T \text{diag} \phi'(o_{i-1}) \leq \gamma_\theta \cdot \gamma_\phi$ [de Freitas, 2015]. So if $\gamma_\theta \cdot \gamma_\phi$ is less than 1, after several transitions of state, the gradient will become close zero. Or if $\gamma_\theta \cdot \gamma_\phi$ is greater than 1, the gradient will become exponentially large. This leads to the gradient descent meaningless at some state s_i . After several time steps, parameters will not be updated or updated with meaningless numbers. However, to represent a sentence, it is better to have memory of the sentence. Thus, to solve the gradient vanishing, one way is to incrementally add past state to current state and the equation about the state become $s_t = 1 \cdot \phi(s_{t-1}) + \theta_x x_t$. As we can see, the gradient vanishing problem is solved because every time the derivative equals one. However, this also brings a problem. We just simply incrementally add the last state to current state. But a good memory should not remember everything. Here an alternative model named "**Long-short term memory**" could solve this problem.

3.1.2.3 Long-short Term Memory

Long-short term memory(LSTM) is a recurrent neural network as well. LSTM has three gates,input gate, output gate and a forget gate.

Specifically, LSTM is composed with cells and the inner structure of cell is like figure 3.4. Traditional LSTM is with chain structure although there are other novel struc-

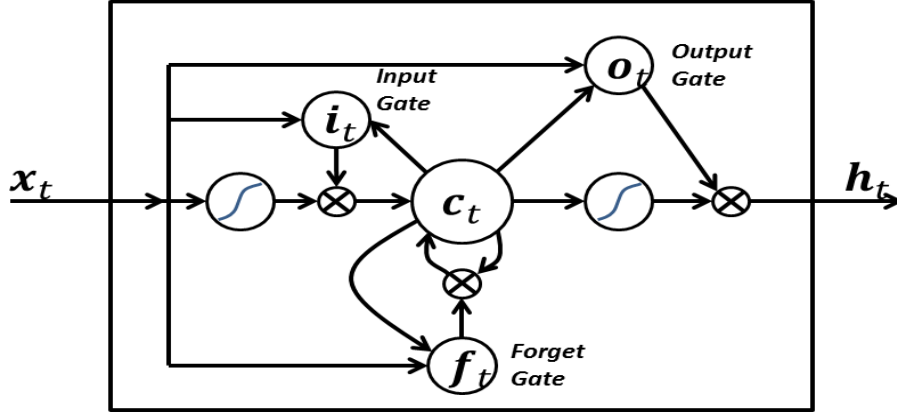


Figure 3.4: A simple LSTM cell which has input, output and forget gate[Hochreiter and Schmidhuber, 1997].

tures currently. Its transition functions are as follows[Hochreiter and Schmidhuber, 1997]:

$$\begin{aligned}
 i_t &= \sigma(W^{(i)}x_t + U^{(i)}h_{t-1} + b^{(i)}) \\
 f_t &= \sigma(W^{(f)}x_t + U^{(f)}h_{t-1} + b^{(f)}) \\
 o_t &= \sigma(W^{(o)}x_t + U^{(o)}h_{t-1} + b^{(o)}) \\
 u_t &= \tanh(W^{(u)}x_t + U^{(u)}h_{t-1} + b^{(u)}) \\
 c_t &= i_t \odot u_t + f_t \odot c_{t-1} \\
 h_t &= o_t \odot \tanh(c_t)
 \end{aligned} \tag{3.3}$$

where x_t is the input at current time step, σ is the sigmoid function, $\odot$ is the element-wise multiplication and W is the model parameters. The input gate, i_t , forget gate, f_t and output gate, o_t are in range $[0,1]$. Every time there is new data and past state value flowing into the cell and this three gates decide which one could pass or not. Another important thing is that output of the gate is learned by data itself. It is the data itself which decides how much supplement should be added in the flow. After this improvement, LSTM can choose to how well the last state in in the flow can influence the future state instead of simply incrementing states. Meanwhile it is able to avoid the gradient vanishing problem. This is more like a modern computer which is capable of writing, reading and erasing memory.

3.1.3 Neural Network Representation for Conceptual Knowledge

3.1.3.1 Local Representation

In neural network, the most simple way to represent knowledge or concept is to let one neuron to represent one concept. For example, one output neuron is able to represent one cluster or one class. There are several advantages of local representation as [Hinton, 2011] stated. It is easy to understand, can be coded by hand and easy to associate with other representation. However this model is inefficient because other neurons are not representing anything. And for the objects which have many properties or relations to each other, local representation has difficulty representing them.

3.1.3.2 Distributed Representation

To concur the limitations of local representations, the concept of distributed representation was imported. The definition of distributed representation is:

Definition 3.1.1. Distributed representation is a many-to-many relationship between two types of representation (such as concepts and neurons)[Hinton, 2011].

It means that one neuron can represent multiple concepts and one concept can be represented by multiple neurons. Although using this kind of representation, one neuron can not have an accurate representation of each concept, the combination of several representations can be much more powerful than one local neuron using local representation. In the 3.2 and 3.3.2.1, the application of distributed representation will be explained in detail.

3.1.4 Neural Network Model Training

There are two phases during training: forward propagation and backward propagation. The two phases with loss function drive the model towards our interest. In this section, we use a feed-forward neural network as an example. And we will talk about the forward propagation and loss function, then the backward propagation. In the following section, we will talk about how three components together train a complete model.

3.1.4.1 Forward Propagation

In this section, forward propagation will be stated first.

As introduced, the neural network is a composite of single neurons. So, in the neural network, except for the neurons in the input layer, every single neuron's input becomes the output of another neuron in the last layer. For example, in figure 3.2(a), $a_1^{(2)} = f(W_{11}^{(1)}x_1 + W_{12}^{(1)}x_2 + W_{13}^{(1)}x_3 + b_1^{(1)})$ where $a_1^{(2)}$ denote the activation (output value) of unit 1 in layer 2, f denotes the activation function, $W_{ij}^{(1)}$ denotes the weight

which associates with the connection from unit i in layer 1 to unit j in layer 2, x_i denotes the input in unit i , layer 1 [Ng et al., 2012]. Following the same rule and computing layer by layer, we can get other output value a_2, a_3 as well. At last, after all the outputs are propagated to the output layer, we can get the final output. For example, in the figure 3.2(a), since it is a pretty simple structure with only one output node, the output is like: $h_{W,b}(x) = a_1^{(3)} = f(W_{11}^{(2)} a_1^{(2)} + W_{12}^{(2)} a_2^{(2)} + W_{13}^{(2)} a_3^{(2)} + b_1^{(2)})$ [Ng et al., 2012].

This procedure of mapping input representation to output representation is called forward propagation.

3.1.4.2 Loss Function

After forward propagation, there should be criteria to measure how well this output fits our interest. So, we need a criteria function named loss function.

The loss function is a concept from decision theory. As the definition from [Pun, 2014]:

Definition 3.1.2. The loss function, $L : \Theta \times A \rightarrow R$ represents the loss when an action a is employed and Θ turns out to be the true nature of state.

There are many kinds of loss functions. For example, a commonly used loss functions is squared error loss function. $L(\theta, a) = \frac{1}{2}(\theta - a)^2$ where θ is the ground truth and a is the estimated value of θ . In a neural network, a is the output value computed by forward propagation. This loss function is usually used in linear regression. Another commonly used loss function is logistic loss function. $L(\theta, a) = -\sum_{i=1}^N \{\theta_n \ln a_i + (1 - a_n) \ln(1 - \theta_n)\}$ where θ is the ground truth and a is the output value computed by neural network. In fact, a single neuron with sigmoid activation function and logistic loss function is the **logistic regression** model.

The ground truth can be manually defined by human or can be extracted from data itself. This also defines if the neural network is supervised or not. For instance, one kind of neural networks, Auto-encoder, use the input data as the ground truth. So the loss function is the error measure between the output value computed by neural network and the input value itself.

3.1.4.3 Backward Propagation

To minimize the loss, a common optimization method is gradient descent. Here a dynamic-programming method named **Backward Propagation** will be presented.

Backward propagation is a method to compute the gradient based on chain rule. There are several steps for backward propagation. First we define $a_i^{(l)}$ is the output of node i in layer l as we showed in 3.1.1. Then we define a "error term" $\delta_i^{(l)}$ to measure how much a node is responsible for the error to the final output. Then weight on each edge is defined as $W_{ji}^{(l)}$. Then $z_i^{(l)}$ is the weighted sum of input at node i

in layer l and $f(z^{(l)})$ is the activation function where input is $z^{(l)}$ and output is $a_i^{(l)}$. And $L(\theta, a)$ is defined as loss function as noted in 3.1.4.2. Then here are the steps of backward propagation:

- I. First calculate the partial derivative of the loss function, which is the δ of output nodes.

$$\delta_i^{(n_l)} = \frac{\partial}{\partial z_i^{(n_l)}} L(\theta, a) \quad (3.4)$$

- II. For hidden layers, for each node i in layer l , we calculate the error measure δ :

$$\delta_i^{(l)} = \left(\sum_{j=1}^{s_{l+1}} W_{ji}^{(l)} \delta_j^{(l+1)} \right) f'(z_i^{(l)}) \quad (3.5)$$

- III. Calculate the the gradient using the δ :

$$\frac{\partial L(\theta, a)}{\partial W_{ji}^{(l)}} = a_j^{(l)} \delta_i^{(l+1)} \quad (3.6)$$

From this procedure, we get gradients for every weight in the neural network.

3.1.4.4 Model Parameters Learning

In sum, the procedure of training a neural network is to do the forward propagation first. Then use loss function to measure the error. After error is back propagated, we can get the gradients for every model parameters W . At last, the parameters can be updated like:

$$W_{ji}^{(l)} = W_{ji}^{(l)} - \alpha a_j^{(l)} \delta_i^{(l+1)} \quad (3.7)$$

where α is the learning rate. And the model is adjusted towards our learning goal. Usually when learning model parameters W , there are some techniques which can make the performance of the model better. We will introduce them as follows.

Regularization When updating parameters W , the regularization can be added. It is a method to prevent overfitting by penalizing models with additional parameter values.

For example, L1 regularization is as follows:

$$W_{ji}^{(l)} = W_{ji}^{(l)} - \alpha \frac{\partial L(W)}{\partial W_{ji}^{(l)}} - \alpha \lambda \text{sign}(W_{ji}^{(l)}) \quad (3.8)$$

It adds a penalty when updating model parameters.

The L2 regularization will modify the loss function to:

$$L(\hat{W}) = L(W) + \frac{\lambda}{2} W'W \quad (3.9)$$

Then when updating parameters, the gradient will become:

$$W_{ji}^{(l)} = W_{ji}^{(l)} - \alpha \frac{\partial L(W)}{\partial W_{ji}^{(l)}} - \alpha \lambda W_{ji}^{(l)} \quad (3.10)$$

Usually, λ is an important hyperparameter for our model. We often do **Hyperparameters Tuning** to this parameter before we officially train our model.

Another common regularization usually adopted by Neural Network is called **Early Stopping**. Early stopping is to test the performance of the model on the validation set after every iteration. If the performance begin to decrease instead of increasing, the training will stop.

AdaGrad For the learning rate α , it can be a fixed number, or it can be adjusted. A common method to adjust α is named **AdaGrad**[Duchi et al., 2011].

AdaGrad adjusts the learning rate component-wise based on the historical gradient. We denote the sum of squares of historical gradient as G , and the adjusted α is α_a . A simple implementation is as follows:

$$\alpha_a = \frac{\alpha}{\sqrt{G}} \quad (3.11)$$

It can be seen every time when updating parameters W , α is modified by the historical gradient. Empirically, AdaGrad can make convergence faster and more reliable.

3.1.5 Unsupervised Pre-training and Supervised Fine-tuning

Unsupervised Pre-training means before doing **Supervised Fine-tuning**, we pre-trained an input representation for the following supervised task. Usually it can help improve the performance of the following supervised task because it has trained a representation as an input instead of random initialization. We can consider that random initialization almost gives zero initial information for the training the model. However as explained in [Erhan et al., 2010], there are two possibilities for the reason why pre-training helps training the neural network model. One is that pre-training can put the parameter in a proper range for further supervised training. Another one is that pre-training can initialize the model to a point in parameter space which can make the optimization process more effective. It can also be regarded as a kind of regularization because pre-training restricts parameters to particular regions[Erhan et al., 2010].

However the training strategy for pre-training is usually greedy but not based on the global interest. Thus the representation is only sub-optimal[Bengio et al., 2015]. So this is the reason that, after pre-training, there must be a phase named **Supervised Fine-tuning**. Fine-tuning is to train a model to fit the global interest.

After pre-training and fine-tuning, the model's performance is empirically better than the methods using only supervised training.

3.2 Word Representation

We introduced local representation and distributed representation in 3.1.3. Here their application on words will be introduced respectively.

3.2.1 One-hot Word Representation

Conventionally, supervised lexicalized NLP approaches take a word and convert it to a symbolic ID, which is then transformed into a feature vector using a one-hot representation[Turian et al., 2010].

In relation extraction one of the most common features is the context words of entities. For example, in the sentence *"Jenny and her husband Richard spoiled themselves on a mutual day off work by having dinner at Les Bistronomes. After that they went directly back to their hotel Hyatt."*, we can extract two proceeding words and following words around the entities. Here for relation `dineIn(Richard, Les Bistronomes)` the context words are "her", "husband", "spoiled", "themselves" around "Richard" and "dinner", "at" around "Les Bistronomes"(because there are no words after "Les Bistronomes", so there are only two words around "Les Bistronomes").

Then we can transform it to one-hot word representation. One-hot representation is a kind of local representation. It encodes concept or knowledge using 1 or 0. The one-hot representation is like:

her	(1, 0, 0, 0, 0, 0)
husband	(0, 1, 0, 0, 0, 0)
spoiled	(0, 0, 1, 0, 0, 0)
themselves	(0, 0, 0, 1, 0, 0)
dinner	(0, 0, 0, 0, 1, 0)
at	(0, 0, 0, 0, 0, 1)

It can be seen that all the words are converted to vector-like features with only 1 and 0.

However, this method to represent word has some serious limitations:

- I. The one-hot representation is usually high-dimensional which is computationally expensive for some specific algorithms
- II. This kind of representations do not generalize well. For example, it is not capable of representing the relations between words in vector space. Every word in vector space is equal to each other.

Because of these limitations, under certain situations, distributed representation of words can be used to improve the performance of relation extraction task.

3.2.2 Distributed Representation of Word

Distributed representation of word is a kind of representations of words which can help improve the performance of natural language processing task by grouping similar words in the form of word vector.

For example, the distance between different words follow the specific rules in geometry space:

$$\begin{aligned} W(\text{"woman"}) - W(\text{"man"}) &\simeq W(\text{"aunt"}) - W(\text{"uncle"}) \\ W(\text{"woman"}) - W(\text{"man"}) &\simeq W(\text{"queen"}) - W(\text{"king"}) \end{aligned}$$

We can see the distance between word *woman* and word *man* is very close to the distance between *aunt* and *uncle*. This appearance displays that the distributed representation of words learned with particular training criteria owns the ability to group words. The technique mapping words to distributed representation in the form of the vector is also called **Word Embedding**.

3.2.2.1 Skip-gram Model

Now a common model to learn this kind of representation is called Skip-gram model[Mikolov et al., 2013b]. To get a representation of a word, we must maximize the likelihood below:

$$\frac{1}{T} \sum_{t=1}^T \sum_{-c \leq j \leq c, j \neq 0} \log p(w_{t+j}|w_t) \quad (3.12)$$

where c represents the training context size, which may vary based on the central word w_t , and w_t denotes the words in the training sequence.


The $p(w_{t+j}|w_t)$ is defined using softmax:

$$p(c|w) = \frac{\exp(v_c \cdot v_w)}{\sum_{c' \in C} \exp(v_{c'} \cdot v_w)} \quad (3.13)$$

where c is the context word and w is the target word. And C is the vocabulary set with all possible context words. As we can see that this formula can't be implemented in practical situation because the C is too large with $10^5 - 10^7$ terms[Mikolov et al., 2013b]. So another approach must be used.

Negative Sampling To maximize the log likelihood 3.12, a common way is negative sampling. Method is as the following steps:

- I. First label the origin sequence around the target word as true.



- $$\log \sigma(v_c \cdot v_w) + \sum_{i=1}^k E_{w_i \sim P_n(w)} [\log \sigma(-v_{c'_i} \cdot v_w)] \quad (3.14)$$

Although there are many other models like Continuous Bag-of-Words(COW) Model[Mikolov et al., 2013a], in our project we use the word2vec which is the vector collection trained by Skip-gram model.

In skip-gram model, the representation is grouped with its semantic meaning because its training object is to maximize the likelihood of its context words given the

⁶<http://4.bp.blogspot.com/-jGdnqFCJsP8/U6XQ3tLrQI/AAAAAAAAAIE0/w8lfdAhcRRk/s1600/plot.5.jpg>

target words. This model is trained with documents in Wikipedia. However, this training object is not fixed. For example, the COW model's training goal is to maximize the likelihood of the target word given its context word.

Different training goal give different performance in different tasks. In fact, different training goal defines the distance between words in its own criteria so the vectors are grouped by corresponding rule in vector space. And in our project, we will define our own distance to fit our requirement.

3.3 Representation of Phrase and Sentence

In this section, we will focus on how to acquire the representation of phrase and sentence.

3.3.1 One-hot Representation of Phrase and Sentence

Hand-crafted features could also be encoded with one-hot representation. For example, the simple unigram feature of a sentence could be encoded with a vector with the size of vocabulary. All the words in the sentence will be encoded with 1s otherwise 0s. The approach for sentence modelling usually doesn't generalize well when training data size is small.

3.3.2 Distributed Representation of Phrase and Sentence

There are several typical methods to acquire the distributed representation of phrase and sentence. We will focus on the method of LSTM. Other typical methods will also be introduced.

3.3.2.1 Distributed Representation of Phrase and Sentence Learning with LSTM

We can use LSTM to train a sentence or phrase representation. For different tasks, we can choose different training criteria. And based on the different training criteria, the representation LSTM learned will be different.

For instance, in [Sutskever et al., 2014], their task is to do machine translation. Thus their strategy is to map the input sequence to a fixed-sized vector using LSTM. Then the learning goal of their the model is to maximize the $p(y_1, \dots, y_{T'} | x_1, \dots, x_T)$ where x is the input sequence and y is the output sequence. The length of input and output might be different. Here:

$$p(y_1, \dots, y_{T'} | x_1, \dots, x_T) = \prod_{t=1}^{T'} p(y_t | v, y_1, \dots, y_{t-1}) \quad (3.15)$$

where v is the fixed dimensional representation of the input sequence $(x_1, \dots, x_{t-1})$ given by last hidden state of LSTM and each $p(y_t | v, y_1, \dots, y_{t-1})$ is regarded as a softmax over all the vocabularies [Sutskever et al., 2014].

3.3.2.2 Typical Approaches

Modelling sentences and phrases with LSTM is not the only method. In fact, we could use any neural network models to model sentences and phrases. But the quality of different neural sentence models will be different. Empirically, LSTM is a relatively better model than other ones. Except modelling with neural networks, there are other typical methods proposed. We will introduce them in the following.

Average Vectors Both phrase and sentence can be acquired by simply weighted average the distributed representation of words in sentence[Le and Mikolov, 2014]. But this method doesn't consider the order between words.

Concatenate Vectors Sentence representation can also be acquired by concatenate the distributed representation of words in an order given by the parse tree of a sentence. But this method highly relies on parse. So it is only for sentences.

Skip-gram Model for Learning Phrase Phrase can also be trained using skip-gram model as well just like the distributed representation of words. However there is a little difference. There is a score function used to form a phrase which is like:

$$score(w_i, w_j) = \frac{count(w_i w_j) - \delta}{count(w_i) \times count(w_j)} \quad (3.16)$$

where the δ is the discounting coefficient used to prevent too many phrases consisting of infrequent words. Here it can be seen that, compared with the score function of word representation, this score function is formed based on the count of unigram and bigram.

3.4 Summary

Text representation is a broad field which includes a lot of methods. In this chapter, we just introduced a few examples for our convenience to present our own ideas to represent text. In the next chapter, we will focus on how to construct our own text representation model and use it to improve the performance of our baseline system.

Models for Extracting Relations

In this chapter, we will introduce the baseline models in 4.1. Then our new models for extracting relations will be proposed. It should be mentioned that our system along with baseline only focus on binary relations. Thus in our work, the higher-order relation won't be considered.

4.1 Baseline System with Hand-crafted Features

In this section, the details about the baseline system with hand-crafted features will be proposed. In 4.1.1, the broad concepts about our baseline will be introduced. Then in 4.1.2, the features we selected for the baseline system will be explained.

4.1.1 Overview

Our baseline is derived from two papers [Chan and Roth, 2010] and [Chan and Roth, 2011]. For the baseline system, our model adopt logistic regression model with the input of traditional hand-crafted features. As we can see, in figure 4.1, the hand-crafted features will be extracted from sentences and encoded with one-hot representation. Then it will be the input of logistic regression. The optimization algorithm in baseline is Adagrad, which has been introduced in 3.1.4.4.

At the end of this project, the performance of this baseline system will be the main comparison for the performance of new system with unsupervised pre-training representation learning and supervised fine-tuning phase.

4.1.2 Feature Selection

For the baseline, we use five types of features selected from [Chan and Roth, 2010] and [Chan and Roth, 2011].

- I. **Base chunk feature:** Base chunk feature is a boolean feature to see whether there is a phrase chunk between two mentions.

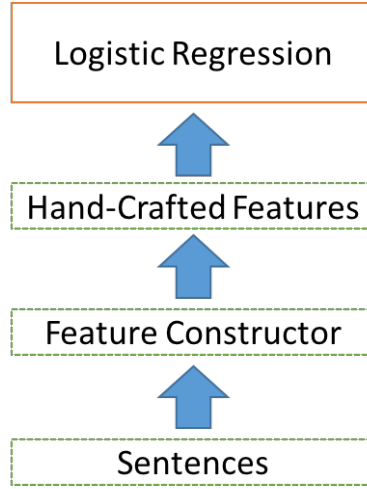


Figure 4.1: Architecture of Baseline System with Hand-crafted Features.

- II. **Collocations feature:** Collocations feature is a set of features denoted by $C_{i,j}$. For example, $C_{-1,+1}$ is a sequence of three tokens, the token on the immediate left of the head word of an entity, the token of this head word and the token on the immediate right of head word. Here we use the $C_{-1,-1}, C_{+1,+1}, C_{-2,-1}, C_{-1,+1}$ and $C_{+1,+2}$.
- III. **Syntactic parse feature:** Syntactic parse feature is tokens and part-of-speech tags on dependency path between two entities.
- IV. **Lexical feature:** Lexical feature contains a set of features. It includes head word of m_1 and head word of m_2 and head words of m_1 and m_2 combining together where m_1 is the first mention in sentences and m_2 is the second one. Other lexical features are tokens in mentions, unigram between mentions and bigram between mentions.
- V. **Dependency feature:** Dependency feature is also set of features. It includes head of m_1 and its dependency parent, head of m_2 and its dependency parent, the words on dependency path between two mentions and dependency labels on the path.

4.2 Novel Representation Learning Model

In this section, we will introduce our representation learning models. Firstly we will explain the preliminary background including the motivation behind our models and the novel structure of LSTM we used. Then we will propose the architecture of our system. At last, we will introduce our approach to learn model parameters.

4.2.1 Motivation

In baseline system, we use one-hot representations and logistic regression. Because of paraphrase problem – one relation may be expressed in many ways, the number of dimensions will be pretty high. And also since supervised approaches need manually labelled data, we can only get limited training data in most cases. However, logistic regression has a lousy performance with limited training data but high dimension features. To solve those problems, we could use distributed representations. It is intuitive that the semantic expressions around two entities are highly correlated with the relation between two entities. If we can map expressions into latent distributed representations and the representations labelled with same relations can be grouped together such as in the figure 4.2, it will be easy for logistic regression to find optimal decision boundaries for classifications of relations.



Figure 4.2: Expression grouped by its relation.

4.2.2 Shortest Dependency Path LSTM

In our project, we adopt a novel LSTM model, **Tree LSTM**[Tai et al., 2015], to map the expression to latent distributed representations. And we choose **Shortest Dependency Path** as the semantic expression.

4.2.2.1 Tree LSTM

The transition equations of this binary LSTM are as follows:

$$\begin{aligned}
 i_t &= \sigma(W^{(i)}x_t + U^{(i)}h_{t-1} + b^{(i)}) \\
 f_t &= \sigma(W^{(f)}x_t + U^{(f)}h_{t-1} + b^{(f)}) \\
 o_t &= \sigma(W^{(o)}x_t + U^{(o)}h_{t-1} + b^{(o)}) \\
 u_t &= \tanh(W^{(u)}x_t + U^{(u)}h_{t-1} + b^{(u)}) \\
 c_j &= i_j \odot u_j + \sum_{l=1}^N f_{jl} \odot c_{jl} \\
 h_t &= o_t \odot \tanh(c_t)
 \end{aligned} \tag{4.1}$$

where x_t is the input at current time step, σ is the sigmoid function, $\odot$ is the element-wise multiplication and W is the model parameters. The transition functions are almost as the traditional LSTM. The only difference is the transition function, $c_j = i_j \odot u_j + \sum_{l=1}^N f_{jl} \odot c_{jl}$, where l is the sub-level of j and c_j , becomes summation of its children cells' output instead of only the last cell. The comparison between chain structure and tree structure is as the figure in 4.3.

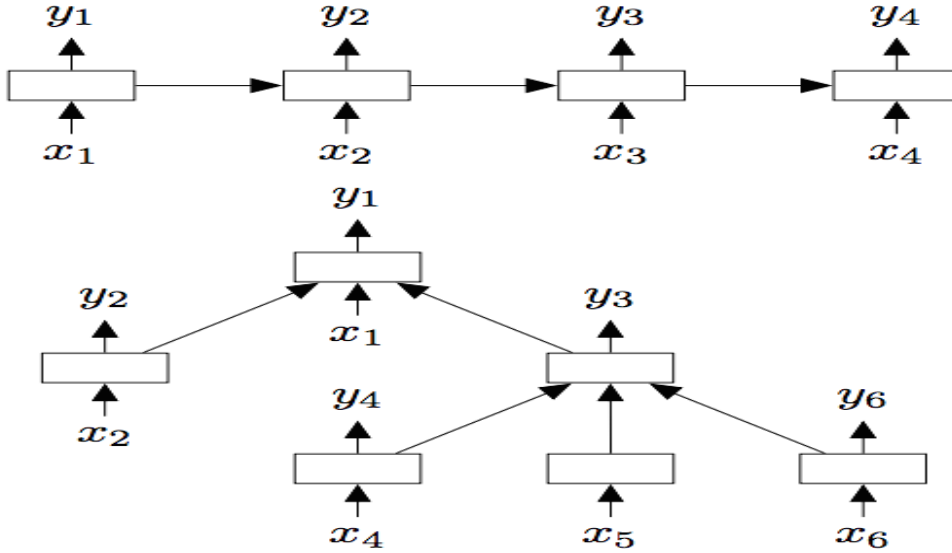


Figure 4.3: **Top:** a traditional chain LSTM structure. **Bottom:** a tree LSTM structure[Tai et al., 2015].

Discussion The reason that we use LSTM is that, as noted in 3.1.2.3, LSTM has a good performance on sequence data and it won't have the gradient vanishing problem like normal recurrent neural networks. And also this binary tree structure is good at catching the relation patterns in the expressions.

Basic Dependencies:

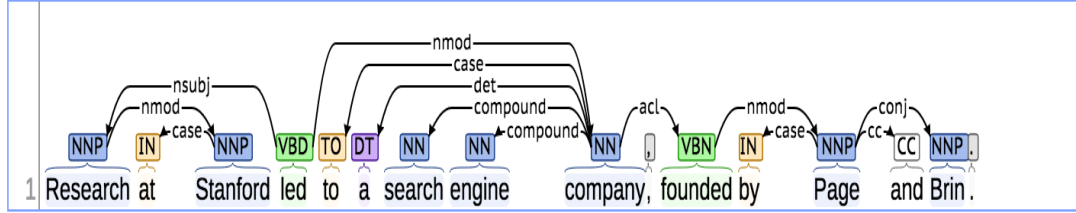


Figure 4.4: This is a dependency tree parsed by Stanford Core NLP online demo¹.

4.2.2.2 Shortest Dependency Path

The expression we decide to use is the shortest dependency path between two mentions m_i and m_j in the sentence linking with entity e_i and entity e_j . Shortest dependency path is the shortest path between two words in the dependency tree. For example, as in figure 4.4, the path between words "Stanford" and "Page" is "Stanford" <- "Research" <- "led"(ROOT) -> "Company" -> "founded" -> "Page" where "led" is the root of the dependency tree.

It should be noticed that the mentions may contain multiple words. So here we use path between head words hw of mentions m as the path between mentions. To get the head word, we use one heuristic method from [Chan and Roth, 2011]: if mention m contains a preposition and a noun preceding the preposition, the noun will be the head word hw . If there is no preposition in m , the last noun in m will be the hw .

Here we ignore the direction in the dependency path, but the root should be marked because it will be of use in building the LSTM tree.

Here, following the shortest dependency path, we construct the tree LSTM as the following steps. The input for every node in the input layer is the entity vector and word vector. Then we merge the node from mentions to root. Because there are only two mentions, we will get two branches. At last, we merge those two branches and get a complete tree. For example, as in figure 4.5, "Stanford" merges with "Research" to get node with "Stanford Research". Then node with "Stanford Research" merge with root "receive" and we get the left branch. For the right branch, "Page" merges with "founded", then "founded Page" merges with "Company", at last merges with the root "receive". Finally left and right branches can be merged to one completed tree.

¹<http://nlp.stanford.edu:8080/corenlp/process>

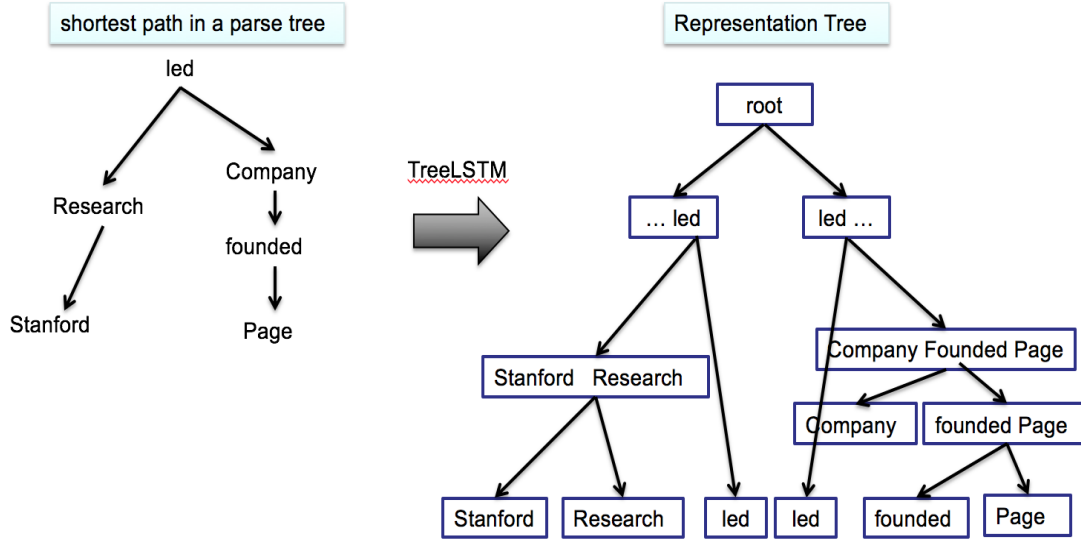


Figure 4.5: Shortest dependency path to LSTM tree.

Discussion The reason that we use shortest dependency path is, empirically, the words on dependency path between two mentions contain key information about relations between entities. And the shortest path guarantees us to only get the most important information so that we don't have to take too much computation when training the model.

4.2.3 Architecture of Novel System

The architecture of our novel system is as figure 4.6. After LSTM mapping the expressions to latent representation, we input both hand-crafted feature and expression representations to logistic regression. After training, we will get our model parameter.

However, there are two choices for the parameter initialization of LSTM.

First is the random initialization. In our project, we just consider it as another baseline system used to evaluate whether pre-training is helpful.

In another option, the model parameters of LSTM are learned during pre-training. In this method, there are two phases, **pre-training** and **fine-tuning**. Pre-training, as introduced in 3.1.5, is able to initialize the model to a point in parameter space which can make the optimization process more effective[Erhan et al., 2010]. For our task, after pre-training, LSTM is able to map expressions to latent representations. Under optimal situations, the representations can be pre-grouped based on their types of relations.

Because pre-training is a greedy strategy, fine-tuning can help us train a model which fits our global interest. For our project, fine-tuning will combine the pre-trained la-

tent representations and hand-crafted features together to improve the performance of baseline.

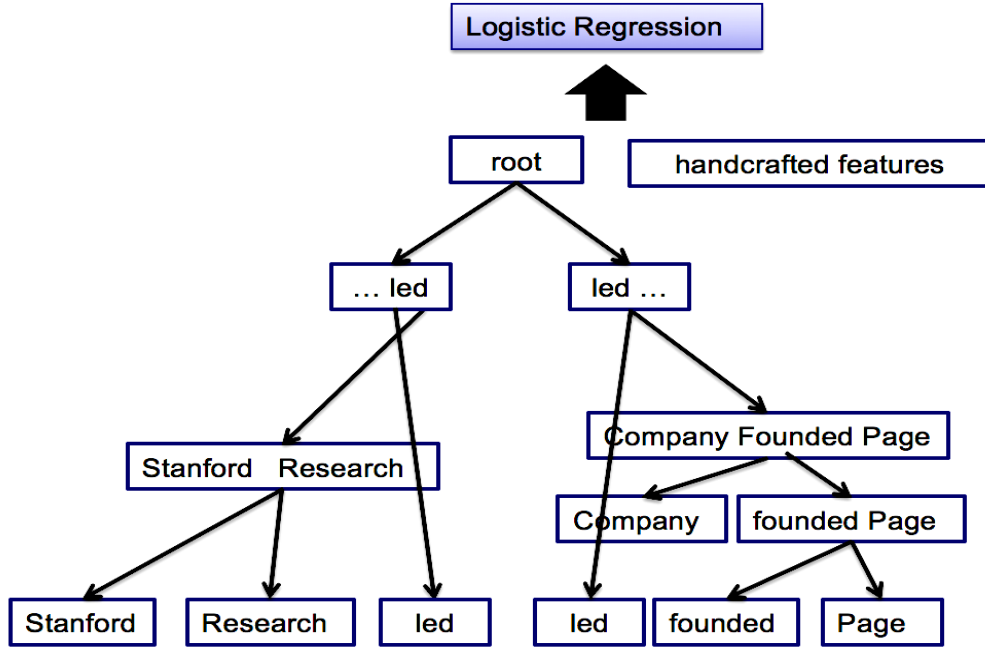


Figure 4.6: The process of fine-tuning.

4.2.4 Model Parameters Learning

In this section, we will introduce how to learn the parameters of our models. Firstly methods to initialize the input of our models will be proposed. Then we will introduce the pre-training phase including the loss functions and how we update parameters. At last, the fine-tuning phase will be introduced.

4.2.4.1 Word and Entity Representations Initialization

Before pre-training and fine-tuning, we need to build an entity vector repository E_e and a word vector repository E_w as the input for models.

For normal words, we use the word2vec repository, which is a collection of distributed representation of words trained by Skip-gram model, to map words in corpus to word vectors.

For entities, since entities usually have many surface patterns, we need to do some pre-processing. As mentioned in the 3.3.2.2, some people average word vectors for

words in the phrase or sentence to create phrase or sentence representations. So here we will use a similar approach to create our representations for entities.

Our strategy is to average the word vectors in all mentions of one entity to create the entity vector. However, multiple mentions can be mapped to one entity. So one way is to go through all the sentences in the dataset and find the all mentions linking to the entity. Then word vectors in mentions for each entity will be averaged.

4.2.4.2 Pre-training

With the input, we could begin to learn the parameters of LSTM. There are two loss functions in our pre-training phase.

One loss function is at the output node of LSTM, used for estimating the conditional probability of entities given the shortest dependency path representation. Because the loss can be considered as using the shortest dependency path representation to predict entities around, we refer it as **Entity Prediction Loss Function** L_o .

Another loss function is at inner nodes of LSTM, used for estimating the conditional probability of local context words given the phrase representation generated on each inner node. Because the loss can be considered as using the phrase representation to predict local context words, we refer it as **Word Prediction Loss Function** L_i . This loss function is optional. We will evaluate the performance of this loss function in a series of experiments.

As noted, our interest of pre-training is to train a model which is able to map expressions to the latent representations that can be pre-grouped based on their relations. To explain the reason that the two loss functions fit our interest, the loss functions, as well as the motivations behind them, will be explained.

Entity Prediction Loss Function Entity Prediction loss function L_o is:

$$\log \sigma(s(e_i, e_j, f(x_{ij}))) + \sum_{i=1}^k E_{e_i \sim P(e_i)} \log \sigma(-s(e_i, e_j, f(x_{ij}))) + \sum_{i=1}^k E_{e_j \sim P(e_j)} \log \sigma(-s(e_i, e_j, f(x_{ij}))) \quad (4.2)$$

where e_i and e_j are two entities in the sentence and $f(x_{ij})$ is the shortest dependency path representation between e_i and e_j .

This loss function is at output node. It is for measuring the correlation between expression representation and the entities around.

The idea of this loss function is borrowed from the Skip-gram model [Mikolov et al., 2013a]. Looking back the Skip-gram model introduced in 3.2.2.1, we find that the key component of Skip-gram is to maximize scores computed by taking the dot product of pairs of latent vectors for the context words. Take a close look at the dot product of two vectors in Skip-gram score function,

$$s = v'_i \cdot v_j \quad (4.3)$$

The partial derivative of s is w.r.t v_i and v_j are v_j and v_i respectively. If we update parameters with stochastic gradient descent,

$$v_i^{t+1} = v_i^t + v_j^t \quad (4.4)$$

$$v_j^{t+1} = v_j^t + v_i^t \quad (4.5)$$

The element v_i^t and v_j^t will enhance each other if they share the same sign or they will go to zero together. v_i and v_j are each other's context word. Thus the Skip-gram model is able to encode the information of context words into the target words. The result is that if two words have the similar context words around, their word vectors trained by Skip-gram model will be close to each other in the feature space.

The method we use to achieve our goal is similar to Skip-gram model's. We have a hypothesis:

Hypothesis 1. If two expressions have the same entities around them, there is a high possibility that they express the same relation.

In order to group the expressions, we can maximize the likelihood:

$$\frac{1}{I} \cdot \frac{1}{J} \sum_{i=1}^I \sum_{j=1}^J (\log p(e_i | x_{ij}, e_j) + \log p(e_j | x_{ij}, e_i)) \quad (4.6)$$

where e_i and e_j are two entities and x_{ij} are the shortest dependency between e_i and e_j .

Then we can design a score function, similar with Skip-gram's, to capture the co-occurrence patterns of entities and their relational expressions. If we start with entity and word vectors, then we can map the expression x_{ij} around two entities e_i and e_j with the map function $f(x_{ij})$ trained by LSTM. Then we can get our own score function:

$$s = e_i' \cdot \text{diag}(f(x_{ij})) \cdot e_j \quad (4.7)$$

This refers to the the dot product multiplication of this three vectors and we can get a scalar number as the score. The likelihood defined by score function and softmax function is:

$$\frac{1}{I} \cdot \frac{1}{J} \sum_{i=1}^I \sum_{j=1}^J \left(\log \frac{s(e_i, \text{diag}(f(x_{ij})), e_j)}{\sum_{e_i \in E_e} s(e_i, \text{diag}(f(x_{ij})), e_j)} + \log \frac{s(e_i, \text{diag}(f(x_{ij})), e_j)}{\sum_{e_j \in E} s(e_i, \text{diag}(f(x_{ij})), e_j)} \right) \quad (4.8)$$

where E_e is the entity repository.

As we can see, maximization of this softmax function has the same problem as when we are maximizing the softmax function of Skip-gram model. This formulation is impractical because the number of entities is too large. So the negative sampling method is adopted. The loss function becomes:

$$\log p(e_i | x_{ij}, e_j) = \log \sigma(s(e_i, e_j, f(x_{ij}))) + \sum_{i=1}^k E_{e_i \sim P(e_i)} \log \sigma(-s(e_i, e_j, f(x_{ij}))) \quad (4.9)$$

where $E_{e_i \sim P(e_i)}$ means the sample expectation.

At last, the loss function becomes equation 4.2 as mentioned at the beginning. Now our task is to maximize this log likelihood. As we can see, when we are maximizing the log likelihood, the derivative of the score function is:

$$e_1^{t+1} = e_2^t + e_1^t \cdot \text{diag}(f(x_{ij}^t)) \quad (4.10)$$

$$e_2^{t+1} = e_1^t + e_2^t \cdot \text{diag}(f(x_{ij}^t)) \quad (4.11)$$

It can be seen if e_1 and e_2 share same latent pattern of the expression x_{ij} , they will enhance this pattern when we are maximizing the loss function. Thus expressions which are highly correlated with the same relation will be grouped together in the vector space. As mentioned in 4.2, we assume the expressions are highly correlated with relations.

Word Prediction Loss Function The Word Prediction Loss Function L_i is at internal nodes. Its formula is the same as Skip-gram's:

$$\log \sigma(v_c \cdot v_w) + \sum_{i=1}^k E_{w_i \sim P_n(w)} [\log \sigma(-v_{c'_i} \cdot v_w)] \quad (4.12)$$

The difference is that v_w is not the word representation now, it is the phrase representation computed by internal node of LSTM. And v_c are the context words of this phrase. For example, in figure 4.5, v_c for internal node which outputs the representation of "Stanford Research" is word vector of "at" if the context window is one. We can see this loss function is for measuring the phrase representation's correlation with its local contexts.

Although local contexts around phrases don't have correlations with relations as strong as entities, they still include some semantic information of relations. Loss function L_o at output node implies that the expressions which have same entities around have potential to own the same relation. Here we want to add more implications. The combination of entity prediction loss L_o at output node and word prediction loss L_i at internal node implies that the expressions which have the same entities and local contexts around have potential to own the same relation.

Options for Parameters Learning After loss calculated, there are several choices when learning weights. We can choose to only update the model parameters W_l of the LSTM. We can also update the word vectors v_w and entity vectors v_e in the repositories E_w and E_e . All the options will bring different performance, so we will test some possible variations to see which one will bring the highest performance.

4.2.4.3 Fine-tuning

Since pre-training is a greedy strategy, to fit our global interest-classify relations, there is still one more step, fine-tuning. As in figure 4.6, we input both hand-crafted features and the expression representations mapped by LSTM to the logistic regression. During training, the model parameters of both LSTM W_l and logistic regression W_r will be learned with the logistic loss function. After training, we will get a new model which will bring different performance compared with two baseline models.

Experiments

In this chapter, we will introduce the details of our dataset and how we pre-process our dataset. Then the methods of hyperparameter tuning will be proposed along with the tuning results. After that, we will explain our experiment settings. At last, the experiment results and analysis will be displayed.

5.1 Dataset Description

In our project, we use two datasets. Stanford Dataset, cited from [Angeli et al., 2014], is from 2010 and 2013 KBP official document collections and a July 2013 dump of Wikipedia. Google dataset is extracted from Wikipedia, as introduced in Google Research Blog¹.

Stanford Dataset is a CSV file. Each line contains one sentence, mentions, position index of mentions and relation label among mentions. We define one sentence as a data instance. Then through statistics, there are 28516 data instances and 40 relations. The distribution of relations is as in the figure 5.1. We select the relations with the top five and the last five numbers, displayed in the figure. It can be seen the relations are not evenly distributed. The one with largest number is "*no_relation*", which exists in 9002 instances while the one with the smallest number is "*per:religion*" which only exists in 3 instances.

Google Dataset is a JSON file. Each line is a JSON object which contains one sentence, the machine id of the entities and the relation among two entities. There are 17582 instances in this dataset. There are only four relations. Relation distribution is as follows Section 5.2.

5.1.1 Pre-processing Steps

In our project, we need to annotate the Part-of-Speech tag of every token. And we also need to build a dependency tree for every sentence. The most important thing is that we need the entities and their positions in the sentence .

We use **Stanford Parser**² to tokenize sentence and annotate Part-of-Speech for tokens.

¹<http://googleresearch.blogspot.com.au/2013/04/50000-lessons-on-how-to-read-relation.html>

²<http://nlp.stanford.edu/software/lex-parser.shtml>

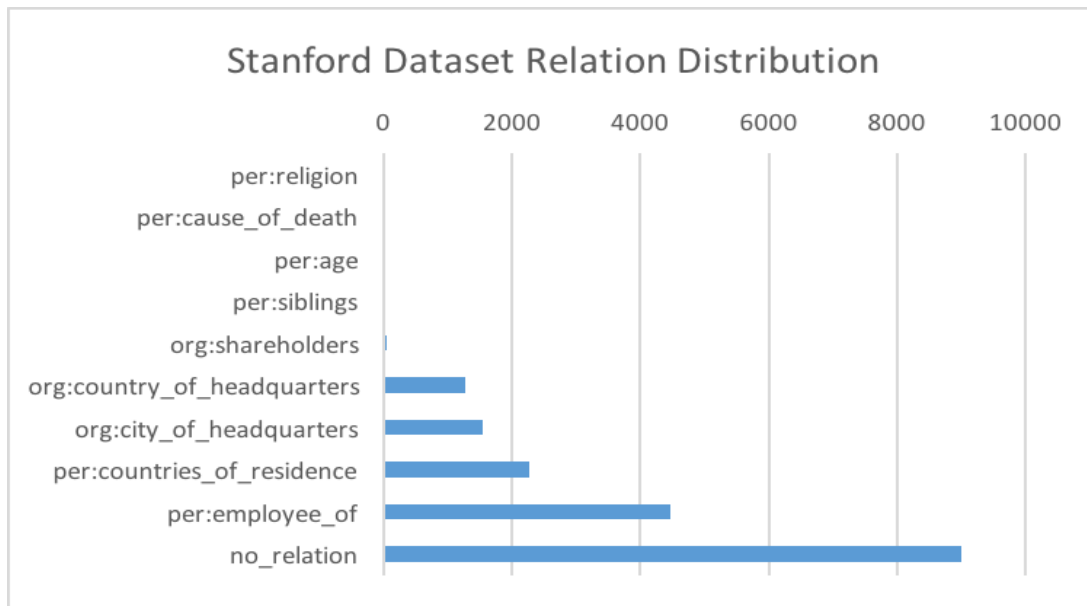


Figure 5.1: Distribution of Relations in Stanford Dataset.

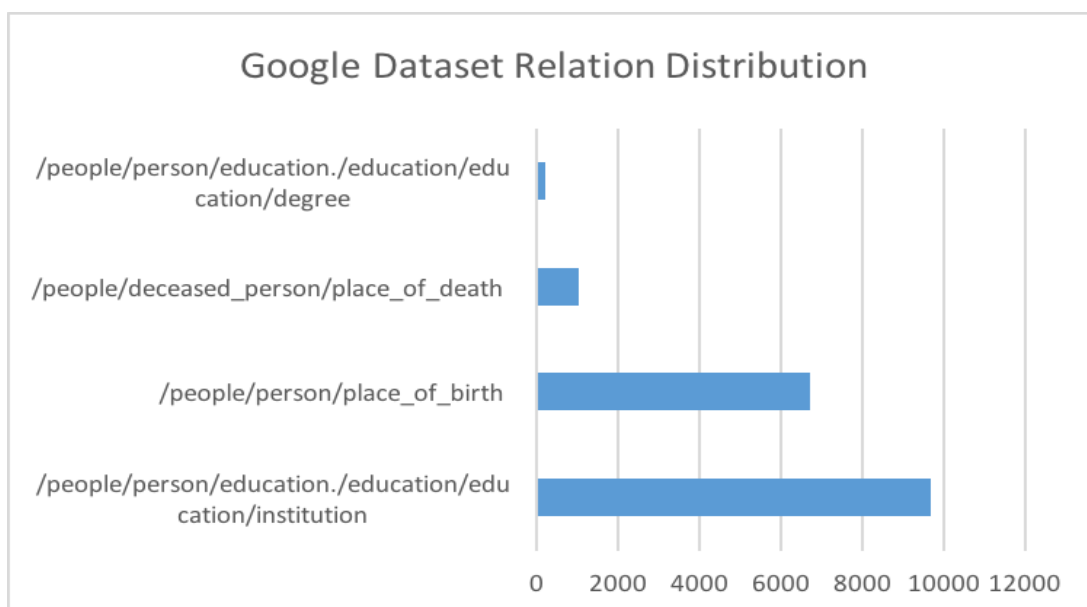


Figure 5.2: Distribution of Relations in Google Dataset.

Then we use linear **MaltParser**³ to build the dependency tree. And since Stanford dataset only offers us mentions and their positions in sentence. We do the entity linkage for Stanford dataset. We link mentions to Freebase entities. Because there is no tool directly linking mentions to Freebase entities. First we link mentions to YAGO entities using AIDA. AIDA is a framework and online tool for entity detection and disambiguation⁴. Then as introduced in 2.2.3.1, both Freebase and YAGO are derived from Wikipedia, so we can map YAGO entities to Wikipedia entities using a mapping dictionary. Following that we dumped whole Freebase database, imported it to Apache Jena database and extract entities from Freebase based on the Wikipedia entity ids. Every entity in Freebase corresponds a unique machine id. So here we are able to use machine ids to symbolize every entity. For Google dataset, it gives us the machine id of Freebase, so we use Freebase REST API to get the entity name. Since Google dataset doesn't give us the position of every entity, we use a heuristic regular expression matching to find their positions. There are three kinds of entities, the location, education degree and person name. For a person name, it is not quite possible to have ambiguity in a sentence. Thus if part of the name can be matched at the specific position in a sentence, we assume the name's entity is at that position. For the other kinds of entities, all the parts of their entity text should be exactly matched.

5.1.2 Datasets Analysis

The two datasets are not compatible. We will assign them different tasks. Compared with Google dataset, there are several challenges for our model when dealing with Stanford data set. First, there are only 28516 data instances which is quite a small number. Second, there are 40 relations which are not evenly distributed. This might bring difficulties for our supervised learning model. Thirdly, the reasons for "no_relation" might vary but all the data instances with label "no_relation" are considered in the same group. Those instances would create noise. Fourth, the instances with "no_relation" occupy one third of whole dataset, which may lead a huge bias. However the limitations of Google dataset is obvious as well. First, the data size is even smaller than Stanford dataset. Secondly, it has only four relations which makes this dataset not convincing enough to evaluate our model. Thus here, we only use Google dataset for hyperparameter tuning during pre-training phase because less relations can make the tuning results easier to compare and the computation cost is lower. All the other tasks during pre-training phase and fine-tuning phase including training, validation and testing will use Stanford dataset. We believe the results acquired by Stanford dataset will be more sound.

³<https://github.com/dkpro/dkpro-core/tree/bf90b7952c6efb3945a23ad21c04c57465839cb1>

⁴<https://www.mpi-inf.mpg.de/departments/databases-and-information-systems/research/yago-naga/aida/>

5.2 Hyperparameter Tuning

In this section, the methods we used to do hyperparameter tuning will be introduced. And the results of tuning will be displayed.

5.2.1 Hyperparameter Tuning for Pre-training

We use Google dataset to do the hyperparameter tuning for pre-training.

We choose 3/4 Google dataset as training set and 1/4 as validation set. There is no test data because pre-training is unsupervised. It should be noted the dataset is not strictly randomly separated. We want to assure the validation set will have four relations as well as the training set. So we randomly split the dataset for many times. If there are no four relations in validation set, we re-split. After splitting, the partition of dataset won't be changed any more because we want, every time, the tuning results can be compared horizontally with other parameter settings.

We choose L1 regularization here. Although entity vectors and word vectors are not from the same domain, we still learn them with shared learning rates for reducing computational cost. And we use k-means to cluster the expression representations after training. After that, Rand Index introduced in 2.4.1.3 is used to evaluate the performance of the model.

We use different learning rates and regularization parameters for learning model parameters and updating input vectors.

We firstly tune the learning rates α_{pw} and regularization parameter λ_{pw} for learning model parameters of LSTM. And we turn off the options of learning word vectors and entity vectors. Then we train the model and observe the results of Rand Index as table 5.1. We can see that different L1 regularization barely bring different effect while learning rates of 0.001f bring a large variance for the results. So we don't select 0.001f as learning rate. Instead we select the 0.001f and 0.1f as the optimal λ_{pw} and α_{pw} respectively.

Then we tune the learning rates α_{pe} and regularization parameters λ_{pe} for learning entity vectors and word vectors with the fixed tuned LSTM parameters α_{pw} and λ_{pw} . In comparison with the tuning results of LSTM, there is not much variance. All the results are around 0.58f. So we just choose a commonly adopted pair. Empirically, α_{pe} could be 10 times α_{pw} . Thus we select 0.001f and 0.1f as the optimal regularization parameter λ_{pe} and learning rate α_{pe} respectively.

5.2.2 Hyperparameter Tuning for Fine-tuning

We use Stanford Dataset to do the hyperparameter tuning for fine-tuning. 35% of the dataset, which is 9980 instances, is training set. 20% of the dataset is both the validation set and test set.

In hyperparameter tuning, we don't use any pre-trained models, the model parameters of LSTM are randomly initialized.

Here we tune the learning rates α_{fw} and α_{fc} , regularization parameters λ_{fw} and λ_{fc} for LSTM and logistic regression respectively and separately.

Regularization Parameter	0.0001f	0.0001f	0.0001f	0.000001f	0.000001f	0.000001f
Learning Rate	0.1f	0.01f	0.001f	0.1f	0.01f	0.001f
Rand Index	0.5850123	0.5850123	0.5850129	0.5850123	0.5850123	0.56168
	0.5850123	0.5850123	0.58501357	0.5850123	0.5850123	0.58501357
			0.5850123			0.5850123
			0.47688133			0.47568637
			0.47455508			0.47704232
			0.47480485			

Table 5.1: Tuning Results for Weights on LSTM

Regularization Parameter	0.0001f	0.0001f	0.0001f	0.000001f	0.000001f	0.000001f
Learning Rate	0.1f	0.01f	0.001f	0.1f	0.01f	0.001f
Macro-Precision	0.4064905	0.31999898	0.01934031	0.42622223	0.4421185	0.044637516
Macro-Recall	0.2545123	0.12995863	0.029275449	0.2593944	0.18361308	0.031583756
Macro-F1Measure	0.29914954	0.14870085	0.018138776	0.3049322	0.22467111	0.0220251
Accuracy	0.5206872	0.4652875	0.33134642	0.5322581	0.49964938	0.33520338

Table 5.2: Tuning Results for Model Parameters of Logistic Regression

Firstly, we fix LSTM learning rate α_{fw} as 0.01f and regularization parameter λ_{fw} as 0.001f. Then we design 6 pairs of λ_{fc} and λ_{fc} . The results on the test set is as table 5.2. As we can see the pair of α_{fc} as 0.1f and λ_{fc} as 0.000001f can bring the best recall, F1Measure and accuracy. Although precision is not the best, it is not far from the optimal performance. So we decide to choose α_{fc} as 0.1f and λ_{fc} as 0.000001f.

Secondly, we tune α_{fw} and λ_{fw} . We fix the α_{fc} as 0.1f and λ_{fc} as 0.000001f. As well, we design 6 pairs. The result on the test set is as table 5.3. Then we found the pair of α_{fw} as 0.1f and λ_{fw} as 0.000001f could bring the best accuracy. Although compared with other pairs, Precision, Recall and F1Measure are not the best, none of the performance is the worst. This pair is the most stable one. Thus we decide to choose α_{fw} as 0.1f and λ_{fw} as 0.000001f.

Regularization Parameter	0.0001f	0.0001f	0.0001f	0.000001f	0.000001f	0.000001f
Learning Rate	0.1f	0.01f	0.001f	0.1f	0.01f	0.001f
Macro-Precision	0.4220812	0.43920225	0.443421	0.4165563	0.4442537	0.43949598
Macro-Recall	0.24918497	0.25197038	0.25125498	0.25176826	0.24653225	0.25963798
Macro-F1Measure	0.2968473	0.30054057	0.2980951	0.2955865	0.29633698	0.30784795
Accuracy	0.5217391	0.5269986	0.5245442	0.5336606	0.52384293	0.5269986

Table 5.3: Tuning Results for Model Parameters of LSTM

5.3 Experiment Settings

Based on our model variations, we designed eight experiments, two for baseline and six for our model. For all the experiments, we choose 70% of our dataset(19961 instances) as out training set, 10%(2851 instances) as our validation set and 20%(5704 instances) as our testing set. We adopt an incrementing instance training strategy. At beginning, we only use 2^{-9} of whole training instances(29 instances). Then we double the training instances every time until the number of instances comes to 19961. At last, there will be 10 times training for every experiment and we record each of the results.

There are invariants and variants among the experiments. The next we will introduce the variant and invariant settings.

5.3.1 Baseline

5.3.1.1 Invariants

For the two baselines, the learning rate α_{fc} and regularization parameter λ_{fc} for logistic regression are 0.1f and 0.000001f respectively.

5.3.1.2 Variants

The variants for two baselines are as follows:

- I. For the first baseline, we only use hand-crafted feature. We refer it as $B - H$ (Baseline with Hand-crafted Feature).
- II. For the second baseline, we use both expression representation and handcrafted feature. However unlike the pre-trained model, the model parameters of LSTM here is random initialized. We refer it as $B - HL$ (Baseline with Hand-crafted feature and Shortest Dependency Path LSTM).

5.3.2 Representation Learning Models

5.3.2.1 Invariants

In pre-training phase, we select the 0.1f and 0.001f as the optimal LSTM learning rate α_{pw} and LSTM regularization parameter λ_{pw} respectively. And for updating entity and word vectors, we select 0.1f and 0.001f as the optimal learning rate α_{pe} and regularization parameter λ_{pe} respectively.

In fine-tuning phase, we select learning rate α_{fc} as 0.1f and regularization parameter λ_{fc} as 0.000001f for logistic regression. And we choose learning rate α_{fw} as 0.1f and regularization parameter λ_{fw} as 0.000001f for LSTM. For the negative sampling, we set the sample times as 5 for both the entity prediction loss L_o and word prediction

loss L_i .

5.3.2.2 Variants

The experiments can be categorized by whether using word prediction loss L_i or not during pre-training phase.

The experiments without word prediction loss L_i are as follows:

- I. We set this experiment as only updating model parameter of LSTM in pre-training phase. We don't use word prediction loss, don't update entity vectors and word vectors. We refer this experiment as $M - E - L$ (Model with Entity Prediction Loss, Shortest Dependency Path LSTM).
- II. In this experiment, we don't use word prediction loss, don't update word vectors but update entity vectors. We refer this experiment as $M - E - LUE$ (Model with Entity Prediction Loss, Shortest Dependency Path LSTM, Update Entity Vector).
- III. In this experiment, we don't use word prediction loss but update word vectors and entity vectors. We refer this experiment as $M - E - LUEW$ (Model with Entity Prediction Loss, Shortest Dependency Path LSTM, Update Entity Vector and Word Vector).

The experiments with word prediction loss L_i are as follows:

- I. We set this experiment as using word prediction loss. We don't update entity vectors and word vectors. We refer this experiment as $M - EW - L$ (Model with Entity Prediction Loss and Word Prediction Loss, Shortest Dependency Path LSTM).
- II. In this experiment, we use word prediction loss, don't update word vectors but update entity vectors. We refer this experiment as $M - EW - LUE$ (Model with Entity Prediction Loss and Word Prediction Loss, Shortest Dependency Path LSTM, Update Entity Vector).
- III. In this experiment, we use word prediction loss, update word vectors and entity vectors. We refer this experiment as $M - EW - LUEW$ (Model with Entity Prediction Loss and Word Prediction Loss, Shortest Dependency Path LSTM, Update Entity Vector, Word Vector).

5.4 Results

In this section, we will present the results and analysis of our experiments. We will focus on the comparison between the text representation models and the two baselines.

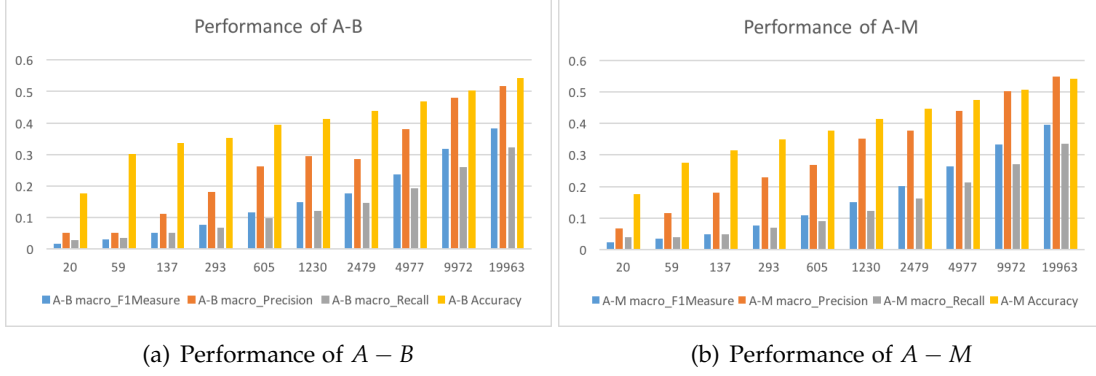


Figure 5.3: Performance of the Baselines and Models based on Representation Learning

5.4.1 Overall Comparison

We compared the average performance $A - B$ of the two baselines and the average performance $A - M$ of the six text representations models. From chart 5.3, we can see that both of the performance $A - B$ and $A - M$ are increasing with the increasing number of training instances. It proves that although different models will bring different performance relatively, number of training instances is still the dominant factor influencing the model performance. And we also realized that when the size of training instances is small, the model performance is usually pretty lousy. Under this situation, the performance is also unstable. Comparing the performance between models on a small instance size is meaningless. Thus we only compare the performance with largest number of instances (19963) in the next.

Let's take a close look at the case with 19963 training instances. From the chart 5.4, the macro-precision of $A - M$ is improved from 0.51720151 to 0.548091515, macro-recall is improved from 0.321693825 to 0.33483990333 and macro-FMeasure is improved from 0.382639875 to 0.396789315. However, there is not much change on accuracy. The accuracy of $A - B$ is 0.5435659 and the accuracy of $A - M$ is 0.54260168333.

As results shown, the pre-training improved the performance of baseline w.r.t all the macro performances. However accuracy doesn't look much different. Because the performance of accuracy is mainly dominated by the relations with large instance size while macro performance consider all the relations equal. So we can infer, with this dataset, pre-training doesn't improve performance on the relations with large instance size but it is able to help logistic regression with detecting the relations with small instance size.

We found in the dataset, there are 9002 instances with relation *no_relation*, which occupies 1/3 of the whole dataset. So we compare the $A - B$ to $A - M$ on the relation *no_relation*. From the chart 5.5, we can see that $A - B$ and $A - M$ on the relation *no_relation* are almost the same. This can explain why the accuracy isn't improved. Because pre-training has not much effect on *no_relation* while *no_relation* dominates the performance of accuracy.

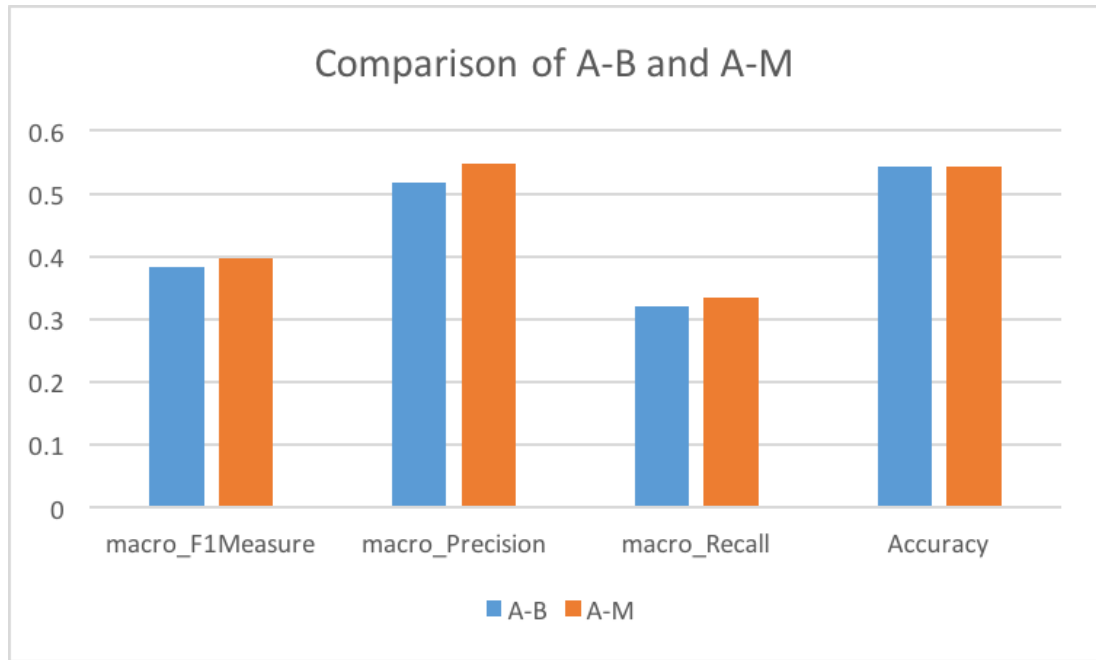


Figure 5.4: Comparison of the $A - B$ and $A - M$ when number of training instances is 19963.

There are many possible reasons that pre-training doesn't influence the performance on *no_relation*. We conjecture it is because *no_relation* doesn't really mean there is no relation between two mentions. It just means there is no relation in the label set. For example, here is a sentence in dataset: *Shortly after this; the then Chancellor of the Exchequer; Nigel Lawson; and other Conservative politicians claimed that misleading statistics were largely responsible for the Government's poor handling of the economy*. The mentions in this sentence are *Nigel Lawson* and *Exchequer*. We can see there is a relation *ChancellorOf* between two mentions although the instance is still labelled as *no_relation*. In this case, our model may still find the pattern of *ChancellorOf* and highlight it. However this is a misleading information for logistic regression because logistic regression will only try to detect the relations which are pre-defined by human.

However pre-training has a quite good performance on relations with a small number. For example, the relation *per:cause_of_death* only has 5 instances. In both baselines, the precision, recall and FMeasure on this relation are all 0 when training instances are with the maximum size(19963). In the six experiments of new models, there are three of them ($M - E - LUE$, $M - E - LUEW$, $M - EW - LUEW$) which is capable of detecting this relation. And precision, recall and FMeasure are all 1. Because the performance on relations with small number increase and macro consider every relation equal weight, the whole performance of precision, recall and FMeasure of $A - M$ are increased compared with $A - B$.

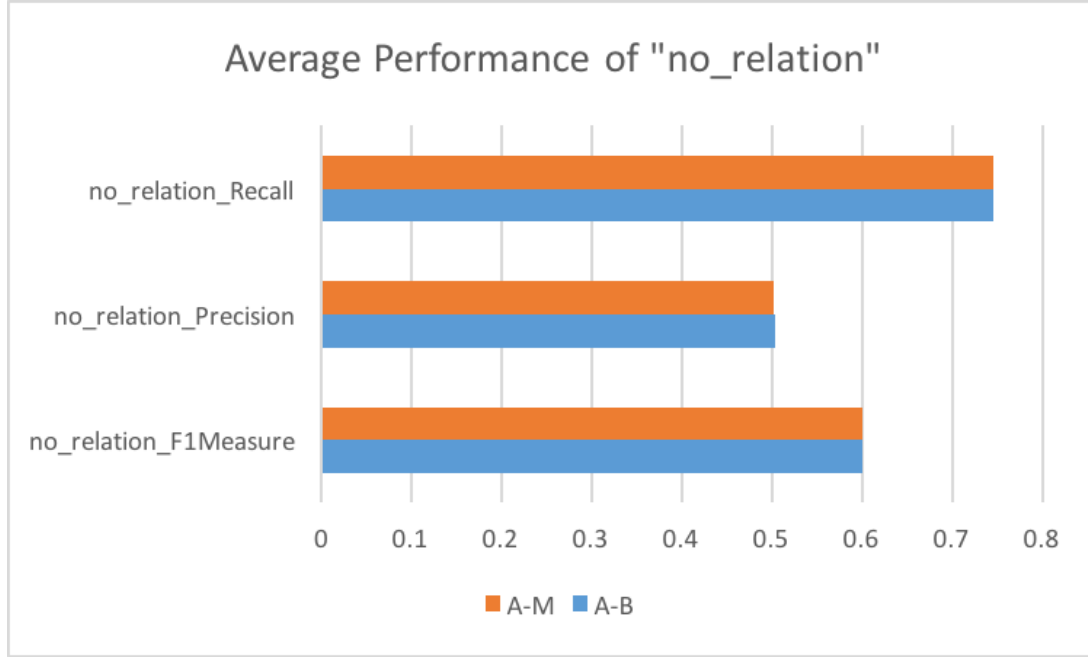


Figure 5.5: Comparison of the average performance $A - B$ and $A - M$ on the relation "no_relation".

5.4.2 Evaluation of Baseline

From chart 5.6, we can see that although baseline $B - HL$ imported the expression representation, the performances of the two baselines are almost the same with respect to macro-precision, macro-recall, macro-FMeasure and accuracy. The difference between them is that the precision of $B - HL$ is always increasing with the increasing number of training instances while precision of $B - H$ decreased when number of training instances is 2479. The reason might be the result is unstable when experimenting with small number of training instance. We can see after the training instance size becomes larger, the growth curve of $B - H$ becomes smooth. So we can infer that expression representation learned with random initialization LSTM has no either positive or negative influence on the baseline system with hand-crafted feature.

5.4.3 Influence of Entity Prediction Loss

In order to observe the influence of global loss, we compare the performance of $M - E - L$ with the performance of two baselines $B - H$, $B - HL$ and the average performance $A - M$ of representation learning models.

It can be seen that with respect to precision, recall and FMeasure, the performance of $M - E - L$ is higher than performance of two baselines. This can display that global loss function has the ability to help detect the relation. But in comparison with

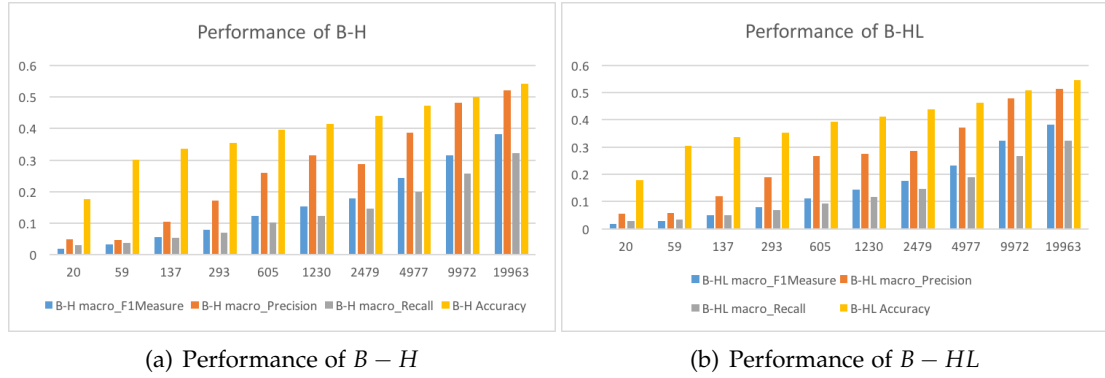
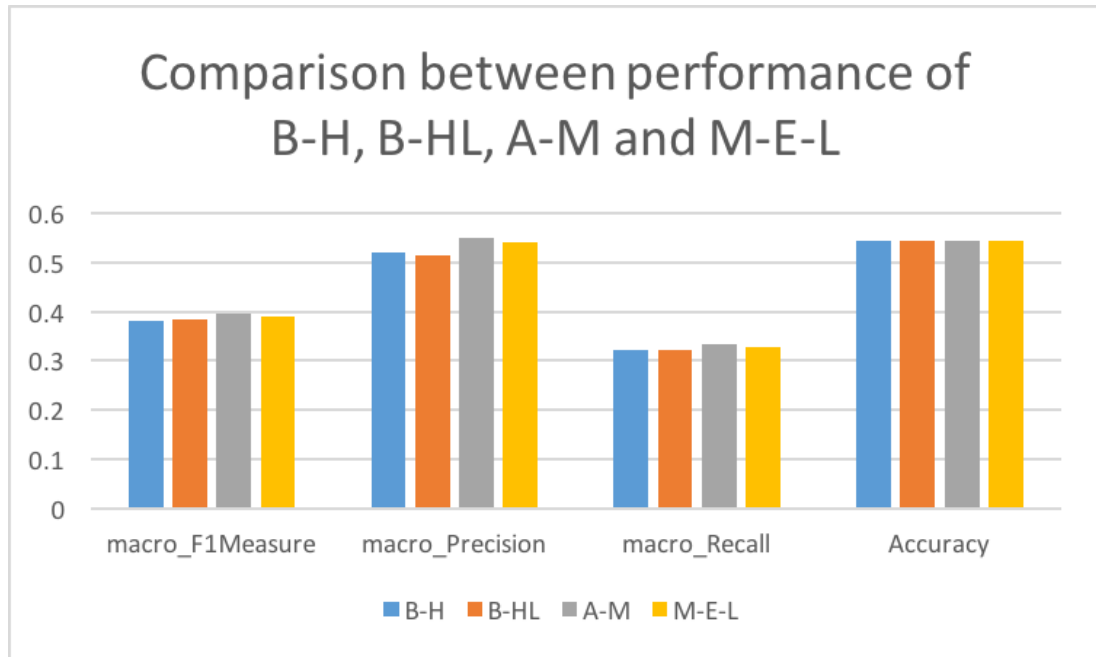


Figure 5.6: Performance of the Baselines

$A-M$, the performance of $M-E-L$ with respect to precision, recall and FMeasure are all a little lower. $M-E-L$ doesn't achieve the average level, which infers that the reason that $A-M$ performs better is depended on variations other than Entity Prediction Loss.

Figure 5.7: Compare the performance of $B-H$, $B-HL$, $A-M$ and $M-E-L$.

5.4.4 Influence of Word Prediction Loss

In order to observe the influence of word prediction loss, we compare the performance of $M-EW-L$ with the performance of $M-E-L$ and the average perfor-

mance $A - M$ of our novel model with six variations.

It can be seen after we imported the word prediction loss, precision has slightly improvement compared with $M - E - L$. The others are all decreasing. This displays that if we only update model parameters, the word prediction loss may not be helpful on improving performance. However we can observe whether word prediction loss combine with others will bring different outcomes.

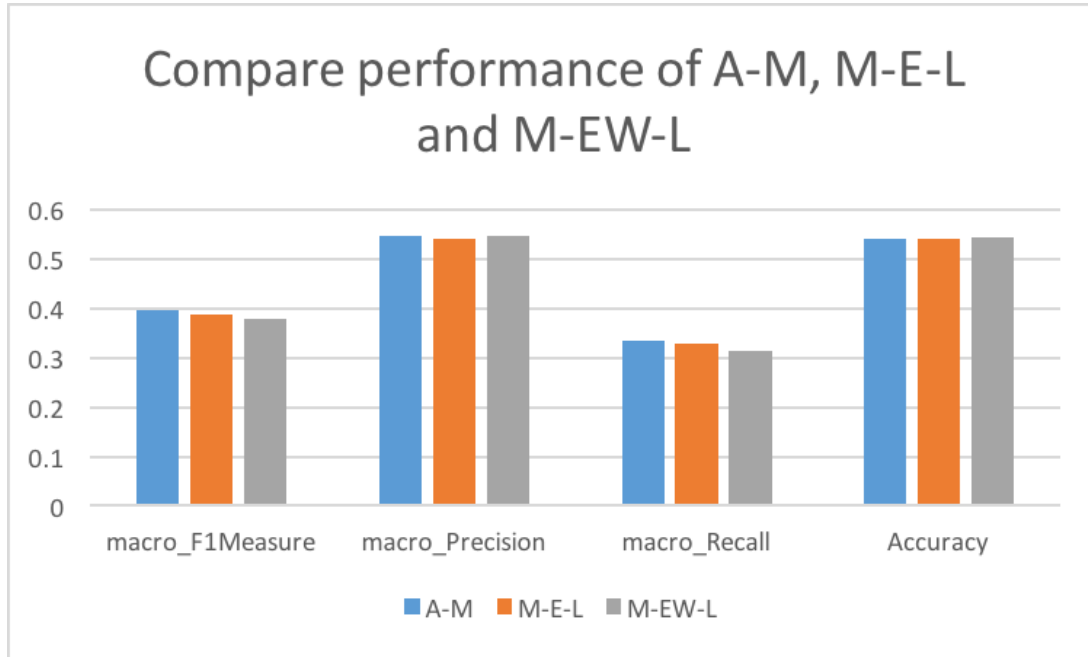


Figure 5.8: Compare the performance of $A - M$, $M - E - L$ and $M - EW - L$.

5.4.5 Influence of Updating Entity Vector

To observe the influence of updating entity vectors, we separate the comparison as two pairs. One pair is the comparison between $M - E - L$, $M - E - LUE$ and $A - M$. Another pair is the comparison between $M - EW - L$, $M - EW - LUE$ and $A - M$. We want to observe the results in the conditions with and without word prediction loss.

From the chart 5.9(a), we can see that, without word prediction loss, after updating the entity vectors, all the performance except accuracy is increased and better than average performance. Precision is increased from 0.5408333 to 0.5501761. And 0.5501761 is the highest precision we've seen for now. Recall is increased from 0.32829905 to 0.34533334. FMeasure is increased from 0.38919714 to 0.4070243.

However from chart 5.9(b), we can see that, with word prediction loss and updating entity vectors, not all the performances are increased. The precision is decreased from 0.54792714 to 0.543988. Compared with the corresponding situation without

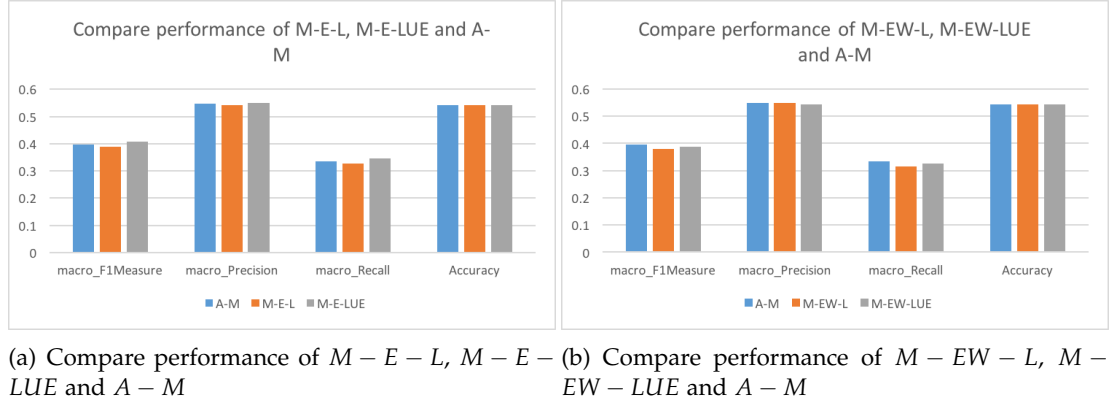


Figure 5.9: Performance of the Updating Entity Vector

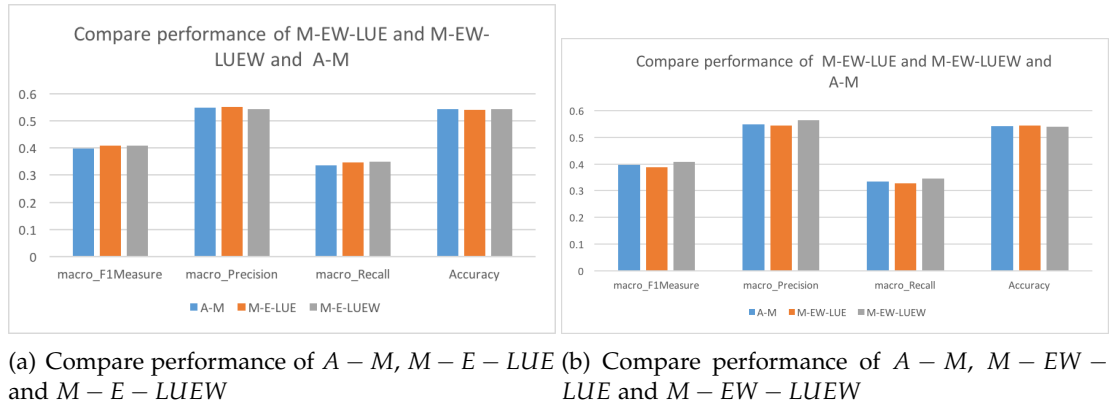


Figure 5.10: Performance of the Updating Word Vector

word prediction loss, word prediction loss doesn't have a good performance here. Here is the conjectural reason. Updating entity vector can help pre-training and group the expression representations which have the same entities around. However word prediction loss has no relation with entities prediction. Although $M-EW-LUE$ also use the entity prediction loss, the word prediction loss may have some negative influence on updating entity vectors. Thus the precision in $M-EW-LUE$ is not increased.

5.4.6 Influence of Updating Word Vector

To observe the influence of updating word vectors, we separate the comparison as two pairs as well. One pair is the comparison between $M-E-LUE$, $M-E-LUEW$ and $A-M$. Another pair is the comparison between $M-EW-LUE$, $M-EW-LUEW$ and $A-M$. We want to observe the results in the conditions with and without word prediction loss.

From chart 5.10(a), we can see that from $M-E-LUE$ to $M-E-LUEW$, the

model's precision is decreased from 0.5501761 to 0.5420345. The recall, FMeasure and Accuracy are almost the same. We added a new variation but performance is not improved. The reason might be the same as that we add word prediction loss when updating entity vectors. Updating word vector alone without word prediction loss has a negative influence on the models with updating entity vectors and entity prediction loss.

However, from chart 5.10(b), we can see that we get the highest performance for now. Precision is increased from 0.543988 to 0.56359005, recall is increased from 0.38833365 to 0.40700668 and FMeasure is increased from 0.3269379 to 0.34504116.

From the observation, I think the reasons might be as follows:

Let's denote the variations with two pairs, word prediction loss and updating word vectors, entity prediction loss and updating entity vectors. Updating entity vector can help pre-training with entity prediction loss and updating word vector can help pre-training with word prediction loss. However, when they exist alone, none of them will achieve the same performance as they exist in pair. And when the two pairs all exist, like the situation in $M - EW - LUEW$, the performance of our model will be improved to the largest degree.

5.4.7 Summary

In sum, with 8 experiments, we can see that text representation learning has a positive influence on relation extraction task. With some specific combinations of variations, we can adjust the performance of models to the optimal. But it also has some limitations, especially when classifying the *no_relation*.

Conclusion

This chapter will recap the contributions of our work and bring forward the future directions.

6.1 Contributions

In this thesis, we presented our ideas about how to apply text representation learning on the relation extraction task. We also built several text representation learning models and conducted a series of experiments. From the results of experiments, we've proved that text representation is able to improve the performance of baseline system. And we also analysed the influence of every variation in our models. At last, we found an optimal combination of variations on our dataset.

6.2 Future Work

From the results of experiments, we can see There is still much work ahead. In what follows we discuss several directions in future work.

6.2.1 Pre-training on Different Dataset

From our assumption in 5.4.1, the reason the performance of accuracy is not improved is that there are too many *no_relation* instances. To justify our assumption and find the method to improve performance of accuracy, we could test our models on another dataset which have close numbers of relations as Stanford Dataset but without *no_relation*. Then we could observe the performance and see if our assumption is right.

6.2.2 Choice of Expression

In our project, we build LSTM tree with the shortest dependency path between two mentions. The advantage is that the computational cost is relatively low. The disadvantage is that we lost some words, which might be important information. Thus

we could choose to use the whole sequence between two mentions instead of just using the shortest path. Then we could test our models on Stanford Dataset again and observe the results.

Appendix A

A.1 Results of Experiments

instance number	20	59	137	293	605	1230	2479	4977	9972	19963
macro_FIMeasure	0.018139772	0.031010427	0.05459837	0.078530014	0.12296783	0.15323138	0.17747343	0.24234925	0.31485575	0.38220945
macro_Precision	0.04787253	0.046931658	0.1032367	0.1718671	0.2588028	0.3142514	0.2868303	0.38719153	0.4817804	0.52027176
macro_Recall	0.030014262	0.03794201	0.05397829	0.06860159	0.10219344	0.12313305	0.1469107	0.19825585	0.25670385	0.3213864
micro_FIMeasure	0.17724404	0.30014026	0.3367812	0.3536115	0.3951613	0.4156732	0.44004208	0.47230014	0.5012272	0.54242635
micro_Precision	0.17724404	0.30014026	0.3367812	0.3536115	0.3951613	0.41567323	0.44004208	0.47230014	0.5012272	0.54242635
micro_Recall	0.17724404	0.30014026	0.3367812	0.3536115	0.3951613	0.41567323	0.44004208	0.47230014	0.5012272	0.54242635
no relation_FIMeasure	0.21653256	0.47126277	0.5027556	0.50359064	0.5235507	0.54126036	0.55633507	0.5689549	0.5823004	0.59991145
no relation_Precision	0.3242059	0.34757033	0.371714	0.37456492	0.39064613	0.41099402	0.42743596	0.45544556	0.47395653	0.502785
no relation_Recall	0.16254805	0.74629325	0.7764964	0.7682592	0.79352003	0.79242176	0.79736406	0.7578254	0.7545305	0.7435475
org.alternate.names_FIMeasure	0	0	0.1891892	0.2905028	0.29411763	0.28767124	0.37333333	0.4634146	0.5113636	0.57777774
org.alternate.names_Precision	0	0	0.3888889	0.3880597	0.43103448	0.61764705	0.7368421	0.7307692	0.703125	0.7647059
org.alternate.names_Recall	0	0	0.125	0.23214285	0.22321428	0.1875	0.25	0.3392857	0.4017857	0.4642857
org.city_of_headquarters_FIMeasure	0.0059880237	0	0.31504125	0.3261368	0.44306415	0.47887325	0.5328597	0.5621806	0.5939597	0.6577181
org.city_of_headquarters_Precision	0.041666668	0	0.34901962	0.568	0.61849713	0.5271318	0.5928854	0.5956679	0.6188911	0.6853147
org.city_of_headquarters_Recall	0.0032258064	0	0.28709677	0.22903226	0.3451613	0.43870968	0.48387095	0.5322581	0.57096773	0.63225806
org.country_of_headquarters_FIMeasure	0	0.015999999	0.03088803	0.11258278	0.0942761	0.19753087	0.21637428	0.36982968	0.45673075	0.53579676
org.country_of_headquarters_Precision	0	0.4	0.2857143	0.2982456	0.26923078	0.4050633	0.3814433	0.45783132	0.55555556	0.61702126
org.country_of_headquarters_Recall	0	0.008163265	0.01632653	0.06938776	0.057142857	0.13061224	0.15102041	0.3102041	0.3877551	0.47346938
org.dissolved_FIMeasure	0	0	0	0	0	0	0	0	0	0
org.dissolved_Precision	0	0	0	0	0	0	0	0	0	0.5
org.dissolved_Recall	0	0	0	0	0	0	0	0	0	0.06666667
org.founded_FIMeasure	0	0	0	0	0.023529412	0.11363636	0.17204301	0.26	0.33333334	0.4516129
org.founded_Precision	0	0	0	0	0.16666667	0.55555556	0.5714286	0.61904764	0.54285717	0.62222224
org.founded_Recall	0	0	0	0	0.012658228	0.06329114	0.101265825	0.16455697	0.24050634	0.35443038
org.founded_by_FIMeasure	0	0	0	0	0	0.16842945	0.09890909	0.2264151	0.36415095	0.4309748
org.founded_by_Precision	0	0	0	0	0	0.5	0.44444445	0.44444445	0.5185185	0.65
org.founded_by_Recall	0	0	0	0	0	0.101265825	0.050632913	0.15189873	0.17721519	0.32911393
org.member_of_FIMeasure	0	0.24277456	0.36668388	0.24113475	0.37575758	0.25503358	0.30588223	0.36956525	0.44976076	0.47474748
org.member_of_Precision	0	0.40384614	0.6458333	0.85	0.70454544	0.6785714	0.53061223	0.53968257	0.53409904	0.6103896
org.member_of_Recall	0	0.17355372	0.25619835	0.14049587	0.25619835	0.1570248	0.21487603	0.28099173	0.38842976	0.38842976
org.members_FIMeasure	0	0	0	0	0	0	0	0.22727272	0.40816325	0.45289014
org.members_Precision	0	0	0	0	0	0	0	0.71428573	0.8333333	0.75
org.members_Recall	0	0	0	0	0	0	0	0.13513513	0.27027026	0.3243243
org.parents_FIMeasure	0.015999999	0	0	0	0.07317074	0.09756097	0.1509434	0.16666667	0.20930234	0.32160804
org.parents_Precision	0.33333334	0	0	0	0.14285715	0.1904762	0.3243243	0.3043478	0.36	0.41558442
org.parents_Recall	0.008196721	0	0	0	0.04918033	0.06557377	0.09836066	0.114754096	0.14754099	0.26229507
org.political.religious.affiliation_FIMeasure	0	0	0	0	0	0	0	0	0.13333334	0.23529413
org.political.religious.affiliation_Precision	0	0	0	0	0	0	0	0	1	0.66666667
org.political.religious.affiliation_Recall	0	0	0	0	0	0	0	0.071428575	0.14285715	0.14285715
org.shareholders_FIMeasure	0	0	0	0	0	0	0	0	0	0
org.shareholders_Precision	0	0	0	0	0	0	0	0	0	0
org.shareholders_Recall	0	0	0	0	0	0	0	0	0	0
org.state.province_of_headquarters_FIMeasure	0	0	0	0	0.34543436	0.31034482	0.3958333	0.43680322	0.4509804	0
org.state.province_of_headquarters_Precision	0	0	0	0	0.46575344	0.5510204	0.5671642	0.55555556	0.5822785	0.488
org.state.province_of_headquarters_Recall	0	0	0	0	0.272	0.216	0.304	0.36	0.368	0.26080956
org.subsidiaries_FIMeasure	0	0	0	0	0.03125	0.029411767	0.10666667	0.175	0.20689657	0.41379312
org.subsidiaries_Precision	0	0	0	0	1	0.2	0.33333334	0.4117647	0.375	0.1904762
org.subsidiaries_Recall	0	0	0	0	0.015873017	0.015873017	0.06349207	0.11111111	0.14285715	0.16753246
org.top_members/employees_FIMeasure	0	0	0	0.013333333	0.013333333	0.013333333	0.013333333	0.013333333	0.013333333	0.013333333
org.top_members/employees_Precision	0	0	0	0.25	0.33333334	0.5294118	0.40983605	0.47297296	0.54761904	0.3698633
org.top_members/employees_Recall	0	0	0	0.006849315	0.006849315	0.061643835	0.17123288	0.23972602	0.31506848	0.5
perage_FIMeasure	0	0	0	0	0	0	0	0	0.2857143	1
perage_Precision	0	0	0	0	0	0	0	0	1	0.33333334
perage_Recall	0	0	0	0	0	0	0	0	0.16666667	0.37735853
per.alternate.names_FIMeasure	0	0	0	0	0	0.09304255	0	0.049999997	0.2857143	0.71428573
per.alternate.names_Precision	0	0	0	0	0	0.5	0	0.7	0	0.25641027
per.alternate.names_Recall	0	0	0	0	0	0.051282052	0	0.025641026	0.17948718	0
per.cause_of_death_FIMeasure	0	0	0	0	0	0	0	0	0	0
per.cause_of_death_Precision	0	0	0	0	0	0	0	0	0	0
per.cause_of_death_Recall	0	0	0	0	0	0	0	0	0	0.24242425
per.children_FIMeasure	0	0	0	0	0	0	0	0	0.2580645	0.36363637
per.children_Precision	0	0	0	0	0	0	0	0	0.44444445	0.18181819
per.children_Recall	0	0	0	0	0	0	0	0	0.18181819	0.2740741
per.cities_of_residence_FIMeasure	0	0	0.02764977	0.010526316	0.040816326	0.058536585	0.06030151	0.18502203	0.2591093	0.39784947
per.cities_of_residence_Precision	0	0	0.075	0.07602308	0.21052632	0.21428572	0.27272728	0.42	0.45714286	0.20093955
per.cities_of_residence_Recall	0	0	0.016949153	0.0056497175	0.02259887	0.033898305	0.033898305	0.118644066	0.18079996	0.5859873
per.city_of_birth_FIMeasure	0.1604781	0.05660378	0.039215088	0.23079805	0.37269305	0.4400903	0.53416145	0.5802469	0.57333333	0.6969097
per.city_of_birth_Precision	0.15625	0.2	0.18181819	0.38333333	0.63157580	0.59302206	0.6142857	0.6091718	0.7288136	0.50549453
per.city_of_birth_Recall	0.16483517	0.032967035	0.021978023	0.23079823	0.26373628	0.36263737	0.47252747	0.51648355	0.47252747	0.48000002
per.city_of_death_FIMeasure	0	0	0	0	0	0	0	0	0.18181819	0.46153846
per.city_of_death_Precision	0	0	0	0	0	0	0	0.2857143	0.54545456	0.4
per.city_of_death_Recall	0	0	0	0	0	0	0	0.13333334	0.4	0.45432693
per.countries_of_residence_FIMeasure	0.004638406	0	0.071428575	0.104166664	0.3036649	0.32627645	0.32078105	0.33032256	0.3846154	0.46137447
per.countries_of_residence_Precision	0.5	0	0.2278481	0.1986755	0.3421829	0.34650804	0.39383056	0.36571428	0.4225352	0.44470587
per.countries_of_residence_Recall	0.002352941	0	0.04235294	0.07058824	0.27294117	0.3082353	0.27058825	0.30117646	0.3529412	0.3289474
per.country_of_birth_FIMeasure	0	0	0	0	0	0.08333333	0.09756098	0.16793892	0.25850338	0.5813953
per.country_of_birth_Precision	0	0	0	0	0	0.45454547	0.42857143	0.5	0.5	0.2293578
per.country_of_birth_Recall	0	0	0	0	0	0.04587156	0.055045873	0.10091743	0.17431192	0.09090909
per.country_of_death_FIMeasure	0	0	0	0	0	0	0	0	0	0.25
per.country_of_death_Precision	0	0	0	0	0	0	0	0	0.05555556	0
per.country_of_death_Recall	0	0	0	0	0	0	0	0	0	0.61538464
per.date_of_birth_FIMeasure	0	0	0	0	0.42105266	0.42105266	0.5	0.45454547	0.6086956	0.72727275
per.date_of_birth_Precision	0	0	0	0	1	1	0.66666667	0.71428573	0.875	0.53333336
per.date_of_birth_Recall	0	0	0	0	0.26666668	0.26666668	0.4	0.33333334	0.46666667	0.6521739
per.date_of_death_FIMeasure	0	0	0	0	0	0.12903225	0	0.4736842	0.36842105	0.48253295
per.date_of_death_Precision	0	0	0	0	0	1	0	1	0.7777778	0.51724136
per.date_of_death_Recall	0	0	0	0	0	0.06896552	0	0.10344482	0.2413793	0.5219874
per.employee_of_FIMeasure	0.25917602	0.24659863	0.28571427	0.32913667	0.36692223	0.38136986	0.41214055	0.46096656	0.47811818	0.51233184
per.employee_of_Precision	0.15442981	0.19423978	0.23747109	0.26813188	0.34643227	0.36024845	0.3797841	0.42382812	0.4509804	0.53201395
per.employee_of_Recall	0.8055879	0.33708187	0.35855645	0.42007683	0.38998836	0.40512222	0.45052385	0.50523865	0.50873107	0.53999996
per.origin_FIMeasure	0	0	0	0.029411767	0.08571429	0.12500001	0.21428573	0.4375	0.4950495	0.7941176
per.origin_Precision	0	0	0	0.5	0.75	0.35714287	0.5	0.7	0.71428573	0.4090909
per.origin_Recall	0	0	0	0.015151516	0.045454547	0.07575758	0.13636364	0.3181818	0.37878788	0
per.other.family_FIMeasure	0	0	0	0	0	0	0	0	0	0
per.other.family_Precision	0	0	0	0	0	0	0	0	0	0
per.other.family_Recall	0	0	0	0	0	0	0	0	0	0.27027026
per.parents_FIMeasure	0	0	0	0	0	0	0	0.0625	0.55555556	0.71875
per.parents_Precision	0	0	0	0	0	0	0	0.25	0	0.17857143
per.parents_Recall	0	0	0	0	0	0	0	0	0.035714287	0
per.religion_FIMeasure	0	0	0	0	0					

instance number	20	50	137	293	605	1230	2479	4977	9972	19963
macro F1Measure	0.017471176	0.028100075	0.05014503	0.0780785	0.11215027	0.14488265	0.176058	0.23334552	0.3224984	0.3830703
macro Precision	0.055089683	0.057870142	0.11891381	0.18958606	0.26699895	0.2743268	0.2852596	0.37197295	0.47989806	0.5115586
macro Recall	0.028256841	0.034659103	0.050094873	0.06808167	0.09242147	0.11720539	0.14570592	0.19010663	0.2675454	0.32200125
micro F1Measure	0.17829593	0.30452314	0.33590463	0.35396212	0.39323282	0.41146567	0.43723702	0.46353436	0.5078892	0.54470545
micro Precision	0.17829593	0.30452314	0.33590463	0.35396212	0.39323282	0.41146564	0.43723702	0.46353436	0.5078892	0.54470545
micro Recall	0.17829593	0.30452314	0.33590463	0.35396212	0.39323282	0.41146564	0.43723702	0.46353436	0.5078892	0.54470545
no relation F1Measure	0.22947441	0.4763508	0.49713394	0.506424	0.52562326	0.5375093	0.5530042	0.56059094	0.58682114	0.60229784
no relation Precision	0.30642202	0.3434466	0.36356708	0.37509912	0.38381794	0.40814582	0.42437592	0.4429573	0.48167723	0.5038817
no relation Recall	0.18341571	0.7770456	0.785832	0.77924216	0.8336079	0.78693026	0.79352003	0.76331687	0.7506864	0.74848986
org.alternate.names F1Measure	0	0	0.2675159	0.2857143	0.30857143	0.28	0.34013605	0.4596273	0.53932583	0.5632184
org.alternate.names Precision	0	0	0.46666667	0.37142858	0.42857143	0.55263156	0.71428573	0.75510204	0.72727275	0.7903226
org.alternate.names Recall	0	0	0.1875	0.23214285	0.24107143	0.1875	0.22321428	0.33035713	0.42857143	0.4375
org.city of headquarters F1Measure	0	0	0.33203125	0.30215827	0.3904555	0.5026738	0.53641206	0.556701	0.5938087	0.656291
org.city of headquarters Precision	0	0	0.42779207	0.58875505	0.5960265	0.501753	0.59683794	0.5955882	0.6060606	0.67346936
org.city of headquarters Recall	0	0	0.27419356	0.2032258	0.29032257	0.45483872	0.4870968	0.5225806	0.58064514	0.63870966
org.country of headquarters F1Measure	0	0.016129032	0.023809524	0.076124564	0.075862065	0.17665616	0.22910216	0.34020618	0.47030878	0.5346063
org.country of headquarters Precision	0	0.66666667	0.42857143	0.25	0.24444444	0.38888889	0.47435898	0.46153846	0.5625	0.6436782
org.country of headquarters Recall	0	0.008163265	0.012244898	0.04489796	0.04489796	0.114285715	0.15102041	0.26938775	0.40408164	0.45714286
org.dissolved F1Measure	0	0	0	0	0	0	0	0	0	0
org.dissolved Precision	0	0	0	0	0	0	0	0	0	0
org.dissolved Recall	0	0	0	0	0	0	0	0	0	0
org.founded F1Measure	0	0	0	0	0.024096385	0.15217392	0.1935484	0.2330097	0.34188038	0.41538462
org.founded Precision	0	0	0	0	0.25	0.53846157	0.64285713	0.5	0.5263158	0.5294118
org.founded Recall	0	0	0	0	0.012658228	0.088607594	0.11392405	0.15189873	0.25316456	0.34177214
org.founded by F1Measure	0	0	0	0.024328145	0.025	0.10989011	0.12353955	0.19147175	0.34188038	0.33543305
org.founded by Precision	0	0	0	0.33333334	1	0.41666666	0.5	0.41666666	0.5263158	0.7083333
org.founded by Recall	0	0	0	0.012658228	0.012658228	0.06329114	0.12658228	0.25316456	0.43037975	0.43037975
org.member of F1Measure	0	0.12765957	0.19858158	0.22857141	0.3170732	0.23529412	0.30167598	0.38251367	0.4329897	0.4509804
org.member of Precision	0	0.45	0.7	0.84210527	0.60465115	0.5625	0.46551725	0.5645161	0.5890411	0.55421686
org.member of Recall	0	0.07438017	0.11570248	0.1322314	0.21487603	0.14876033	0.2231405	0.2892562	0.353719	0.38016528
org.members F1Measure	0	0	0	0	0	0	0	0.22727272	0.35294116	0.35294116
org.members Precision	0	0	0	0	0	0	0	0.71428573	0.64285713	0.64285713
org.members Recall	0	0	0	0	0	0	0	0.13513513	0.24324325	0.24324325
org.parents F1Measure	0.016129032	0	0	0	0.07058824	0.064935066	0.12269939	0.12048192	0.15204678	0.3469388
org.parents Precision	0.5	0	0	0	0.125	0.15625	0.24390244	0.22727273	0.26530612	0.45945945
org.parents Recall	0.008196721	0	0	0	0.04918033	0.040983606	0.08196721	0.08196721	0.10655738	0.27868852
org.political/religious affiliation F1Measure	0	0	0	0	0	0	0	0	0.13333334	0.23529413
org.political/religious affiliation Precision	0	0	0	0	0	0	0	0	0	0.66666667
org.political/religious affiliation Recall	0	0	0	0	0	0	0	0	0.071428575	0.14285715
org.shareholders F1Measure	0	0	0	0	0	0	0	0	0	0
org.shareholders Precision	0	0	0	0	0	0	0	0	0	0
org.shareholders Recall	0	0	0	0	0	0	0	0	0	0
org.stateorprovince of headquarters F1Measure	0	0	0	0.01388889	0.31578946	0.28901735	0.38918918	0.43869524	0.44221106	0.5698777
org.stateorprovince of headquarters Precision	0	0	0	0.05263158	0.46153846	0.52083333	0.6	0.5411765	0.5945946	0.6896552
org.stateorprovince of headquarters Recall	0	0	0	0.008	0.24	0.2	0.288	0.368	0.352	0.48
org.subsidiaries F1Measure	0	0	0	0.030769233	0.057971016	0	0.10810812	0.12658228	0.17204301	0.23655917
org.subsidiaries Precision	0	0	0	0.5	0.33333334	0	0.36363637	0.3125	0.26666668	0.36666667
org.subsidiaries Recall	0	0	0	0.015873017	0.031746034	0	0.06349207	0.07936508	0.12698413	0.17460318
org.top_members/employees F1Measure	0	0	0	0.013122819	0.013157895	0.09756908	0.23762377	0.34128573	0.4229016	0.48672566
org.top_members/employees Precision	0	0	0	0.33333334	0.16666667	0.44444445	0.42857143	0.515625	0.59259292	0.6875
org.top_members/employees Recall	0	0	0	0.006849315	0.006849315	0.05479452	0.16438356	0.2260274	0.32876712	0.37671232
perage F1Measure	0	0	0	0	0	0	0	0	0.2857143	0.5
perage Precision	0	0	0	0	0	0	0	0	0	1
perage Recall	0	0	0	0	0	0	0	0	0.16666667	0.33333334
per.alternate.names F1Measure	0	0	0	0	0	0	0	0.09756098	0.25531918	0.33333334
per.alternate.names Precision	0	0	0	0	0	0	0	1	0.75	0.6
per.alternate.names Recall	0	0	0	0	0	0	0	0.051282052	0.15384616	0.23076923
per.cause of death F1Measure	0	0	0	0	0	0	0	0	0	0
per.cause of death Precision	0	0	0	0	0	0	0	0	0	0
per.cause of death Recall	0	0	0	0	0	0	0	0	0	0
per.children F1Measure	0	0	0	0	0	0	0	0	0.20000002	0.32432434
per.children Precision	0	0	0	0	0	0	0	0	0.375	0.4
per.children Recall	0	0	0	0	0	0	0	0	0.13636364	0.27272728
per.cities of residence F1Measure	0	0	0.028708132	0.020618556	0.033149168	0.039603963	0.07070707	0.16390912	0.25781247	0.29520924
per.cities of residence Precision	0	0	0.09375	0.11764706	0.75	0.16	0.33333334	0.3392857	0.4177215	0.42553192
per.cities of residence Recall	0	0	0.016949153	0.011299435	0.016949153	0.02259887	0.03954802	0.107344635	0.18644068	0.2259887
per.city of birth F1Measure	0.15714285	0.04081833	0.021505376	0.30508476	0.31666666	0.45454547	0.5841456	0.5521472	0.5430636	0.59119505
per.city of birth Precision	0.2244898	0.2857143	0	0.66666667	0.6551724	0.73170733	0.71428573	0.625	0.68333334	0.6911705
per.city of birth Recall	0.12087912	0.021978023	0.010989011	0.1978022	0.20879121	0.32967034	0.4945055	0.4945055	0.45054945	0.51648355
per.city of death F1Measure	0	0	0	0	0	0	0	0.260696	0.48000002	0.54545456
per.city of death Precision	0	0	0	0	0	0	0	0.375	0.6	0.85714287
per.city of death Recall	0	0	0	0	0	0	0	0.2	0.4	0.4
per.countries of residence F1Measure	0.004683406	0	0.021505376	0	0.1218638	0.26647967	0.3275434	0.32835823	0.43308508	0.41972184
per.countries of residence Precision	0.5	0	0.125	0.2556391	0.3298611	0.3464567	0.3878205	0.39449543	0.43555192	0.45905706
per.countries of residence Recall	0.002352941	0	0.011764706	0.08	0.22352941	0.31058824	0.28470588	0.3035294	0.39058822	0.43529412
per.country of birth F1Measure	0	0	0	0	0	0.049999997	0.096	0.2074074	0.32432434	0.32467535
per.country of birth Precision	0	0	0	0	0	0.27272728	0.375	0.53846157	0.61538464	0.55555556
per.country of birth Recall	0	0	0	0	0	0.027522936	0.055045873	0.12844037	0.22018349	0.2293578
per.country of death F1Measure	0	0	0	0	0	0	0	0	0	0.0952381
per.country of death Precision	0	0	0	0	0	0	0	0	0	0.33333334
per.country of death Recall	0	0	0	0	0	0	0	0	0	0.055555556
per.date of birth F1Measure	0	0	0	0	0.23529413	0.42105266	0.5	0.43478262	0.59259266	0.66666667
per.date of birth Precision	0	0	0	0	1	1	0.66666667	0.625	0.66666667	0.88888889
per.date of birth Recall	0	0	0	0	0.13333334	0.26666668	0.4	0.33333334	0.33333336	0.33333336
per.date of death F1Measure	0	0	0	0	0	0.18181819	0	0.36842105	0.52389855	0.66666666
per.date of death Precision	0	0	0	0	0	0.75	0	0.77777778	0.84615386	0.77272725
per.date of death Recall	0	0	0	0	0	0.10344828	0	0.2413793	0.37931034	0.5862069
per.employee of F1Measure	0.25525412	0.24603176	0.29281518	0.32670063	0.37234047	0.3785523	0.40685228	0.45157778	0.48320696	0.5225843
per.employee of Precision	0.15268572	0.19801277	0.23929098	0.27112135	0.37815127	0.35089463	0.37661052	0.42390195	0.45187438	0.51348317
per.employee of Recall	0.77764845	0.3247963	0.37718278	0.41094297	0.36670548	0.41094297	0.44237486	0.4831199	0.5192084	0.53201395
per.origin F1Measure	0	0	0	0.029411767	0.05633803	0.10526316	0.17073171	0.30583334	0.5102041	0.5242718
per.origin Precision	0	0	0	0.5	0.4	0.4	0.4375	0.63333333	0.78125	0.72927297
per.origin Recall	0	0	0	0.015151516	0.030330331	0.060606062	0.10606061	0.28787878	0.37878788	0.4090909
per.other family F1Measure	0	0	0	0	0	0	0	0	0	0
per.other family Precision	0	0	0	0	0	0	0	0	0	0
per.other family Recall	0	0	0	0	0	0	0	0	0	0
per.parents F1Measure	0	0	0	0	0	0	0	0	0	0
per.parents Precision	0	0	0	0	0	0	0	0	0.11764707	0.21621622
per.parents Recall	0	0	0	0	0	0	0	0	0.33333334	0.44444445
per.religion F1Measure	0	0	0	0	0	0	0	0	0.071428575	0.14285715
per.religion Precision	0	0	0	0	0	0	0	0	0	0
per.religion Recall	0	0								

instance number	20	59	137	293	605	1230	2479	4077	9972	19963
macro FMeasure	0.02014817	0.03561276	0.04561733	0.0774566	0.10990504	0.15156762	0.20946942	0.2662033	0.33694678	0.38019714
macro Precision	0.045035914	0.114397734	0.1908015	0.20307654	0.25433438	0.34552377	0.39411435	0.44794875	0.5032449	0.5408333
macro Recall	0.029408913	0.03923494	0.047125094	0.07102449	0.092138685	0.12272665	0.16749257	0.20764077	0.27619955	0.32829905
micro FMeasure	0.16129032	0.27577138	0.32030153	0.34975457	0.375	0.41164097	0.45196354	0.47159886	0.5091164	0.5429523
micro Precision	0.16129032	0.27577138	0.32030153	0.34975457	0.375	0.41164094	0.45196354	0.47159886	0.5091164	0.5429523
micro Recall	0.16129032	0.27577138	0.32030153	0.34975457	0.375	0.41164094	0.45196354	0.47159886	0.5091164	0.5429523
no relation FMeasure	0.23804748	0.42401573	0.4860679	0.50677794	0.5158064	0.5390915	0.5631280	0.56986856	0.5838349	0.59854656
no relation Precision	0.30427352	0.33046946	0.33763346	0.3707094	0.38221282	0.40772245	0.43035403	0.45102432	0.47068915	0.49063236
no relation Recall	0.19546698	0.5914333	0.8336079	0.800659	0.7929709	0.7951675	0.8143877	0.77375066	0.7457441	0.74629325
org.alternate names FMeasure	0	0	0	0	0.084745765	0.2576687	0.4142012	0.3846154	0.59009006	0.59009006
org.alternate names Precision	0	0	0	0	0.8333333	0.4117647	0.61403507	0.6818182	0.41964287	0.8125
org.alternate names Recall	0	0	0	0	0.04464286	0.1875	0.3125	0.26785713	0.60194176	0.4642857
org.city of headquarters FMeasure	0.012820513	0.27430555	0.28650904	0.39215684	0.4268078	0.4705882	0.5474683	0.5387097	0.6038961	0.65
org.city of headquarters Precision	1	0.29699248	0.25183374	0.397351	0.47081712	0.47682118	0.5372671	0.5387097	0.6	0.67241377
org.city of headquarters Recall	0.006451613	0.2548387	0.33225808	0.38709676	0.39032257	0.46451613	0.5580645	0.5387097	0.44131452	0.62903225
org.country of headquarters FMeasure	0	0.015209124	0.007905138	0.13003097	0.20103092	0.27053142	0.35643563	0.3627204	0.519337	0.52380955
org.country of headquarters Precision	0	0.11111111	0.125	0.26293078	0.27272728	0.33136094	0.4528302	0.47368422	0.38367346	0.62857145
org.country of headquarters Recall	0	0.008163205	0.0040816325	0.08571429	0.15918367	0.22857143	0.29387754	0.29387754	0	0.4489796
org.dissolved FMeasure	0	0	0	0	0	0	0	0	0	0.125
org.dissolved Precision	0	0	0	0	0	0	0	0	0	1
org.dissolved Recall	0	0	0	0	0	0	0	0	0.37606835	0.06666667
org.founded FMeasure	0	0	0	0.11363636	0.14893618	0.24561404	0.21276596	0.23404256	0.57894737	0.43548387
org.founded Precision	0	0	0	0.5555556	0.46666667	0.4	0.6666667	0.73333335	0.278481	0.6
org.founded Recall	0	0	0	0.06329114	0.088607594	0.17721519	0.12658228	0.1392405	0.46551722	0.34177214
org.founded by FMeasure	0	0	0	0	0.15384614	0.17391301	0.317757	0.36997248	0.7297297	0.47619045
org.founded by Precision	0	0	0	0	0.5833333	0.571286	0.60714287	0.6666667	0.34177214	0.63829786
org.founded by Recall	0	0	0	0	0.088607594	0.101265825	0.21518987	0.25316456	0.41791046	0.37974682
org.member of FMeasure	0	0	0.09375	0.1076923	0.3253012	0.37078652	0.3314286	0.40206188	0.525	0.43781093
org.member of Precision	0	0	0.85714287	0.7777778	0.6	0.57894737	0.537037	0.53424656	0.34710744	0.55
org.member of Recall	0	0	0.049586777	0.05785124	0.2231405	0.27272728	0.23660943	0.32231405	0.38297874	0.36363637
org.members FMeasure	0	0	0.10256411	0.1904762	0.15	0.1285713	0.31111112	0.9	0.4444442	0.23529413
org.members Precision	0	0	0	1	0.8	1	0.6	0.875	0.24324325	0.7058824
org.members Recall	0	0	0	0.054054055	0.10810811	0.08108108	0.08108108	0.1891892	0.3043478	0.3243243
org.parents FMeasure	0	0	0	0	0	0.015873015	0.08759124	0.12328767	0.4516129	0.38190955
org.parents Precision	0	0	0	0	0	0.25	0.4	0.375	0.22950819	0.4935065
org.parents Recall	0	0	0	0	0	0.008196721	0.04918033	0.07377049	0.25	0.3114754
org.political/religious affiliation FMeasure	0	0	0	0	0	0	0.13333334	0	1	0.23529413
org.political/religious affiliation Precision	0	0	0	0	0	0	1	0	0.14285715	0.6666667
org.political/religious affiliation Recall	0	0	0	0	0	0	0.071428575	0	0	0.14285715
org.shareholders FMeasure	0	0	0	0	0	0	0	0	0	0
org.shareholders Precision	0	0	0	0	0	0	0	0	0	0
org.shareholders Recall	0	0	0	0	0	0	0	0	0	0.4678899
org.state/province of headquarters FMeasure	0	0	0	0.15476191	0.1990498	0.16216215	0.33862433	0.430622	0.54383871	0.53333336
org.state/province of headquarters Precision	0	0	0.123222746	0.2631579	0.25	0.5	0.53571427	0.408	0.4	0.6
org.state/province of headquarters Recall	0	0	0	0.208	0.16	0.12	0.256	0.36	0.19512197	0.48
org.subsidiaries FMeasure	0	0	0	0	0	0.029850747	0.08695652	0.10389611	0.42105263	0.25581396
org.subsidiaries Precision	0	0	0	0	0	0.25	0.5	0.2857143	0.12698413	0.17826087
org.subsidiaries Recall	0	0	0	0	0	0.015873017	0.04761905	0.06349207	0.4394619	0.17460318
org.top members/employees FMeasure	0	0	0.013605443	0.086419754	0.08606516	0.19680119	0.2617801	0.33333333	0.6363636	0.4741379
org.top members/employees Precision	0	0	0	0.4375	0.46666667	0.40425333	0.55555556	0.4868421	0.33561644	0.6395349
org.top members/employees Recall	0	0	0.006849315	0.047945205	0.13013698	0.17123288	0.25342464	0.5	0.37671232	0.37671232
perage FMeasure	0	0	0	0	0	0	0	0.2857143	1	0.5
perage Precision	0	0	0	0	0	0	0	1	0.33333334	1
perage Recall	0	0	0	0	0	0	0	0.16666667	0.28	0.33333334
per.alternate names FMeasure	0	0	0.049999997	0.04999997	0.04999997	0.04999997	0.0952381	0.17777778	0.6363636	0.3137255
per.alternate names Precision	1	1	1	1	1	1	0.6666667	0.6666667	0.17948718	0.6666667
per.alternate names Recall	0	0	0.025641026	0.025641026	0.025641026	0.025641026	0.051282052	0.102564104	0	0.20512821
per.cause of death FMeasure	0	0	0	0	0	0	0	0	0	0
per.cause of death Precision	0	0	0	0	0	0	0	0	0	0
per.cause of death Recall	0	0	0	0	0	0	0	0	0.13793103	0
per.children FMeasure	0	0	0	0	0	0	0	0	0.2857143	0.30393034
per.children Precision	0	0	0	0	0	0	0	0	0.09090909	0.45454547
per.children Recall	0	0	0	0	0	0	0	0	0.21599999	0.22727273
per.cities of residence FMeasure	0	0	0	0	0.020942409	0.06542056	0.12499999	0.15384614	0.369863	0.28793776
per.cities of residence Precision	0	0	0	0	0.14285715	0.1891892	0.29787233	0.31578946	0.15254237	0.4625
per.cities of residence Recall	0	0	0	0	0.011299435	0.03954802	0.07909604	0.10169491	0.56050956	0.20939355
per.city of birth FMeasure	0	0	0.19471777	0.36363637	0.3561644	0.407778	0.50340134	0.5466667	0.6666667	0.59119505
per.city of birth Precision	0	0	0.44444445	0.47272727	0.5471698	0.66071427	0.69491524	0.48351648	0.6911705	0.6911705
per.city of birth Recall	0	0	0.10989011	0.30769232	0.2857143	0.31868133	0.4065934	0.45054945	0.3157895	0.51648355
per.city of death FMeasure	0	0	0	0	0	0	0	0.11764707	0.75	0.5217392
per.city of death Precision	0	0	0	0	0	0	0	0.5	0.2	0.75
per.city of death Recall	0	0	0	0	0	0	0	0.06666667	0.40202275	0.4
per.countries of residence FMeasure	0.11878574	0.16711591	0.060085833	0.16021654	0.22222221	0.32249674	0.28851254	0.36363634	0.43442622	0.45728037
per.countries of residence Precision	0.073051944	0.1955836	0.34146342	0.23214285	0.27118644	0.3604051	0.38888889	0.41373365	0.37411764	0.4679803
per.countries of residence Recall	0.31764707	0.14588235	0.032941177	0.12235294	0.1882353	0.2917647	0.23058824	0.32470587	0.24057536	0.44705883
per.country of birth FMeasure	0	0.036036037	0.018018018	0.06015037	0.0661157	0.18320611	0.226695036	0.19402985	0.4864865	0.32258064
per.country of birth Precision	0	1	0.5	0.16666667	0.33333334	0.54545456	0.5	0.52	0.16513762	0.54347825
per.country of birth Recall	0	0.018348623	0.0091743115	0.036697246	0.036697246	0.110091746	0.14678898	0.11926056	0	0.2293578
per.country of death FMeasure	0	0	0	0	0	0	0	0	0.09090909	0.09090909
per.country of death Precision	0	0	0	0	0	0	0	0	0	0.25
per.country of death Recall	0	0	0	0	0	0	0	0	0.64000005	0.05555556
per.date of birth FMeasure	0.09090909	0.125	0.125	0	0	0.23529413	0.6086956	0.6086956	0.8	0.69230765
per.date of birth Precision	1	1	1	0	0	1	0.875	0.875	0.53333336	0.8181818
per.date of birth Recall	0.06666667	0.06666667	0.06666667	0	0	0.13333334	0.46666667	0.46666667	0.59999996	0.6
per.date of death FMeasure	0	0	0	0	0	0	0.22857141	0.31285715	0.71428573	0.6530612
per.date of death Precision	0	0	0	0	0	0	0	0.6666667	1	0.51724136
per.date of death Recall	0	0	0	0	0	0	0.13793103	0.20689656	0.55172414	0.55172414
per.employee of FMeasure	0.25069124	0.2613982	0.20234986	0.27906975	0.29981717	0.35199007	0.40286055	0.5040745	0.5192418	0.5192418
per.employee of Precision	0.17028381	0.19402143	0.23031203	0.29419354	0.314578	0.37783712	0.41269842	0.47729918	0.5154639	0.5124717
per.employee of Recall	0.4749709	0.40046567	0.18044238	0.20542419	0.28637952	0.32945284	0.39348078	0.3764706	0.8064516	0.52619326
per.origin FMeasure	0	0	0	0	0.05714286	0.23681211	0.35714287	0.84210527	0.37878788	0.54001963
per.origin Precision	0	0	0	0	0.5	0.8333333	0.9	0.24242425	0	0.777778
per.origin Recall	0	0	0	0	0.030303031	0.13636364	0.22727273	0	0	0.42424244
per.other family FMeasure	0	0	0	0	0	0	0	0	0	0
per.other family Precision	0	0	0	0	0	0	0	0	0.1875	0
per.other family Recall	0	0	0	0	0	0	0	0.12121213	0.75	0
per.parents FMeasure	0	0	0	0	0	0	0	0.4	0.10714286	0.30769232
per.parents Precision	0	0	0	0	0	0	0	0.071428575	0	0.54545456
per.parents Recall	0	0	0	0	0	0	0	0	0	0.21428572
per.religion FMeasure	0	0	0	0	0	0	0	0	0	0
per.religion Precision	0	0	0	0	0					

instance number	20	59	137	293	605	1290	2479	4977	9972	19963
macro FMeasure	0.0244476553	0.035612766	0.05191559	0.07183133	0.0998873	0.15913217	0.19980552	0.2834333	0.3411472	0.4070243
macro Precision	0.07726521	0.114397734	0.1896726	0.24354619	0.24314995	0.37529195	0.35990562	0.45523817	0.5111061	0.5501761
macro Recall	0.032938607	0.03923494	0.05249303	0.0694816	0.09134643	0.1267283	0.15975504	0.2382401	0.2766059	0.34533334
micro FMeasure	0.3108345	0.27577138	0.3096073	0.35220897	0.37856096	0.41602835	0.4482819	0.47685835	0.50508416	0.54102385
micro Precision	0.3108345	0.27577138	0.3096073	0.35220897	0.37856096	0.41602835	0.4482819	0.47685835	0.50508416	0.54102385
micro Recall	0.3108345	0.27577138	0.3096073	0.35220897	0.37856096	0.41602835	0.4482819	0.47685835	0.50508416	0.54102385
no relation FMeasure	0.4802415	0.42401573	0.47229174	0.5020725	0.5261857	0.5424103	0.5626315	0.5721233	0.5775333	0.598696
no relation Precision	0.32522383	0.33040646	0.35011926	0.36967808	0.38332912	0.39755834	0.43163145	0.4542231	0.46971783	0.5020454
no relation Recall	0.9176277	0.5914333	0.7254256	0.7819879	0.83086216	0.8904544	0.8077979	0.73370662	0.74958813	0.7413509
org:alternate names FMeasure	0	0	0	0	0.006895524	0.26043503	0.4074074	0.47598772	0.53892213	0.57309943
org:alternate names Precision	0	0	0	0	0	0.3859649	0.66	0.7254002	0.8181818	0.8305085
org:alternate names Recall	0	0	0	0	0.035714287	0.19642857	0.29484287	0.33631313	0.42857	0.4408163
org:city of headquarters FMeasure	0.012820513	0.27430555	0.28900257	0.38504672	0.37937385	0.41735845	0.52147245	0.5553772	0.5923461	0.6415813
org:city of headquarters Precision	1	0.2969428	0.23940678	0.4577777	0.44206008	0.47840533	0.49707003	0.55271566	0.61163835	0.6643836
org:city of headquarters Recall	0.006451613	0.2548387	0.36451614	0.33225808	0.33225808	0.44561513	0.5483871	0.5550645	0.57410354	0.6280645
org:country of headquarters FMeasure	0	0.015209124	0	0.1104512	0.18546365	0.25822783	0.3618582	0.39627014	0.47201946	0.5192308
org:country of headquarters Precision	0	0.1111111	0	0.1919192	0.24025974	0.34	0.4512195	0.46195653	0.58433735	0.6315789
org:country of headquarters Recall	0	0.008163365	0	0.07753102	0.15102041	0.20843426	0.30204082	0.3469388	0.39591837	0.4408163
org:dissolved FMeasure	0	0	0	0	0	0	0	0	0	0.11764707
org:dissolved Precision	0	0	0	0	0	0	0	0	0	0.5
org:dissolved Recall	0	0	0	0	0	0	0	0	0	0.06666667
org:founded FMeasure	0	0	0	0	0.11494253	0.18947369	0.25454545	0.1935484	0.19565217	0.331024
org:founded Precision	0	0	0	0	0.625	0.5625	0.4516129	0.44285713	0.6923077	0.6506232
org:founded Recall	0	0.06399114	0	0.1392405	0.1772119	0.1392405	0.1392405	0.2912405	0.331024	0.4408163
org:founded by FMeasure	0	0	0	0	0.13636363	0.21053632	0.30476192	0.3272727	0.45614057	0.47241093
org:founded by Precision	0	0	0	0	0.66666667	0.625	0.61538464	0.58064514	0.714285716	0.625
org:founded by Recall	0	0	0	0	0.07594936	0.12658228	0.20253165	0.2278481	0.32911393	0.37974682
org:member of FMeasure	0	0	0.09375	0.122137405	0.3550296	0.37288138	0.32142857	0.3743315	0.43564358	0.46226415
org:member of Precision	0	0	0.85714287	0.8	0.625	0.58928573	0.5744681	0.530303	0.54320985	0.53840157
org:member of Recall	0	0.049586777	0.0696157	0.2470388	0.27272728	0.2307405	0.2802562	0.3403405	0.4032787	0.4538687
org:members FMeasure	0	0	0.10256411	0.18694651	0.19512194	0.13933488	0.36734697	0.36734697	0.41509433	0.41509433
org:members Precision	0	0	0	0.66666667	1	0.5	0.75	0.75	0.75	0.6875
org:members Recall	0	0	0.054054055	0.10810811	0.10810811	0.08108108	0.24324325	0.24324325	0.2927973	0.2927973
org:parents FMeasure	0	0	0	0	0.015873015	0.07142857	0.086330935	0.30939227	0.35602093	0.35602093
org:parents Precision	0	0	0	0	0	0	0	0	0	0
org:parents Recall	0	0	0	0	0	0	0	0	0	0
org:political/religious affiliation FMeasure	0	0	0	0	0	0.008196721	0.040958306	0.04918033	0.22505819	0.27586852
org:political/religious affiliation Precision	0	0	0	0	0	0	0	0	0.25	0.23252413
org:political/religious affiliation Recall	0	0	0	0	0	0	0	0	0	0.66666667
org:shareholders FMeasure	0	0	0	0	0	0	0	0	0.14285715	0.14285715
org:shareholders Precision	0	0	0	0	0	0	0	0	0	0
org:shareholders Recall	0	0	0	0	0	0	0	0	0	0
org:shareholders FMeasure	0	0	0	0.16190477	0.18652849	0.1797528	0.37158474	0.45370373	0.49074075	0.5038767
org:stateprovince of headquarters Precision	0	0	0.2	0.2647059	0.3018868	0.5862009	0.53846157	0.5824176	0.6258176	0.6258176
org:stateprovince of headquarters Recall	0	0	0.136	0.144	0.128	0.272	0.392	0.424	0.512	0.512
org:subsidiaries FMeasure	0	0	0.030303031	0	0.030303031	0.029411767	0.10958905	0.22985006	0.23913044	0.23913044
org:subsidiaries Precision	0	0.33333334	0	0.33333334	0	0.33333334	0.03400007	0.4	0.41666666	0.37931034
org:subsidiaries Recall	0	0.015873017	0	0.015873017	0.015873017	0.015873017	0.06340007	0.1573016	0.17460318	0.17460318
org:top members/employees FMeasure	0	0.0136015443	0.051612906	0.10588235	0.20725387	0.21164021	0.35514015	0.43064018	0.42666667	0.42666667
org:top members/employees Precision	0	1	0.4444445	0.375	0.42553192	0.4651163	0.5588235	0.6376812	0.6675949	0.6675949
org:top members/employees Recall	0	0.006849315	0.006739726	0.061643835	0.1369863	0.1369863	0.26027396	0.30136988	0.32867712	0.32867712
perage FMeasure	0	0	0	0	0	0	0	0.287143	0.5	0.5
perage Precision	0	0	0	0	0	0	0	1	1	1
perage Recall	0	0	0	0	0	0	0	0.6666667	0.33333334	0.33333334
per:alternate names FMeasure	0	0	0.049999997	0.049999997	0.09756098	0.0952381	0.17777777	0.26927087	0.32	0.32
per:alternate names Precision	0	0	1	1	1	1	0.6666667	0.6666667	0.53846157	0.72727275
per:alternate names Recall	0	0.025641026	0.025641026	0	0.051282052	0.051282052	0.102564104	0.17948718	0.20512821	0.20512821
per:cause of death FMeasure	0	0	0	0	0	0	0	0	0	0
per:cause of death Precision	0	0	0	0	0	0	0	0	0	0
per:cause of death Recall	0	0	0	0	0	0	0	0	0	0
per:children FMeasure	0	0	0	0	0	0	0	0	0.2857143	0.34285715
per:children Precision	0	0	0	0	0	0	0	0	0.6666667	0.46133846
per:children Recall	0	0	0	0	0	0	0	0	0.18181819	0.27272728
per:city of residence FMeasure	0	0	0.011235955	0.010752688	0.10232557	0.16216215	0.17777778	0.20408162	0.3129771	0.3129771
per:city of residence Precision	0	0	0.11111111	0.28947368	0.4	0.41666666	0.36764705	0.43253294	0.4823294	0.4823294
per:city of residence Recall	0	0	0.0056407175	0.0056407175	0.06214689	0.10101991	0.1289335	0.14121294	0.23163832	0.23163832
per:city of birth FMeasure	0.26490065	0.26446283	0.36942676	0.36942676	0.410547	0.410547	0.5419355	0.5419355	0.5419355	0.5419355
per:city of birth Precision	0.33333334	0.33333336	0.43930394	0.48214287	0.625	0.60784316	0.65625	0.64179105	0.67142856	0.67142856
per:city of birth Recall	0.21978022	0.17582418	0.31868133	0.2967033	0.32967034	0.34065935	0.46153846	0.47527247	0.51648355	0.51648355
per:city of death FMeasure	0	0	0	0	0	0	0	0.3	0.3	0.3
per:city of death Precision	0	0	0	0	0	0	0	0.6	0.6	0.6
per:city of death Recall	0	0	0	0	0	0	0	0	0.4	0.4
per:country of residence FMeasure	0.091767885	0.16711591	0.14285715	0.1627543	0.22126436	0.32180852	0.30276567	0.35318518	0.39056358	0.44144446
per:country of residence Precision	0.10759494	0.1955836	0.2195122	0.24290066	0.28413284	0.37043008	0.39694658	0.4018127	0.4408284	0.46649486
per:country of residence Recall	0.08	0.14588235	0.105882354	0.12235294	0.18117647	0.28470585	0.24470858	0.31294116	0.35058823	0.42588234
per:country of birth FMeasure	0	0.036036037	0.035714284	0.0620155	0.15827338	0.17518249	0.22377622	0.1884058	0.25333333	0.28947368
per:country of birth Precision	0	1	0.66666667	0.2	0.36666667	0.42857143	0.47058824	0.44827586	0.46341464	0.5116279
per:country of birth Recall	0	0.018348623	0.018348623	0.036967246	0.10091743	0.10091746	0.14678898	0.119266056	0.17431192	0.20138486
per:country of death FMeasure	0	0	0	0	0	0	0	0	0	0.09060909
per:country of death Precision	0	0	0	0	0	0	0	0	0	0.25
per:country of death Recall	0	0	0	0	0	0	0	0	0	0.055555556
per:date of birth FMeasure	0.125	0.125	0	0	0	0.125	0.54545456	0.5217392	0.64000005	0.64000005
per:date of birth Precision	0	1	1	0	0	1	0.85714287	0.75	0.8	0.8
per:date of birth Recall	0	0.06666667	0.06666667	0	0	0.06666667	0.4	0.53333336	0.53333336	0.53333336
per:date of death FMeasure	0	0	0	0	0	0.06666667	0.2529941	0.2857143	0.5217392	0.64
per:date of death Precision	0	0	0	0	0	0.8	0.8333333	0.7058824	0.7619048	0.7619048
per:date of death Recall	0	0	0	0	0.03448276	0.13793103	0.1724138	0.41379312	0.51572414	0.51572414
per:employee of FMeasure	0.08486017	0.2613982	0.24087957	0.31480518	0.2889035	0.34749526	0.39953405	0.45685438	0.47097847	0.52771616
per:employee of Precision	0.24719101	0.4202413	0.21103327	0.28424016	0.3313253	0.3816156	0.3997669	0.45319494	0.44842106	0.5037037
per:employee of Recall	0.05122235	0.40046567	0.2805588	0.35273573	0.25611177	0.31895755	0.3993015	0.48079163	0.4959255	0.5541327
per:origin FMeasure	0	0	0	0.05797016	0.21072632	0.37290393	0.3874612	0.39399305	0.5251575	0.5714286
per:origin Precision	0	0	0	0.66666667	0.8	0.7619048	0.8	0.86200905	0.7692208	0.7692208
per:origin Recall	0	0	0	0.030303031	0.121212125	0.24242225	0.24242225	0.37878788	0.45454547	0.45454547
per:other family FMeasure	0	0	0	0	0	0	0	0	0	0
per:other family Precision	0	0	0	0	0	0	0	0	0	0
per:other family Recall	0	0	0	0	0	0	0	0	0	0
per:parents FMeasure	0	0	0	0	0	0.064516135	0.24242426	0.22222224	0.33333334	0.33333334
per:parents Precision	0	0	0	0	0	0	0	0	0.8	0.5
per:parents Recall	0	0	0	0	0	0	0.035714287	0.14285715	0.14285715	0.14285715
per:region FMeasure	0	0	0	0	0	0	0	0	0	0
per:region Precision	0	0	0	0	0	0	0	0</		

Table A.4: Performance of $M - E - LUE$

instance number	20	50	137	293	605	1230	2470	4977	9972	19963
macro FMeasure	0.029712686	0.035612766	0.0433363	0.074671	0.10390158	0.13905409	0.1994201	0.25954375	0.3273146	0.4082272
macro Precision	0.10237411	0.11439734	0.16268632	0.22117816	0.2632771	0.31922948	0.3558912	0.432435	0.42663153	0.5420345
macro Recall	0.035415888	0.03923494	0.04560056	0.06715876	0.0872334	0.11430035	0.16048174	0.20821652	0.26036383	0.34785005
micro FMeasure	0.26069424	0.27571738	0.31837308	0.35080644	0.37517536	0.41532254	0.4456522	0.4763324	0.50946707	0.54347825
micro Precision	0.26069424	0.27571738	0.31837308	0.35080644	0.37517533	0.41532257	0.4456522	0.4763324	0.50946707	0.54347825
micro Recall	0.26069424	0.27571738	0.31837308	0.35080644	0.37517533	0.41532257	0.4456522	0.4763324	0.50946707	0.54347825
no relation FMeasure	0.41435225	0.42401573	0.4802761	0.50145376	0.52176095	0.54518735	0.55379588	0.573401	0.58664984	0.6072821
no relation Precision	0.31808278	0.33046946	0.3427164	0.36413315	0.37994987	0.4096053	0.42657433	0.4548969	0.47557137	0.50406206
no relation Recall	0.7215816	0.5914333	0.8023064	0.80505216	0.83250964	0.8149369	0.8039359	0.77539814	0.7649643	0.74958813
org.alternate names FMeasure	0	0	0	0	0.051724136	0.2368421	0.39751554	0.44171777	0.57142854	0.71542854
org.alternate names Precision	0	0	0	0	0.75	0.45	0.6536012	0.7058824	0.41964287	0.7396508
org.alternate names Recall	0	0	0	0	0.026783715	0.1671428	0.282143	0.3212857	0.599018	0.5452857
orgcity of headquarters FMeasure	0.012820513	0.02743055	0.29216868	0.396072	0.37500003	0.46381584	0.5466238	0.57051283	0.60977474	0.6417512
orgcity of headquarters Precision	1	1	0.29692948	0.2740113	0.40199336	0.43589744	0.47351437	0.54487818	0.566879	0.59032255
orgcity of headquarters Recall	0.006451613	0.2548387	0.31290323	0.39032257	0.32903227	0.45483872	0.54583871	0.57419354	0.4117644	0.6322506
orgcountry of headquarters FMeasure	0	0.0115209124	0.022900764	0.057971008	0.17258884	0.2843602	0.3491272	0.40677968	0.5521472	0.5255814
orgcountry of headquarters Precision	0	0.11511111	0.1764706	0.2586045	0.22818792	0.33898306	0.44871795	0.5	0.36734094	0.6108108
orgcountry of headquarters Recall	0	0.008163265	0.012241898	0.03265306	0.13873551	0.24139796	0.2857143	0.3453715	0	0.4612241
org.dissolved FMeasure	0	0	0	0	0	0	0	0	0	0
org.dissolved Precision	0	0	0	0	0	0	0	0	0	0
org.dissolved Recall	0	0	0	0	0	0	0	0	0	0
org.founded FMeasure	0	0	0	0	0.04761905	0.06741573	0.20370369	0.21276596	0.27083334	0.41599998
org.founded Precision	0	0	0	0	0.3	0.37931034	0.6666667	0.7647059	0.278481	0.5652174
org.founded Recall	0	0	0	0	0.025316456	0.0397468	0.1392055	0.16455697	0.16455697	0.32911893
org.founded by FMeasure	0	0	0	0	0.1194253	0.13333333	0.2857143	0.388054	0.7071027	0.41420296
org.founded by Precision	0	0	0	0	0.625	0.54554556	0.5769231	0.64705884	0.32911893	0.627907
org.founded by Recall	0	0	0	0	0.06329114	0.07594936	0.18987341	0.17919046	0.34177214	0.34177214
org.member of FMeasure	0	0	0.07874016	0.0930323255	0.2909091	0.36571428	0.39575128	0.56060066	0.525	0.44554556
org.member of Precision	0	0	0.8333333	0.75	0.54545456	0.5929296	0.5625926	0.30578512	0.34710744	0.5555555
org.member of Recall	0	0	0.041322313	0.04986777	0.1983471	0.2644628	0.2844628	0.41666663	0.33333334	0.3388833
org.members FMeasure	0	0	0.10256411	0.1947662	0.1947662	0.1947662	0.18604651	0.3909694	0.7272727	0.0740743
org.members Precision	0	0	1	0.8	0.8	0.8	0.6666667	0.27027026	0.2162622	0.64705884
org.members Recall	0	0	0.054054055	0.10810811	0.10810811	0.10810811	0.08510638	0.3068182	0.2972973	0.2972973
org.parents FMeasure	0	0	0	0	0	0	0.04444444	0.31578946	0.5	0.34554973
org.parents Precision	0	0	0	0	0	0	0.23079233	0.04918033	0.22311418	0.47826987
org.parents Recall	0	0	0	0	0	0	0.024590164	0	0.25	0.2704918
orgpolitical religious affiliation FMeasure	0	0	0	0	0	0	0	0	0	0
orgpolitical/religious affiliation Precision	0	0	0	0	0	0	0	0	0	0
orgpolitical/religious affiliation Recall	0	0	0	0	0	0	0	0	0	0
orgshareholders FMeasure	0	0	0	0	0	0	0	0	0	0
orgshareholders Precision	0	0	0	0	0	0	0	0	0	0
orgshareholders Recall	0	0	0	0	0	0	0	0	0	0
orgstateprovince of headquarters FMeasure	0	0	0	0	0	0	0	0.42211056	0.49541283	0.41599998
orgstateprovince of headquarters Precision	0	0	0.1473262	0.19704434	0.16049384	0.3645833	0.5676073	0.5804114	0.564148	0.564148
orgstateprovince of headquarters Recall	0	0	0.22580044	0.25641027	0.35131535	0.52328804	0.336	0.432	0.0763297	0.0763297
orgsubsidiaries FMeasure	0	0	0.112	0.16	0.104	0.28	0.078947365	0.18390085	0.488	0.488
orgsubsidiaries Precision	0	0	0	0	0.03125	0.08333336	0.23076923	0.33333334	0.2391304	0.2391304
orgsubsidiaries Recall	0	0	0	0.5	0	1	0.33333334	0.04761905	0.12098413	0.37931034
orgtop members/employees FMeasure	0	0	0.015873017	0	0.015873017	0.04761905	0.29388886	0.4151557	0.71460318	0.71460318
orgtop members/employees Precision	0	0.013065443	0.0607561	0.09746098	0.1954946	0.30597414	0.47429714	0.57429714	0.6573737	0.6573737
orgtop members/employees Recall	0	1	0.2777778	0.4444444	0.46153846	0.5952381	0.72123876	0.30136098	0.6538461	0.6538461
orgtop members/employees Precision	0	0	0.006849315	0.05479452	0.12328767	0.17123288	0.2857143	0.5	0.33451058	0.33451058
orgtop members/employees Recall	0	0	0	0	0	0	0	1	0.5	0.5
orgtop members/employees Precision	0	0	0	0	0	0	0	0.16666667	0.33333334	1
orgtop members/employees Recall	0	0	0	0	0	0	0	0.17777778	0.226415	0.33333334
orgtop members/employees Precision	0	0.049999997	0.049999997	0.04999997	0.04999997	0.095281	0.6666667	0.102564104	0.15384616	0.72727275
orgtop members/employees Recall	0	1	1	1	1	1	0.6666667	0.102564104	0.15384616	0.72727275
orgtop members/employees Precision	0	0.025641026	0.025641026	0.025641026	0.025641026	0.051282052	0.051282052	0	0.20512821	0.20512821
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Recall	0	0	0	0	0	0	0	0	0	0
orgtop members/employees Precision	0	0	0	0						

Table A.5: Performance of $M - E - LUEW$

instance number	20	59	137	293	605	1230	2479	4977	9972	19963
macro F1Measure	0.092462885	0.036312766	0.047448337	0.07953772	0.10714161	0.1608003	0.19433147	0.2571875	0.3316044	0.3807464
macro Precision	0.059920024	0.114397734	0.1951538	0.23618153	0.27573457	0.37409383	0.39589795	0.43779448	0.49749488	0.54792714
macro Recall	0.041950483	0.03923494	0.04750006	0.07140385	0.08962873	0.128514	0.15537168	0.2063707	0.2701213	0.31557792
micro F1Measure	0.113604486	0.27577138	0.31258765	0.34765077	0.37780505	0.41830295	0.44477558	0.4745924	0.5077139	0.5438289
micro Precision	0.113604486	0.27577138	0.31258765	0.34765077	0.37780505	0.41830295	0.44477558	0.4745924	0.5077139	0.5438289
micro Recall	0.113604486	0.27577138	0.31258765	0.34765077	0.37780505	0.41830295	0.44477558	0.4745924	0.5077139	0.5438289
no relation F1Measure	0.17611942	0.42401573	0.46989007	0.49907917	0.5244732	0.548093	0.56907264	0.5868315	0.585311	0.601929
no relation Precision	0.27473807	0.33046946	0.34349594	0.37545025	0.37970864	0.41446237	0.4299531	0.4523037	0.4747755	0.5009121
no relation Recall	0.12959912	0.5914333	0.7424492	0.74409664	0.84733665	0.8088962	0.8056031	0.7655135	0.7567271	0.75398135
org:alternate names F1Measure	0	0	0	0	0.06896524	0.26190472	0.39506173	0.42236024	0.55172414	0.58620685
org:alternate names Precision	0	0	0	0	1	0.39285713	0.64	0.6938776	0.7741935	0.82258064
org:alternate names Recall	0	0	0	0	0.035714287	0.19642857	0.2857143	0.30357143	0.42857143	0.45535713
org:city of headquarters F1Measure	0.012820513	0.27430555	0.3290963	0.392755	0.39464882	0.47819066	0.5410628	0.56418383	0.608838	0.640396
org:city of headquarters Precision	1	0.29699248	0.34507042	0.4128114	0.4097222	0.4789644	0.5401929	0.55451715	0.6179402	0.6678322
org:city of headquarters Recall	0.006451613	0.2548387	0.31612903	0.37419355	0.38064516	0.47741935	0.5419355	0.57419354	0.6	0.61612904
org:country of headquarters F1Measure	0.008032128	0.015209124	0	0.118421055	0.16167665	0.25581393	0.3529412	0.42180094	0.4574209	0.53613055
org:country of headquarters Precision	0.25	0.11111111	0	0.30508474	0.30337077	0.2972973	0.4417178	0.50282484	0.56626055	0.625
org:country of headquarters Recall	0.0040816325	0.008163265	0	0.073469386	0.11020408	0.2244898	0.29387754	0.3632653	0.38367346	0.46938777
org:dissolved F1Measure	0	0	0	0	0	0	0	0	0	0
org:dissolved Precision	0	0	0	0	0	0	0	0	0	0
org:dissolved Recall	0	0	0	0	0	0	0	0	0	0
org:founded F1Measure	0	0	0	0.09195403	0.16666667	0.27027026	0.15384614	0.26262626	0.4237288	0.42276424
org:founded Precision	0	0	0	0.5	0.47058824	0.46875	0.58333333	0.65	0.64102566	0.59090906
org:founded Recall	0	0	0	0.050632913	0.101265825	0.18987341	0.088607594	0.16455697	0.3164557	0.32911393
org:founded by F1Measure	0	0	0	0	0.16842104	0.36769232	0.3931624	0.46856527	0.4793888	0.4793888
org:founded by Precision	0	0	0	0	0.625	0.5	0.64	0.6052632	0.75	0.6904762
org:founded by Recall	0	0	0	0	0.06329114	0.101265825	0.20253165	0.29113925	0.34177214	0.36708862
org:member of F1Measure	0	0	0.07874016	0.13333835	0.2857143	0.36571428	0.3488372	0.3957219	0.4251208	0.4467005
org:member of Precision	0	0	0.83333333	0.75	0.575	0.5925926	0.5882353	0.56060606	0.5116279	0.57894737
org:member of Recall	0	0	0.041322313	0.07438017	0.19008264	0.2644628	0.24793388	0.30578512	0.36363637	0.36363637
org:members F1Measure	0	0	0	0.10256411	0.194762	0.19512194	0.13953488	0.39999998	0.375	0.21276596
org:members Precision	1	0.5	0.8	0.5	0.5	0.5	0.5	0.692208	0.8181818	0.5
org:members Recall	0	0	0	0.054054055	0.10810811	0.10810811	0.08108108	0.27027026	0.24324325	0.13513513
org:parents F1Measure	0	0	0	0	0.016260162	0.01574803	0.07194244	0.08510638	0.3163842	0.34313726
org:parents Precision	0	0	0	0	0	0	0.2	0.31578946	0.5090909	0.42682928
org:parents Recall	0	0	0	0	0.008196721	0.008196721	0.04093606	0.04918033	0.22950819	0.28688523
org:political/religious affiliation F1Measure	0	0	0	0	0	0	0	0	0.25	0.23292413
org:political/religious affiliation Precision	0	0	0	0	0	0	0	0	1	0.6666667
org:political/religious affiliation Recall	0	0	0	0	0	0	0	0	0.14285715	0.14285715
org:shareholders F1Measure	0	0	0	0	0	0	0	0	0	0
org:shareholders Precision	0	0	0	0	0	0	0	0	0	0
org:shareholders Recall	0	0	0	0	0	0	0	0	0	0
org:stateorprovince of headquarters F1Measure	0	0	0	0.14697917	0.24271846	0.19707442	0.377551	0.44221106	0.47747743	0.5454545
org:stateorprovince of headquarters Precision	0	0	0	0.15686275	0.30864197	0.3017021	0.52112675	0.5639466	0.5463917	0.6315789
org:stateorprovince of headquarters Recall	0	0	0	0.128	0.2	0.136	0.296	0.352	0.424	0.48
org:subsidiaries F1Measure	0	0	0.030769233	0.059701495	0	0.03125	0.059701495	0.10389611	0.17721519	0.24175826
org:subsidiaries Precision	0	0	0.5	0.5	0	0	0.5	0.2857143	0.4375	0.39285713
org:subsidiaries Recall	0	0	0.015873017	0.031746034	0	0.15873017	0.031746034	0.06349207	0.11111111	0.17460318
org:top_members/employees F1Measure	0	0	0.01360543	0.025974026	0.10285714	0.21111111	0.25915944	0.2995169	0.42056535	0.47826987
org:top_members/employees Precision	0	0	0.25	0.31034482	0.5588235	0.61538464	0.5081967	0.6017647	0.6616747	0.6547619
org:top_members/employees Recall	0	0	0.006849315	0.01369863	0.016143835	0.13013698	0.16438356	0.21232876	0.36021916	0.37671232
perage F1Measure	0	0	0	0	0	0	0	0.2857143	0.5	0.5
perage Precision	0	0	0	0	0	0	0	1	1	1
perage Recall	0	0	0	0	0	0	0	0.16666667	0.33333334	0.33333334
per:alternate names F1Measure	0	0	0.049999997	0.049999997	0	0.09756098	0.0952381	0.093023255	0.26923078	0.36734694
per:alternate names Precision	1	0	0	0	0	0.66666667	0.5	0.53846157	0.9	0.9
per:alternate names Recall	0	0	0.025641026	0.025641026	0	0.051282052	0.051282052	0.051282052	0.17948718	0.23076923
per:cause of death F1Measure	0	0	0	0	0	0	0	0	0	0
per:cause of death Precision	0	0	0	0	0	0	0	0	0	0
per:cause of death Recall	0	0	0	0	0	0	0	0	0	0
per:children F1Measure	0	0	0	0	0	0	0	0	0	0
per:children Precision	0	0	0	0	0	0	0	0	0.1481815	0.24242425
per:children Recall	0	0	0	0	0	0	0	0	0.84	0.36363637
per:cities of residence F1Measure	0	0	0	0.011235955	0.010928962	0.0861244	0.12334801	0.20425533	0.23622046	0.29927006
per:cities of residence Precision	0	0	0	1	0.16666667	0.28125	0.28	0.41379312	0.38061038	0.4226804
per:cities of residence Recall	0	0	0	0.0056497175	0.0056497175	0.050847456	0.07909604	0.13559322	0.16949153	0.23163842
per:city of birth F1Measure	0.34722224	0	0.26066668	0.36363637	0.3649486	0.41428575	0.46153846	0.528758	0.561010253	0.6086957
per:city of birth Precision	0.4716981	0	0.55172414	0.44444445	0.47368422	0.59183675	0.63461536	0.6451613	0.6769231	0.7
per:city of birth Recall	0.2747253	0	0.17582418	0.30769232	0.2967033	0.31868133	0.36263737	0.4395644	0.48351648	0.53846157
per:city of death F1Measure	0.025974026	0	0	0	0	0	0	0.11111112	0.3157895	0.54545456
per:city of death Precision	0.016129032	0	0	0	0	0	0	0.33333334	0.75	0.85714287
per:city of death Recall	0.06666667	0	0	0	0	0	0	0.06666667	0.2	0.4
per:countries of residence F1Measure	0.1345805	0.16711591	0.06477732	0.1434472	0.20214305	0.2973684	0.27596438	0.34814864	0.3924528	0.45812806
per:countries of residence Precision	0.075987846	0.1955836	0.23188406	0.26089556	0.28947368	0.33731344	0.37349397	0.40952381	0.42162162	0.48062013
per:countries of residence Recall	0.5882353	0.14588235	0.037647057	0.09882353	0.15529412	0.26588234	0.21882352	0.3035294	0.3670588	0.4764704
per:country of birth F1Measure	0	0.036036037	0.018018018	0.030534351	0.13846155	0.2142857	0.23448275	0.24113476	0.26315787	0.30769232
per:country of birth Precision	0	1	0.5	0.09090909	0.42857143	0.48387095	0.47222222	0.53125	0.4651163	0.5106383
per:country of birth Recall	0	0.018348623	0.0091743115	0.018348623	0.08256881	0.13761468	0.1559633	0.1559633	0.18348624	0.22018349
per:country of death F1Measure	0	0	0	0	0	0	0	0.10526316	0	0.09090909
per:country of death Precision	0	0	0	0	0	0	0	0.25	0	0
per:country of death Recall	0	0	0	0	0	0	0	0.055555556	0	0.055555556
per:date of birth F1Measure	0.029411765	0.125	0.125	0	0	0.23529413	0.4	0.5714286	0.6086956	0.66666667
per:date of birth Precision	0.018867925	1	1	0	0	0	0.8	1	0.875	0.8888889
per:date of birth Recall	0.06666667	0.06666667	0.06666667	0	0	0.13333334	0.26666668	0.4	0.46666667	0.53333336
per:date of death F1Measure	0	0	0	0	0	0.06451613	0.06666667	0.12603225	0.5882353	0.6521739
per:date of death Precision	0	0	0	0	0	0	0.5	1	0.6818182	0.8823295
per:date of death Recall	0	0	0	0	0	0.03448276	0.03448276	0.06896552	0.51724136	0.51724136
per:employee of F1Measure	0.14140041	0.2613982	0.25668934	0.31160426	0.26409903	0.35964912	0.38872916	0.45161292	0.4664032	0.5185668
per:employee of Precision	0.10993465	0.19402143	0.2102526	0.25843558	0.3226891	0.38941655	0.3840909	0.41958043	0.45285088	0.5089686
per:employee of Recall	0.12107101	0.40046567	0.32945284	0.39231664	0.22351572	0.33410943	0.39348078	0.48894063	0.48079163	0.52825154
per:origin F1Measure	0	0	0	0	0.058823533	0.23076925	0.41379312	0.3373494	0.5102041	0.5510204
per:origin Precision	0	0	0	0	0.75	0.85714287	0.82352941	0.78125	0.84375	0.84375
per:origin Recall	0	0	0	0	0.030303031	0.13636364	0.27272728	0.21212122	0.37878788	0.4090909
per:other family F1Measure	0	0	0	0	0	0	0	0	0	0
per:other family Precision	0	0	0	0	0	0	0	0	0	0
per:other family Recall	0	0	0	0	0	0	0	0	0	0
per:parents F1Measure	0	0	0	0	0	0	0	0.0625	0.18181819	0.22222224
per:parents Precision	0	0	0	0	0	0	0	0.25		

instance number	20	59	137	293	605	1230	2479	4977	9972	19963
macro F1Measure	0.018540654	0.035612766	0.049348764	0.07559154	0.11067816	0.14783485	0.20597911	0.2531068	0.33313245	0.38833365
macro Precision	0.0590399	0.114397734	0.18723457	0.26407558	0.301078	0.35538006	0.3707783	0.42841172	0.51068634	0.543988
macro Recall	0.04441729	0.03923494	0.049584012	0.06926939	0.09159223	0.11896159	0.16423345	0.20612706	0.27215406	0.3269379
micro F1Measure	0.100981764	0.27577138	0.3083801	0.3467742	0.38253856	0.41619918	0.4479313	0.47335204	0.5035063	0.5440042
micro Precision	0.100981764	0.27577138	0.3083801	0.3467742	0.38253856	0.41619915	0.4479313	0.47335204	0.5035063	0.5440042
micro Recall	0.100981764	0.27577138	0.3083801	0.3467742	0.38253856	0.41619915	0.4479313	0.47335204	0.5035063	0.5440042
no relation F1Measure	0.1507579	0.42401573	0.465285	0.5024424	0.5241783	0.54419035	0.55745906	0.5710204	0.5827139	0.600622
no relation Precision	0.29677418	0.33046946	0.3393802	0.3681923	0.38170427	0.40806806	0.4291642	0.4543983	0.47506925	0.50428945
no relation Recall	0.10104338	0.5914333	0.7397035	0.7907743	0.83635366	0.8165843	0.7951675	0.7682592	0.75343215	0.7424492
org.alternate.names F1Measure	0	0	0	0	0.06896524	0.22222222	0.4260355	0.4121212	0.4698795	0.5805954
org.alternate.names Precision	0	0	0	0	1	0.36	0.6315789	0.6415094	0.7222222	0.8360656
org.alternate.names Recall	0	0	0	0	0.035714287	0.16071428	0.32142857	0.30357143	0.3482143	0.45535713
org.city of headquarters F1Measure	0.012820513	0.27439055	0.30592102	0.38538206	0.41834864	0.47668394	0.5440252	0.5578447	0.6026404	0.64094115
org.city of headquarters Precision	1	0.29699248	0.31208053	0.39726028	0.48510638	0.51301116	0.5306749	0.5482866	0.5987261	0.65217394
org.city of headquarters Recall	0.006451613	0.2548387	0.3	0.37419355	0.36774194	0.44516128	0.5580645	0.56774193	0.60645163	0.62903225
org.country of headquarters F1Measure	0	0.015209124	0.015384616	0.060150374	0.18348625	0.2772277	0.33990148	0.40097797	0.4397163	0.5368171
org.country of headquarters Precision	0	0.11111111	0.13333334	0.3809524	0.20942408	0.35220125	0.42857143	0.5	0.5224719	0.64204544
org.country of headquarters Recall	0	0.008163265	0.008163265	0.03265306	0.1632653	0.22857143	0.28163266	0.33469388	0.37959182	0.4612245
org.dissolved F1Measure	0	0	0	0	0	0	0	0	0.125	0.125
org.dissolved Precision	0	0	0	0	0	0	0	0	1	1
org.dissolved Recall	0	0	0	0	0	0	0	0	0.06666667	0.06666667
org.founded F1Measure	0	0	0	0.09302326	0.10869566	0.22857141	0.18556702	0.25263155	0.38983053	0.43548387
org.founded Precision	0	0	0	0.5714286	0.3846154	0.46153846	0.5	0.75	0.5897436	0.6
org.founded Recall	0	0	0	0.050632913	0.06329114	0.15189873	0.11392405	0.15189873	0.29113925	0.34177214
org.founded by F1Measure	0	0	0	0	0	0.11363636	0.21052632	0.29965514	0.37168145	0.4383714
org.founded by Precision	0	0	0	0	0	0.5555556	0.625	0.5714286	0.61764705	0.72727275
org.founded by Recall	0	0	0	0	0.06329114	0.12658228	0.20253165	0.2658228	0.30379745	0.39240506
org.member of F1Measure	0	0	0.06349206	0.1076923	0.30303028	0.36257312	0.3314286	0.37362638	0.44	0.46078432
org.member of Precision	0	0	0.8	0.7777778	0.5681818	0.62	0.537037	0.55737704	0.556962	0.56626505
org.member of Recall	0	0	0.03305785	0.05785124	0.20661157	0.25619835	0.23660943	0.28099173	0.36363637	0.38842976
org.members F1Measure	0	0	0	0.10256411	0.194762	0.19612194	0.18604651	0.375	0.45283014	0.35294116
org.members Precision	0	0	0	1	0.5	0.6666667	0.8181818	0.75	0.64285713	0.64285713
org.members Recall	0	0	0	0.054054055	0.10810811	0.10810811	0.10810811	0.24324325	0.3243243	0.24324325
org.parents F1Measure	0	0	0	0	0	0	0.07194244	0.0945946	0.26737967	0.36734694
org.parents Precision	0	0	0	0	0	0	0.29411766	0.26923078	0.3846154	0.4864865
org.parents Recall	0	0	0	0	0	0	0.04083606	0.057377048	0.20491803	0.29508197
org.political/religious affiliation F1Measure	0	0	0	0	0	0	0	0	0.25	0.25
org.political/religious affiliation Precision	0	0	0	0	0	0	0	0	1	1
org.political/religious affiliation Recall	0	0	0	0	0	0	0	0	0.14285715	0.14285715
org.shareholders F1Measure	0	0	0	0	0	0	0	0	0	0
org.shareholders Precision	0	0	0	0	0	0	0	0	0	0
org.shareholders Recall	0	0	0	0	0	0	0	0	0	0
org.state/province of headquarters F1Measure	0	0	0	0.16164616	0.16759777	0.21348314	0.40206185	0.44761905	0.46511632	0.5338396
org.state/province of headquarters Precision	0	0	0	0.13953489	0.2777778	0.35849056	0.5652174	0.5529412	0.5555556	0.6145833
org.state/province of headquarters Recall	0	0	0.192	0.12	0.152	0.312	0.376	0.4	0.472	0.472
org.subsidiaries F1Measure	0	0	0.029850747	0	0	0.03125	0.059701495	0.10126583	0.16666667	0.27659574
org.subsidiaries Precision	0	0	0.25	0	0	1	0.5	0.25	0.33333334	0.41935483
org.subsidiaries Recall	0	0	0.015873017	0	0	0.015873017	0.031746034	0.06349207	0.11111111	0.20634921
org.top_members/enp F1Measure	0	0	0.013605443	0.10598235	0.11566993	0.18947369	0.2513801	0.3007083	0.4162896	0.44718858
org.top_members/enp Precision	0	0	0.375	0.37037036	0.4090909	0.53333336	0.51666665	0.61333334	0.6712329	0.6712329
org.top_members/enp Recall	0	0	0.006843835	0.06143835	0.06849315	0.12328767	0.16438356	0.21232876	0.31506848	0.35561644
per.age F1Measure	0	0	0	0	0	0	0	0.2857143	0.5	0.5
per.age Precision	0	0	0	0	0	0	0	1	1	1
per.age Recall	0	0	0	0	0	0	0	0.16666667	0.33333334	0.33333334
per.alternate.names F1Measure	0	0	0.049999997	0.049999997	0.04999997	0.04999997	0.04878049	0.13953489	0.3265306	0.3265306
per.alternate.names Precision	0	0	1	1	1	1	0.5	0.75	0.66666667	0.8
per.alternate.names Recall	0	0	0.025641026	0.025641026	0.025641026	0.025641026	0.025641026	0.07692308	0.15384616	0.20512821
per.cause of death F1Measure	0	0	0	0	0	0	0	0	0	0
per.cause of death Precision	0	0	0	0	0	0	0	0	0	0
per.cause of death Recall	0	0	0	0	0	0	0	0	0	0
per.children F1Measure	0.013071896	0	0	0	0	0	0	0	0	0
per.children Precision	0.0070422534	0	0	0	0	0	0	0	0.074074075	0.23529413
per.children Recall	0.09090909	0	0	0	0	0	0	0	0.2	0.33333334
per.cities of residence F1Measure	0	0	0	0.011235955	0.010416667	0.05529954	0.11926605	0.1746725	0.22047243	0.3082707
per.cities of residence Precision	0	0	0	1	0.06666667	0.15	0.31707317	0.3846154	0.36363637	0.46067417
per.cities of residence Recall	0	0	0	0.0056497175	0.0056497175	0.033898305	0.073446326	0.11299435	0.15819208	0.23163842
per.city of birth F1Measure	0.06252001	0	0.2718644	0.1577992	0.3537115	0.40845072	0.4379662	0.5326316	0.56724845	0.56616778
per.city of birth Precision	0	0	0.5925926	0.42647058	0.4642857	0.5886275	0.65217394	0.6885246	0.6818182	0.6617047
per.city of birth Recall	0.032967035	0	0.17582418	0.31868133	0.2857143	0.31868133	0.32967034	0.46153846	0.4945055	0.4945055
per.city of death F1Measure	0	0	0	0	0	0	0	0	0.3	0.5217392
per.city of death Precision	0	0	0	0	0	0	0	0	0.6	0.75
per.city of death Recall	0	0	0	0	0	0	0	0	0.2	0.4
per.countries of residence F1Measure	0.14153847	0.16711591	0.16727906	0.15767317	0.20972644	0.30089957	0.32462232	0.33714854	0.37431554	0.46545452
per.countries of residence Precision	0.07942446	0.1955836	0.28805978	0.21544716	0.29613733	0.3970588	0.39862543	0.40460527	0.4218289	0.48
per.countries of residence Recall	0.64941174	0.14588235	0.065882355	0.12470588	0.16235293	0.25411764	0.27294117	0.28941175	0.33647057	0.4517647
per.country of birth F1Measure	0	0.036036037	0.018018018	0.01724138	0.08196721	0.19310343	0.28571427	0.23529412	0.27450982	0.3137255
per.country of birth Precision	0	1	0.5	0.14285715	0.3846154	0.3888889	0.55263156	0.5925926	0.47727272	0.54545456
per.country of birth Recall	0	0.018348623	0.0091743115	0.0091743115	0.04587156	0.12844037	0.19260056	0.14678898	0.19260056	0.22018349
per.country of death F1Measure	0	0	0	0	0	0	0	0	0	0.09090909
per.country of death Precision	0	0	0	0	0	0	0	0	0.25	0
per.country of death Recall	0	0	0	0	0	0	0	0	0	0.05555556
per.date of birth F1Measure	0.14634147	0.125	0.125	0	0	0.125	0.5714286	0.5833333	0.66666667	0.66666667
per.date of birth Precision	0.0895224	1	1	0	0	1	1	0.7777778	0.8888889	0.8888889
per.date of birth Recall	0.4	0.06666667	0.06666667	0	0	0.06666667	0.53333336	0.53333336	0.53333336	0.53333336
per.date of death F1Measure	0	0	0	0	0	0	0.33333334	0.29411763	0.5714286	0.6530612
per.date of death Precision	0	0	0	0	0	0	0.85714287	1	0.7	0.8
per.date of death Recall	0	0	0	0	0	0	0.20680656	0.1724138	0.4827586	0.55172414
per.employee of F1Measure	0.120980084	0.2613982	0.23945712	0.2760981	0.30186167	0.3644068	0.3935185	0.44860816	0.46989867	0.52096146
per.employee of Precision	0.17673378	0.19402143	0.2051495	0.2706935	0.35193798	0.37957126	0.3912543	0.41520264	0.45755237	0.50107527
per.employee of Recall	0.091967404	0.40046567	0.28754365	0.28172293	0.26426077	0.35040745	0.39580908	0.4877765	0.4831199	0.54249126
per.origin F1Measure	0	0	0	0.02950747	0.08695653	0.16438358	0.35294122	0.36781612	0.5319149	0.55769235
per.origin Precision	0	0	0	1	0	0.85714287	0.7894737	0.7019048	0.80285713	0.7631579
per.origin Recall	0	0	0	0.015151516	0.045454547	0.09090909	0.22727273	0.24242425	0.37878788	0.43039394
per.other family F1Measure	0	0	0	0	0	0	0	0	0	0
per.other family Precision	0	0	0	0	0	0	0	0	0	0
per.other family Recall	0	0	0	0	0	0	0	0	0	0
per.parents F1Measure	0	0	0	0	0	0	0.125	0.125	0.26315787	0.26315787
per.parents Precision	0	0	0	0	0	0	0.5	0.5	0.5	0.5
per.parents Recall	0	0	0	0	0	0	0.071428575	0.071428575	0.17857143	0.17857143
per.religion F1Measure	0</									

instance number	20	59	137	293	605	1230	2479	4977	9972	19963
macro F1Measure	0.022839328	0.035612766	0.04638321	0.0713174	0.10780148	0.14787763	0.2020092	0.26311852	0.3279714	0.40700668
macro Precision	0.050927072	0.114397734	0.16126151	0.19998644	0.27103445	0.34230348	0.38716424	0.43652856	0.4971533	0.56590095
macro Recall	0.050523154	0.03923494	0.049035322	0.06678242	0.090275615	0.12085392	0.16093616	0.21077916	0.26671925	0.34504116
micro F1Measure	0.11132539	0.27577138	0.318899	0.35518935	0.37640256	0.41286817	0.4456522	0.47791025	0.5105189	0.5403226
micro Precision	0.11132538	0.27577138	0.318899	0.35518935	0.37640253	0.41286817	0.4456522	0.47791025	0.5105189	0.5403226
micro Recall	0.11132538	0.27577138	0.480424	0.35518935	0.37640253	0.41286817	0.4456522	0.47791025	0.5105189	0.5403226
no relation F1Measure	0.1849711	0.42401573	0.34880835	0.51078284	0.5227273	0.5433462	0.5615782	0.57435477	0.58848524	0.5982222
no relation Precision	0.27032736	0.33046946	0.7715541	0.36971486	0.38343164	0.40863788	0.43117648	0.45802024	0.47990298	0.50242827
no relation Recall	0.1405821	0.5914333	0	0.8259198	0.8209775	0.81054366	0.80505216	0.76909664	0.7605711	0.73915434
org.alternate.names F1Measure	0	0	0	0	0.085470095	0.23076923	0.4146341	0.44578317	0.5529412	0.55172414
org.alternate.names Precision	0	0	0	0	1	0.4090909	0.65384614	0.6851852	0.8103448	0.7741935
org.alternate.names Recall	0	0	0.2857143	0	0.04464286	0.16071428	0.30357143	0.33035713	0.41964287	0.42857143
org.city.of.headquarters F1Measure	0.012820513	0.27430555	0.22600827	0.3796034	0.38861038	0.49411788	0.5318818	0.5354331	0.5931929	0.65016946
org.city.of.headquarters Precision	1	0.29699248	0.33225808	0.33838382	0.4585153	0.48895898	0.5135135	0.52307695	0.5909912	0.6655405
org.city.of.headquarters Recall	0.006451613	0.2548387	0.022304833	0.43225807	0.33870968	0.5	0.5516129	0.5438371	0.59032255	0.63548386
org.country.of.headquarters F1Measure	0.09078125	0.015209124	0.125	0.04511278	0.18594104	0.2745098	0.35996154	0.42180094	0.46411481	0.5277778
org.country.of.headquarters Precision	0.09090909	0.11111111	0.012244898	0.2857143	0.20918368	0.34355828	0.4269006	0.50282484	0.5606936	0.606257
org.country.of.headquarters Recall	0.0040816325	0.008163265	0	0.024489796	0.16734694	0.22857143	0.29759918	0.3632653	0.39591837	0.46530613
org.dissolved F1Measure	0	0	0	0	0	0	0	0	0	0.125
org.dissolved Precision	0	0	0	0	0	0	0	0	0	1
org.dissolved Recall	0	0	0	0	0	0	0	0	0	0.06666667
org.founded F1Measure	0	0	0	0.06896551	0.16666667	0.24347828	0.20833334	0.2828283	0.42975205	0.44799998
org.founded Precision	0	0	0	0.375	0.47058824	0.3888888	0.5882353	0.7	0.61904764	0.6068956
org.founded Recall	0	0	0	0.03797468	0.101265825	0.17721519	0.12658228	0.17721519	0.32911393	0.35443038
org.founded by F1Measure	0	0	0	0	0.071428575	0.17294301	0.3063063	0.41071427	0.48387095	0.48387095
org.founded by Precision	0	0	0	0	0.6	0.5711286	0.53125	0.6363636	0.6969007	0.6666667
org.founded by Recall	0	0	0.09375	0	0.03797468	0.101265825	0.21518987	0.2658228	0.29113925	0.37974682
org.member of F1Measure	0	0	0.85714287	0.09375	0.30303028	0.36571428	0.31952664	0.4064171	0.44230768	0.43137255
org.member of Precision	0	0	0.049586777	0.85714287	0.5681818	0.5025926	0.5625	0.57575756	0.52873564	0.5301205
org.member of Recall	0	0	0	0.049586777	0.20661157	0.2644628	0.2231405	0.3140396	0.38016528	0.36363637
org.members F1Measure	0	0	0	0.10256411	0.1904762	0.19512914	0.18181819	0.26066665	0.34042552	0.23529416
org.members Precision	1	0	1	0.8	0.5	0.5714286	0.75	0.8	0.8	0.64285713
org.members Recall	0	0	0	0.054054055	0.10810811	0.10810811	0.10810811	0.16216215	0.21621622	0.24324325
org.parents F1Measure	0	0	0	0	0.016129032	0.02919708	0.08275862	0.31284916	0.33170733	0.33170733
org.parents Precision	0	0	0	0	0	0	0	0.5	0.33333334	0.26086956
org.parents Recall	0	0	0	0	0	0.008196721	0.01639442	0.04918033	0.22950819	0.27868852
org.political/religious affiliation F1Measure	0	0	0	0	0	0	0	0	0.25	0.23529416
org.political/religious affiliation Precision	0	0	0	0	0	0	0	0	1	0.6666667
org.political/religious affiliation Recall	0	0	0	0	0	0	0.071428575	0	0.14285715	0.14285715
org.shareholders F1Measure	0	0	0	0	0	0	0	0	0	0
org.shareholders Precision	0	0	0	0	0	0	0	0	0	0
org.shareholders Recall	0	0	0	0	0	0	0	0	0	0
org.state.province.of.headquarters F1Measure	0	0	0	0	0.12307693	0.17171718	0.17045455	0.3316962	0.46728972	0.4626296
org.state.province.of.headquarters Precision	0	0	0	0.17142858	0.23287672	0.29411766	0.47058824	0.56179774	0.5494506	0.63265306
org.state.province.of.headquarters Recall	0	0	0	0.096	0.136	0.12	0.256	0.4	0.4	0.496
org.subsidiaries F1Measure	0	0	0	0	0	0.030303031	0.08450705	0.10389611	0.19277109	0.25
org.subsidiaries Precision	0	0	0	0	0	0.33333334	0.375	0.2857143	0.4	0.36363637
org.subsidiaries Recall	0	0	0.013605443	0	0	0.015873017	0.04761905	0.06349207	0.12608413	0.1904762
orgtop_members F1Measure	0	0	0.06369427	0.10909092	0.25945944	0.31884056	0.41666667	0.47058921	0.47058921	0.47058921
orgtop_members employees Precision	0	0	0.006849315	0.45454547	0.47368422	0.36956522	0.61538464	0.5409836	0.64285713	0.6933333
orgtop_members employees Recall	0	0	0	0.034246575	0.061643835	0.11643836	0.2260274	0.30821916	0.3561644	0.3561644
per.age F1Measure	0	0	0	0	0	0	0	0.2857143	0.5	0.5
per.age Precision	0	0	0	0	0	0	0	1	1	1
per.age Recall	0	0	0.049999997	0	0	0	0	0.16666667	0.33333334	0.33333334
per.alternate.names F1Measure	0	0	0	0.049999997	0.04999997	0.04999997	0.0952381	0.17391305	0.25000003	0.34015386
per.alternate.names Precision	1	0	0.025641026	1	1	1	0.6666667	0.5714286	0.6666667	0.6923077
per.alternate.names Recall	0	0	0	0.025641026	0.025641026	0.025641026	0.051282052	0.102564104	0.15384616	0.23076923
per.cause of death F1Measure	0	0	0	0	0	0	0	0	0	1
per.cause of death Precision	0	0	0	0	0	0	0	0	0	1
per.cause of death Recall	0	0	0	0	0	0	0	0	0	1
per.children F1Measure	0	0	0	0	0	0	0	0	0	0
per.children Precision	0	0	0	0	0	0	0	0	0.14285715	0.35294117
per.children Recall	0	0	0	0	0	0	0	0	0.33333334	0.5
per.cities of residence F1Measure	0	0	0	0	0.010899565	0.049504947	0.13084112	0.15899582	0.24409449	0.26415095
per.cities of residence Precision	0	0	0	0	0.14285715	0.2	0.3783784	0.30645162	0.4025974	0.39772728
per.cities of residence Recall	0	0	0.30434784	0	0.0056497175	0.028248588	0.07090604	0.107344635	0.17514125	0.1974011
percity of birth F1Measure	0.33112583	0	0.44688652	0.35294128	0.37908497	0.39726025	0.484865	0.5304737	0.56969025	0.5430999
percity of birth Precision	0.41666666	0	0.23076923	0.17147617	0.46774194	0.5272727	0.6315789	0.6721311	0.67164177	0.6107183
percity of birth Recall	0.2747253	0	0	0.30769232	0.31868133	0.31868133	0.3956044	0.45054945	0.4945055	0.48351648
percity of death F1Measure	0	0	0	0	0	0	0	0.11764707	0.3157895	0.4761905
percity of death Precision	0	0	0	0	0	0	0	0.5	0.75	0.8333333
percity of death Recall	0	0	0.09160306	0	0	0	0	0.06666667	0.2	0.33333334
per.countries of residence F1Measure	0.14671295	0.16711591	0.24212425	0.15042734	0.22707424	0.31392407	0.2869406	0.3616731	0.38070405	0.44852942
per.countries of residence Precision	0.07814535	0.1955836	0.056470588	0.275	0.2977099	0.33972603	0.36764705	0.42405063	0.4269006	0.4680307
per.countries of residence Recall	0.7058824	0.14588235	0.018018018	0.10352941	0.1835294	0.2917647	0.23529412	0.34529412	0.43045825	0.4680307
per.country of birth F1Measure	0	0.036036037	0.5	0.01459854	0	0.1617647	0.25850338	0.24242423	0.3026316	0.29487178
per.country of birth Precision	0	1	0.0091743115	0.035714287	0.055045873	0.4074074	0.5	0.6956522	0.5488374	0.4893617
per.country of birth Recall	0	0.018348623	0	0.0091743115	0	0.10691743	0.17431192	0.14678898	0.21100917	0.21100917
per.country of death F1Measure	0	0	0	0	0	0	0	0	0	0.092381
per.country of death Precision	0	0	0	0	0	0	0	0	0	0.33333334
per.country of death Recall	0	0	0	0	0	0	0	0	0	0.055555556
per.date of birth F1Measure	0.0875	0.125	0	0	0	0	0.5	0.54545456	0.64000005	0.72
per.date of birth Precision	0.048275862	1	0	0	0	0	1	0.85714287	0.8	0.9
per.date of birth Recall	0.40666667	0.06666667	0	0	0	0	0.33333334	0.4	0.53333336	0.6
per.date of death F1Measure	0	0	0	0	0	0.125	0.33333334	0.51063883	0.51063883	0.650612
per.date of death Precision	0	0	0	0	0	1	0.6666667	0.85714287	0.6666667	0.8
per.date of death Recall	0	0	0.25487098	0	0.2875564	0.03448276	0.06896552	0.20689656	0.41379312	0.55172414
per.employee of F1Measure	0.05	0.2613982	0.2326923	0.28520072	0.32225433	0.3346354	0.39359808	0.4563857	0.48702374	0.5281965
per.employee of Precision	0.37704918	0.19402143	0.28172293	0.29382715	0.2596042	0.37961596	0.4009962	0.4269777	0.4632353	0.5075107
per.employee of Recall	0.026775321	0.40046667	0	0.27706635	0.057971016	0.2991851	0.38645992	0.49010476	0.5133877	0.5506403
per.origin F1Measure	0	0	0	0	0.6666667	0.25000003	0.36781612	0.35714287	0.47826987	0.5343333
per.origin Precision	0	0	0	0	0.030303031	0.71428573	0.7019048	0.83333334	0.84615386	0.7714286
per.origin Recall	0	0	0	0	0	0.15151516	0.24242425	0.22727273	0.33333334	0.4090909
per.other.family F1Measure	0	0	0	0	0	0	0	0	0	0
per.other.family Precision	0	0	0	0	0	0	0	0	0	0
per.other.family Recall	0	0	0	0	0	0	0	0	0	0
per.parents F1Measure	0	0	0	0	0	0	0	0.0625	0.125	0.21621622
per.parents Precision	0	0	0	0	0	0	0	0.25	0.5	0.44444445
per.parents Recall	0	0	0	0	0	0	0	0.035714287	0.071428575	0.14285715

References

- AGICHTEIN, E. AND GRAVANO, L., 2000. Snowball: Extracting relations from large plain-text collections. In *Proceedings of the Fifth ACM International Conference on Digital Libraries*. (cited on page 9)
- ANGELI, G.; TIBSHIRANI, J.; WU, J. Y.; AND MANNING, C. D., 2014. Combining distant and partial supervision for relation extraction. In *EMNLP*. <http://nlp.stanford.edu/pubs/2014emnlp-kbpactivelearning.pdf>. (cited on page 41)
- BACH, N. AND BADASKAR, S., 2007. A review of relation extraction. (cited on pages 6, 8, and 10)
- BANKO, M.; CAFARELLA, M. J.; SODERLAND, S.; BROADHEAD, M.; AND ETZIONI, O., 2007. Open information extraction from the web. In *Proceedings of the 20th International Joint Conference on Artificial Intelligence (IJCAI)*, 2670–2676. <http://www.ijcai.org/papers07/Papers/IJCAI07-429.pdf>. (cited on page 9)
- BENGIO, Y.; GOODFELLOW, I. J.; AND COURVILLE, A., 2015. Deep learning. <http://www.iro.umontreal.ca/~bengioy/dlbook>. Book in preparation for MIT Press. (cited on pages xv, 17, 18, and 23)
- BRIN, S., 1999. Extracting patterns and relations from the world wide web. (cited on pages 9 and 10)
- CHAN, Y. S. AND ROTH, D., 2010. Exploiting background knowledge for relation extraction. In *Proceedings of the 23rd International Conference on Computational Linguistics*, 152–160. Association for Computational Linguistics. (cited on page 29)
- CHAN, Y. S. AND ROTH, D., 2011. Exploiting syntactico-semantic structures for relation extraction. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, 551–560. Association for Computational Linguistics. (cited on pages 29 and 33)
- COWAN, B.; ZETHELIUS, S.; LUK, B.; BARAS, T.; UKARDE, P.; AND ZHANG, D., 2015. Named entity recognition in travel-related search queries. In *Twenty-Seventh IAAI Conference*. (cited on page 3)
- DE FREITAS, N., 2015. Deep learning. (cited on page 18)
- DUCHI, J.; HAZAN, E.; AND SINGER, Y., 2011. Adaptive subgradient methods for online learning and stochastic optimization. vol. 12. (cited on page 23)

-
- ERHAN, D.; BENGIO, Y.; COURVILLE, A.; MANZAGOL, P.-A.; VINCENT, P.; AND BENGIO, S., 2010. Why does unsupervised pre-training help deep learning? vol. 11, 625–660. JMLR. org. (cited on pages 23 and 34)
- GRISHMAN, R. AND SUNDHEIM, B., 1996. Message understanding conference-6: A brief history. In *COLING*, vol. 96, 466–471. (cited on page 5)
- GUBER, T., 1993. A translational approach to portable ontologies. vol. 5, 199–229. (cited on page 4)
- HEARST, M. A., 1992. Automatic acquisition of hyponyms from large text corpora. In *COLING 1992 Volume 2: The 14th International Conference on Computational Linguistics*. <https://aclanthology.org/C92-2082>. (cited on page 9)
- HINTON, G., 2011. Distributed representation. (cited on page 20)
- HOCHREITER, S. AND SCHMIDHUBER, J., 1997. Long short-term memory. vol. 9, 1735–1780. MIT Press. (cited on pages xv and 19)
- JUN'ICHI, T., 2006. Extraction of gene-disease relations from medline using domain dictionaries and machine learning. World Scientific. (cited on page 3)
- JURAFSKY, D., 2014. Relation extraction. (cited on page 11)
- LE, Q. V. AND MIKOLOV, T., 2014. Distributed representations of sentences and documents. (cited on page 28)
- MIKOLOV, T.; CHEN, K.; CORRADO, G.; AND DEAN, J., 2013a. Efficient estimation of word representations in vector space. (cited on pages 26 and 36)
- MIKOLOV, T.; SUTSKEVER, I.; CHEN, K.; CORRADO, G. S.; AND DEAN, J., 2013b. Distributed representations of words and phrases and their compositionality. In *Advances in neural information processing systems*, 3111–3119. (cited on page 25)
- MINTZ, M.; BILLS, S.; SNOW, R.; AND JURAFSKY, D., 2009. Distant supervision for relation extraction without labeled data. In *Proceedings of the Joint Conference of the 47th Annual Meeting of the ACL and the 4th International Joint Conference on Natural Language Processing of the AFNLP: Volume 2-Volume 2*, 1003–1011. Association for Computational Linguistics. (cited on page 11)
- NADEAU, D. AND SEKINE, S., 2007. A survey of named entity recognition and classification. vol. 30, 3–26. John Benjamins publishing company. (cited on page 5)
- NG, A.; NGIAM, J.; FOO, C. Y.; MAI, Y.; AND SUEN, C., 2012. Ufldl tutorial. (cited on pages 15 and 21)
- PISKORSKI, J. AND YANGARBER, R., 2013. Information extraction: Past, present and future. doi:10.1007/978-3-642-28569-1_2. http://dx.doi.org/10.1007/978-3-642-28569-1_2. (cited on page 3)

PUN, W. H., 2014. Statistical decision theory. (cited on page 21)

RAVICHANDRAN, D. AND HOVY, E., 2002. Learning surface text patterns for a question answering system. In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, 41–47. Association for Computational Linguistics. (cited on page 3)

SUTSKEVER, I.; VINYALS, O.; AND LE, Q. V., 2014. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, 3104–3112. (cited on page 27)

TAI, K. S.; SOCHER, R.; AND MANNING, C. D., 2015. Improved semantic representations from tree-structured long short-term memory networks. (cited on pages xv, 31, and 32)

TURIAN, J.; RATINOV, L.; AND BENGIO, Y., 2010. Word representations: a simple and general method for semi-supervised learning. In *Proceedings of the 48th annual meeting of the association for computational linguistics*, 384–394. Association for Computational Linguistics. (cited on page 24)

VAN ASCH, V., 2013. Macro-and micro-averaged evaluation measures [[basic draft]]. (cited on page 8)

WEBERS, C., 2015. Nerual network. (cited on page 16)