

Machine Collaboration

Qingfeng Liu* and Yang Feng†

February 13, 2024

Abstract

We propose a new ensemble framework for supervised learning, called machine collaboration (MaC), using a heterogeneous collection of base machines for prediction tasks. Unlike bagging/stacking (a parallel & independent framework) and boosting (a sequential & top-down framework), MaC is a type of *circular & interactive* learning framework. The *circular & interactive* feature helps the base machines to transfer information circularly and update their structures and parameters accordingly. The theoretical result on the risk bound of the estimator from MaC reveals that the *circular & interactive* feature can help MaC reduce risk via a parsimonious ensemble. We conduct extensive experiments on MaC using both simulated data and 119 benchmark real datasets. The results demonstrate that in most cases, MaC performs significantly better than several other state-of-the-art methods, including classification and regression trees, neural networks, stacking, and boosting.

1 Introduction

In recent decades, various learning methods, including deep neural networks (DNN), decision trees (DT, Breiman et al. (1984)), support vector machines Cortes and Vapnik (1995), and k-nearest neighbors (kNN) have been developed for regression in supervised learning. As argued by Hastie et al. (2009), each of these methods may have advantages over the others in some respects, but not in others. For example, while DNN is effective at approximating complicated nonlinear functions, the problems of overfitting and vanishing gradients could harm their performances, especially when the sample size is small. As another popular learning method, DT is robust to irrelevant predictor variables and outliers and insensitive to monotone transformations of the input data. However, the lack of smoothness of the prediction surface is one limitation of DT. Another drawback of DT is that a slight change in data can result in quite different splits

*Corresponding author. Department of Industrial and Systems Engineering, Hosei University, Koganei City, Tokyo, Japan. Email: qliu@hosei.ac.jp.

†School of Global Public Health at New York University, NY, NY, USA. Email: yang.feng@nyu.edu.

of the DT, leading to a potentially large variance of prediction. Ridge regression is also a popular learning method, being robust against the multicollinearity of the predictors. However, it can only capture the linear relationship between the response and predictors. There is no single learning method that will dominate all others in all scenarios. In this article, we propose a new ensemble learning framework to combine the strengths of these different learning methods through collaboration.

Ensemble learning has emerged and been extensively studied by many in the past few decades (e.g., Dasarathy and Sheela (1979), Schapire (1990), Ho (1995), and Breiman (1996)), with its popularity recently skyrocketing (e.g., Lu and Van Roy (2017), Yu et al. (2018), Qi et al. (2019), and Tian and Feng (2021)). Mendes-Moreira et al. (2012), Sagi and Rokach (2018), and Dong et al. (2020) are some recent comprehensive surveys. The general idea of ensemble learning is to combine the predictions obtained from different learning methods (hereafter, base machines), or predictions based on different subsamples or different feature spaces, in order to improve prediction performance. Bagging, stacking, and boosting are three prominent examples. In bagging (Breiman, 1996) and stacking, base machines are first run in parallel and independently, and then the final prediction is constructed as a simple/weighted average of the predictions from these base machines. In boosting (Schapire et al., 1998), the base machines work jointly in a top-down manner. In all three algorithms, the output from each base machine is fixed after being calculated. Like human collaboration, an idea that may yield potential improvement is to let different kinds of base machines communicate with each other and update their outputs after observing the predictions of the other base machines. Based on this idea, we propose the *Machine Collaboration* (MaC) ensemble learning framework with heterogeneous base machines, where the word heterogeneous stands for that the base machines are of different types (e.g. DT, DNN, Ridge Regression).

Compared with bagging, stacking, and boosting, MaC has the following desirable features. Figure 1 provides the schematic for bagging, stacking, boosting, and MaC. As illustrated, bagging and stacking are parallel & independent, boosting is sequential & top-down, while MaC is *circular & recursive*. In the framework of MaC, base machines work in a circular manner. Further, the circulation goes multiple rounds. Valuable information is passed recursively through base machines around a "round table", but not top-down. In this process, the base machines update their structures and/or parameters once in each round, according to the information received from the other machines. We demonstrate that MaC can deliver competitive performance when compared with the base machines or other ensemble methods.

Three existing ensemble learning methods are closely related to MaC. One is the so-called super learner (hereafter, SL) proposed in van der Laan et al. (2007), which can be viewed as a stacking method. SL receives predictions from different kinds of base machines, then outputs a weighted average of these predictions as the final prediction, where the weights are obtained using cross-validation with some specified loss function. The second one is the LS-Boost proposed in Friedman (2001). LS-Boost works as a forward regression, using a

particular base machine (e.g. tree) each time to fit the current residuals, and ensemble all machines in the end. LS-Boost is then a sequential & top-down method. While both ensemble methods work well in certain situations, we show that our newly proposed MaC performs better in our extensive simulation studies and real data analysis, partly due to its distinctive circular & recursive learning structure. The third one is the so-called additive groves which were proposed to train an additive ensemble of regression trees (See Sorokina et al. (2007) and Sorokina et al. (2008)). The main difference is that the additive groves are meant to build an ensemble of homogeneous models (regression trees), more in the spirit of LS-boost or bagging, while MaC focuses on heterogeneous ensembles in the spirit of stacking.

The main contributions of this work are fourfold. First, we propose a new type of ensemble learning framework, MaC, which is *circular & recursive*. The *circular & recursive* aspect could be a potential direction for exploring new methods of ensemble learning. Second, we present some desirable finite statistical properties of MaC. Third, we demonstrate via extensive simulations that MaC performs better than all individual base machines and the ensemble methods SL and LS-Boost. Lastly, in the real data analysis, we compare MaC with the competing methods on 119 benchmark datasets in the Penn Machine Learning Benchmarks (PMLB) (Olson et al., 2017), which demonstrate notable advantages of MaC over competing methods for most datasets.

2 Method

We now introduce the details of the new ensemble learning framework, machine collaboration (MaC). In MaC, we consider a collection of base machines and allow them to collaborate to improve the prediction performance. The base machines could contain both hyperparameters and non-hyperparameters. Here, a hyperparameter is a parameter whose value controls the structure of the base machine and could be set using domain knowledge or selected by cross-validation or data-splitting. The remaining parameters, whose values are estimated by fitting the base machine with fixed hyperparameters on the training data, are non-hyperparameters. For example, in DNN, the learning rate, number of nodes, number of layers, and the activation function are hyperparameters, while for DT, the maximum depth is a hyperparameter. For DNN, the weights of each layer are non-hyperparameters, and for DT, the split variable and value for each split are non-hyperparameters. Hereafter, for the sake of simplicity, we use “parameter” instead of “non-hyperparameter” unless confusion arises. First, we provide a simple sketch of MaC with two base machines in the next subsection. Then the general MaC framework is provided in subsection 2.2.

2.1 Sketch of MaC with two base machines

Suppose we have a regression task and two base machines, M_A and M_B (e.g., a DT and a DNN). Denote the dataset as $\mathbf{D} = \{\text{feature } X, \text{ target } Y\}$. For two

real-valued n_z -dimensional vectors $Z = (z_1, \dots, z_{n_z})$ and $\hat{Z} = (\hat{z}_1, \dots, \hat{z}_{n_z})$, denote the loss function as $L(z, \hat{z})$, the empirical risk function $R(Z, \hat{Z}) \equiv \frac{1}{n_z} \sum_{j=1}^{n_z} L(z_j, \hat{z}_j)$. Let $\hat{Y}_A$ and $\hat{Y}_B$ denote the currently fitted values from machines M_A and M_B , respectively. Note that the key idea of MaC is to update $\hat{Y}_A$ and $\hat{Y}_B$ alternatively throughout the collaboration process. Figure 2 is a schematic of MaC with two base machines with the detailed steps as follows.

Step 1 Randomly split data $\mathbf{D}$ to training data $\mathbf{D}^t = \{X^t, Y^t\}$ and validation data $\mathbf{D}^v = \{X^v, Y^v\}$. Initialize $\hat{Y} = \hat{Y}_A = \hat{Y}_B = \mathbf{0}$.

Step 2 Update the working response for machine M_A as $Y_A \equiv Y - \hat{Y}_B$. Construct $\tilde{\mathbf{D}} = \{X, Y_A\}$ and split it into $\tilde{\mathbf{D}}^t$ and $\tilde{\mathbf{D}}^v$ accordingly. Tune the hyperparameters and estimate the parameters of M_A with the data $\tilde{\mathbf{D}}$, update the predicted value $\hat{Y}_A$ of Y_A using machine M_A . Then, update $\hat{Y} = (\hat{Y}^t, \hat{Y}^v) \equiv \hat{Y}_A + \hat{Y}_B$, where $\hat{Y}^t$ and $\hat{Y}^v$ denote the predictions of the training sample and the validation sample, respectively. Calculate the empirical risk of validation data $R^v = R(Y^v, \hat{Y}^v)$.

Step 3 Update the working response for machine M_B as $Y_B \equiv Y - \hat{Y}_A$. Construct $\tilde{\mathbf{D}} = \{X, Y_B\}$ split it into $\tilde{\mathbf{D}}^t$ and $\tilde{\mathbf{D}}^v$. Tune the hyperparameters and estimate the parameters of M_B with the data $\tilde{\mathbf{D}}$, update the predicted value $\hat{Y}_B$ of Y_B using machine M_B . Then, calculate $\hat{Y} = (\hat{Y}^t, \hat{Y}^v) \equiv \hat{Y}_A + \hat{Y}_B$ and the empirical risk of validation data $R^v = R(Y^v, \hat{Y}^v)$.

Step 4 Iterate Steps 2 and 3 with M_A and M_B up to $T > 0$ times. During each iteration, check the loss of validation data and stop the iteration if R^v does not decrease any more.

Step 5 The final prediction of Y is the $\hat{Y}$ from the iteration with the smallest R^v .

Note that we adopt a hold-out method to evaluate different machines. In theory, a cross-validation method (hear after, CV), e.g. k -fold CV scheme could be adopted, for our experiments, however, Optuna, the hyperparameter optimization software framework taken by us prevents us to adopt a CV method. Taking the k -fold CV as an example, Optuna will not give us the evaluation values for the same hyperparameters for all the k folds so that we can't take the average of the evaluation values across the k -fold. Developing a new optimization framework for k -fold is an interesting future work.

2.2 A general algorithm for MaC

We can easily extend the idea in the MaC for two machines to a situation with more machines. To describe the general algorithm (Algorithm 1) of MaC with more than 2 base machines, we need the following setup and notations. Suppose we have an independent and identically distributed sample of size n

$$\mathbf{D} = (D_1, \dots, D_n) = ((X_1, Y_1), \dots, (X_n, Y_n))$$

generated from the true distribution P_0 , which is an element of a statistical model $\mathbb{P}$. The support of P_0 is $\mathcal{D} \equiv \mathcal{X} \times \mathcal{Y} = \{d \in \mathbb{R}^l \times \mathbb{R} | P_0(d) \neq 0\}$, where l is a positive integer denoting the dimension of $\mathcal{X}$. MaC is constructed based on K_n different base machines $\{m_{k,\lambda_k,\theta_k}\}_{k=1,\dots,K_n}$, where λ_k and θ_k are the vectors of hyperparameters and parameters of the k th machine, respectively. Here, we use K_n to allow the number of base machines K to grow alongside sample size n , as demonstrated in Section 3. We use the same loss function and risk function for tuning the parameters and hyperparameters of the base machines and the MaC throughout Algorithm 1. Moreover, assume the tuning and estimation algorithm for each base machine is given. Let $\hat{Y}_k^t$ and $\hat{Y}_k^v$ denote the predictions of the training sample and validation sample based on the k th machine, respectively. For machine $k = 1, \dots, K_n$, define $\hat{Y}_k \equiv (\hat{Y}_k^t, \hat{Y}_k^v)$, $\hat{Y}_{-k} \equiv \sum_{j \neq k}^{K_n} \hat{Y}_j$ and $\hat{Y}^v \equiv \sum_{j=1}^{K_n} \hat{Y}_j^v$. Define the index pair of the outer and inner loops when the loop stops as $\{i^*, k^*\}$.

When the sample size is not large, if we do not use the full data but only $\mathbf{D}^t$ to estimate the non-hyperparameter vector, there could be a large information loss. To avoid this, in our experiments in Section 4, we follow common practice in machine learning (See Listing 4.1 in p.98 of Chollet (2017)), namely to use the full data to estimate the non-hyperparameter vector in step 6 of Algorithm 1. Note that, there is a trade-off between computation cost and the accuracy of prediction. To get a higher accuracy of prediction, you would need bigger T or K_n , leading to higher computation cost.

3 Theory for finite sample

Under the setting of subsection 2.2, denote the cumulative distribution function of X_1 as F_0 . Let $B_n \in \{0, 1\}^n$ be a random binary n -vector whose observed value defines a split of the data $\mathbf{D}$ into a training sample $\mathbf{D}^t$ and a validation sample $\mathbf{D}^v$, with 1 for validation and 0 for training. Let p denote the proportion of observations in the validation sample, and P_n , P_{n,B_n}^t and P_{n,B_n}^v denote the empirical distributions of $\mathbf{D}$, $\mathbf{D}^t$, and $\mathbf{D}^v$, respectively.

Suppose we have a set of K_n base machines $\{M_1, \dots, M_{K_n}\}$. Assume the space of the hyperparameter λ_j and the parameter vector θ_j of the j th base machine are $\Lambda_j \subseteq \mathbb{R}^{d_{\lambda,j}}$ and $\Theta_j \subseteq \mathbb{R}^{d_{\theta,j}}$, respectively. Then, each base machine $M_j : \mathbb{P} \rightarrow \mathcal{S}_j(\mathcal{X} | \Lambda_j \times \Theta_j)$ is a mapping from $\mathbb{P}$ into $\mathcal{S}_j(\mathcal{X}) \equiv \mathcal{S}_j(\mathcal{X} | \Lambda_j \times \Theta_j)$. $\mathcal{S}_j(\mathcal{X} | \Lambda_j \times \Theta_j)$ is a space of real-valued parametric functions from $\mathcal{X}$ to $\mathbb{R}$, taking the vectors of the hyperparameters and parameters in the space $\Lambda_j \times \Theta_j$. For $j = 1, \dots, K_n$, denote the realization of M_j as $m_{j,\lambda_j,\theta_j} : \mathcal{X} \rightarrow \mathbb{R}$, which is a function with hyperparameter vector $\lambda_j \in \Lambda_j$ and parameter vector $\theta_j \in \Theta_j$.

We consider candidate MaCs constructed by the sum of K_n base machines with certain hyperparameters and parameters. In particular, we have $\mathcal{M} \equiv M_1(\cdot) + \dots + M_{K_n}(\cdot) : \mathbb{P} \rightarrow \mathcal{S}(\mathcal{X}) \equiv \mathcal{S}(\mathcal{X} | \Lambda(n) \times \Theta(n))$, where $\Lambda(n) = \prod_{j=1}^{K_n} \Lambda_j$ and $\Theta(n) = \prod_{k=1}^{K_n} \Theta_k$ denotes the space of the hyperparameter vector $\lambda \equiv \{\lambda_1, \lambda_2, \dots, \lambda_{K_n}\}$ and parameter vector $\theta \equiv \{\theta_1, \theta_2, \dots, \theta_{K_n}\}$ of MaC, respectively.

Algorithm 1: Algorithm for Machine Collaboration (MaC)

Require: $K > 1$ different base machines $\{m_{k,\lambda_k,\theta_k}\}_{k=1,\dots,K}$. Maximum Tolerance integers $\tau > 0$ and $T > 0$.

Input: $\mathbf{D} = \{\text{feature data } X, \text{ target data } Y\}$, a new feature data $X^* \sim P_0$.

Output: The trained MaC, $\hat{\mathbf{m}} : \mathcal{X} \rightarrow \mathcal{Y}$; the prediction based on X^* , $\hat{Y}^*$.

```

1 Randomly split  $\mathbf{D}$  into training data  $\mathbf{D}^t \equiv (X^t, Y^t)$  and validation data
   $\mathbf{D}^v \equiv (X^v, Y^v)$  so that the proportion of the validation data is  $p$ ;
2 Initialize  $t = 0$ ,  $R_0 = \infty$ ,  $\hat{Y}_k = (\hat{Y}_k^t, \hat{Y}_k^v) = (\mathbf{0}, \mathbf{0})$  for  $k = 1, \dots, K$ ;
3 for  $i = 1$  to  $T$  do
4   for  $k = 1$  to  $K$  do
5     Construct  $\tilde{\mathbf{D}}^t$  and  $\tilde{\mathbf{D}}^v$  by replacing  $Y$  in  $\mathbf{D}^t$  and  $\mathbf{D}^v$  with
        $Y_k \leftarrow (Y - \hat{Y}_{-k})$ , where  $\hat{Y}_{-k} = \sum_{j \neq k}^K \hat{Y}_j$ ;
6     For  $m_{k,\lambda_k,\theta_k}$ , tune the hyperparameters and estimate the
       non-hyperparameters, obtain  $\hat{\lambda}_k^{(i)}$  and  $\hat{\theta}_k^{(i)}$ , using  $\tilde{\mathbf{D}}^t$  and  $\tilde{\mathbf{D}}^v$  as
       training data and validation data, respectively.
7      $\hat{Y}_k = (\hat{Y}_k^t, \hat{Y}_k^v) \leftarrow (m_{k,\hat{\lambda}_k^{(i)},\hat{\theta}_k^{(i)}}(X^t), m_{k,\hat{\lambda}_k^{(i)},\hat{\theta}_k^{(i)}}(X^v))$ ;
8      $\hat{Y}^v = \sum_{j=1}^K \hat{Y}_j^v$ ;  $R_k^v \leftarrow R(Y^v, \hat{Y}^v)$ ;
9   end
10   $\tilde{k} = \operatorname{argmin}_k R_k^v$ ;
11  if  $R_{\tilde{k}}^v < R_0$ 
12     $R_0 \leftarrow R_{\tilde{k}}^v$ ;  $k' \leftarrow \tilde{k}$ ;  $i' \leftarrow i$ ;  $t = 0$ ;
13  else
14     $t = t + 1$ ;
15  end
16  if  $t \geq \tau$  or  $i \geq T$ 
17     $i^* = i'$ ;  $k^* = k'$ ;
18    break;
19  end
20 end
21 return
    
$$\hat{\mathbf{m}} = \left\{ m_{1,\hat{\lambda}_1^{(i^*)},\hat{\theta}_1^{(i^*)}} + \dots + m_{k^*,\hat{\lambda}_{k^*}^{(i^*)},\hat{\theta}_{k^*}^{(i^*)}} \right. \\ \left. + m_{k^*+1,\hat{\lambda}_{k^*+1}^{(i^*-1)},\hat{\theta}_{k^*+1}^{(i^*-1)}} + \dots + m_{K,\hat{\lambda}_K^{(i^*-1)},\hat{\theta}_K^{(i^*-1)}} \right\}, \quad \hat{Y}^* = \hat{\mathbf{m}}(X^*);$$


```

Define the space of all candidate MaCs as $\mathbb{M} \equiv \{\mathcal{M}(P) : P \in \mathbb{P}\} \subseteq \mathcal{S}(\mathcal{X})$, then each realization of $\mathcal{M}$, $\mathbf{m} \equiv \mathbf{m}_{\lambda, \theta} : \mathcal{X} \rightarrow \mathbb{R}$ is an element of $\mathbb{M}$ with hyperparameter vector $\lambda \in \Lambda(n)$ and parameter vector $\theta \in \Theta(n)$. Denote the loss function of m by $L(D, m)$ and the risk of m by $E_{P_0} L(D, m)$ for $D \in \mathcal{D}$, and m denoting a base machine or a MaC. Endow the space $\mathcal{S}(\mathcal{X})$ a dissimilarity function $\delta : \mathcal{S}(\mathcal{X}) \times \mathcal{S}(\mathcal{X}) \rightarrow \mathbb{R}$, with the dissimilarity between $\mathbf{m}_1$ and $\mathbf{m}_2$ in $\mathbb{M}$ defined as

$$\delta(\mathbf{m}_1, \mathbf{m}_2) \equiv \int |L(d, \mathbf{m}_1) - L(d, \mathbf{m}_2)| dP_0(d).$$

Define the pseudo-true MaC as

$$\begin{aligned} \mathbf{m}_0 \equiv \mathcal{M}(P_0) &= \operatorname{argmin}_{\mathbf{m} \in \mathbb{M}} E_{P_0} L(D, \mathbf{m}) \\ &= \operatorname{argmin}_{\mathbf{m} \in \mathbb{M}} \int L(d, \mathbf{m}) dP_0(d), \end{aligned}$$

and the risk difference of $\mathbf{m}$ as $\delta(\mathbf{m}, \mathbf{m}_0)$.

Denote the space of the hyperparameter vector in which the MaC algorithm searches by $\tilde{\Lambda}(n) \subseteq \Lambda(n)$ with cardinality $|\tilde{\Lambda}(n)| = J_n$. Indexing the elements of $\tilde{\Lambda}(n)$ as $\{\lambda_{(1)}, \dots, \lambda_{(J_n)}\}$, we construct J_n subspace $\mathbb{M}_k \equiv \{\mathbf{m}_{\lambda_{(k)}, \theta} : \theta \in \Theta(n)\} \subseteq \mathbb{M}$ according to the selection of hyperparameter vector for $k \in \kappa_n \equiv \{1, \dots, J_n\}$. For a particular subspace $\mathbb{M}_k$ with fixed hyperparameter vector $\lambda_{(k)}$, the MaC algorithm searches for the optimal parameter vector on the parameter space $\tilde{\Theta}_k(n) \subseteq \Theta(n)$. After collecting MaCs whose hyperparameter vector is $\lambda_{(k)}$ and parameter vector $\theta \in \tilde{\Theta}_k(n)$, we create the space $\mathbb{M}_{k, \tilde{\Theta}_k} \equiv \{\mathbf{m}_{k, \theta} \equiv \mathbf{m}_{\lambda_{(k)}, \theta} : \theta \in \tilde{\Theta}_k(n)\} \subseteq \mathbb{M}_k$. Define the risk approximation error of $\mathbb{M}_{k, \tilde{\Theta}_k}$ as $B_0(k) \equiv \min_{\mathbf{m} \in \mathbb{M}_{k, \tilde{\Theta}_k}} \delta(\mathbf{m}, \mathbf{m}_0)$. Note that, in van der Laan (2006), $\mathbb{M}_{k, \tilde{\Theta}_k}$ is called epsilon-net, which is a form of sieving net for the parameters.

For any empirical distribution P_n , define the estimated model with fixed k based on our algorithm as

$$\hat{\mathcal{M}}_k(P_n) \equiv \operatorname{argmin}_{\mathbf{m} \in \mathbb{M}_{k, \tilde{\Theta}_k(n)}} \int L(d, \mathbf{m}) dP_n(d).$$

Then, the estimated MaC is $\hat{\mathcal{M}}(P_n) \equiv \hat{\mathcal{M}}_{k(P_n)}(P_n)$, where $k(P_n) \equiv \operatorname{argmin}_{k \in \kappa_n} \int L(d, \hat{\mathcal{M}}_k(P_n^t)) dP_n^v(d)$.

To introduce the following theorem, we need the following definition.

Definition 3.1 (Searching Number and Searching Resolution). Let $\tilde{\Theta}_k(n) = \{\theta_{(k,1)}, \dots, \theta_{(k,N_k)}\}$ with $N_k < \infty$. For a real number $\varepsilon > 0$, define a sphere $B(\mathbf{m}_j, \varepsilon) \equiv \{\mathbf{m} \in \mathbb{M}_k : |\mathbf{m} - \mathbf{m}_j| \leq \varepsilon\}$. We refer to N_k as the searching number and $\varepsilon_k \equiv \inf_{\varepsilon} \left\{ \varepsilon : \mathbb{M}_k \subseteq \bigcup_{j=1}^{N_k} B(\mathbf{m}_{(k,j)}, \varepsilon) \right\}$ as the searching resolution of $\mathbb{M}_{k, \tilde{\Theta}_k}$ for the algorithm, where $\mathbf{m}_{k,j}$ denotes the MaC in $\mathbb{M}_k$ with the non-hyperparameter vector $\theta_{(k,j)}$.

Note that in the definition above, the space $\tilde{\Theta}_k(n)$ is first fixed. If we first fix ε_k , and then select a space $\tilde{\Theta}_k(n)$ with minimum N_k so that $\bigcup_{j=1}^{N_k} B(\mathbf{m}_{(k,j)}, \varepsilon)$ can cover $\mathbb{M}_k$, then N_k is just what we would call a covering number.

Let us refer to the value of the parameter vector that results in the minimum of the empirical loss of estimation as the optimal parameter vector. In the theoretical analysis, following van der Laan et al. (2007), we only consider a MaC algorithm that searches the optimal parameter vector on a discrete set.¹ As N_k goes to infinity with n , Theorem 1 can be regarded as an approximate result for the MaC algorithm that searches the optimal parameter vector on the whole domain. For $\tilde{\Theta}_k(n) = \{\theta_{(k,1)}, \dots, \theta_{(k,N_k)}\}$ with $N_k < \infty$, we have the following finite sample result.

Theorem 1. Assume a constant $C_0 < \infty$ exists, $|Y| \leq C_0$ a.s. and $\sup_{\mathbf{m} \in \mathbb{M}} \sup_{X \in \mathcal{X}} |\mathbf{m}(X)| \leq C_0$. Define $C_1 \equiv 4C_0^2$ and $C_2 \equiv 16C_0^2$. Let $L(D, \mathbf{m}) \equiv (Y - \mathbf{m}(X))^2$, $\mathbf{m}_0(X) \equiv E_{P_0}[Y|X]$, $C(a) \equiv 4(1 + a/2)^2 (\frac{2C_1}{3} + \frac{2C_2}{a})$. Then, for any $a > 0$ the following inequality holds

$$\begin{aligned} & E_{P_0} \delta \left(\hat{\mathcal{M}}(P_{n,B_n}^t)(x), \mathbf{m}_0(x) \right) \\ & \leq (1+a) \times \min_{k \in \kappa_n} \left\{ (1+a) \tilde{B}_0(k) \right. \\ & \quad \left. + C(a) \frac{1 + \log(N_k)}{n(1-p)} \right\} + C(a) \frac{1 + \log(J_n)}{np}, \end{aligned} \quad (1)$$

where $\tilde{B}_0(k) = \min_{\mathbf{m} \in \mathbb{M}_k, \tilde{\Theta}_k} \int (\mathbf{m}(x) - \mathbf{m}_0(x))^2 dF_0(x)$.

The proof of Theorem 1 is provided in the supplement. Theorem 1 shows that the expectation of the risk difference of $\hat{\mathcal{M}}(P_{n,B_n}^t)(x)$ and $\mathbf{m}_0(x)$ depends on the searching number N_k , and the cardinality J_n of the searching space of the hyperparameters $\tilde{\Lambda}(n)$. Suppose we search for the optimal MaC on $\mathbb{M}_k$. If the searching number N_k of $\mathbb{M}_k$ is small, the searching resolution $\varepsilon_k(N_k)$ may be large, and then $\tilde{B}_0(k)$ could be large too. As a result, a small N_k could result in the risk bound increasing. Moreover, if J_n is small, the value of $\min_{k \in \kappa_n} \tilde{B}_0(k)$ could be large. To reduce the prediction risk, we need to not only adjust N_k to strike a balance between the term associated with $\log(N_k)$ and that associated with risk in the approximation error $\tilde{B}_0(k)$ but also adjust the balance between $\min_{k \in \kappa_n} \tilde{B}_0(k)$ and the term with $\log(J_n)$. Note that increasing the number of base machines, K_n , may reduce the first term of eq.(1), but cause the term with $\log(J_n)$ to increase, hence a proper selection of the base machines and a moderate K_n would also be helpful to reduce the risk.

Theorem 1 also illustrates a merit of the *circular & recursive* feature of MaC, that is, MaC only needs to add up the final K_n machines during the loop of the algorithm without the need to record all single machines in the loop. Note that K_n is ordinarily much smaller than the total number of all single machines of the algorithm. Using a *circular & recursive* type algorithm can reduce J_n compared with a *sequential & top-down* type algorithm because a *sequential & top-down* type algorithm needs to add all single machines into its final estimate.

Remark 2. A related method of MaC is LS-Boost (Friedman, 2001), which essentially works via repeatedly fitting the residual on the predictors using one

¹[

base machine at a time. Recall that we have K_n base machines. For MaC, in Algorithm 1, the estimated machine in step i , $m_{k, \hat{\lambda}_k^{(i)}} \hat{\theta}_k^{(i)}$, is an updated version of $m_{k, \hat{\lambda}_k^{(i-1)}} \hat{\theta}_k^{(i-1)}$, for $i > 1$. In the MaC, the machines collaborate with each other by updating themselves after considering the actions of all others. Note that we only need to store one set of estimates for each machine at any given time. The final result of MaC is the summation of the K_n machines with their most recent estimates. In contrast, for LS-Boost, if we expect to modify the result of the first round based on K_n estimated base machines, we need to use a special version of LS-Boost, in which we fit the K_n base machines $r_n > 1$ times in a sequential fashion. In such an LS-Boost, late-coming machines complement earlier machines. The results of all single machines are kept and added to the final result. Finally, the estimated result of LS-Boost is the summation of the results from the $r_n \times K_n$ estimated base machines. As a result, the total number of single machines, $r_n \times K_n$, for LS-Boost could be much larger than that, K_n , for MaC. A large total number of single machines could increase the risk of LS-Boost. Admittedly, this is not decisive for a comparison between LS-Boost and MaC because there are additional factors such as the searching space of every single machine. As a result, LS-Boost and MaC may have their own advantages and disadvantages in different situations.

4 Experiments

4.1 Artificial simulation experiments

We first generate data for 10 independent variables, $x_1, x_2, \dots, x_{10}$, following a multivariate normal distribution $N(0, \Sigma)$, with a variance-covariance matrix $\Sigma = [\Sigma_{ij}]_{10 \times 10}$, where $\Sigma_{ij} = \rho^{|i-j|}$ with $\rho = 0.1$. Then, generate the error term $\varepsilon \sim N(0, 1)$. We consider the following two data-generating processes (DGPs).

$$\begin{aligned} \text{DGP 1: } y = & c_0 + c_1 (x_1 + x_2 + 0.5x_3 + 0.3x_4 + 0.2x_5)^3 \\ & + c_2 I(x_4 > 0) + c_3 I(x_5 > 1) \\ & + c_4 I(x_1 x_2 > 0) + \varepsilon, \end{aligned}$$

$$\begin{aligned} \text{DGP 2: } y = & c_0 + c_1 (x_1 + x_2 + 0.5x_3 + 0.3x_4 + 0.2x_5)^3 \\ & + c_2 I(x_1 > 0) \times x_2 - c_3 I(x_1 < 1) \times x_2 \\ & + c_4 I(x_1 > 0) \times 3^{x_2} + c_5 I(x_3 x_4 > 0) \\ & \times \sin(x_5) + \varepsilon, \end{aligned}$$

where $I(\cdot)$ stands for indicator function and the constants c_0 through c_5 are chosen to standardize each term (mean 0 and variance 1). It is clear to see that DGP 2 has stronger nonlinearity than DGP 1. Note that the variables $x_6, \dots, x_{10}$ are not included in either of the DGPs, but are included as predictors for all methods. The sample size n and the number of replications for both is 1000. We set $p = 0.25$. The sample is randomly split into training data of 600 observations, validation data of 200 observations, and test data of 200 observations. We

choose the mean squared prediction error $\text{MSPE}_i = \frac{1}{n} \sum_{j=1}^n (\hat{y}_{i,j} - y_j)^2$ as the loss for both the artificial and real data experiments, where $\hat{y}_{i,j}$ is the prediction of y_j for the i th replication.

We use DT (CART, Breiman et al. (1984)), DNN, and Ridge regression as base machines. The DNN used here has 5 dense layers. Each of the first 4 dense layers is associated with a dropout layer. We treat the number of nodes of the latent layers, the types of activation functions, the dropout ratio, the learning rate of optimization, the batch size, and the number of epochs as hyperparameters. The maximum depth of the DT is fixed as 10. The DT is pruned according to the cost complexity parameter, which is a hyperparameter. The tuning parameter that controls the strength of the penalty of Ridge is also a hyperparameter. The order of the base machines is also treated as a hyperparameter. As mentioned in Section 2, all the hyperparameters are tuned with respect to the MSPE in the validation data. Using these three base machines for MaC, LS-boost, and SL, we compare the prediction performances on the test data between MaC, SL, and LS-Boost for both DGPs. For MaC, we set $T = 50$ and $\tau = 10$.

We conduct LS-boost with a similar setup of MaC. The three base machines are repeatedly used with a fixed order for at most $T = 50$ times. The order is selected according to the empirical risk of the validation data. The processes will be stopped if the empirical risk of the validation data does not decrease for $\tau = 10$ times. For LS-boost and SL, the hyperparameters of each base machine are tuned according to the empirical risk of the validation data, when we fit each base machine.

We use the Greene HPC Cluster of New York University to carry out all the experiments. All the experiments are carried out by CPU with a 2x Intel Xeon Platinum 8268 24C 205W 2.9GHz Processor. For each simulation replication, the computing time of the artificial simulation is about 64 minutes, while that of the real data experiments with datasets of different sizes ranges from 42 minutes to 50 hours.

The simulation results for DGP 1 are in Figures 3a and 3b, with that of DGP 2 in Figures ?? and ?. We count the number of replications for which MaC wins, i.e., it produces a smaller MSPE for the test data than its competitors, namely a particular ensemble method or a base machine. As depicted in Figures 3a and ?, for both DGPs, MaC generally outperforms all the other methods. The boxplots in Figure 3b and ? show that MaC has a smaller mean and median of prediction errors on the test data than all the other methods, whose means and medians are marked by the blue rectangles and the orange lines, respectively. For the simulation and the real data experiment (in the next subsection), we calculate the mean and median of MSPE for each method, the paired t-statistic, and Cohen’s d (Cohen, 1988) of the means of MSPEs for each pair, which consists of an alternative method and MaC. The results of the simulations are tabulated in the first two panels of Table 1. For both DGPs, all the paired t-statistics are large with values of at least 4.6, and most of Cohen’s d s are greater than 0.2, implying that the mean and median of MSPE for the MaC are significantly smaller than those of the other methods.

4.2 Real data experiment

We use the same base machines and the same setting as the simulations for our real data experiment. The real datasets are from PMLB, which is an open-source dataset collection for benchmarking machine learning methods. All the datasets do not contain personally identifiable information or offensive content. There are 122 datasets for regression in PMLB in total, including data about automobile prices, faculty salaries, pollution, and crime. The sample sizes of the datasets range from 47 to 1025010. We dropped three datasets with sample sizes greater than or equal to 1 million because of our limits in computing resources. As a result, the datasets used have sample sizes ranging from 47 to 177147 with a mean of 5476.69, while the numbers of features are from 2 to 1000 with a mean of 26.05. To make the comparison between the different methods simpler, we standardize all variables in the datasets so they all have a mean of 0 and a variance of 1. We apply MaC, SL, LS-Boost, and the three individual base machines to predict

the target variable in the test data for each dataset. We perform the experiment 20 times, in which for each time, each dataset is randomly split into training (64%), validation (16%), and test (20%). All the prediction results are in Figures 3c, 3d, and 4. We count the number of datasets for which MaC outperforms its competitors in terms of MSPE on the test data. The results are in Figure 3c, which shows that MaC wins for more than 60% datasets against all competitors. Moreover, as illustrated in Figure 3d, MaC has a smaller mean and median of MSPE than all the competing methods. To obtain a closer look at the settings where MaC has an advantage, we calculate the MSPE differences by subtracting the MSPEs of the other methods from that of MaC. The results of the MSPE differences are plotted in Figure 4 for all the methods. As shown, for each subfigure, there are more points with positive MSPE difference than with negative MSPE difference. It means that MaC has smaller MSPE than corresponding alternative methods. In Figure 4, we draw an orange cross when MaC outperforms others and a blue cross otherwise. MaC has superior performance across the entire range of sample sizes and the number of variables. Similar to the simulation, the paired t-statistics and Cohen’s d for the real data in the third panel of Table 1 show that the mean and median of MSPE of the MaC are significantly smaller than those of the other methods.²² [Note that the MSPE of SL for one dataset is extremely large (42.48), which we ignore in some figures for better visibility (we calculate the paired t-statistic and Cohen’s d after deleting the pair corresponding to this dataset).]

5 Conclusion

In this paper, we propose a new ensemble learning framework, MaC, for regression problems. The key feature of MaC being *circular & recursive* helps it to communicate among the base machines, yielding better performance in various

²²[

scenarios. However, the framework of making an ensemble algorithm *circular* & *recursive* is not limited to supervised regression learning tasks. Some interesting extensions would be to apply this same MaC framework to other types of tasks such as classification and semisupervised learning. In our theoretical analysis, we derive the risk bound of MaC using a quadratic risk function. Deriving risk bounds for more general risk functions and comparing the risks of MaC with individual base machines, super learner, and boosting could also lead to a deeper understanding of MaC. We intend to address these extensions in future work. Similar to boosting methods, MaC has a limitation on the burden of computation, since the current version of the algorithm of MaC can't be executed in parallel. It is another important future work to reduce the burden of computation.

Acknowledgments

Partially supported by NIH Grant 1R21AG074205-01 and NSF Grant DMS-2324489 (Feng) and JSPS KAKENHI (grant number JP19K01582 and JP22H00833) (Liu).

References

- Breiman, L., 1996. Bagging predictors. *Machine learning* 24, 123–140.
- Breiman, L., Friedman, J., Stone, C.J., Olshen, R.A., 1984. *Classification and regression trees*. CRC press.
- Chollet, F., 2017. *Deep learning with Python*. Simon and Schuster.
- Cohen, J., 1988. *Statistical power analysis for the behavioral sciences*. 2nd ed., Lawrence Erlbaum Associates Inc.
- Cortes, C., Vapnik, V., 1995. Support-vector networks. *Machine learning* 20, 273–297.
- Dasarathy, B.V., Sheela, B.V., 1979. A composite classifier system design: Concepts and methodology. *Proceedings of the IEEE* 67, 708–713.
- Dong, X., Yu, Z., Cao, W., Shi, Y., Ma, Q., 2020. A survey on ensemble learning. *Frontiers of Computer Science* 14, 241–258.
- Friedman, J.H., 2001. Greedy function approximation: A gradient boosting machine. *The Annals of Statistics* 29, 1189 – 1232.
- Hastie, T., Tibshirani, R., Friedman, J., 2009. *The elements of statistical learning: data mining, inference, and prediction*. Springer Science & Business Media.

- Ho, T.K., 1995. Random decision forests, in: Proceedings of 3rd international conference on document analysis and recognition, IEEE. pp. 278–282.
- van der Laan, M.J., Dudoit, S., van der Vaart, A.W., 2006. The cross-validated adaptive epsilon-net estimator. *Statistics & Decisions* 24, 373–395.
- van der Laan, M.J., Polley, E.C., Hubbard, A.E., 2007. Super learner. *Statistical Applications in Genetics and Molecular Biology* 6, 1544–6115.
- Lu, X., Van Roy, B., 2017. Ensemble sampling, in: Guyon, I., Luxburg, U.V., Bengio, S., Wallach, H., Fergus, R., Vishwanathan, S., Garnett, R. (Eds.), *Advances in Neural Information Processing Systems*, Curran Associates, Inc.. pp. 3259–3267.
- Mendes-Moreira, J., Soares, C., Jorge, A.M., Sousa, J.F.D., 2012. Ensemble approaches for regression: A survey. *Acm computing surveys (csur)* 45, 1–40.
- Olson, R.S., La Cava, W., Orzechowski, P., Urbanowicz, R.J., Moore, J.H., 2017. Pmlb: a large benchmark suite for machine learning evaluation and comparison. *BioData Mining* 10, 36.
- Qi, Y., Liu, B., Wang, Y., Pan, G., 2019. Dynamic ensemble modeling approach to nonstationary neural decoding in brain-computer interfaces, in: Wallach, H., Larochelle, H., Beygelzimer, A., d'Alché-Buc, F., Fox, E., Garnett, R. (Eds.), *Advances in Neural Information Processing Systems*, Curran Associates, Inc.. pp. 6087–6096.
- Sagi, O., Rokach, L., 2018. Ensemble learning: A survey. *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery* 8, e1249.
- Schapire, R.E., 1990. The strength of weak learnability. *Machine Learning* 5, 197–227.
- Schapire, R.E., Freund, Y., Bartlett, P., Lee, W.S., 1998. Boosting the margin: A new explanation for the effectiveness of voting methods. *The annals of statistics* 26, 1651–1686.
- Sorokina, D., Caruana, R., Riedewald, M., 2007. Additive groves of regression trees, in: *European Conference on Machine Learning*, Springer. pp. 323–334.
- Sorokina, D., Caruana, R., Riedewald, M., Fink, D., 2008. Detecting statistical interactions with additive groves of trees, in: *Proceedings of the 25th international conference on Machine learning*, pp. 1000–1007.
- Tian, Y., Feng, Y., 2021. Rase: Random subspace ensemble classification. *Journal of Machine Learning Research* .
- Yu, Z., Luo, P., Liu, J., Wong, H.S., You, J., Han, G., Zhang, J., 2018. Semi-supervised ensemble clustering based on selected constraint projection. *IEEE Transactions on Knowledge and Data Engineering* 30, 2394–2407.

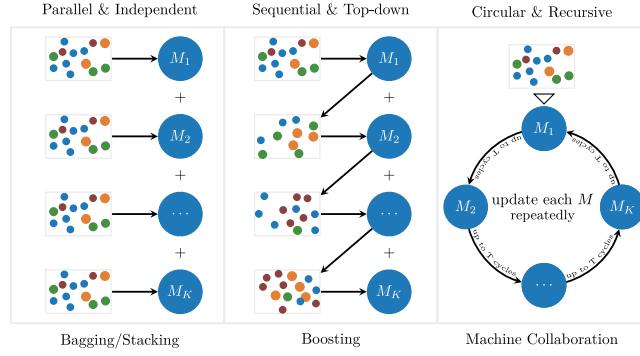


Figure 1: Bagging, boosting, and machine collaboration

Table 1: Results of simulation and real data experiment

	MaC	SL	LS-Boost	DNN	Tree	Ridge
DGP 1						
Mean	1.92	2.21	2.11	2.48	2.53	3.36
Median	1.85	2.16	2.06	2.43	2.48	3.31
paired t		23.62	15.45	36.91	47.10	104.45
Cohen's d		0.75	0.49	1.17	1.49	3.30
DGP 2						
Mean	3.05	3.21	3.27	4.02	3.35	6.25
Median	2.73	2.96	2.93	3.60	3.11	5.96
paired t		4.64	6.61	23.61	7.71	68.16
Cohen's d		0.15	0.21	0.75	0.24	2.16
Real data						
Mean	0.26	0.70	0.28	0.36	0.37	0.52
Median	0.20	0.27	0.23	0.32	0.32	0.61
paired t		6.97	12.52	33.02	15.71	26.87
Cohen's d		0.22	0.40	1.04	0.50	0.85

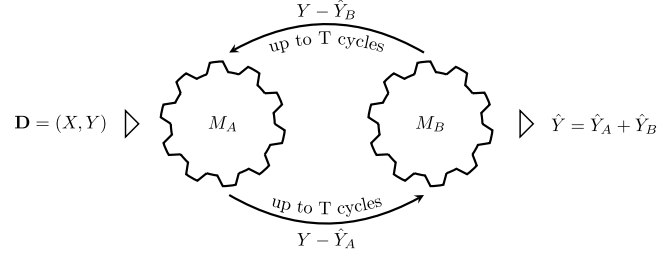


Figure 2: Machine Collaboration

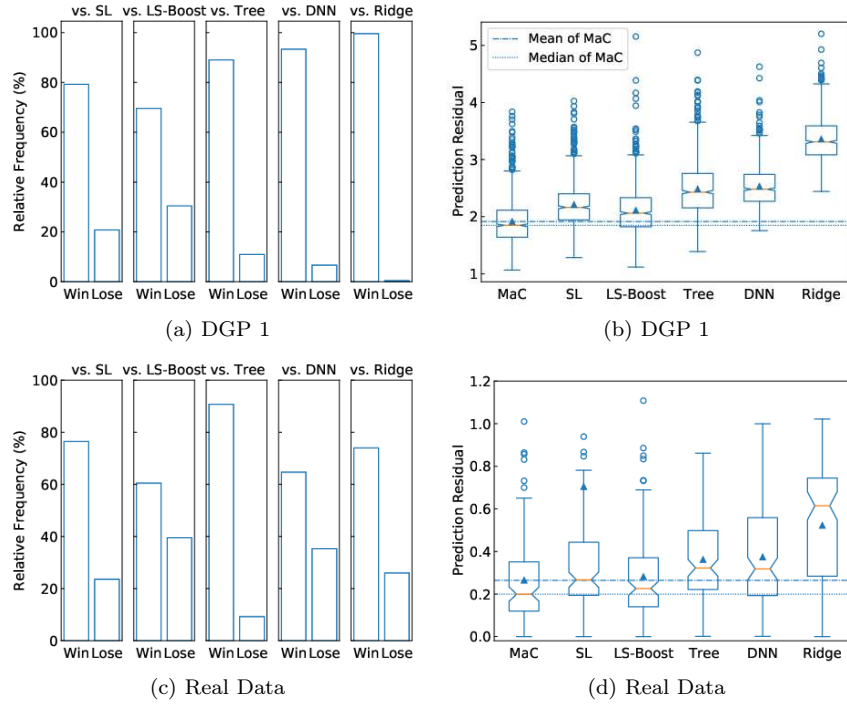


Figure 3: MaC vs alternatives

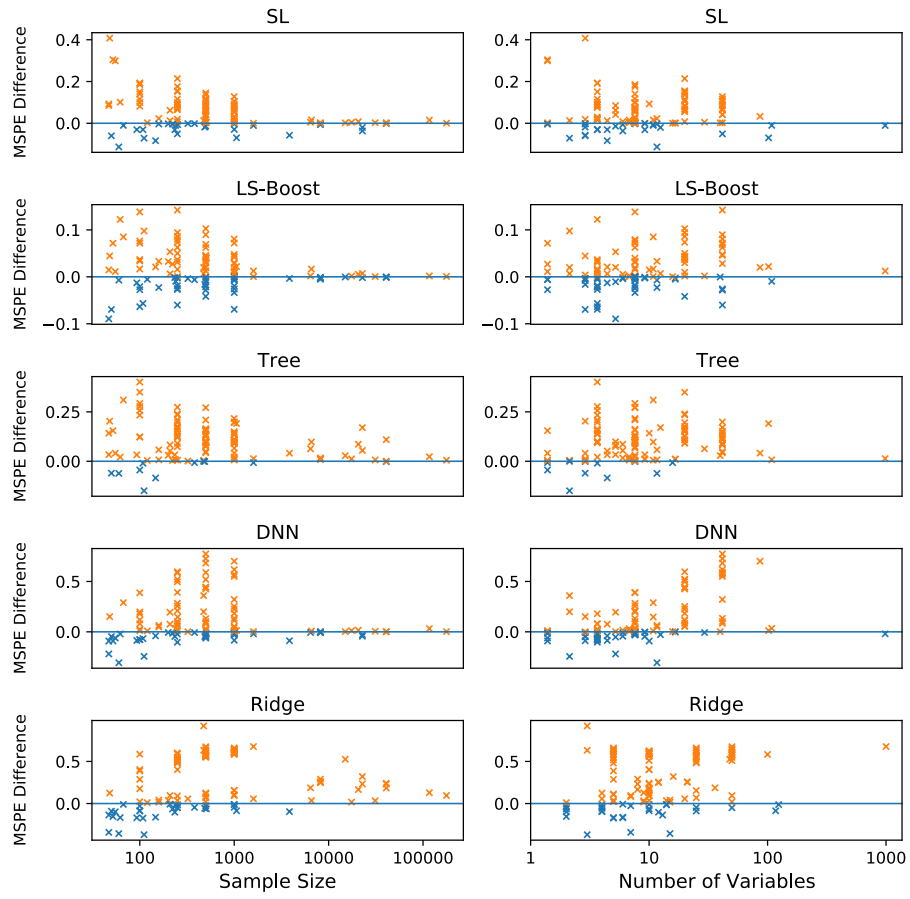


Figure 4: MSPE difference (Alternative – MaC)

Appendix

The finite sample theoretical result in the main article is an application of the results of van der Laan et al. (2006). To prove Theorem 1, we require the following assumptions and proposition.

Assumptions

1. $\sup_{\mathbf{m} \in \mathbb{M}} \sup_{D \in \mathcal{D}} |L(D, \mathbf{m}) - L(D, \mathbf{m}_0)| \leq C_1.$
2. assume

$$\sup_{\mathbf{m} \in \mathbb{M}} \frac{\text{VAR}_{P_0} [L(D, \mathbf{m}) - L(D, \mathbf{m}_0)]}{E_{P_0} [L(D, \mathbf{m}) - L(D, \mathbf{m}_0)]} \leq C_2.$$

Proposition 1. *Under Assumptions 1 and 2, the following finite sample inequality holds for some constant $C(a)$*

$$\begin{aligned} E_{P_0} \delta \left(\hat{\mathcal{M}}(P_{n, B_n}^t), \mathbf{m}_0 \right) &\leq (1+a) \min_{k \in \kappa_n} \left\{ (1+a) B_0(k) + C(a) \frac{1 + \log(N_k)}{n(1-p)} \right\} \\ &\quad + C(a) \frac{1 + \log(J_n)}{np} \end{aligned}$$

for any $a > 0$. Therein, N_k is the searching number of $\mathbb{M}_k$ for the MaC algorithm,

$$C(a) \equiv 4(1+a/2)^2 \left(\frac{2C_1}{3} + \frac{2C_2}{a} \right).$$

Note that

$$\begin{aligned} E_{P_0} \delta \left(\hat{\mathcal{M}}(P_{n, B_n}^t), \mathbf{m}_0 \right) &= E_{P_0} \delta \left(\hat{\mathcal{M}}_{k(P_n)}(P_{n, B_n}^t), \mathbf{m}_0 \right) \\ &= E_{P_0} \int \left(\hat{\mathcal{M}}_{k(P_n)}(P_{n, B_n}^t)(x) - \mathbf{m}_0(x) \right)^2 dF_0(x). \end{aligned}$$

Simply applying Theorem 3.1 (van der Laan et al., 2006) with fixed ε_k , the conclusion of Proposition 1 is straightforward.

Proof of Theorem 1

We provide a sketch of the proof using the results in (van der Laan et al., 2006) here.

Proof. To apply Proposition 1, we need only check Assumptions 1 and 2. First, Assumption 1 holds, given

$$\begin{aligned} &\sup_{\mathbf{m} \in \mathbb{M}} \sup_{D \in \mathcal{D}} |L(D, \mathbf{m}) - L(D, \mathbf{m}_0)| \\ &= \sup_{\mathbf{m} \in \mathbb{M}} \sup_{D \in \mathcal{D}} \left| (Y - \mathbf{m}(x))^2 - (Y - \mathbf{m}_0(x))^2 \right| \\ &\leq \sup_{\mathbf{m} \in \mathbb{M}} \sup_{D \in \mathcal{D}} |Y^2 + \mathbf{m}^2(x) + 2Y^2 + \mathbf{m}_0^2(x)| \\ &= 4C_0^2 = C_1. \end{aligned}$$

For Assumption 2, note that using some simple algebra, we have

$$\int (L(d, \mathbf{m}) - L(d, \mathbf{m}_0)) dP_0(d) = \int (\mathbf{m}(x) - \mathbf{m}_0(x))^2 dF_0(x).$$

Then

$$\begin{aligned} & VAR_{P_0} [L(D, \mathbf{m}) - L(D, \mathbf{m}_0)] \\ & \leq E_{P_0} [(L(D, \mathbf{m}) - L(D, \mathbf{m}_0))^2] \\ & = \int (\mathbf{m}^2(x) - \mathbf{m}_0^2(x) - 2y\mathbf{m}(x) + 2y\mathbf{m}_0(x))^2 dP_0(d) \\ & = \int [(\mathbf{m}(x) - \mathbf{m}_0(x))(\mathbf{m}(x) + \mathbf{m}_0(x) - 2y)]^2 dP_0(d) \\ & \leq 16C_0^2 \int (\mathbf{m}(x) - \mathbf{m}_0(x))^2 dF_0(d) \\ & = C_2 E_{P_0} [L(D, \mathbf{m}) - L(D, \mathbf{m}_0)]. \end{aligned}$$

Assumption 2 is satisfied. We complete the proof by applying Proposition 1. $\square$