

Construction of Sparse Suffix Trees and LCE Indexes in Optimal Time and Space

Dmitry Kosolobov ✉ 

Ural Federal University, Ekaterinburg, Russia

Nikita Sivukhin ✉ 

Ural Federal University, Ekaterinburg, Russia

Abstract

The notions of synchronizing and partitioning sets are recently introduced variants of locally consistent parsings with a great potential in problem-solving. In this paper we propose a deterministic algorithm that constructs for a given readonly string of length n over the alphabet $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$ a variant of a τ -partitioning set with size $\mathcal{O}(b)$ and $\tau = \frac{n}{b}$ using $\mathcal{O}(b)$ space and $\mathcal{O}(\frac{1}{\epsilon}n)$ time provided $b \geq n^\epsilon$, for $\epsilon > 0$. As a corollary, for $b \geq n^\epsilon$ and constant $\epsilon > 0$, we obtain linear time construction algorithms with $\mathcal{O}(b)$ space on top of the string for two major small-space indexes: a sparse suffix tree, which is a compacted trie built on b chosen suffixes of the string, and a *longest common extension* (LCE) index, which occupies $\mathcal{O}(b)$ space and allows us to compute the longest common prefix for any pair of substrings in $\mathcal{O}(n/b)$ time. For both, the $\mathcal{O}(b)$ construction storage is asymptotically optimal since the tree itself takes $\mathcal{O}(b)$ space and any LCE index with $\mathcal{O}(n/b)$ query time must occupy at least $\mathcal{O}(b)$ space by a known trade-off (at least for $b \geq \Omega(n/\log n)$). In case of arbitrary $b \geq \Omega(\log^2 n)$, we present construction algorithms for the partitioning set, sparse suffix tree, and LCE index with $\mathcal{O}(n \log_b n)$ running time and $\mathcal{O}(b)$ space, thus also improving the state of the art.

2012 ACM Subject Classification Theory of computation → Design and analysis of algorithms

Keywords and phrases (τ, δ) -partitioning set, longest common extension, sparse suffix tree

Funding Supported by the Russian Science Foundation (RSF), project 20-71-00050.

1 Introduction

Indexing data structures traditionally play a central role in algorithms on strings and in information retrieval. Due to constantly growing volumes of data in applications, the attention of researchers in the last decades was naturally attracted to small-space indexes. In this paper we study two closely related small-space indexing data structures: a sparse suffix tree and a longest common extension (LCE) index. We investigate them in the general framework of (deterministic) locally consistent parsings that was developed by Cole and Vishkin [10], Jeř [27, 26, 28, 25], and others [1, 15, 17, 18, 20, 34, 35, 39] (the list is not exhausting) and was recently revitalized in the works of Birenzwe et al. [7] and Kempa and Kociumaka [31] where two new potent concepts of partitioning and synchronizing sets were introduced.

The sparse suffix tree (*SST*) for a given set of b suffixes of a string is a compacted trie built on these suffixes. It can be viewed as the suffix tree from which all suffixes not from the set were removed (details follow). The tree takes $\mathcal{O}(b)$ space on top of the input string and can be easily constructed in $\mathcal{O}(n)$ time from the suffix tree, where n is the length of the string. One can build the suffix tree in $\mathcal{O}(n)$ time [13] provided the letters of the string are sortable in linear time. However, if at most $\mathcal{O}(b)$ space is available on top of the input, then in general there is not enough memory for the full suffix tree and the problem, thus, becomes much more difficult. The $\mathcal{O}(b)$ bound is optimal since the tree itself takes $\mathcal{O}(b)$ space. The construction problem with restricted $\mathcal{O}(b)$ space naturally arises in applications of the sparse suffix tree and the sparse suffix array (which is easy to retrieve from the tree) where we have to index data in the setting of scarce memory. As is common in algorithms on strings, it is assumed that the input string is readonly, its letters are polynomially bounded integers $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$, and the space is at least polylogarithmic, i.e., $b \geq \log^{\Omega(1)} n$. We note, however, that in supposed usages the memory restrictions can often be relaxed even more to $b \geq n^\epsilon$, for constant $\epsilon > 0$.

The $\mathcal{O}(b)$ -space construction problem was posed by Kärkkäinen and Ukkonen [30] who showed how to solve it in linear time for the case of evenly spaced b suffixes. In a series of works [4, 7, 15, 19, 24, 29], the problem was settled for the case of randomized algorithms: an optimal linear $\mathcal{O}(b)$ -space Monte Carlo construction algorithm for the sparse suffix tree was proposed by Gawrychowski and Kociumaka [19] and an optimal linear $\mathcal{O}(b)$ -space Las-Vegas algorithm was described by Birenzwe et al. [7]. The latter authors also presented the best up-to-date deterministic solution that builds the sparse suffix tree within $\mathcal{O}(b)$ space in $\mathcal{O}(n \log \frac{n}{b})$ time [7] (log is in base 2 unless explicitly stated otherwise). All these solutions assume (as we do too) that the input string is readonly and its alphabet is $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$; the case of rewritable inputs is apparently very different, as was shown by Prezza [37].

The LCE index, crucial in string algorithm applications, preprocesses a readonly input string of length n so that one can answer queries $\text{lce}(p, q)$, for any positions p and q , computing the length of the longest common prefix of the suffixes starting at p and q . The now classical result of Harel and Tarjan states that the LCE queries can be answered in $\mathcal{O}(1)$ time provided $\mathcal{O}(n)$ space is used [22]. In [5] Bille et al. presented an LCE index that, for any given user-defined parameter b , occupies $\mathcal{O}(b)$ space on top of the input string and answers queries in $\mathcal{O}(\frac{n}{b})$ time. In [32] it was proved that this time-space trade-off is optimal provided $b \geq \Omega(n/\log n)$ (it is conjectured that the same trade-off lower bound holds for a much broader range of values b ; a weaker trade-off appears in [6, 8]). In view of these lower bounds, it is therefore natural to ask how fast one can construct, for any parameter b , an LCE index that can answer queries in $\mathcal{O}(\frac{n}{b})$ time using $\mathcal{O}(b)$ space on top of the input. The space $\mathcal{O}(b)$ is optimal for this query time and the construction algorithm should not exceed it. The

■ **Table 1** LCE indexes deterministically constructible in $\mathcal{O}(b)$ space on a readonly input, for $b \geq \Omega(\log^2 n)$.

Algorithm	Tanimura et al. [41]	Birenzweige et al. [7]	Theorem 4
Query time	$\mathcal{O}(\frac{n}{b} \log \min\{b, \frac{n}{b}\})$	$\mathcal{O}(\frac{n}{b} \sqrt{\log^* n})$	$\mathcal{O}(\frac{n}{b})$
Construction in $\mathcal{O}(b)$ space	$\mathcal{O}(n \cdot \frac{n}{b})$	$\mathcal{O}(n \log \frac{n}{b})$	$\mathcal{O}(n \log_b n)$

issue with the data structure of [5] is that its construction time is unacceptably slow, which motivated a series of works trying to solve this problem. As in the case of sparse suffix trees, the problem was completely settled in the randomized setting: an optimal linear $\mathcal{O}(b)$ -space Monte Carlo construction algorithm for an LCE index with $\mathcal{O}(\frac{n}{b})$ -time queries was presented by Gawrychowski and Kociumaka [19] and a Las-Vegas construction with the same time and space was proposed by Birenzweige et al. [7] provided $b \geq \Omega(\log^2 n)$. The best deterministic solution is also presented in [7] and runs in $\mathcal{O}(n \log \frac{n}{b})$ time answering queries in slightly worse time $\mathcal{O}(\frac{n}{b} \sqrt{\log^* n})$ provided $b \geq \Omega(\log n)$ (the previous best solution was from [41] and it runs in $\mathcal{O}(n \cdot \frac{n}{b})$ time but, for some exotic parameters b , has slightly better query time). The input string is readonly in all these solutions and the alphabet is $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$.

For a broad range of values b , we settle both construction problems, for sparse suffix trees and LCE indexes, in $\mathcal{O}(b)$ space in the deterministic case. Specifically, given a readonly string of length n over the alphabet $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$, we present two algorithms: one that constructs the sparse suffix tree, for any user-defined set of b suffixes such that $b \geq \Omega(\log^2 n)$, in $\mathcal{O}(n \log_b n)$ time using $\mathcal{O}(b)$ space on top of the input; and another that constructs an LCE index with $\mathcal{O}(\frac{n}{b})$ -time queries, for any parameter b such that $b \geq \Omega(\log^2 n)$, in $\mathcal{O}(n \log_b n)$ time using $\mathcal{O}(b)$ space on top of the input. This gives us optimal $\mathcal{O}(b)$ -space solutions with $\mathcal{O}(\frac{1}{\epsilon}n) = \mathcal{O}(n)$ time when $b \geq n^\epsilon$, for constant $\epsilon > 0$, which arguably includes most interesting cases. As can be seen in Table 1, our result beats the previous best solution in virtually all settings since $n \log_b n = o(n \log \frac{n}{b})$, for $b = o(n)$.

In order to achieve these results, we develop a new algorithm that, for any given parameter $b \geq \Omega(\log^2 n)$, constructs a so-called τ -partitioning set of size $\mathcal{O}(b)$ with $\tau = \frac{n}{b}$. This result is of independent interest.

We note that there is another natural model where the input string is packed in memory in such a way that one can read in $\mathcal{O}(1)$ time any $\Theta(\log_\sigma n)$ consecutive letters of the input packed into one $\Theta(\log n)$ -bit machine word, where $\{0, 1, \dots, \sigma-1\}$ is the input alphabet. In this case the $\mathcal{O}(n)$ construction time is not necessarily optimal for the sparse suffix tree and the LCE index and one might expect to have $\mathcal{O}(n/\log_\sigma n)$ time. As was shown by Kempa and Kociumaka [31], this is indeed possible for LCE indexes in $\mathcal{O}(n/\log_\sigma n)$ space. It remains open whether one can improve our results for the $\mathcal{O}(b)$ -space construction in this setting; note that the lower bound of [32] does not apply here due to its assumption of single-letter input memory cells.

Techniques. The core of our solution is a version of locally consistent parsing developed by Birenzweige et al. [7], the so-called τ -partitioning sets (unfortunately, we could not adapt the more neat τ -synchronizing sets from [31] for the deterministic case). It was shown by Birenzweige et al. that the $\mathcal{O}(b)$ -space construction of a sparse suffix tree or an LCE index can be performed in linear time provided a τ -partitioning set of size $\mathcal{O}(b)$ with $\tau = \frac{n}{b}$ is given. We define a variant of τ -partitioning sets and, for completeness, repeat the argument of Birenzweige et al. with minor adaptations to our case. The main bulk of the text is devoted to the description of an $\mathcal{O}(b)$ -space algorithm that builds a (variant of) τ -partitioning set of size

$\mathcal{O}(b)$ with $\tau = \frac{n}{b}$ in $\mathcal{O}(n \log_b n)$ time provided $b \geq \Omega(\log^2 n)$, which is the main result of the present paper. In comparison Birenzwe et al.'s algorithm for their τ -partitioning sets runs in $\mathcal{O}(n)$ expected time (so that it is a Las Vegas construction) and $\mathcal{O}(b)$ space; their deterministic algorithm takes $\mathcal{O}(n \log \tau)$ time but the resulting set is only $\tau \log^* n$ -partitioning. Concepts very similar to partitioning sets appeared also in [38, 40].

Our solution combines two well-known approaches to deterministic locally consistent parsings: the *deterministic coin tossing* introduced by Cole and Vishkin [10] and developed in [1, 15, 17, 18, 20, 34, 35, 39], and the *recompression* invented by Jeř [25] and studied in [23, 27, 26, 28]. The high level idea is first to use Cole and Vishkin's technique that constructs a τ -partitioning set of size $\mathcal{O}(b \log^* n)$ where $\tau = \frac{n}{b}$ (in our algorithm the size is actually $\mathcal{O}(b \log \log \log n)$ since we use a "truncated" version of Cole and Vishkin's bit reductions); second, instead of storing the set explicitly, which is impossible in $\mathcal{O}(b)$ space, we construct a string R of length $\mathcal{O}(b \log^* n)$ in which every letter corresponds to a position of the set and occupies $o(\log \log n)$ bits so that R takes $o(b \log^* n \log \log n)$ bits in total and, thus, can be stored into $\mathcal{O}(b)$ machine words of size $\mathcal{O}(\log n)$ bits; third, Jeř's recompression technique is iteratively applied to the string R until R is shortened to length $\mathcal{O}(b)$; finally, the first technique generating a τ -partitioning set is performed again but this time we retain and store explicitly those positions that correspond to surviving letters of the string R . There are many hidden obstacles on this path and because of them our solution is only of purely theoretical value in its present form due to numerous internal complications in the actual scheme (in contrast, randomized results on synchronizing sets [12, 31] seem quite practical).

The paper is organized as follows. In Section 2 we define τ -partitioning sets and show how one can use them to build an LCE index. Section 3 describes the first stage of the construction of a τ -partitioning set that is based on a modification of Cole and Vishkin's technique. Section 4 improves the running time of this stage from $\mathcal{O}(n \log \tau)$ to $\mathcal{O}(n \log_b \tau)$. In Section 5 the second stage based on a modification of Jeř's recompression technique is presented. Appendix E describes separately the case of very small τ .

2 Partitioning Sets with Applications

Let us fix a readonly string s of length n whose letters $s[0], s[1], \dots, s[n-1]$ are from a polynomially bounded alphabet $\{0, 1, \dots, n^{\mathcal{O}(1)}\}$. We use s as the input in our algorithms. As is standard, the algorithms are in the word-RAM model, their space is measured in $\Theta(\log n)$ -bit machine words, and each $s[i]$ occupies a separate word. We write $s[i..j]$ for the *substring* $s[i]s[i+1] \dots s[j]$, assuming it is empty if $i > j$; $s[i..j]$ is called a *suffix* (resp., *prefix*) of s if $j = n - 1$ (resp., $i = 0$). For any string t , let $|t|$ denote its length. We say that t *occurs* at position i in s if $s[i..i+|t|-1] = t$. Denote $[i..j] = \{k \in \mathbb{Z} : i \leq k \leq j\}$, $(i..j) = [i..j] \setminus \{i\}$, $[i..j) = [i..j] \setminus \{j\}$, $(i..j) = [i..j) \cap (i..j]$. A number $p \in [1..|t|]$ is called a *period* of t if $t[i] = t[i - p]$ for each $i \in [p..|t|]$. For brevity, denote $\log \log \log n$ by $\log^{(3)} n$. We assume that n , the length of s , is sufficiently large: larger than $2^{\max\{16, c\}}$, where c is a constant such that n^c upper-bounds the alphabet.

Given an integer $\tau \in [4..n/2]$, a set of positions $S \subseteq [0..n)$ is called a τ -*partitioning set* if it satisfies the following properties:

- (a) if $s[i-\tau..i+\tau] = s[j-\tau..j+\tau]$ for $i, j \in [\tau..n-\tau)$, then $i \in S$ iff $j \in S$;
- (b) if $s[i..i+\ell] = s[j..j+\ell]$, for $i, j \in S$ and some $\ell \geq 0$, then, for each $d \in [0..\ell-\tau)$, $i + d \in S$ iff $j + d \in S$;
- (c) if $i, j \in S \cup \{0, n-1\}$ with $j-i > \tau$ and $(i..j) \cap S = \emptyset$, then the period of $s[i..j]$ is at most $\tau/4$.

Our definition is inspired by the *forward synchronized* (τ, τ) -partitioning sets from [7, Def. 3.1 and 6.1] but slightly differs; nevertheless, we retain the term “partitioning” to avoid inventing unnecessary new terms for very close concepts. In the definition, (a), (b), and (c) state, respectively, that S is locally consistent, forward synchronized, and dense: the choice of positions depends only on short substrings around them, long enough equal right “contexts” of positions from S are “partitioned” identically, and S has a position every τ letters unless a long range with small period is encountered. In our construction of S a certain converse of (c) will also hold: whenever a substring $s[i..j]$ has a period at most $\tau/4$, we will have $S \cap [i + \tau..j - \tau] = \emptyset$ (see Lemma 17). This converse is not in the definition since it is unnecessary for our applications and we will use auxiliary τ -partitioning sets not satisfying it. The definition also implies the following convenient property of “monotonicity”.

► **Lemma 1.** *For any $\tau' \geq \tau$, every τ -partitioning set is also τ' -partitioning.*

Due to (c), all τ -partitioning sets in some strings have size at least $\Omega(n/\tau)$. In the remaining sections we devise algorithms that construct a τ -partitioning set of s with size $\mathcal{O}(n/\tau)$ (matching the lower bound) using $\mathcal{O}(n/\tau)$ space on top of s ; for technical reasons, we assume that $\Omega(\log^2 n)$ space is always available, i.e., $n/\tau \geq \Omega(\log^2 n)$, which is a rather mild restriction. Thus, we shall prove the following main theorem.

► **Theorem 2.** *For any string of length n over an alphabet $[0..n^{\mathcal{O}(1)}]$ and any $\tau \in [4.. \mathcal{O}(n/\log^2 n)]$, one can construct in $\mathcal{O}(n \log_b n)$ time and $\mathcal{O}(b)$ space on top of the string a τ -partitioning set of size $\mathcal{O}(b)$, for $b = n/\tau$.*

Let us sketch how one can construct indexes with the τ -partitioning set of Theorem 2.

LCE index and sparse suffix tree. An LCE index is a data structure on s that, given a pair of positions p and q , answers the *LCE query* $\text{lce}(p, q)$ computing the length of the longest common prefix of $s[p..n-1]$ and $s[q..n-1]$. Such index can be stored in $\mathcal{O}(b)$ space on top of s with $\mathcal{O}(\frac{n}{b})$ query time [5] and this trade-off is optimal, at least for $b \geq \Omega(\frac{n}{\log n})$ [32].

Given b suffixes $s[i_1..n-1], s[i_2..n-1], \dots, s[i_b..n-1]$, their *sparse suffix tree* [30] is a compacted trie on these suffixes in which all edge labels are stored as pointers to corresponding substrings of s . Thus, the tree occupies $\mathcal{O}(b)$ space.

Our construction scheme for these two indexes is roughly as follows: given a τ -partitioning set S with $\tau = \frac{n}{b}$ and size $\mathcal{O}(b) = \mathcal{O}(n/\tau)$, we first build the sparse suffix tree T for the suffixes $s[j..n-1]$ with $j \in S$, then we use it to construct an LCE index, and, using the index, build the sparse suffix tree for arbitrarily chosen b suffixes. We elaborate on this scheme below; our exposition, however, is rather sketchy and some details are omitted since the scheme is essentially the same as in [7] and is given here mostly for completeness.

To construct the sparse suffix tree T for all $s[j..n-1]$ with $j \in S$, we apply the following lemma. Its cumbersome formulation is motivated by its subsequent use in Section 4. In the special case when $m = n$ and $\sigma = n^{\mathcal{O}(1)}$, which is of primary interest for us now, the lemma states that T can be built in $\mathcal{O}(n)$ time: this case implies that $m \log_b \sigma = \mathcal{O}(n \log_b n)$ is $\mathcal{O}(n)$ if $b > n/\log n$, and $b \log b$ is $\mathcal{O}(n)$ if $b \leq n/\log n$, and, therefore, $\min\{m \log_b \sigma, b \log b\} = \mathcal{O}(n)$. The proof essentially follows arguments of [7] and is given in Appendix A.

► **Lemma 3.** *Given an integer $\tau \geq 4$ and a read-only string s of length m over an alphabet $[0..\sigma]$, let S be an “almost” τ -partitioning set of size $b = \Theta(m/\tau)$: it satisfies properties (a) and (b), but not necessarily (c). The sparse suffix tree T for all suffixes $s[j..m-1]$ with $j \in S$ can be built in $\mathcal{O}(m + \min\{m \log_b \sigma, b \log b\})$ time and $\mathcal{O}(m/\tau)$ space on top of the space required for s .*

For our LCE index, we equip T with the lowest common ancestor (LCA) data structure [22], which allows us to compute $\text{lce}(p, q)$ in $\mathcal{O}(1)$ time for $p, q \in S$, and we preprocess an array $N[0..b-1]$ such that $N[i] = \min\{j \geq i\tau : j \in S\}$ for $i \in [0..b)$, which allows us to calculate $\min\{j \geq p : j \in S\}$, for any p , in $\mathcal{O}(\tau)$ time by traversing j_k, j_{k+1}, \dots in S , for $j_k = N[\lfloor p/\tau \rfloor]$. In order to answer an arbitrary query $\text{lce}(p, q)$, we first calculate $p' = \min\{j \geq p + \tau : j \in S\}$ and $q' = \min\{j \geq q + \tau : j \in S\}$ in $\mathcal{O}(\tau)$ time. If either $p' - p \leq 2\tau$ or $q' - q \leq 2\tau$, then by the local consistency of S , $s[p..n-1]$ and $s[q..n-1]$ either differ in their first 3τ positions, which is checked naïvely, or $s[p..p'] = s[q..q']$ and the answer is given by $p' - p + \text{lce}(p', q')$ using T . If $\min\{p' - p, q' - q\} > 2\tau$, then the strings $s[p+\tau..p']$ and $s[q+\tau..q']$ both have periods at most $\tau/4$ due to property (c); we compare $s[p..p+2\tau]$ and $s[q..q+2\tau]$ naïvely and, if there are no mismatches, therefore, due to periodicity, $s[p+\tau..p']$ and $s[q+\tau..q']$ have a common prefix of length $\ell = \min\{p' - p, q' - q\} - \tau$; hence, the problem is reduced to $\text{lce}(p + \ell, q + \ell)$, which can be solved as described above since either $p' - (p + \ell) \leq 2\tau$ or $q' - (q + \ell) \leq 2\tau$. We thus have proved the following theorem.

► **Theorem 4.** *For any string of length n over an alphabet $[0..n^{\mathcal{O}(1)}]$ and any $b \geq \Omega(\log^2 n)$, one can construct in $\mathcal{O}(n \log_b n)$ time and $\mathcal{O}(b)$ space on top of the string an LCE index that can answer LCE queries in $\mathcal{O}(n/b)$ time.*

Let us consider the construction of the SST for b suffixes $s[i_1..n-1], s[i_2..n-1], \dots, s[i_b..n-1]$. Denote by j_k the k th position in a given τ -partitioning set S of size $\mathcal{O}(b)$ with $\tau = \frac{n}{b}$ (so that $j_1 < \dots < j_{|S|}$). For each suffix $s[i_\ell..n-1]$, we compute in $\mathcal{O}(\tau)$ time using the array N an index k_ℓ such that $j_{k_\ell} = \min\{j \geq i_\ell + \tau : j \in S\}$. It takes $\mathcal{O}(b\tau) = \mathcal{O}(n)$ time in total. Then, we sort all strings $s[i_\ell..i_\ell+4\tau]$ in $\mathcal{O}(n)$ time as in the proof of Lemma 3 and assign to them ranks r_ℓ (equal strings are of equal ranks). For each $k \in [1..|S|]$, we obtain from the tree T the rank \tilde{r}_k of $s[j_k..n-1]$ among the suffixes $s[j..n-1]$ with $j \in S$. Suppose that $j_{k_\ell} \leq i_\ell + 3\tau$, for all $\ell \in [1..b]$. By property (a), the equality $r_\ell = r_{\ell'}$, for any $\ell, \ell' \in [1..b]$, implies that $j_{k_\ell} - i_\ell = j_{k_{\ell'}} - i_{\ell'}$ when $j_{k_\ell} - i_\ell \leq 3\tau$. Then, we sort the suffixes $s[i_\ell..n-1]$ with $\ell \in [1..b]$ in $\mathcal{O}(b)$ time using the radix sort on the corresponding pairs $(r_\ell, \tilde{r}_{j_{k_\ell}})$. The SST can be assembled from the sorted suffixes in $\mathcal{O}(b\tau) = \mathcal{O}(n)$ time using the LCE index to calculate longest common prefixes of adjacent suffixes.

The argument is more intricate when the condition $j_{k_\ell} > i_\ell + 3\tau$ does not hold. Suppose that $j_{k_\ell} > i_\ell + 3\tau$, for some $\ell \in [1..b]$. Then, by property (c), the minimal period of $s[i_\ell+\tau..j_{k_\ell}]$ is at most $\tau/4$. Denote this period by p_ℓ . We compute p_ℓ in $\mathcal{O}(\tau)$ time using a linear $\mathcal{O}(1)$ -space algorithm [11] and, then, we find the leftmost position $t_\ell > j_{k_\ell}$ breaking this period: $s[t_\ell] \neq s[t_\ell - p_\ell]$. As $j_{k_\ell} - p_\ell > i_\ell + 2\tau > j_{k_{\ell-1}}$, we obtain $s[j_{k_\ell} - \tau..j_{k_\ell} + \tau] \neq s[j_{k_\ell} - p_\ell - \tau..j_{k_\ell} - p_\ell + \tau]$ (since otherwise $j_{k_\ell} - p_\ell \in S$ by property (a)) and, hence, $t_\ell \in (j_{k_\ell}..j_{k_\ell} + \tau]$. Therefore, the computation of t_ℓ takes $\mathcal{O}(\tau)$ time. Thus, all p_ℓ and t_ℓ can be calculated in $\mathcal{O}(b\tau) = \mathcal{O}(n)$ total time. We then sort the strings $s[t_\ell..t_\ell + \tau]$ in $\mathcal{O}(n)$ time and assign to them ranks \tilde{r}_ℓ . For each suffix $s[i_\ell..n-1]$ with $\ell \in [1..b]$, we associate the tuple $(r_\ell, 0, 0, \tilde{r}_{j_{k_\ell}})$ if $j_{k_\ell} \leq i_\ell + 3\tau$, and the tuple $(r_\ell, d_\ell, \tilde{r}_\ell, \tilde{r}_{j_{k_\ell}})$ if $j_{k_\ell} > i_\ell + 3\tau$, where $d_\ell = \pm(t_\ell - i_\ell - n)$ with plus if $s[t_\ell] < s[t_\ell - p_\ell]$ and minus otherwise. We claim that the order of the suffixes $s[i_\ell..n-1]$ is the same as the order of their associated tuples and, hence, the suffixes can be sorted by sorting the tuples in $\mathcal{O}(n)$ time using the radix sort. We then assemble the SST as above using the LCE index. We do not dive into the proof of the claim since it essentially repeats similar arguments in [7]; see [7] for details.

► **Theorem 5.** *For any string of length n over an alphabet $[0..n^{\mathcal{O}(1)}]$ and any $b \geq \Omega(\log^2 n)$, one can construct in $\mathcal{O}(n \log_b n)$ time and $\mathcal{O}(b)$ space on top of the string the sparse suffix tree for arbitrarily chosen b suffixes.*

3 Refinement of Partitioning Sets

In this section we describe a process that takes the trivial partitioning set $[0..n]$ and iteratively refines it in $\lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$ phases removing some positions so that, after the k th phase, the set is $(2^{k+3} \lfloor \log^{(3)} n \rfloor)$ -partitioning and has size $\mathcal{O}(n/2^k)$; moreover, it is “almost” 2^{k+3} -partitioning, satisfying properties (a) and (b) but not necessarily (c) (for $\tau = 2^{k+3}$). In particular, the set after the last phase is $\frac{\tau}{2}$ -partitioning (and, thus, τ -partitioning by Lemma 1) and has size $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$. Each phase processes all positions of the currently refined set from left to right and, in an almost online fashion, chooses which of them remain in the set. Rather than performing the phases one after another, which requires $\mathcal{O}(n)$ space, we run them simultaneously feeding the positions generated by the k th phase to the $(k+1)$ th phase. Thus, the resulting set is produced in one pass. The set, however, has size $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$, which is still too large to be stored in $\mathcal{O}(n/\tau)$ space; this issue is addressed in Section 5. Let us elaborate on the details of this process.

Throughout this section, we assume that $\tau \geq 2^5 \log^{(3)} n$ and, hence, the number of phases is non-zero; the case $\tau < 2^5 \log^{(3)} n$ is addressed in Appendix E. Consider the k th phase, for $k \geq 1$. Its input is a set S_{k-1} produced by the $(k-1)$ th phase; for $k = 1$, $S_0 = [0..n]$. Denote by j_h the h th position in S_{k-1} (so that $j_1 < \dots < j_{|S_{k-1}|}$). The phase processes j_1, j_2, \dots from left to right and decides which of them to put into the new set $S_k \subseteq S_{k-1}$ under construction. The decision for j_h is based on the distances $j_h - j_{h-1}$ and $j_{h+1} - j_h$, on the substrings $s[j_h + \ell..j_h + \ell + 2^k]$ with $\ell \in [-1..4]$, and on certain numbers v_{h-1}, v_h, v_{h+1} computed for j_{h-1}, j_h, j_{h+1} , which we define below.

For any distinct integers $x, y \geq 0$, denote by $\text{bit}(x, y)$ the index of the lowest bit in which the bit representations of x and y differ (the lowest bit has index 0); e.g., $\text{bit}(1, 0) = 0$, $\text{bit}(2, 8) = 1$, $\text{bit}(8, 0) = 3$. It is well known that $\text{bit}(x, y)$ can be computed in $\mathcal{O}(1)$ time provided x and y occupy $\mathcal{O}(1)$ machine words [42]. Denote $\text{vbit}(x, y) = 2 \text{bit}(x, y) + a$, where a is the bit of x with index $\text{bit}(x, y)$; e.g., $\text{vbit}(8, 0) = 7$ and $\text{vbit}(0, 8) = 6$. Note that the bit representation of the number $\text{vbit}(x, y)$ is obtained from that of $\text{bit}(x, y)$ by appending a .

Let w be the number of bits in an $\mathcal{O}(\log n)$ -bit machine word sufficient to represent letters from the alphabet $[0..n^{\mathcal{O}(1)}]$ of s . For each j_h , denote $s_h = \sum_{i=0}^{2^k} s[j_h + i] 2^{wi}$. Each number s_h takes $(2^k + 1)w$ bits and its bit representation coincides with that of the string $s[j_h..j_h + 2^k]$, when we treat this string as a number stored in memory in the little endian format. The numbers s_h are introduced merely for convenience of the exposition, they are never discerned from their corresponding substrings $s[j_h..j_h + 2^k]$ in the algorithm. For each j_h , define $v'_h = \text{vbit}(s_h, s_{h+1})$ if $j_{h+1} - j_h \leq 2^{k-1}$ and $s_h \neq s_{h+1}$, and $v'_h = \infty$ otherwise. Observe that $\text{bit}(s_h, s_{h+1}) = w\ell + \text{bit}(s[j_h + \ell], s[j_{h+1} + \ell])$, where $\ell = \text{lce}(j_h, j_{h+1})$; i.e., $\text{bit}(s_h, s_{h+1})$ is given by an LCE query in the bit string of length wn obtained from s by substituting each letter with its w -bit representation. Define $v''_h = \text{vbit}(v'_h, v'_{h+1})$, $v'''_h = \text{vbit}(v''_h, v''_{h+1})$, $v_h = \text{vbit}(v'''_h, v'''_{h+1})$, assuming $\text{vbit}(x, y) = \infty$ if either $x = \infty$ or $y = \infty$.

For each j_h , denote by $R(j_h)$ a predicate that is true iff $j_{h+1} - j_h \leq 2^{k-1}$ and $s_h = s_{h+1}$; to verify whether $R(j_h)$ holds, we always check the former condition first and only then the latter if the former condition is satisfied.

Refinement rule. *The k th phase decides to put a position j_h into S_k either if $\infty > v_{h-1} > v_h$ and $v_h < v_{h+1}$ (i.e., $v_{h-1} \neq \infty$ and v_h is a local minimum of the sequence v_1, v_2, \dots), or in three “boundary” cases: (i) $j_{h+1} - j_h > 2^{k-1}$ or $j_h - j_{h-1} > 2^{k-1}$; (ii) $R(j_{h-1})$ does not hold while $R(j_h), R(j_{h+1}), R(j_{h+2})$ hold; (iii) $R(j_h)$ holds but $R(j_{h+1})$ does not.*

For now, assume that the numbers $\text{bit}(s_h, s_{h+1})$, required to calculate v'_h and $R(j_h)$, are

computed by the naïve comparison of $s[j_h..j_h+2^k]$ and $s[j_{h+1}..j_{h+1}+2^k]$ in $\mathcal{O}(2^k)$ time (we will change it later). Thus, the process is well defined. The trick with local minima and vbit reductions is, in essence, as in the deterministic approach of Cole and Vishkin to locally consistent parsings [10]. In what follows we derive some properties of this approach in order to prove that the k th phase indeed produces a $(2^{k+3}\lfloor \log^{(3)} n \rfloor)$ -partitioning set.

It is convenient to interpret the k th phase as follows (see Fig. 1): the sequence j_1, j_2, \dots is split into maximal disjoint contiguous regions such that, for any pair of adjacent positions j_h and j_{h+1} inside each region, the distance $j_{h+1} - j_h$ is at most 2^{k-1} and $R(j_h) = R(j_{h+1})$. Thus, the regions are of two types: all- R ($\{j_{16}, \dots, j_{20}\}$ in Fig. 1) and all-non- R ($\{j_1, \dots, j_{15}\}$ or $\{j_{21}, \dots, j_{25}\}$ in Fig. 1). By case (i), for each long gap $j_{h+1} - j_h > 2^{k-1}$ between regions, we put both j_h and j_{h+1} into S_k . In each all- R region, we put into S_k its last position due to case (iii) and, if the length of the region is at least 3, its first position by case (ii). In each all-non- R region, we put into S_k all local minima v_h such that $v_{h-1} \neq \infty$. Only all-non- R regions have positions j_h with $v_h \neq \infty$; moreover, as it turns out, only the last three or four their positions j_h have $v_h = \infty$ whereas, for other j_h , $v_h \neq \infty$ and $v_h \neq v_{h+1}$. Lemmas 8, 9 describe all this formally; their proof is deferred to Appendix B.1.

The goal of the fourfold vbit reduction for v_h is to make v_h small enough so that local minima occur often and, thus, the resulting set S_k is not too sparse. This is the key observation of Cole and Vishkin [10] and it is stated in Lemma 7 and directly follows from the construction of v_h and Lemma 6.

► **Lemma 6** (see [10]). *Given a string $a_1 a_2 \dots a_m$ over an alphabet $[0..2^u)$ such that $a_i \neq a_{i+1}$ for any $i \in [1..m)$, the string $b_1 b_2 \dots b_{m-1}$ such that $b_i = \text{vbit}(a_i, a_{i+1})$, for $i \in [1..m)$, satisfies $b_i \neq b_{i+1}$, for any $i \in [1..m-1)$, and $b_i \in [0..2u)$.*

Proof. Consider b_i and b_{i+1} . Denote $\ell = \text{bit}(a_i, a_{i+1})$ and $\ell' = \text{bit}(a_{i+1}, a_{i+2})$. As $a_i, a_{i+1} \in [0..2^u)$, we have $\ell \in [0..u)$. Hence, $b_i \leq 2\ell + 1 \leq 2u - 1$, which proves $b_i \in [0..2u)$. If $b_i = b_{i+1}$, then $\ell = \ell'$ and the bits with indices ℓ and $\ell' = \ell$ in a_i and a_{i+1} coincide; on the other hand, by the definition of $\ell = \text{bit}(a_i, a_{i+1})$, a_i and a_{i+1} must differ in this bit, which is a contradiction. ◀


► **Lemma 7** (see [10]). *For any $v_h \neq \infty$ in the k th phase, we have $v_h \in [0..2 \log^{(3)} n + 3)$.*

Proof. Since $v'_h \in [0..2nw) = [0..\mathcal{O}(n \log n))$, we deduce from Lemma 6 that $v''_h \in [0..\mathcal{O}(\log n))$, $v'''_h \in [0..2 \log \log n + \mathcal{O}(1))$, and, due to the inequality $\log(x + \delta) \leq \log x + \frac{\delta \log e}{x}$, we finally obtain $v_h \in [0..2 \log^{(3)} n + 3)$, for sufficiently large n . ◀

The refinement rule implies that, for contiguous regions j_p, j_{p+1}, \dots, j_q where $R(j_h)$ holds, only j_p and j_q may be in S_k and the period of $s[j_p..j_q + 2^k]$ is $\leq 2^{k-1}$; for “dense” contiguous regions j_p, j_{p+1}, \dots, j_q where $R(j_h)$ does not hold, Lemma 6 ensure frequent local minima. This is summarized in Lemmas 8, 9 (the proofs are in Appendix B.1).

► **Lemma 8.** *Let j_p, j_{p+1}, \dots, j_q be a maximal contiguous region of j_1, j_2, \dots such that, for all $h \in [p..q]$, $R(j_h)$ holds. Then, we have $j_q \in S_k$. Further, if $q - p \geq 2$ or $j_p - j_{p-1} > 2^{k-1}$, we have $j_p \in S_k$. All other positions j_h in the region do not belong to S_k . The string $s[j_p..j_q + 2^k]$ has a period at most 2^{k-1} .*

► **Lemma 9.** *Let j_p, j_{p+1}, \dots, j_q be a maximal contiguous region of j_1, j_2, \dots such that, for all $h \in [p..q]$, $R(j_h)$ does not hold and, for $h \in [p..q)$, we have $j_{h+1} - j_h \leq 2^{k-1}$. Then, $v_h \neq \infty$ for $h \in [p..q-4]$, $v_h = \infty$ for $h \in (q-3..q]$, and v_{q-3} may be ∞ or not. Further, for $h \in [p..q-3]$, we have $v_h \neq v_{h+1}$ whenever $v_h \neq \infty$. For $h \in (p..q)$, $j_h \in S_k$ iff $\infty > v_{h-1} > v_h$ and $v_h < v_{h+1}$; $j_p \in S_k$ iff $j_p - j_{p-1} > 2^{k-1}$; $j_q \in S_k$ iff $j_{q+1} - j_q > 2^{k-1}$.*



■ **Figure 1** The k th phase. The heights of the dashed lines over j_h are equal to v_h . Encircled positions are put into S_k : they are local minima of v_h , or are at the “boundaries” of all- R regions, or form a gap of length $>2^k$. In the figure $R(j_{16}), \dots, R(j_{20})$ hold and $R(j_{21})$ does not hold.

By Lemmas 9 and 7, any sequence of $8 \log^{(3)} n + 12$ numbers v_h all of which are not ∞ contains a local minimum v_h and j_h will be put in S_k . Thus, we obtain the following lemma.

► **Lemma 10.** *Let S_{k-1} and S_k be the sets generated by the $(k-1)$ th and k th phases. Then, any range $j_\ell, j_{\ell+1}, \dots, j_m$ of at least $8 \log^{(3)} n + 12$ consecutive positions from S_{k-1} such that $v_h \neq \infty$, for all $h \in [\ell..m]$, has a position from S_k .*

The following lemma is intuitive but its proof is far from trivial; see Appendix B.2.

► **Lemma 11.** *For any $i, i' \in [0..n]$, $|S_k \cap [i..i']| \leq 2^6 \lceil (i' - i) / 2^k \rceil$; in particular, $|S_k| \leq n / 2^{k-6}$.*

Now we are able to prove that S_k is a $(2^{k+3} \lfloor \log^{(3)} n \rfloor)$ -partitioning set and, moreover, it is almost a 2^{k+3} -partitioning set, in a sense. The proof technique is very similar to the one in [7]; for brevity, we defer its detailed proof to Appendix B.2.

► **Lemma 12.** *The k th phase generates a $(2^{k+3} \lfloor \log^{(3)} n \rfloor)$ -partitioning set S_k . Moreover, S_k is almost 2^{k+3} -partitioning: for $\tau = 2^{k+3}$, it satisfies properties (a) and (b) but not (c), i.e., if $(i..j) \cap S_k = \emptyset$, for $i, j \in S_k$ such that $2^{k+3} < j - i \leq 2^{k+3} \lfloor \log^{(3)} n \rfloor$, then $s[i..j]$ does not necessarily have period $\leq 2^{k+2}$.*

4 Speeding up the Refinement Procedure

Since, for any k , $|S_k| \leq n / 2^{k-6}$ by Lemma 11, it is evident that the algorithm of Section 3 takes $\mathcal{O}(|S_0| + |S_1| + \dots) = \mathcal{O}(n)$ time plus the time needed to calculate the numbers v'_h , for all positions (from which the numbers v_h are derived). For a given $k \geq 1$, denote by j_h the h th position in S_{k-1} . For each j_h , the number v'_h can be computed by checking whether $j_{h+1} - j_h > 2^{k-1}$ (in this case $v'_h = \infty$), and, if $j_{h+1} - j_h \leq 2^{k-1}$, by the naïve comparison of $s[j_h..j_h + 2^k]$ and $s[j_{h+1}..j_{h+1} + 2^k]$ in $\mathcal{O}(2^k)$ time. Thus, all numbers v'_h for the set S_{k-1} can be computed in $\mathcal{O}(2^k |S_{k-1}|) = \mathcal{O}(n)$ time, which leads to $\mathcal{O}(n \log \tau)$ total time for the whole algorithm. This naïve approach can be sped up if one can perform the LCE queries that compare $s[j_h..j_h + 2^k]$ and $s[j_{h+1}..j_{h+1} + 2^k]$ faster; in fact, if one can do this in $\mathcal{O}(1)$ time, the overall time becomes linear. To this end, we exploit the online nature of the procedure. Let us briefly outline the procedure again on a high level.

The algorithm runs simultaneously $\lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$ phases: the k th phase takes positions from the set S_{k-1} produced by the $(k-1)$ th phase and decides which of them to feed to the $(k+1)$ th phase, i.e., to put into S_k (the “top” phase feeds the positions to an external procedure described in the next section). To make the decision for $j_h \in S_{k-1}$, the k th phase needs to know the distance $j_h - j_{h-1}$ and the distances $j_{h+\ell} - j_h$ to the positions $j_{h+\ell}$ with $\ell \in [1..5]$ such that $j_{h+\ell} - j_h \leq 5 \cdot 2^{k-1}$. Then, the k th phase calculates $\min\{2^k + 1, \text{lce}(j_{h+\ell-1}, j_{h+\ell})\}$, for all $\ell \in [0..5]$ such that $j_{h+\ell} - j_{h+\ell-1} \leq 2^{k-1}$ and $j_{h+\ell} - j_h \leq 5 \cdot 2^{k-1}$, and, based on the distances and the LCE values, computes v_{h-1}, v_h, v_{h+1} and decides the fate of j_h .

The key for our optimization is the locality of the decision making in the phases that is straightforward for the described process: for any prefix $s[0..d]$, once the positions $S_{k-1} \cap [0..d]$ are known to the k th phase, it reports all positions from the set $S_k \cap [0..d-5 \cdot 2^{k-1}]$ and no position from the set $S_{k-1} \cap [0..d-6 \cdot 2^{k-1}]$ will be accessed by an LCE query of the k th phase in the future. Thus, we can discard all positions $S_{k-1} \cap [0..d-6 \cdot 2^{k-1}]$ and have to focus only on positions $S_{k-1} \cap (d-6 \cdot 2^{k-1}.. \infty]$ and LCE queries on them in the future. We deduce from this that after processing the prefix $s[0..d]$ by the whole algorithm, the k th phase reports all positions from the set $S_k \cap [0..d-5 \sum_{k'=0}^{k-1} 2^{k'}] \supseteq S_k \cap [0..d-5 \cdot 2^k]$ and no LCE query in the k th phase accesses positions from the set $S_{k-1} \cap [0..d-6 \cdot 2^k]$ in the future.

This locality of the decision procedure guarantees that, at the time we processed a length- ℓ prefix of the string s , for some $\ell \geq 0$, all positions from the set $S_k \cap [0..\ell-5 \cdot 2^k]$ are reported and no position from the set $S_{k-1} \cap [0..\ell-5 \cdot 2^k]$ will be accessed by an LCE query of the k th phase in the future. Let us summarize this as follows.

► **Lemma 13.** *Suppose we run the described $\lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$ phases on a string s of length n from left to right. Then, for any $k \geq 1$ and $d \geq 0$, after processing the prefix $s[0..d]$, the k th phase reports all positions from $S_k \cap [0..d-5 \cdot 2^k]$ to the $(k+1)$ th phase and will not perform queries $\text{lce}(j, j')$ on positions $j, j' \in S_{k-1}$ such that $\min\{j, j'\} \leq d-6 \cdot 2^k$ in the future.*

Recall that we have $\mathcal{O}(\log \tau)$ phases and $\mathcal{O}(\log \tau)$ space is always available. Let us briefly describe main techniques for speeding up the algorithm. Details are given in Appendix C.

Suppose that $\tau < \sqrt{n}$. We have $b = \Theta(\frac{n}{\tau}) \geq \Omega(\sqrt{n})$ additional space for the algorithm in this case. To answer all required LCE queries in constant time, when the algorithm processes a letter $s[d]$, the LCE data structure [22] is maintained for the leftmost substring $C_i = s[i \lfloor \sqrt{n} \rfloor .. (i+3) \lfloor \sqrt{n} \rfloor - 1]$ whose middle part contains the position d (i.e. $d \in (i+1) \lfloor \sqrt{n} \rfloor .. (i+2) \lfloor \sqrt{n} \rfloor - 1$). By Lemma 13, we can use the data structure to correctly handle all queries because all LCE queries performed by the algorithm at the step d lie within the substring C_i . Since we must build the LCE data structure for every C_i once, the overall running time is $\mathcal{O}(n + \sum_i |C_i|) = \mathcal{O}(n)$ and the occupied space is $\mathcal{O}(\sqrt{n}) = \mathcal{O}(b)$.

Let us generalize this idea to the case $\tau \geq \sqrt{n}$. Denote $b = \frac{n}{\tau}$. We have $\mathcal{O}(b) < \mathcal{O}(\sqrt{n})$ space and cannot use the scheme described above since LCE data structures for substrings of length $\mathcal{O}(b)$ are not enough to answer queries of the form $\min\{2^k+1, \text{lce}(j, j')\}$ when $2^k > \Omega(b)$. The key idea is to group contiguous phases into “levels” and maintain SST for a sliding window of positions in each level (in the case $\tau < \sqrt{n}$ we had a single “level” and a sliding window of size $\mathcal{O}(\sqrt{n})$). We must choose “level” size to be large enough to build less SSTs and fit in the $\mathcal{O}(n \log_b n)$ running time, but also the “levels” must be small to efficiently reduce the number of positions in each level and fit all supporting data structures in the $\mathcal{O}(b)$ space. To achieve this, we split evenly all $\lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$ phases into “levels”, each containing $\Theta(\log \hat{b})$ phases, where $\hat{b} = \lfloor \frac{b}{\log n} \rfloor$. For each “level”, we maintain a window of $\mathcal{O}(\hat{b})$ positions from S_k , where k is the lowest phase in the “level”; one window spans a substring of length $\mathcal{O}(2^k \hat{b})$ and the windows change $\mathcal{O}(\frac{n}{2^k \hat{b}})$ times in total. Overall we use $\mathcal{O}(\hat{b} \log \hat{b}) = \mathcal{O}(b)$ space. By Lemma 12, the set S_k is “almost” 2^k -partitioning, so we can build SST for each “level” as in Lemma 3 in time $\mathcal{O}(2^k \hat{b} + \min\{2^k \hat{b} \log_b n, \hat{b} \log \hat{b}\})$, which simplifies to $\mathcal{O}(\hat{b} \log_b n)$ for the first “level” and to $\mathcal{O}(2^k \hat{b})$ for subsequent “levels”. Overall we can upperbound the running time with $\mathcal{O}(n \log_b n)$ for all $\mathcal{O}(\log_b n)$ “levels”. Thus, the described routine builds partitioning sets S_k in time $\mathcal{O}(n \log_b n)$ and space $\mathcal{O}(b)$. The described sketch of the algorithm is elaborated in details in Appendix C.

5 Recompression

Let S be the set produced by the last phase of the procedure from Sections 3 and 4. By Lemma 12, S is a $\frac{\tau}{2}$ -partitioning set of size $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$. Throughout this section, we assume that $\tau \geq (\log^{(3)} n)^4$ so that the size of S is at most $\mathcal{O}(\frac{n}{(\log^{(3)} n)^3})$; the case $\tau < (\log^{(3)} n)^4$ is discussed in Appendix E. In what follows we describe an algorithm that removes positions from S transforming it into a τ -partitioning set of size $\mathcal{O}(n/\tau)$.

Instead of storing S explicitly, which is impossible in $\mathcal{O}(n/\tau)$ space, we construct a related-to- S string R of length $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$ over a small alphabet such that R can be packed into $\mathcal{O}(n/\tau)$ machine words. Positions of S are represented, in a way, by letters of R . The construction of R is quite intricate, which is necessary in order to guarantee that letters of R corresponding to close positions of S (namely, positions at a distance at most $\tau/2^5$) are necessarily distinct even if the letters are not adjacent in R . This requirement is stronger than the requirement of distinct adjacent letters that was seen, for instance, in Lemma 6 but it is achieved by similar means using vbit reductions as in Section 3. We then apply to R a variant of the iterative process called *recompression* [25] that removes some letters thus shrinking the length of R to $\mathcal{O}(n/\tau)$. Then, the whole procedure of Sections 3–4 that generated S is performed again but this time we discard all positions of S corresponding to removed positions of the string R and store the remaining positions explicitly in a set $S^* \subseteq S$. We show that S^* is τ -partitioning and has size $\mathcal{O}(n/\tau)$. Let us elaborate on the details.

The algorithm starts with an empty string R and receives positions of S from left to right appending to the end of R new letters corresponding to the received positions. It is more convenient to describe the algorithm as if it acted in two stages: the first stage produces a $\frac{3}{4}\tau$ -partitioning set $S' \subseteq S$, for which a condition converse to property (c) holds (thus, some positions of S are discarded already in this stage), and the second stage, for each position of S' , appends to the end of R a letter of size $\mathcal{O}((\log^{(3)} n)^2)$ bits. Both stages act in an almost online fashion and, hence, can be actually executed simultaneously in one pass without the need to store the auxiliary set S' . The separation is just for the ease of the exposition.

The first stage. The goal is to construct set $S' \subseteq S$ by excluding from S all positions h for which there exist $i, j \in S$ such that $i < h \leq j$, $j - i \leq \tau/4$, and $s[i..i+\tau/2] = s[j..j+\tau/2]$. The algorithm generating S' is as follows.

We consider all positions of S from left to right and, for each $i \in S$, process every $j \in (i..i+\tau/4] \cap S$ by comparing $s[i..i+\tau/2]$ with $s[j..j+\tau/2]$. If $s[i..i+\tau/2] = s[j..j+\tau/2]$, then we traverse all positions of the set $(i..j] \cap S$ from right to left marking them for removal until an already marked position is encountered. Since the marking procedure works from right to left, every position is marked at most once. The position i is put into S' iff it was not marked previously. During the whole process, we maintain a “look-ahead” queue that stores the positions $(i..i+\tau/4] \cap S$ and indicates which of them were marked for removal.

Due to Lemma 11, the size of the set $(i..i+\tau/4] \cap S$ is $\mathcal{O}(\log^{(3)} n)$. Therefore, the look-ahead queue takes $\mathcal{O}(\log^{(3)} n)$ space, which is $\mathcal{O}(n/\tau)$ since $n/\tau \geq \log^2 n$, and $\mathcal{O}(\log^{(3)} n)$ comparisons are performed for each i . Hence, if every comparison takes $\mathcal{O}(1)$ time, the set S' is constructed in $\mathcal{O}(|S| \log^{(3)} n) = \mathcal{O}(\frac{n}{\tau} (\log^{(3)} n)^2)$ time, which is $\mathcal{O}(n)$ since $\tau \geq (\log^{(3)} n)^4$. Thus, it remains to explain how the comparisons can be performed.

Similar to the algorithm of Section 4, we consecutively consider substrings $C'_i = s[i\tau..(i+3)\tau)$, for $i \in [0..n/\tau-3]$: when all positions from a set $S \cap [i\tau..(i+3)\tau)$ are collected, we use the algorithm of Lemma 3 to build a SST for all suffixes of the string C'_i whose starting positions

are from S ; the tree, endowed with an LCA data structure [22], is used in the procedure for deciding which of the positions from the set $S \cap [(i + \frac{1}{2})\tau..(i + \frac{3}{2})\tau]$ (or $S \cap [0..\frac{3}{2}\tau]$ if $i = 0$) should be marked for removal. Thus, after processing the last string C'_i , all positions of S are processed and S' is generated. By Lemma 11, the number of suffixes in the SST for C'_i is $\mathcal{O}(\log^{(3)} n)$ and, therefore, the tree occupies $\mathcal{O}(\log^{(3)} n) \leq \mathcal{O}(n/\tau)$ space and its construction takes $\mathcal{O}(\tau + \log^{(3)} n \cdot \log \log^{(3)} n)$ time by Lemma 3, which is $\mathcal{O}(\tau)$ since $\tau \geq (\log^{(3)} n)^4$. Thus, the total construction time for all the trees in the stage is $\mathcal{O}(\frac{n}{\tau}\tau) = \mathcal{O}(n)$ and the space used is $\mathcal{O}(\log^{(3)} n)$ since, at every moment, at most one tree is maintained.

The following lemma shows that the transformation within the first stage does not break τ -partitioning properties. Its proof is deferred to Appendix D.1.

► **Lemma 14.** *The set S' is τ -partitioning and satisfies a converse of property (c): if a substring $s[i..j]$ has a period at most $\tau/4$, then $S' \cap [i + \frac{3}{4}\tau..j - \frac{3}{4}\tau] = \emptyset$. Moreover, S' is almost $\frac{3}{4}\tau$ -partitioning, meeting properties (a) and (b) with $\frac{3}{4}\tau$ in place of τ , but not necessarily (c).*

The second stage. We consider all positions of S' from left to right and, for each $p \in S'$, append to the end of the (initially empty) string R a new carefully constructed letter a_p occupying $\mathcal{O}((\log^{(3)} n)^2)$ bits. Thus, the string R will have length $|S'|$ and will take $\mathcal{O}(|S'|(\log^{(3)} n)^2) = \mathcal{O}(\frac{n}{\tau}(\log^{(3)} n)^3)$ bits of space, which can be stored into $\mathcal{O}(n/\tau)$ machine words of size $\mathcal{O}(\log n)$ bits. The crucial property of R for us is that any two letters of R corresponding to close positions of S' are distinct, namely the following lemma will be proved:


► **Lemma 15.** *For any $p, \bar{p} \in S'$, if $0 < \bar{p} - p \leq \tau/2^5$, then $a_p \neq a_{\bar{p}}$.*

Consider $p \in S'$. We are to describe an algorithm generating an $\mathcal{O}((\log^{(3)} n)^2)$ -bit letter a_p for p that will be appended to the string R .

Denote by p_1, p_2, \dots, p_m all positions of $S' \cap (p..p + \tau/2^5]$ in the increasing order. By Lemma 11, $m \leq \mathcal{O}(\log^{(3)} n)$ and, hence, there is enough space to store them. By construction, $s[p..p + \frac{\tau}{2}] \neq s[p_j..p_j + \frac{\tau}{2}]$, for each $j \in [1..m]$. One can compute the longest common prefix of $s[p..p + \frac{\tau}{2}]$ and $s[p_j..p_j + \frac{\tau}{2}]$, for any $j \in [1..m]$, in $\mathcal{O}(1)$ time using a SST with an LCA data structure [22] built in the first stage for a substring $C'_i = s[i\tau..(i+3)\tau - 1]$ such that $p \in [i\tau..(i + \frac{3}{2})\tau]$. (In order to have p_1, p_2, \dots, p_m prepared, we handle p , which was reported by the first stage after processing C'_i , only when C'_{i+1} was processed too; thus, the first stage maintains two SSTs: one for a substring C'_{i+1} currently under analysis and one for C'_i , retained for its use in the second stage.)

Denote $\ell = 2^6 \lceil \log^{(3)} n \rceil$. Recall that S is produced by the k th phase of the procedure of Section 3, for $k = \lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$, and hence, by Lemma 11, the size of any set $S \cap [i..j]$, for $i \leq j$, is at most $2^6 \lceil (j - i + 1)/2^k \rceil$. Therefore, since $S' \subseteq S$ and m is the size of the set $S' \cap (p..p + \tau/2^5]$, we obtain $m \leq 2^6(\tau/2^5) / \frac{\tau}{2 \cdot 2^4 \log^{(3)} n} \leq \ell$.

Let w be the number of bits in an $\mathcal{O}(\log n)$ -bit machine word sufficient to represent letters from the alphabet $[0..n^{\mathcal{O}(1)}]$ of s . For each p_j , denote $t_j = \sum_{i=0}^{\tau/2} s[p_j + i]2^{wi}$; similarly, for p , denote $t = \sum_{i=0}^{\tau/2} s[p + i]2^{wi}$. As in an analogous discussion in Section 3, we do not discern the numbers t_j and t from their corresponding substrings in s and use them merely in the analysis. The intuition behind our construction is that the numbers t, t_1, t_2, \dots, t_m , in principle, could have been used for the string R as letters corresponding to the positions p, p_1, p_2, \dots, p_m since t, t_1, t_2, \dots, t_m are pairwise distinct (due to the definition of S') but, unfortunately, they occupy too much space ($\mathcal{O}(w\tau)$ bits each). One has to reduce the space for the letters retaining the property of distinctness. The tool capable to achieve this was already developed in Section 3: it is the vbit reduction, a trick from Cole and Vishkin's deterministic locally consistent parsing [10].

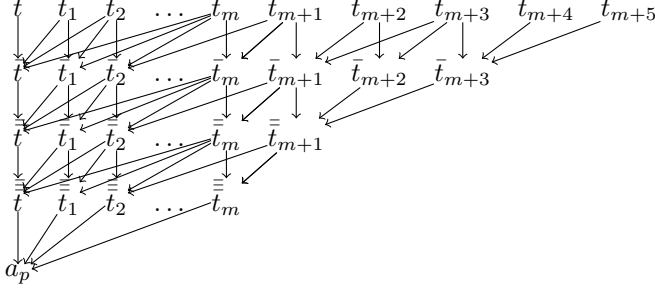

■ **Figure 2** The scheme generating a_p via **vbit** reductions. If a node \hat{t} has ingoing edges labeled with $\tilde{t}, \tilde{t}_1, \tilde{t}_2, \dots, \tilde{t}_r$ (from left to right), then \hat{t} encodes a tuple $\langle \tilde{w}_1, \tilde{w}_2, \dots, \tilde{w}_\ell \rangle$ such that, for $j \in [1..r]$, $\tilde{w}_j = \text{vbit}(\tilde{t}, \tilde{t}_j)$ and, for $j \in (r..\ell]$, $\tilde{w}_j = \infty$. In the figure, the numbers $t, t_1, t_2, \dots, t_{m+5}$ correspond to consecutive positions $p, p_1, p_2, \dots, p_{m+5}$ in the set S' , respectively. By looking at which of the ingoing edges are present and which are not, one can deduce that here we have $S' \cap (p..p+\tau/2^5] = \{p_1, \dots, p_m\}$, $S' \cap (p_1..p_1+\tau/2^5] = \{p_2, \dots, p_m\}$, $S' \cap (p_2..p_2+\tau/2^5] = \{p_3, \dots, p_m, p_{m+1}\}$, $S' \cap (p_m..p_m+\tau/2^5] = \{p_{m+1}\}$, $S' \cap (p_{m+1}..p_{m+1}+\tau/2^5] = \{p_{m+2}, p_{m+3}\}$, $S' \cap (p_{m+2}..p_{m+2}+\tau/2^5] = \{p_{m+3}\}$, $S' \cap (p_{m+3}..p_{m+3}+\tau/2^5] = \{p_{m+4}, p_{m+5}\}$.

We first generate for p a tuple of ℓ numbers $\langle w'_1, w'_2, \dots, w'_\ell \rangle$: for $j \in [1..\ell]$, $w'_j = \text{vbit}(t, t_j)$ if $j \leq m$, and $w'_j = \infty$ otherwise. Since the longest common prefix of substrings $s[p..p+\frac{\tau}{2}]$ and $s[p_j..p_j+\frac{\tau}{2}]$, for $j \in [1..m]$, can be calculated in $\mathcal{O}(1)$ time, the computation of the tuple takes $\mathcal{O}(\ell) = \mathcal{O}(\log^{(3)} n)$ time. By Lemma 6, each number w'_j occupies less than $\lceil \log w + \log \tau + 1 \rceil$ bits. Thus, we can pack the whole tuple into $\ell \lceil \log w + \log \tau + 1 \rceil$ bits encoding each value w'_j into $\lceil \log w + \log \tau + 1 \rceil$ bits and representing ∞ by setting all bits to 1. We denote this chunk of $\ell \lceil \log w + \log \tau + 1 \rceil$ bits by \bar{t} . In the same way, for each p_i with $i \in [1..m]$, we generate a tuple $\langle w'_{i,1}, w'_{i,2}, \dots, w'_{i,\ell} \rangle$ comparing $s[p_i..p_i+\tau/2]$ to $s[q..q+\tau/2]$, for each $q \in S' \cap (p_i..p_i+\tau/2^5]$, and using the **vbit** reduction; the tuple is packed into a chunk \bar{t}_i of $\ell \lceil \log w + \log \tau + 1 \rceil$ bits. See Figure 2. For each $j \in [1..m]$, the number w'_j is not equal to ∞ and, thus, due to Lemma 6, differs from the number $w'_{j,j}$ (the j th element of the tuple $\langle w'_{i,1}, w'_{i,2}, \dots, w'_{i,\ell} \rangle$). Therefore, all the tuples—and, hence, their corresponding numbers $\bar{t}, \bar{t}_1, \bar{t}_2, \dots, \bar{t}_m$ —are pairwise distinct.

The numbers $\bar{t}, \bar{t}_1, \bar{t}_2, \dots, \bar{t}_m$, like the numbers t, t_1, t_2, \dots, t_m , could have been used, in principle, as letters for the string R but they still are too large. We therefore repeat the same **vbit** reduction but now for the numbers $\bar{t}, \bar{t}_1, \bar{t}_2, \dots, \bar{t}_m$ in place of t, t_1, t_2, \dots, t_m thus generating a tuple $\langle w''_1, w''_2, \dots, w''_\ell \rangle$: for $j \in [1..\ell]$, $w''_j = \text{vbit}(\bar{t}, \bar{t}_j)$ if $j \leq m$, and $w''_j = \infty$ otherwise. The computation of $\text{vbit}(\bar{t}, \bar{t}_j)$ takes $\mathcal{O}(\ell)$ time since \bar{t} occupies ℓ machine words of size $\mathcal{O}(\log n)$ bits. It follows from Lemma 6 that the tuple $\langle w''_1, w''_2, \dots, w''_\ell \rangle$ can be packed into a chunk $\bar{\bar{t}}$ of $\ell \lceil \log \ell + \log \lceil \log w + \log \tau + 1 \rceil + 1 \rceil$ bits (i.e., $\mathcal{O}(\log^{(3)} n \cdot \log \log n)$ bits), which already fits into one machine word. We perform analogous reductions for the positions p_1, p_2, \dots, p_m generating m tuples $\langle w''_{i,1}, w''_{i,2}, \dots, w''_{i,\ell} \rangle$, for $i \in [1..m]$, packed into new chunks $\bar{\bar{t}}_1, \bar{\bar{t}}_2, \dots, \bar{\bar{t}}_m$, respectively. Note that, in order to produce a tuple $\langle w''_{i,1}, w''_{i,2}, \dots, w''_{i,\ell} \rangle$, for $i \in [1..m]$, that is packed into $\bar{\bar{t}}_i$, we use not only the numbers $\bar{t}_i, \bar{t}_{i+1}, \dots, \bar{t}_m$ corresponding to positions p_i, p_{i+1}, \dots, p_m but also similarly computed numbers at other positions from $S' \cap (p_i..p_i+\tau/2^5]$, if any. See Figure 2 for a clarification: it can be seen that the “top” numbers include not only t, t_1, \dots, t_m precisely because of this.

By the same argument that proved the distinctness of $\bar{t}, \bar{t}_1, \bar{t}_2, \dots, \bar{t}_m$, one can easily show that $\bar{\bar{t}}, \bar{\bar{t}}_1, \bar{\bar{t}}_2, \dots, \bar{\bar{t}}_m$ are pairwise distinct. But they are still too large to be used as letters of R . Then again, we repeat the same reductions at positions p, p_1, p_2, \dots, p_m but now for the numbers $\bar{\bar{t}}, \bar{\bar{t}}_1, \bar{\bar{t}}_2, \dots, \bar{\bar{t}}_m$ in place of $\bar{t}, \bar{t}_1, \bar{t}_2, \dots, \bar{t}_m$, thus generating new chunks $\bar{\bar{\bar{t}}}, \bar{\bar{\bar{t}}}_1, \bar{\bar{\bar{t}}}_2, \dots, \bar{\bar{\bar{t}}}_m$. Finally, once more, we do the vbit reduction for $\bar{\bar{\bar{t}}}, \bar{\bar{\bar{t}}}_1, \bar{\bar{\bar{t}}}_2, \dots, \bar{\bar{\bar{t}}}_m$ generating a tuple $\langle w_1, w_2, \dots, w_\ell \rangle$ such that, for $j \in [1..\ell]$, w_j is $\text{vbit}(\bar{\bar{\bar{t}}}, \bar{\bar{\bar{t}}}_j)$ if $j \leq m$, and ∞ otherwise.

Using the same reasoning as in the proof of Lemma 7, one can deduce from Lemma 6 that the tuple $\langle w_1, w_2, \dots, w_\ell \rangle$ fits into a chunk of $\ell \cdot 2 \log \log^{(3)} n \leq 2^6 \lceil \log^{(3)} n \rceil^2$ bits (the inequality holds provided $n > 2^{16}$) encoding each value w_j into $\lceil \log^{(3)} n \rceil$ bits and representing ∞ by setting all $\lceil \log^{(3)} n \rceil$ bits to 1. Denote by a_p this chunk of $2^6 \lceil \log^{(3)} n \rceil^2$ bits that encodes the tuple. We treat a_p as a new letter of R that corresponds to the position p and we append a_p to the end of R . Lemma 15 follows then straightforwardly by construction.

Given $p \in S'$, the calculation of the numbers $\bar{\bar{t}}, \bar{\bar{t}}_p$ takes $\mathcal{O}(\ell^2)$ time. The calculation of $\bar{\bar{\bar{t}}}$ requires $\mathcal{O}(\ell^3)$ time since each reduction $\text{vbit}(\bar{\bar{t}}, \bar{\bar{t}}_j)$ for it takes $\mathcal{O}(\ell)$ time. Hence, the total time for the construction of R is $\mathcal{O}(|S'| \ell^3) = \mathcal{O}(\frac{n}{\tau} (\log^{(3)} n)^4)$, which is $\mathcal{O}(n)$ as $\tau \geq (\log^{(3)} n)^4$.

Recompression. If the distance between any pair of adjacent positions of S' is at least $\tau/2^6$, then $|S'| \leq 2^6 n / \tau$ and, by Lemma 14, S' can be used as the resulting τ -partitioning set of size $\mathcal{O}(n/\tau)$. Unfortunately, in general, this is not the case and we have to “sparsify” S' .

There is a one-to-one correspondence between S' and positions of R . Using a technique of Jež [25] called *recompression*, we can remove in $\mathcal{O}(|R|)$ time some letters of R reducing by a fraction $\frac{4}{3}$ the number of pairs of adjacent letters $R[i], R[i+1]$ whose corresponding positions in S' are at a distance at most $\tau/2^6$. We perform such reductions until the length of R becomes at most $2^{14} \cdot n / \tau$. The positions of S' corresponding to remaining letters will constitute a τ -partitioning set of size $\mathcal{O}(n/\tau)$. In order to guarantee that this subset of S' is τ -partitioning, we have to execute the recompression reductions gradually increasing the distances that are of interest for us: first, we get rid of adjacent pairs with distances at most $\tau / \log^{(3)} n$ between them, then the threshold is increased to $2\tau / \log^{(3)} n$, then $2^2\tau / \log^{(3)} n$, and so on until (most) adjacent pairs with distances at most $2^{\log^{(4)} n - 6} \tau / \log^{(3)} n = \tau/2^6$ between them are removed in last recompression reductions. The details follow.

Since it is impossible to store in $\mathcal{O}(n/\tau)$ space the precise distances between positions of S' , the information about distances needed for recompression is encoded as follows. For each $i \in [0..|R|)$ and a position $p \in S'$ corresponding to the letter $R[i]$, we store an array of numbers $M_i[0..\lceil \log^{(4)} n \rceil]$ such that, for $j \in [0..\lceil \log^{(4)} n \rceil]$, $M_i[j]$ is equal to the size of the set $S' \cap (p..p + \tau/2^j]$. By Lemma 11, we have $|S' \cap (p..p + \tau)| \leq \mathcal{O}(\log^{(3)} n)$ and, hence, each number $M_i[j]$ occupies $\mathcal{O}(\log^{(4)} n)$ bits. Therefore, all the arrays M_i can be stored in $\mathcal{O}(|R|(\log^{(4)} n)^2) \leq \mathcal{O}(\frac{n}{\tau} \log^{(3)} n \cdot (\log^{(4)} n)^2)$ bits, which fits into $\mathcal{O}(\frac{n}{\tau})$ machine words of size $\mathcal{O}(\log n)$ bits. All arrays M_i are constructed in a straightforward way in $\mathcal{O}(|R| \log^{(3)} n) = \mathcal{O}(\frac{n}{\tau} (\log^{(3)} n)^2)$ time (which is $\mathcal{O}(n)$ since $\tau \geq (\log^{(3)} n)^4$) during the left-to-right pass over S' that generated the string R .

Our algorithm consecutively considers all numbers $j \in [6..\lceil \log^{(4)} n \rceil]$ in decreasing order, starting from $j = \lceil \log^{(4)} n \rceil$. For each j , it iteratively performs a recompression procedure reducing the number of adjacent letters $R[i], R[i+1]$ whose corresponding positions from S' are at a distance at most $\tau/2^j$, until R shrinks to a length at most $2^{j+10} \cdot \frac{n}{\tau}$. Thus, $|R| \leq 2^{16} \cdot \frac{n}{\tau}$ after last recompression reductions for $j = 6$. Let us describe the recompression procedure.

Fix $j \in [6..\lceil \log^{(4)} n \rceil]$. To preserve property (c) of the τ -partitioning set S' during the sparsifications, we impose an additional restriction: a letter $R[i]$ cannot be removed if either $i = 0$ or the distance between the position $p \in S'$ corresponding to $R[i]$ and the predecessor

of p in S' is larger than $\tau/2^5$, i.e., if $M_{i-1}[5] = 0$. The rationale is as follows: the position p might be the right boundary of a gap in S' of length $> \tau$ and it is dangerous to break the gap since, once p is removed, the gap might not satisfy property (c) (the range of the string s corresponding to the gap should have a period that is at most $\tau/4$).

The processing of the number j starts with checking whether $|R| \leq 2^{j+10} \cdot \frac{n}{\tau}$. If so, we skip the processing of j and move to $j - 1$ (provided $j > 6$). Suppose that $|R| > 2^{j+10} \cdot \frac{n}{\tau}$. Denote $\sigma = 2^{2^6 \lceil \log^{(3)} n \rceil^2}$, the size of the alphabet $[0..\sigma)$ of R . Then, the algorithm creates an array $P[0..\sigma-1][0..\sigma-1]$ filled with zeros, which occupies $\mathcal{O}(\sigma^2) = \mathcal{O}(2^{2^7 (\log^{(3)} n)^2}) = o(\log n)$ space, and collects in P statistics on pairs of adjacent letters of R whose corresponding positions in S' are at a distance at most $\tau/2^j$ and whose first letter may be removed: namely, we traverse all $i \in [1..|R|)$ and, if $M_i[j] \neq 0$ and $M_{i-1}[5] \neq 0$, then we increase by one the number $P[R[i]][R[i+1]]$. By Lemma 15, $R[i] \neq R[i+1]$ when $M_i[j] \neq 0$.

The core tool of the recompression technique proposed by Jeř [25] is an algorithm for multidigraph without self-loops $G = (V, E)$ that constructs a directed cut of size at least $\lceil \frac{|E|}{4} \rceil$ edges in time $\mathcal{O}(|V|^2)$ if the graph is given by an adjacency matrix. If we interpret P as an adjacency matrix, we can use Jeř's technique (there are no self-loops because $R[i] \neq R[i+1]$ when $M_i[j] \neq 0$ due to Lemma 15) and split the alphabet into two disjoint subsets corresponding to the cut: $[0..\sigma) = \dot{\Sigma} \sqcup \ddot{\Sigma}$. After that we mark for removal from R all indices $i \in [1..|R|-1]$ for which the following conditions hold: $M_i[j] \neq 0$, $M_{i-1}[5] \neq 0$, $R[i] \in \dot{\Sigma}$, and $R[i+1] \in \ddot{\Sigma}$. Once the sets $\dot{\Sigma}$ and $\ddot{\Sigma}$ are computed in time $\mathcal{O}(\sigma^2) = o(\log^2 n)$, the marking takes $\mathcal{O}(|R|)$ time and can be organized using a bit array of length $|R|$.

After the marking step we update values in all arrays M_i according to removal marks in one right to left pass: for each $i \in [0..|R|)$ and $j' \in [0..\lceil \log^{(4)} n \rceil]$, the new value for $M_i[j']$ is the number of indices $i+1, i+2, \dots, i+M_i[j']$ that were not marked for removal, i.e., $M_i[j']$ is the number of positions in the set $S' \cap (p..p+\tau/2^{j'})$ whose corresponding letters $R[i']$ will remain in R , where $p \in S'$ is the position corresponding to $R[i]$. Since $M_i[j'] \leq M_{i+1}[j'] + 1$, for $i \in [0..|R|-1]$, the pass updating M can be executed in $\mathcal{O}(|R| \log^{(4)} n)$ time.

Finally, we delete letters $R[i]$ and arrays M_i , for all indices i marked for removal, thus shrinking the length of R and the storage for M_i . We call this procedure, which marks letters of R and removes them and their corresponding arrays M_i , the recompression. One recompression iteration takes $\mathcal{O}(|R| \log^{(4)} n)$ time, where $|R|$ is the length of R before shrinking.

The next lemma states that the recompression shrinks the string R by a constant factor.

► **Lemma 16.** *If, for $j \in [6..\lceil \log^{(4)} n \rceil]$, before the recompression procedure there were d non-zero numbers $M_i[j]$ with $i \in [1..|R|)$ such that $M_{i-1}[5] \neq 0$, then the arrays M_i modified by the procedure, for all i corresponding to unremoved positions of R , contain at most $\frac{3}{4}d$ non-zero numbers $M_i[j]$ such that $M_{i-1}[5] \neq 0$.*

Proof. The proof repeats an argument from [25] and [23, Lemma 7]. Consider an undirected weighted graph G corresponding to the digraph encoded in the adjacency matrix P . By construction of P , we have $d = \sum_{a \neq b} P[a][b]$, which follows from Lemma 15 that guarantees $R[i] \neq R[i+1]$ when $M_i[j] \neq 0$. Thus, d is the sum of weights of all edges in G . Putting a letter a into either $\dot{\Sigma}$ or $\ddot{\Sigma}$, we add to the cut at least half of the total weight of all edges connecting a to the letters $0, 1, \dots, a-1$. Therefore, the cut of G induced by $\dot{\Sigma}$ and $\ddot{\Sigma}$ has a weight at least $\frac{1}{2}d$. The edges in the cut might be directed both from $\dot{\Sigma}$ to $\ddot{\Sigma}$ and in the other direction. Switching $\dot{\Sigma}$ and $\ddot{\Sigma}$, if needed, we ensure that the direction from $\dot{\Sigma}$ to $\ddot{\Sigma}$ has a maximal total weight, which is obviously at least $\frac{1}{4}d$. According to this cut, we mark for removal from R at least $\frac{1}{4}d$ letters $R[i]$ such that $M_i[j] \neq 0$. Hence, the number of non-zero

values $M_i[j]$ such that $M_{i-1}[5] \neq 0$ is reduced by $\frac{1}{4}d$, which gives the result of the lemma since new non-zero values could not appear after the deletions. \blacktriangleleft

Suppose, for a fixed $j \in [6.. \lceil \log^{(4)} n \rceil]$, the algorithm has performed one iteration of the recompression. Denote by S'' the set of all positions from S' that “survived” the recompression for $j \in [6.. \lceil \log^{(4)} n \rceil]$ and, thus, have a corresponding letter in the updated string R . There is a one-to-one correspondence between S'' and letters of R . For each $i \in [0..|R|)$ and $j' \in [0.. \lceil \log^{(4)} n \rceil]$, the number $M_i[j']$ in the modified arrays M_i is the size of the set $S'' \cap (p..p+\tau/2^{j'})$, for a position $p \in S''$ corresponding to i . We therefore can again apply the recompression procedure thus further shrinking the length of R . The algorithm first again checks whether $|R| > 2^{j+10} \cdot \frac{n}{\tau}$ and, if so, repeats the recompression. For the given fixed j , we do this iteratively until $|R| \leq 2^{j+10} \cdot \frac{n}{\tau}$. During this process, the number of zero values $M_i[j]$ in the arrays M_i is always at most $2^j \cdot \frac{n}{\tau}$ since the equality $M_i[j] = 0$ implies that $S''' \cap (p..p+\tau/2^j) = \emptyset$, for a set $S''' \subseteq S'$ of size $|R|$ defined by analogy to the definition of S'' and for a position $p \in S'''$ corresponding to i . Therefore, due to Lemma 16, the condition $|R| \leq 2^{j+10} \cdot \frac{n}{\tau}$ eventually should be satisfied. Furthermore, as we are to show, for each j , the condition $|R| \leq 2^{j+10} \cdot \frac{n}{\tau}$ holds after at most three recompression iterations.

Given $j \in [6.. \lceil \log^{(4)} n \rceil]$, the length of R before the first iteration of the recompression for j is at most $2^{j+11} \cdot \frac{n}{\tau}$ since this is a condition under which shrinking iterations stopped for $j+1$. The same bound holds for $j = \lceil \log^{(4)} n \rceil$: the initial length of R is at most $2^{11} \cdot \frac{n}{\tau} \log^{(3)} n$ (which is upper-bounded by $2^{j+11} \cdot \frac{n}{\tau}$) since $S' \subseteq S$ and S is produced by the k th phase of the procedure of Section 3, for $k = \lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$, so that the size of S , by Lemma 11, is at most $2^6 \lceil n/2^k \rceil \leq 2^6 n / \frac{\tau}{2 \cdot 2^4 \log^{(3)} n} = 2^{11} \frac{n}{\tau} \log^{(3)} n$. Fix $j \in [6.. \lceil \log^{(4)} n \rceil]$. Since the number of zero values $M_i[j]$ is always at most $2^j \cdot n/\tau$ and the number of zero values $M_{i-1}[5] = 0$ is at most $2^5 \cdot \frac{n}{\tau}$, three iterations of the recompression for j performed on a string R with initial length r shrink the length of R to a length at most $(\frac{3}{4})^3 r + 2^j \cdot \frac{n}{\tau} + 2^5 \cdot \frac{n}{\tau} \leq (\frac{3}{4})^3 r + 2 \cdot 2^j \cdot \frac{n}{\tau}$, by Lemma 16. Putting $r = 2^{j+11} \cdot \frac{n}{\tau}$, we estimate the length of R after three iterations for j from above by $((\frac{3}{4})^3 2^{j+11} + 2) 2^j \cdot \frac{n}{\tau} < 2^{j+10} \cdot \frac{n}{\tau}$. That is, for each j , three iterations are enough to reduce the length of R to at most $2^{j+10} \cdot \frac{n}{\tau}$.

Thus, the total running time of all recompression procedures is $\mathcal{O}(\sum_{j=\lceil \log^{(4)} n \rceil}^6 2^{j+11} \cdot \frac{n}{\tau} \log^{(4)} n) = \mathcal{O}(\frac{n}{\tau} \log^{(4)} n)$, which is $\mathcal{O}(n)$ since $\tau \geq (\log^{(3)} n)^4$. Observe that the most time consuming part is in recalculations of the arrays M_i , each taking $\mathcal{O}(|R| \log^{(4)} n)$ time, all other parts take $\mathcal{O}(|R|)$ time, i.e., $\mathcal{O}(\sum_{j=\lceil \log^{(4)} n \rceil}^6 2^{j+11} \cdot \frac{n}{\tau}) = \mathcal{O}(\frac{n}{\tau})$ time is needed for everything without the recalculations. The length of R in the end is at most $2^{16} \cdot n/\tau$, which is a condition under which shrinking iterations stopped for $j = 6$.

Finally, we create a bit array E of the same length as the original string R that marks by 1 those letters that survived all iterations. Additional navigational structures for linear-time E construction are straightforward. We then re-run whole “semi-online” algorithm that generates the set S' (from which the string R was constructed) but, in this time, we discard all positions of S' that correspond to unmarked indices in E and we store all positions corresponding to marked indices of E explicitly in an array S^* . Since at most $2^{16} \cdot n/\tau$ indices in E are marked by 1, the size of S^* is $\mathcal{O}(n/\tau)$.

Finally, we have all required instruments to prove the main lemma. The proof is rather technical and, in a way, similar to the proof of Lemma 12; it is detailed in Appendix D.2.

► **Lemma 17.** *The set S^* is τ -partitioning; also a converse of property (c) holds for S^* : if a substring $s[i..j]$ has a period at most $\tau/4$, then $S^* \cap [i + \tau..j - \tau] = \emptyset$.*

References

- 1 S. Alstrup, G. S. Brodal, and T. Rauhe. Pattern matching in dynamic texts. In *Proc. 11th ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 819–828. SIAM, 2000.
- 2 V. Arlazarov, E. Dinic, M. Kronrod, and I. Faradzev. On economical construction of the transitive closure of a directed graph. *Dokl. Akad. Nauk.*, 194(11):1209–1210, 1970.
- 3 J. L. Bentley and R. Sedgewick. Fast algorithms for sorting and searching strings. In *Proc. the 8th ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 360–369. SIAM, 1997.
- 4 P. Bille, J. Fischer, I.L. Gørtz, T. Kopelowitz, B. Sach, and H. W. Vildhøj. Sparse text indexing in small space. *ACM Transactions on Algorithms*, 12(3):1–19, 2016. doi:10.1145/2836166.
- 5 P. Bille, I. L. Gørtz, M. B. T. Knudsen, M. Lewenstein, and H. W. Vildhøj. Longest common extensions in sublinear space. In *Proc. 26th Annual Symposium on Combinatorial Pattern Matching (CPM)*, volume 9133 of *LNCS*, pages 65–76. Springer, 2015. doi:10.1007/978-3-319-19929-0_6.
- 6 P. Bille, I. L. Gørtz, B. Sach, and H. W. Vildhøj. Time-space trade-offs for longest common extensions. *Journal of Discrete Algorithms*, 25:42–50, 2014. doi:10.1016/j.jda.2013.06.003.
- 7 O. Birenzweige, S. Golan, and E. Porat. Locally consistent parsing for text indexing in small space. In *Proc. 14th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 607–626. SIAM, 2020. doi:10.1137/1.9781611975994.37.
- 8 G. S. Brodal, P. Davoodi, and S. S. Rao. On space efficient two dimensional range minimum data structures. In *Proc. 18th Annual European Symposium on Algorithms (ESA)*, volume 6347 of *LNCS*, pages 171–182. Springer, 2010. doi:10.1007/s00453-011-9499-0.
- 9 T. M. Chan, K. G. Larsen, and M. Pătraşcu. Orthogonal range searching on the RAM, revisited. In *Proc. 27th Annual Symposium on Computational Geometry (SoCG)*, pages 1–10. ACM, 2011. doi:10.1145/1998196.1998198.
- 10 R. Cole and U. Vishkin. Deterministic coin tossing with applications to optimal parallel list ranking. *Information and Control*, 70(1):32–53, 1986. doi:10.1016/S0019-9958(86)80023-7.
- 11 M. Crochemore and W. Rytter. Squares, cubes, and time-space efficient string searching. *Algorithmica*, 13(5):405–425, 1995. doi:10.1007/BF01190846.
- 12 P. Dinklage, J. Fischer, A. Herlez, T. Kociumaka, and F. Kurpicz. Practical performance of space efficient data structures for longest common extensions. In *Proc. 28th Annual European Symposium on Algorithms (ESA)*, volume 173 of *LIPIcs*, pages 39:1–39:20, Dagstuhl, Germany, 2020. Schloss Dagstuhl–Leibniz-Zentrum für Informatik. doi:10.4230/LIPIcs.ESA.2020.39.
- 13 M. Farach. Optimal suffix tree construction with large alphabets. In *Proc. 38th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 137–143. IEEE, 1997. doi:10.1109/SFCS.1997.646102.
- 14 N. J. Fine and H. S. Wilf. Uniqueness theorems for periodic functions. *Proc. American Mathematical Society (AMS)*, 16(1):109–114, 1965. doi:10.2307/2034009.
- 15 J. Fischer, T. I, and D. Köppl. Deterministic sparse suffix sorting on rewritable texts. In *Proc. 12th Latin American Symposium on Theoretical Informatics (LATIN)*, volume 9644 of *LNCS*, pages 483–496. Springer, 2016. doi:10.1007/978-3-662-49529-2_36.
- 16 M. L. Fredman and D. E. Willard. Surpassing the information theoretic bound with fusion trees. *Journal of Computer and System Sciences*, 47(3):424–436, 1993. doi:10.1016/0022-0000(93)90040-4.
- 17 M. Gańczorz, P. Gawrychowski, A. Jeż, and T. Kociumaka. Edit distance with block operations. In *Proc. 26th Annual European Symposium on Algorithms (ESA)*, volume 112 of *LIPIcs*. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, 2018. doi:10.4230/LIPIcs.ESA.2018.33.
- 18 P. Gawrychowski, A. Karczmarz, T. Kociumaka, J. Łącki, and P. Sankowski. Optimal dynamic strings. In *Proc. 29th ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 1509–1528. SIAM, 2018. doi:10.1137/1.9781611975031.99.
- 19 P. Gawrychowski and T. Kociumaka. Sparse suffix tree construction in optimal time and space. In *Proc. 28th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, pages 425–439. SIAM, 2017. doi:10.1137/1.9781611974782.27.

- 20 A. Goldberg, S. Plotkin, and G. Shannon. Parallel symmetry-breaking in sparse graphs. In *Proc. 19th Annual ACM Symposium on Theory of Computing (STOC)*, pages 315–324. ACM, 1987. doi:10.1145/28395.28429.
- 21 R. Grossi, A. Orlandi, R. Raman, and S. S. Rao. More haste, less waste: Lowering the redundancy in fully indexable dictionaries. In *26th International Symposium on Theoretical Aspects of Computer Science (STACS)*, volume 3 of *LIPIcs*, pages 517–528, Dagstuhl, Germany, 2009. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik. doi:10.4230/LIPIcs.STACS.2009.1847.
- 22 D. Harel and R. E. Tarjan. Fast algorithms for finding nearest common ancestors. *SIAM Journal on Computing*, 13(2):338–355, 1984. doi:10.1137/0213024.
- 23 T. I. Longest common extensions with recompression. In *Proc. 28th Annual Symposium on Combinatorial Pattern Matching (CPM)*, volume 78 of *LIPIcs*, pages 18:1–18:15, Dagstuhl, Germany, 2017. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik. doi:10.4230/LIPIcs.CPM.2017.18.
- 24 T. I. J. Kärkkäinen, and D. Kempa. Faster sparse suffix sorting. In *Proc. 31st International Symposium on Theoretical Aspects of Computer Science (STACS)*, volume 25 of *LIPIcs*, pages 386–396, Dagstuhl, Germany, 2014. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik. doi:10.4230/LIPIcs.STACS.2014.386.
- 25 A. Jež. Approximation of grammar-based compression via recompression. *Theoretical Computer Science*, 592:115–134, 2015. doi:10.1016/j.tcs.2015.05.027.
- 26 A. Jež. Faster fully compressed pattern matching by recompression. *ACM Transactions on Algorithms*, 11(3):20, 2015. doi:10.1145/2631920.
- 27 A. Jež. A really simple approximation of smallest grammar. *Theoretical Computer Science*, 616:141–150, 2016. doi:10.1016/j.tcs.2015.12.032.
- 28 A. Jež. Recompression: a simple and powerful technique for word equations. *Journal of the ACM*, 63(1):4, 2016. doi:10.1145/2743014.
- 29 J. Kärkkäinen, P. Sanders, and S. Burkhardt. Linear work suffix array construction. *Journal of the ACM*, 53(6):918–936, 2006. doi:10.1145/1217856.1217858.
- 30 J. Kärkkäinen and E. Ukkonen. Lempel–Ziv parsing and sublinear-size index structures for string matching. In *Proc. 3rd South American Workshop on String Processing (WSP)*, pages 141–155. Carleton University Press, 1996.
- 31 D. Kempa and T. Kociumaka. String synchronizing sets: sublinear-time BWT construction and optimal LCE data structure. In *Proc. 51st Annual ACM SIGACT Symposium on Theory of Computing (STOC)*, pages 756–767. ACM, 2019. doi:10.1145/3313276.3316368.
- 32 D. Kosolobov. Tight lower bounds for the longest common extension problem. *Information Processing Letters*, 125:26–29, 2017. doi:10.1016/j.ipl.2017.05.003.
- 33 D. Kosolobov and N. Sivukhin. Construction of sparse suffix trees and LCE indexes in optimal time and space. *arXiv preprint arXiv:2105.03782*, 2021.
- 34 K. Mehlhorn, R. Sundar, and C. Uhrig. Maintaining dynamic sequences under equality tests in polylogarithmic time. *Algorithmica*, 17(2):183–198, 1997. doi:10.1007/BF02522825.
- 35 T. Nishimoto, T. I. S. Inenaga, H. Bannai, and M. Takeda. Dynamic index and LZ factorization in compressed space. *Discrete Applied Mathematics*, 274:116–129, 2020. doi:10.1016/j.dam.2019.01.014.
- 36 M. Patrascu and M. Thorup. Dynamic integer sets with optimal rank, select, and predecessor search. In *Proc. 55th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 166–175. IEEE, 2014. doi:10.1109/FOCS.2014.26.
- 37 N. Prezza. Optimal substring equality queries with applications to sparse text indexing. *ACM Transactions on Algorithms*, 17(1):1–23, 2020. doi:10.1145/3426870.
- 38 M. Roberts, W. Hayes, B. R. Hunt, S. M. Mount, and J. A. Yorke. Reducing storage requirements for biological sequence comparison. *Bioinformatics*, 20(18):3363–3369, 2004. doi:10.1093/bioinformatics/bth408.

- 39 S. C. Sahinalp and U. Vishkin. Symmetry breaking for suffix tree construction. In *Proc. 26th Annual ACM Symposium on Theory of Computing (STOC)*, pages 300–309. ACM, 1994. doi:10.1145/195058.195164.
- 40 S. Schleimer, D. S. Wilkerson, and A. Aiken. Winnowing: local algorithms for document fingerprinting. In *Proc. ACM SIGMOD International Conference on Management of Data*, pages 76–85, 2003. doi:10.1145/872757.872770.
- 41 Y. Tanimura, T. I. H. Bannai, S. Inenaga, S.J. Puglisi, and M. Takeda. Deterministic sub-linear space LCE data structures with efficient construction. In *Proc. 27th Annual Symposium on Combinatorial Pattern Matching (CPM)*, volume 54 of *LIPIcs*, pages 1:1–1:10, Dagstuhl, Germany, 2016. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik. doi:10.4230/LIPIcs.CPM.2016.1.
- 42 D. E. Willard. Log-logarithmic worst-case range queries are possible in space $\Theta(N)$. *Information Processing Letters*, 17(2):81–84, 1983. doi:10.1016/0020-0190(83)90075-3.

A

 LCE index and sparse suffix tree

A.1 Missing proofs

► **Lemma 3.** *Given an integer $\tau \geq 4$ and a read-only string s of length m over an alphabet $[0..\sigma]$, let S be an “almost” τ -partitioning set of size $b = \Theta(m/\tau)$: it satisfies properties (a) and (b), but not necessarily (c). The sparse suffix tree T for all suffixes $s[j..m-1]$ with $j \in S$ can be built in $\mathcal{O}(m + \min\{m \log_b \sigma, b \log b\})$ time and $\mathcal{O}(m/\tau)$ space on top of the space required for s .*

Proof. Denote by j_k the k th position in S (so that $j_1 < \dots < j_b$). Assume that the letters $s[i]$ with $i \geq m$ are equal to the special letter -1 ; with this condition, substrings $s[j..j']$ with $j' \geq m$ are well defined. In one pass, we collect all substrings $s[j_k + d\tau..j_k + d\tau + 2\tau]$ with $j_k \in S$ and $d \in [0..(j_{k+1} - j_k)/\tau)$ into a set C (each substring is identified by its starting position), defining $j_0 = 0, j_{b+1} = m$ to cover all of s by the substrings. We order C by starting positions from left to right: $C = \{s[i_h..i_h + 2\tau] : 1 \leq h \leq |C|\}$, where $i_1 < i_2 < \dots < i_{|C|}$. Observe that $i_{h+1} - i_h \leq \tau$, for any $h \in [1..|C|]$. Since the number of substrings in C is $b + \mathcal{O}(m/\tau) = \mathcal{O}(b)$ and their total length is $\mathcal{O}(b\tau + m) = \mathcal{O}(m)$, they can be sorted in $\mathcal{O}(b)$ space using either the radix sort, which gives $\mathcal{O}(m \log_b \sigma)$ time, or the ternary tree [3], which leads to $\mathcal{O}(m + b \log b)$ time. We choose the fastest method of sorting and obtain $\mathcal{O}(m + \min\{m \log_b \sigma, b \log b\})$ time. Let r_h be the rank of $s[i_h..i_h + 2\tau]$ in the sorted order (equal strings have equal ranks).

We build a suffix tree T' for the string $r_1 r_2 \dots r_{|C|}$ in $\mathcal{O}(|C|) = \mathcal{O}(b)$ time and space [13]. All suffixes $r_h r_{h+1} \dots r_{|C|}$ such that $i_h \notin S$ are then removed from T' . By property (b), the equality $r_h = r_{h'}$, for any $h, h' \in [1..|C|]$ such that $i_h \in S$ and $i_{h'} \in S$, implies that, for all $d \in [0..\tau]$, $i_h + d \in S$ iff $i_{h'} + d \in S$. Hence, $s[i_h..i_h + 2\tau] = s[i_{h'}..i_{h'} + 2\tau]$ and $i_{h+1} - i_h = i_{h'+1} - i_{h'}$ since $i_{h+1} - i_h \leq \tau$, for $h \in [1..|C|]$. We inductively deduce from this that if $r_h r_{h+1} \dots r_{h+\ell-1} = r_{h'} r_{h'+1} \dots r_{h'+\ell-1}$, for $\ell \geq 1$ and $h, h' \in [1..|C|]$ such that $i_h \in S$ and $i_{h'} \in S$, then $s[i_h..i_h + \ell - 1 + 2\tau] = s[i_{h'}..i_{h'} + \ell - 1 + 2\tau]$ and, for all $d \in [0..i_{h+\ell-1} - i_h + \tau]$, $i_h + d \in S$ iff $i_{h'} + d \in S$. Therefore, if $s[i_h..t-1] = s[i_{h'}..t'-1]$ and $s[t] < s[t']$, for some t, t' , and $i_h, i_{h'} \in S$, then $r_h r_{h+1} \dots r_{h+\ell-1} = r_{h'} r_{h'+1} \dots r_{h'+\ell-1}$ and $r_{h+\ell} < r_{h'+\ell}$, where $\ell \geq 0$ is the smallest non-negative integer such that $t \in [i_{h+\ell}..i_{h+\ell} + 2\tau]$. The tree T' is transformed into T as follows. For each node in T' that corresponds to a string $r_h r_{h+1} \dots r_{h+\ell-1}$ and for each pair of its lexicographically adjacent outgoing edges labelled by $r_{h+\ell}$ and $r_{h'+\ell}$, we find in $\mathcal{O}(\tau)$ time the first mismatched positions t and t' in $s[i_{h+\ell}..i_{h+\ell} + 2\tau]$ and $s[i_{h'+\ell}..i_{h'+\ell} + 2\tau]$, and, using this information, create a corresponding node of T . The total running time of the transformation is $\mathcal{O}(|C|\tau) = \mathcal{O}(m)$. ◀

B

 Refinement of Partitioning Sets

B.1 Missing proofs for locally consistent parsing

For the following proof, we need the well-known periodicity lemma.

► **Lemma 18** (see [14]). *If two substrings $s[i..i']$ and $s[j..j']$ with periods p and q , respectively, overlap on at least $p + q$ letters (i.e., $\min\{i', j'\} - \max\{i, j\} > p + q$), then the minimal period of their union, $s[\min\{i, j\}..\max\{i', j'\}]$, is at most $\gcd(p, q)$.*

► **Lemma 8.** *Let j_p, j_{p+1}, \dots, j_q be a maximal contiguous region of j_1, j_2, \dots such that, for all $h \in [p..q]$, $R(j_h)$ holds. Then, we have $j_q \in S_k$. Further, if $q - p \geq 2$ or $j_p - j_{p-1} > 2^{k-1}$,*

we have $j_p \in S_k$. All other positions j_h in the region do not belong to S_k . The string $s[j_p..j_q+2^k]$ has a period at most 2^{k-1} .

Proof. Local minima of v_h are not in the region since, for $h \in [p..q]$, $R(j_h)$ implies $s_h = s_{h+1}$ and $v_h = \infty$. As for the “boundary” cases: (iii) always gives $j_q \in S_k$; (i) can affect only j_p if $j_{p-1} - j_p > 2^{k-1}$; (ii) holds for j_p iff $q - p \geq 2$.

For any $h \in [p..q]$, since $s[j_h..j_h+2^k] = s[j_{h+1}..j_{h+1}+2^k]$ and $j_{h+1} - j_h \leq 2^{k-1}$, the string $s[j_h..j_{h+1}+2^k]$ has period $j_{h+1} - j_h \leq 2^{k-1}$. Then, for $h \in (p..q]$, $s[j_{h-1}..j_h+2^k]$ and $s[j_h..j_{h+1}+2^k]$ both have periods at most 2^{k-1} and overlap on 2^k letters. Hence, by Lemma 18, their minimal periods coincide and are at most 2^{k-1} . Applying this argument for all $h \in (p..q]$, we deduce that the minimal period of $s[j_p..j_q+2^k]$ is at most 2^{k-1} . ◀

► **Lemma 9.** Let j_p, j_{p+1}, \dots, j_q be a maximal contiguous region of j_1, j_2, \dots such that, for all $h \in [p..q]$, $R(j_h)$ does not hold and, for $h \in [p..q]$, we have $j_{h+1} - j_h \leq 2^{k-1}$. Then, $v_h \neq \infty$ for $h \in [p..q-4]$, $v_h = \infty$ for $h \in (q-3..q]$, and v_{q-3} may be ∞ or not. Further, for $h \in [p..q-3]$, we have $v_h \neq v_{h+1}$ whenever $v_h \neq \infty$. For $h \in (p..q)$, $j_h \in S_k$ iff $\infty > v_{h-1} > v_h$ and $v_h < v_{h+1}$; $j_p \in S_k$ iff $j_p - j_{p-1} > 2^{k-1}$; $j_q \in S_k$ iff $j_{q+1} - j_q > 2^{k-1}$.

Proof. We have either $v'_q = \infty$ (if $j_{q+1} - j_q > 2^{k-1}$) or $v'_{q+1} = \infty$ (if $R(j_{q+1})$ holds). Since the numbers v_h are obtained via four **vbit** reductions and, for any x , $\text{vbit}(x, \infty) = \infty$, we have $v_h = \infty$, for $h \in (q-3..q]$, and also $v_{q-3} = \infty$ if $v'_q = \infty$. Since $s_h \neq s_{h+1}$ provided $h \in [p..q]$, the claim for other v_h with $h \in [p..q-4]$ is proved by four applications of Lemma 6 to the sequence s_p, s_{p+1}, \dots, s_q . The criteria for $j_h \in S_k$ follow directly from the refinement rule of the k th phase. ◀

B.2 Proof that the refinement process builds a hierarchy of partitioning sets

► **Lemma 11.** For any $i, i' \in [0..n]$, $|S_k \cap [i..i']| \leq 2^6 \lceil (i' - i) / 2^k \rceil$; in particular, $|S_k| \leq n / 2^{k-6}$.

Proof. Let us prove by induction on k the following claim: the range $[0..n]$ of positions of the string s can be partitioned into disjoint non-empty blocks B_1, B_2, \dots, B_m such that $B_i = [b_i..b_{i+1})$, where $b_1 = 0$, $b_{m+1} = n$, and $b_1 < b_2 < \dots < b_{m+1}$, and the blocks are of two types:

1. a block B_i is *normal* if $2^{k-5} \leq |B_i| \leq 4 \cdot 2^{k-5}$ and $|B_i \cap S_k| \leq 2$;
2. a block B_i is *skewed* if $|B_i| \geq 8 \cdot 2^{k-5}$, $|B_i \cap S_k| \leq 3$, and $[b_i..b_{i+1}-4 \cdot 2^{k-5}] \cap S_k = \emptyset$, i.e., all positions of $B_i \cap S_k$ are concentrated in the suffix of B_i of length $4 \cdot 2^{k-5}$ (hence the name “skewed”).

The claim implies the lemma as follows. The worst case, which maximizes $|S_k \cap [i..i']|$, occurs when a range $[i..i']$ intersects one skewed block and at most $\lceil \frac{i' - i - 3}{2^{k-5}} \rceil$ normal blocks in such a way that the skewed block is the leftmost one and contains three positions from S_k , all inside $[i..i']$, and each normal block contains two positions from S_k , all inside $[i..i']$. We then have $|S_k \cap [i..i']| \leq 2 \lceil \frac{i' - i - 3}{2^{k-5}} \rceil + 3$. The bound can be rewritten as $2 \lceil \frac{c2^k + d}{2^{k-5}} \rceil + 3$, substituting integers $c \geq 0$ and $d \in [0..2^k]$ such that $i' - i - 3 = c2^k + d$, and it is upper-bounded by $2^6 c + \lceil \frac{d}{2^{k-5}} \rceil + 3 \leq 2^6 c + 2^5 + 3 < 2^6(c + 1) = 2^6 \lceil \frac{i' - i - 3}{2^k} \rceil \leq 2^6 \lceil \frac{i' - i}{2^k} \rceil$, as the lemma states.

Now let us return to the inductive proof of the claim. The base of the induction is $k \leq 6$ and it is trivial since the range $[0..n]$ always can be split into blocks of length 2. Suppose that the inductive hypothesis holds for $k \geq 6$ and let us construct a partitioning of the range $[0..n]$ into blocks for $k + 1$.

First, we greedily unite blocks into disjoint pairs and singletons from left to right as follows: given a block B_i such that the blocks $B_1 B_2 \dots B_{i-1}$ were already united into pairs

and singletons, we consider the following cases: (1) if B_i is a skewed block, then it forms a singleton and we analyze B_{i+1} next; (2) if both B_i and B_{i+1} are normal blocks, then B_i and B_{i+1} are united into a pair and we consider B_{i+2} next; (3) if B_i is a normal block and B_{i+1} is a skewed block, then we cut from B_{i+1} a new normal block $B' = [b_{i+1}..b_{i+1}+2^{k-5}]$ of length 2^{k-5} , which is necessarily empty due to properties of skewed blocks, and we unite B_i with B' and analyze the (already cut) block B_{i+1} next; the length of the skewed block B_{i+1} is reduced by 2^{k-5} after the cutting and might become less than $8 \cdot 2^{k-5}$ but it is still considered as skewed since this is not an issue as the block B_{i+1} will be anyways dissolved into normal blocks in a moment. After the construction of all the pairs and singletons, we proceed as follows.

We consider all the produced pairs and singletons of blocks from left to right. A singleton block B_i is always a skewed block and its length is at least $7 \cdot 2^{k-5}$ (a prefix of length 2^{k-5} could be cut from the block). Let $S_k = \{j_1 < \dots < j_{|S_k|}\}$. It follows from the refinement rule that any two consecutive positions j_h and j_{h+1} from S_k can both belong to the set S_{k+1} only if either $j_{h+1} - j_h > 2^k$, or $j_h - j_{h-1} > 2^k$ (and v_{h+1} is a local minimum that is not preceded by ∞ in the latter case). In both cases there is a gap of length at least 2^k between either j_h and j_{h+1} , or j_{h-1} and j_h . Therefore, since only the last $4 \cdot 2^{k-5} = 2^{k-3}$ positions of the skewed block B_i may contain positions of S_k , the refinement rule in the case $|B_i \cap S_k| = 3$ necessarily removes from S_k either the second or the last position of $S_k \cap B_i$ when producing S_{k+1} . Thus, we have $|B_i \cap S_{k+1}| \leq 2$. We then split the skewed block B_i into a series of new normal blocks all of which, except possibly the last one, do not contain positions from S_{k+1} : the last block is $(b_{i+1}-4 \cdot 2^{k-5}..b_{i+1})$ and it has length $4 \cdot 2^{k-5} = 2 \cdot 2^{k-4}$, the remaining prefix of B_i is $[b_i..b_{i+1}-4 \cdot 2^{k-5}]$ (the boundary b_i used here can differ from the original b_i if the skewed block B_i was cut and, thus, b_i was increased) and its length is at least $7 \cdot 2^{k-5} - 4 \cdot 2^{k-5} = 3 \cdot 2^{k-5}$, the prefix is split into normal blocks arbitrarily (recall that the length of a normal block for the inductive step $k+1$ must be at least 2^{k-4} and at most $4 \cdot 2^{k-4}$).

Consider a pair of normal blocks B_i and B_{i+1} . For simplicity, we denote by B_{i+1} the block following B_i even if it was created by cutting the skewed block (actual B_{i+1}) that followed B_i in the initial partitioning. The length of the united block $B_i B_{i+1}$ is at least 2^{k-4} and at most $4 \cdot 2^{k-4}$ so that it could have formed a new normal block if at most two positions of S_{k+1} belonged to it. By the observation above, if two consecutive positions j_h and j_{h+1} were retained in S_{k+1} by the refinement rule, then there is a gap of length at least 2^k between either j_h and j_{h+1} , or j_{h-1} and j_h . Therefore, since $|B_i B_{i+1}| \leq 4 \cdot 2^{k-4} < 2^k$, the united block $B_i B_{i+1}$ contains at most three positions of S_{k+1} , i.e., one of the positions from $S_k \cap B_i B_{i+1}$ must be discarded from S_{k+1} . In case $|S_{k+1} \cap B_i B_{i+1}| \leq 2$, we simply form a new normal block $B_i B_{i+1}$. The case $|S_{k+1} \cap B_i B_{i+1}| = 3$ is more interesting; it occurs when each of the blocks B_i and B_{i+1} contains two positions from S_k and the refinement procedure retains the two positions from $S_k \cap B_i$ and removes the first position of $S_k \cap B_{i+1}$. By the observation above, we must have a gap before the block B_i in this case: $S_{k+1} \cap [b_i - 2^k + |B_i|..b_i] = \emptyset$. Since $|B_i| \leq 4 \cdot 2^{k-5} = 2^{k-3}$, we hence obtain $S_{k+1} \cap [b_i - 7 \cdot 2^{k-3}..b_i] = \emptyset$. Therefore, all newly produced blocks that are entirely contained in the range $[b_i - 7 \cdot 2^{k-3}..b_i]$ are empty, i.e., they do not contain positions of S_k (recall that we process pairs and singletons of blocks from left to right and, so, only newly constructed blocks are located to the left of B_i). Let $\hat{B}_j, \hat{B}_{j+1}, \dots, \hat{B}_\ell$ be a maximal sequence of consecutive newly constructed empty blocks to the left of B_i such that \hat{B}_ℓ is a block immediately preceding B_i (we use the notation \hat{B}_j for the new blocks to distinguish them from the “old” blocks B_1, B_2, \dots). We unite all blocks $\hat{B}_j, \hat{B}_{j+1}, \dots, \hat{B}_\ell$ with B_i and B_{i+1} thus producing a new skewed block whose length is at

least $|B_i B_{i+1}| + 7 \cdot 2^{k-3} - 4 \cdot 2^{k-4}$ (the negative term is because some block to the left of B_i may only partially intersect the “empty” range $[b_i - 7 \cdot 2^{k-3}..b_i)$), which is at least $2^{k-4} + 5 \cdot 2^{k-3} = 11 \cdot 2^{k-4} \geq 8 \cdot 2^{k-4}$. \blacktriangleleft

► **Lemma 12.** *The k th phase generates a $(2^{k+3} \lfloor \log^{(3)} n \rfloor)$ -partitioning set S_k . Moreover, S_k is almost 2^{k+3} -partitioning: for $\tau = 2^{k+3}$, it satisfies properties (a) and (b) but not (c), i.e., if $(i..j) \cap S_k = \emptyset$, for $i, j \in S_k$ such that $2^{k+3} < j - i \leq 2^{k+3} \lfloor \log^{(3)} n \rfloor$, then $s[i..j]$ does not necessarily have period $\leq 2^{k+2}$.*

Proof. The proof is by induction on k . The case $k = 0$ is trivial. Let $k > 0$ and $S_{k-1} = \{j_1 < \dots < j_{|S_{k-1}|}\}$. We first establish property (a) for S_k with $\tau = 2^{k+3}$: if $s[i - 2^{k+3}..i + 2^{k+3}] = s[j - 2^{k+3}..j + 2^{k+3}]$ for $i, j \in [2^{k+3}..n - 2^{k+3}]$, then $i \in S$ iff $j \in S$. Fix i and j such that $s[i - 2^{k+3}..i + 2^{k+3}] = s[j - 2^{k+3}..j + 2^{k+3}]$. It suffices to show that $i \in S_k$ implies $j \in S_k$; the case $j \in S_k$ is symmetric. So, let $i \in S_k$.

By the inductive hypothesis, for any $\ell \in [-2^{k+2}..2^{k+2}]$, we have $i + \ell \in S_{k-1}$ iff $j + \ell \in S_{k-1}$. In particular, i and j both belong to S_{k-1} . Let $i = j_h$ and $j = j_{h'}$, for some h and h' . Therefore, when $i \in S_k$ due to the “boundary” case (i), i.e., either $j_h - j_{h-1} > 2^{k-1}$ or $j_{h+1} - j_h > 2^{k-1}$, then $j_{h'} - j_{h'-1} > 2^{k-1}$ or $j_{h'+1} - j_{h'} > 2^{k-1}$, respectively, as $2^{k-1} < 2^{k+2}$; thus, $j \in S_k$.

Now suppose that $i \in S_k$ because $\infty > v_{h-1} > v_h$ and $v_h < v_{h+1}$, where v_{h-1}, v_h, v_{h+1} are as defined in the transformation of S_{k-1} into S_k . By Lemma 9, whenever $v_h \neq \infty$, then $j_{h+\ell} - j_{h+\ell-1} \leq 2^{k-1}$, for all $\ell \in [1..4]$, and the value of v_h is derived using the substrings $s[j_{h+\ell}..j_{h+\ell} + 2^k]$ with $\ell \in [0..4]$. Then, $j_{h+\ell} - j_{h+\ell-1} \leq 2^{k-1}$, for all $\ell \in [0..4]$. Since $j_{h+4} - j_h \leq 4 \cdot 2^{k-1} < 2^{k+2}$, it follows from the inductive hypothesis that $j_{h+\ell} - j_{h+\ell-1} = j_{h'+\ell} - j_{h'+\ell-1}$, for all $\ell \in [0..4]$, and $s[j_{h+\ell}..j_{h+\ell} + 2^k] = s[j_{h'+\ell}..j_{h'+\ell} + 2^k]$, for all $\ell \in [-1..4]$. Hence, $v_{h'-1} = v_{h-1}$ and $v_{h'} = v_h$. In the same fashion, the case $v_{h+1} \neq \infty$ implies that $j_{h+5} - j_h \leq 5 \cdot 2^{k-1} < 2^{k+2}$ and $s[j_{h+5}..j_{h+5} + 2^k] = s[j_{h'+5}..j_{h'+5} + 2^k]$, thus inferring $v_{h'+1} = v_{h+1}$. By Lemma 9, in case $v_{h+1} = \infty$ either $j_{h+5} - j_{h+4} > 2^{k-1}$, which gives $j_{h'+5} - j_{h'+4} > 2^{k-1}$ since $j_{h+4} + 2^{k-1} - j_h < 2^{k+2}$, or $s[j_{h+4}..j_{h+4} + 2^k] = s[j_{h'+5}..j_{h'+5} + 2^k]$ and $j_{h+5} - j_{h+4} \leq 2^{k-1}$, which gives $s[j_{h'+4}..j_{h'+4} + 2^k] = s[j_{h'+5}..j_{h'+5} + 2^k]$; thus, both alternatives imply $v_{h'+1} = \infty$. Therefore, $j (=j_{h'})$ belongs to S_k because $v_{h'}$ is a local minimum. Analogously, we deduce that when $i \in S_k$ since $R(j_{h-1})$ does not hold but $R(j_h)$, $R(j_{h+1})$, $R(j_{h+2})$ hold, then the same is true for $R(j_{h'-1})$ and $R(j_{h'})$, $R(j_{h'+1})$, $R(j_{h'+2})$, respectively, and, thus, $j \in S_k$. The remaining case when $i \in S$ since $R(j_h)$ holds but $R(j_{h+1})$ does not hold is similar.

Let us establish property (b) for S_k with $\tau = 2^{k+3}$: if $s[i..i + \ell] = s[j..j + \ell]$, for $i, j \in S_k$ and some $\ell \geq 0$, then, for each $d \in [0..2^{k+3}]$, $i + d \in S_k$ iff $j + d \in S_k$. In view of property (a), the only interesting case is when $\ell > 2^{k+3}$ and $d \in (0..2^{k+3})$. Given $i + d \in S_k$, let us show that $j + d \in S_k$; the case $j + d \in S_k$ is symmetric. By the inductive hypothesis, we have $i + d' \in S_{k-1}$ iff $j + d' \in S_{k-1}$, for any $d' \in [0..2^{k+2}]$; moreover, $s[i + d'..i + d' + 2^k] = s[j + d'..j + d' + 2^k]$, for such d' , since $2^k < 2^{k+2}$. In particular, $i + d$ and $j + d$ both belong to S_{k-1} . Let $i + d = j_h$ and $j + d = j_{h'}$, for some h and h' . The remaining case analysis is exactly as in the proof of property (a): the only strings of interest to the “left” of $i + d$ and $j + d$ in the analysis are $s[j_{h-1}..j_{h-1} + 2^k]$ and $s[j_{h'-1}..j_{h'-1} + 2^k]$, respectively, and they coincide since $j_h - j_{h-1} = j_{h'} - j_{h'-1} \leq d$; all strings to the “right” are addressed using the inductive hypothesis.

It remains to establish property (c) for S_k with $\tau = 2^{k+3} \lfloor \log^{(3)} n \rfloor$: if $i, j \in S_k$ with $i < j$, $(i..j) \cap S_k = \emptyset$, and $j - i > \tau$, then $s[i..j]$ has a period at most $\tau/4$. We shall actually prove a stronger claim that $s[i..j]$ has a period at most 2^{k-1} . We assume that

$n > 2^{16}$ so that $\tau > 2^{k+3}$. If $(i..j) \cap S_{k-1} = \emptyset$, then the property follows from the inductive hypothesis. Assume that the set $(i..j) \cap S_{k-1}$ is not empty and denote by j_r, j_{r+1}, \dots, j_t all its positions. Note that $j_\ell \notin S_k$, for all $\ell \in [r..t]$, and $i = j_{r-1}$ and $j = j_{t+1}$. We have $j_\ell - j_{\ell-1} \leq 2^{k-1}$, for all $\ell \in [r..t+1]$, since otherwise $j_{\ell-1}, j_\ell \in S_k$. The latter implies that $2 + t - r \geq (j - i)/2^{k-1} > \tau/2^{k-1} = 2^4 \lfloor \log^{(3)} n \rfloor$.

Suppose that $R(j_u)$ holds, for some $u \in [r..t]$, and let u be the smallest such u . By Lemma 8, the last position of the all- R region containing j_u belongs to S_k and its other positions, except possibly the first one, do not belong to S_k . Hence, $R(j_\ell)$ holds, for all $\ell \in [u..t+1]$, and j ($= j_{t+1}$) is this last position. Suppose that $t + 1 - u \geq 2$. Then, by Lemma 8, the first position in the all- R region containing j_u belongs to S_k too. Hence, this first position must be $j_{r-1} = i$. Therefore, the string $s[i..j]$ has a period at most 2^{k-1} due to Lemma 8.

Suppose that $R(j_r)$ does not hold, i.e., j_r belongs to an all-non- R region according to Lemma 9. Then, by the above argument, $R(j_u)$ may hold only for $u = t$ in $[r..t]$ (so that $t + 1 - u < 2$) and, therefore, all $j_r, j_{r+1}, \dots, j_{t-1}$ are in the same all-non- R region. By Lemma 9, we have $v_\ell \neq \infty$ when $\ell \in [r..t-5]$. Hence, $(t - 5) - r + 1 < 8 \log^{(3)} n + 12$ since otherwise, by Lemma 10, $j_\ell \in S_k$, for some $\ell \in [r..t-5]$. But it contradicts the inequality $t - r > 2^4 \lfloor \log^{(3)} n \rfloor - 2$ derived above, assuming n is large enough. Thus, this case (when $R(j_r)$ does not hold) is impossible. \blacktriangleleft

C Speeding up the Refinement Procedure

The case $\tau < \sqrt{n}$. Each phase in this scheme uses $\mathcal{O}(1)$ space so that the overall space is $\mathcal{O}(\log \tau)$, which, as we assumed, is always available. Suppose that $\tau < \sqrt{n}$. We have $b = \Theta(\frac{n}{\tau}) \geq \Omega(\sqrt{n})$ additional space for the algorithm in this case, which can be utilized in order to speed up LCE queries, the bottleneck of the scheme, as follows. Consider the (overlapping) substrings $C_i = s[i \lfloor \sqrt{n} \rfloor .. (i + 3) \lfloor \sqrt{n} \rfloor - 1]$, for $i \in [0..n/\lfloor \sqrt{n} \rfloor - 3]$. We build in linear time for C_0 an LCE data structure [22] using $\mathcal{O}(|C_0|) = \mathcal{O}(\sqrt{n})$ space that can answer LCE queries in $\mathcal{O}(1)$ time. Then, the algorithm processes the prefix $s[0..2 \lfloor \sqrt{n} \rfloor - 1]$ from left to right feeding the positions $[0..2 \lfloor \sqrt{n} \rfloor]$ to the first and all subsequent phases and computing queries $\min\{2^k + 1, \text{lce}(j, j')\}$, with $j, j' \in [0..2 \lfloor \sqrt{n} \rfloor]$, emerging in the phases along the way in $\mathcal{O}(1)$ time; the latter is possible since $2^k \leq \frac{\tau}{2^4 \log^{(3)} n} < \frac{1}{8} \sqrt{n}$ for all $k \leq \lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$, assuming $n > 2^{16}$, and hence, the strings $s[j..j+2^k]$ and $s[j'..j'+2^k]$ in the queries are substrings of C_0 . Since $6 \cdot 2^k < \sqrt{n}$ for $k \leq \lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$, it follows from Lemma 13 that any subsequent LCE queries $\text{lce}(j, j')$ in the algorithm that will emerge after the processing of the prefix $s[0..2 \lfloor \sqrt{n} \rfloor - 1]$ can be performed only on positions j and j' such that $\min\{j, j'\} \geq \sqrt{n}$, i.e., the positions j and j' and the corresponding substrings $s[j..j+2^k]$ and $s[j'..j'+2^k]$ in the queries will be inside the string C_1 in the next \sqrt{n} steps. Accordingly, to continue the execution of the algorithm, we build an LCE data structure for C_1 in place of the structure for C_0 and continue the run feeding the positions $[2 \lfloor \sqrt{n} \rfloor .. 3 \lfloor \sqrt{n} \rfloor]$ to the first and all subsequent phases. We continue this procedure analogously: on a generic step, after feeding the positions $[i \lfloor \sqrt{n} \rfloor .. (i + 1) \lfloor \sqrt{n} \rfloor]$ using an LCE data structure for C_{i-1} , we construct an LCE data structure for C_i in its place in $\mathcal{O}(|C_i|)$ time and feed the positions $[(i + 1) \lfloor \sqrt{n} \rfloor .. (i + 2) \lfloor \sqrt{n} \rfloor]$ to the algorithm. The overall running time is $\mathcal{O}(n + \sum_i |C_i|) = \mathcal{O}(n)$ and the occupied space is $\mathcal{O}(\sqrt{n}) = \mathcal{O}(b)$.

The case $\tau \geq \sqrt{n}$. Let us generalize this idea to the case $\tau \geq \sqrt{n}$. Denote $b = \frac{n}{\tau}$. We have $\mathcal{O}(b) < \mathcal{O}(\sqrt{n})$ space and, hence, cannot resort to the above described scheme since LCE

data structures for substrings of length $\mathcal{O}(b)$ are not enough to answer queries of the form $\min\{2^k + 1, \text{lce}(j, j')\}$ when $2^k > \Omega(b)$. The key idea is that the queries $\text{lce}(j, j')$ in a k' th phase can use only positions j and j' such that $j, j' \in S_k$, for all $k \in [0..k']$, and therefore, the full suffix tree that lies at the core of the LCE data structure [22] used for the substrings C_i is unnecessary, we can use a sparse suffix tree only for suffixes whose starting positions are from a set S_k , for some $k < k'$. When the sparse suffix tree is equipped with an LCA data structure [22], one can compute the queries $\text{lce}(j, j')$, for $j, j' \in S_{k'-1}$, in $\mathcal{O}(1)$ time.

Denote $\hat{b} = \lfloor \frac{b}{\log n} \rfloor$. Our new scheme evenly splits all $\lfloor \log \frac{\tau}{2^4 \log^{(3)} n} \rfloor$ phases into “levels”, each containing $\Theta(\log \hat{b})$ phases. Observe that, since $b = \Omega(\log^2 n)$, we have $\log \hat{b} = \Theta(\log b)$. The scheme has $\lfloor \log(\frac{\tau}{2^4 \log^{(3)} n}) / \log \hat{b} \rfloor = \mathcal{O}(\log_{\hat{b}} n)$ “levels”, which is $\mathcal{O}(\log_b n)$ as $\log \hat{b} = \Theta(\log b)$. The idea is that each level has its own sparse suffix tree, endowed with an LCA data structure, that occupies $\mathcal{O}(\hat{b})$ space and can answer in $\mathcal{O}(1)$ time LCE queries on a range of $\Theta(\hat{b})$ positions from a set S_k received by the lowest phase in the level; all phases inside the level use this tree for LCE queries, which is possible since the phases process sets S_{k+1}, S_{k+2}, \dots and $S_k \supseteq S_{k+1} \supseteq S_{k+2} \supseteq \dots$. As in the solution for $\tau < \sqrt{n}$, the sparse suffix tree encodes only a certain range of the input at any given time and it has to be rebuilt, in a “sliding window” manner, once a long enough prefix of the input has been processed. The total time required for all rebuilds in one level is $\mathcal{O}(n \log_b n)$, for the lowest level, and $\mathcal{O}(n)$, for all other levels. Thus, the time over all $\Theta(\log_b n)$ levels is $\mathcal{O}(n \log_b n)$. The overall space is $\mathcal{O}(\hat{b} \log_b n) = \mathcal{O}(b)$ (this is why the parameter \hat{b} was introduced: in order to bound the space on each level separately). The precise description follows.

For integer $p \geq 0$, the p th level takes positions from the set S_k produced by the previous level, for $k = p \lfloor \log \hat{b} \rfloor$, and produces the set $S_{k'}$, for $k' = (p+1) \lfloor \log \hat{b} \rfloor$. The p th level receives positions of the set S_k from left to right; for $p = 0$, the received positions are $0, 1, \dots, n-1$. When sufficiently many positions of S_k are collected (at most $\mathcal{O}(\hat{b})$), we temporarily pause the procedure of the previous level, process the collected chunk of positions thus producing some positions of $S_{k'}$ (from left to right), and then continue collecting positions of S_k until the next chunk is ready, which is again processed analogously, and so on. Let us describe the scheme in details.

For integer $p \geq 0$, fix $k = p \lfloor \log \hat{b} \rfloor$ and $k' = (p+1) \lfloor \log \hat{b} \rfloor$. The p th level works as follows. By analogy to the case $\tau < \sqrt{n}$, we consider consecutively substrings $C_i = s[i\hat{b} \cdot 2^{k+3}..(i+3)\hat{b} \cdot 2^{k+3} - 1]$, for $i \in [0..n/(\hat{b} \cdot 2^{k+3}) - 3]$. First, we collect all positions of S_k produced by the $(p-1)$ th level that are less than $3\hat{b} \cdot 2^{k+3}$ (i.e., span the substring C_0) and, then, temporarily pause the generation of new positions from S_k (i.e., pause the levels $p-1, p-2, \dots, 0$). Denote $Q_i = S_k \cap [i\hat{b} \cdot 2^{k+3}..(i+3)\hat{b} \cdot 2^{k+3}]$. By Lemma 11, we have $|Q_i| \leq \mathcal{O}(\hat{b})$. Since, by Lemma 12, the set S_k is “almost” 2^k -partitioning (it satisfies properties (a) and (b)), we can construct on the string C_0 a sparse suffix tree, for all its suffixes $s[j..|C_0|-1]$ starting at positions $j \in Q_0$, in $\mathcal{O}(|C_0| + \min\{|C_0| \log_{\hat{b}} n, \hat{b} \log \hat{b}\})$ time using Lemma 3. This time can be upper-bounded by $\mathcal{O}(|C_0| \log_b n)$ for $p = 0$ (note that $\log_{\hat{b}} n = \Theta(\log_b n)$ since $b \geq \Omega(\log^2 n)$), and by $\mathcal{O}(|C_0| + \frac{|C_0|}{2^k} \log \hat{b}) = \mathcal{O}(|C_0| + \frac{|C_0|}{b^p} \log \hat{b}) = \mathcal{O}(|C_0|)$ for $p \geq 1$ (recall that $k = p \lfloor \log \hat{b} \rfloor$). The sparse suffix tree is equipped in $\mathcal{O}(\hat{b})$ time by an LCA data structure [22] that allows us to compute LCE queries for substrings of C_0 starting at positions from Q_0 in $\mathcal{O}(1)$ time.

We build the set $S_{k'}$ as follows: we first process the positions $S_k \cap [0..2\hat{b} \cdot 2^{k+3}]$ by the usual procedure of the phases $k+1, k+2, \dots, k'$ using the sparse suffix tree of C_0 in order to answer LCE queries of the form $\min\{2^{k'} + 1, \text{lce}(j, j')\}$ emerging along the way in $\mathcal{O}(1)$ time. This is possible since $2^{k'} \leq \hat{b} \cdot 2^k$ and the queries $\text{lce}(j, j')$ access only positions $j, j' \in Q_0 \cap [0..2\hat{b} \cdot 2^{k+3}]$ so that $s[j..j+2^{k'}]$ and $s[j'..j'+2^{k'}]$ are substrings of C_0 . By Lemma 13, we shall report in this way all positions $S_{k'} \cap [0..2\hat{b} \cdot 2^{k+3} - 5 \cdot 2^{k'}] \supseteq S_{k'} \cap [0..(1 + \frac{3}{8})\hat{b} \cdot 2^{k+3}]$ (note that since

$2^{k'} \leq \hat{b} \cdot 2^k$, we have $2\hat{b} \cdot 2^{k+3} - 5 \cdot 2^{k'} \geq 2\hat{b} \cdot 2^{k+3} - 5\hat{b} \cdot 2^k = (1 + \frac{3}{8})2^{k+3}\hat{b}$. Then, we resume the procedures of the previous temporarily paused levels $p-1, p-2, \dots, 0$ that generate S_k and collect all positions from $S_k \cap [3\hat{b} \cdot 2^{k+3}..4\hat{b} \cdot 2^{k+3})$. Once they are collected and, therefore, the set Q_1 is known, the previous levels $p-1, p-2, \dots, 0$ are again paused. We construct the sparse suffix tree of C_1 , for all suffixes starting at positions from Q_1 , in place of the tree for C_0 using Lemma 3, which takes $\mathcal{O}(|C_1| \log_b n)$ or $\mathcal{O}(|C_1|)$ time depending on whether $p=0$ or not. Further, we feed the positions $S_k \cap [2\hat{b} \cdot 2^{k+3}..3\hat{b} \cdot 2^{k+3})$ to the phases $k+1, k+2, \dots, k'$ using the suffix tree to answer LCE queries. This is possible since, by Lemma 13, all substrings $s[j..j+2^{k'}]$ that are accessed by LCE queries at this point have $j \geq 2\hat{b} \cdot 2^{k+3} - 6 \cdot 2^{k'} > \hat{b} \cdot 2^{k+3}$. Thus, we report the rest of the set $S_{k'} \cap [0..3\hat{b} \cdot 2^{k+3} - 5 \cdot 2^{k'}] \supseteq S_k \cap [0..(2 + \frac{3}{8})\hat{b} \cdot 2^{k+3}]$ as a result. Analogously, we continue the described procedure for C_2, C_3, \dots : for C_i , we collect positions from $S_k \cap [(i+2)\hat{b} \cdot 2^{k+3}..(i+3)\hat{b} \cdot 2^{k+3})$, thus constructing Q_i , then temporarily pause the previous levels, construct the sparse suffix tree for the suffixes of C_i starting at positions from Q_i , and feed the positions $S_k \cap [(i+1)\hat{b} \cdot 2^{k+3}..(i+2)\hat{b} \cdot 2^{k+3})$ to the phases $k+1, k+2, \dots, k'$, thus reporting $S_{k'} \cap [0..(i+1 + \frac{3}{8})\hat{b} \cdot 2^{k+3}]$ in the end; then, we move on to C_{i+1} .

Each level uses $\mathcal{O}(\hat{b})$ space. Since the number of levels is $\mathcal{O}(\log_b n)$, the total space is $\mathcal{O}(\hat{b} \log_b n) = \mathcal{O}(b)$. The overall running time of the first level ($p=0$) is $\mathcal{O}(\sum_i |C_i| \log_b n) = \mathcal{O}(n \log_b n)$, the time for each subsequent level ($p>0$) is $\mathcal{O}(\sum_i |C_i|) = \mathcal{O}(n)$. Thus, the total time is $\mathcal{O}(n \log_b n)$.

D Recompression

D.1 Proof that S' obtained after the first stage is τ -partitioning

► **Lemma 14.** *The set S' is τ -partitioning and satisfies a converse of property (c): if a substring $s[i..j]$ has a period at most $\tau/4$, then $S' \cap [i + \frac{3}{4}\tau..j - \frac{3}{4}\tau] = \emptyset$. Moreover, S' is almost $\frac{3}{4}\tau$ -partitioning, meeting properties (a) and (b) with $\frac{3}{4}\tau$ in place of τ , but not necessarily (c).*

Proof. For property (a) of S' (with $\frac{3}{4}\tau$ in place of τ), consider p and q such that $s[p - \frac{3}{4}\tau..p + \frac{3}{4}\tau] = s[q - \frac{3}{4}\tau..q + \frac{3}{4}\tau]$. It suffices to show that if $p \in S'$, then $q \in S'$. Since S is a $\frac{\tau}{2}$ -partitioning set and $S' \subseteq S$, the inclusion $p \in S'$ implies $q \in S$, by property (a) of S (with $\frac{\tau}{2}$ in place of τ). The position q could be excluded from S' only if there exist $r \in (0..\tau/4]$ and $r' \in [0..\tau/4]$ such that $r' + r \leq \tau/4$, $q - r \in S$, $q + r' \in S$, and $s[q - r..q - r + \frac{\tau}{2}] = s[q + r'..q + r' + \frac{\tau}{2}]$. Then, since $p - \frac{3}{4}\tau \leq p - r - \frac{\tau}{2}$ and $p + r' + \frac{\tau}{2} \leq p + \frac{3}{4}\tau$, we have $p - r \in S$ and $p + r' \in S$ by property (a) of S (with $\frac{\tau}{2}$ in place of τ). Therefore, p must be excluded from S' too after the comparison of the equal substrings $s[p - r..p - r + \frac{\tau}{2}]$ and $s[p + r'..p + r' + \frac{\tau}{2}]$, which contradicts the assumption $p \in S'$.

For property (b) of S' (with $\frac{3}{4}\tau$ in place of τ), consider $p, q \in S'$ such that $s[p..p+\ell] = s[q..q+\ell]$, for some $\ell \geq 0$. By contradiction, assume that there exists $d \in [0..\ell - \frac{3}{4}\tau)$ such that $p + d \in S'$ whereas $q + d \notin S'$, and d is the smallest such integer. Denote $p' = p + d$ and $q' = q + d$. Since $p' \in S' \subseteq S$, we have $q' \in S$, by property (b) of S (with $\frac{\tau}{2}$ in place of τ). Then, as above, q' could be excluded from S' only if there are $r \in (0..\tau/4]$ and $r' \in [0..\tau/4]$ such that $r' + r \leq \tau/4$, $q' - r \in S$, $q' + r' \in S$, and $s[q' - r..q' - r + \frac{\tau}{2}] = s[q' + r'..q' + r' + \frac{\tau}{2}]$. Hence, all positions $S \cap (q' - r..q' + r')$ were excluded from S' , i.e., $S' \cap (q' - r..q' + r') = \emptyset$. Since $q \in S'$, we have $q' - r \geq q$. Since $d + r < \ell - \frac{\tau}{2}$ and $q' - r, q' + r' \in S$, we obtain $p' - r \in S$ and $p' + r \in S$, by property (b) of S (with $\frac{\tau}{2}$ in place of τ). Therefore, the positions $S \cap (p' - r..p' + r)$ all too should have been excluded from S' together with p' , which is a contradiction.

For property (c) of S' (with τ), consider $p, q \in S'$ such that $(p..q) \cap S' = \emptyset$ and $q - p > \frac{3}{4}\tau$ (the property requires to consider only $q - p > \tau$ but the claim works for $q - p > \frac{3}{4}\tau$ too). We are to show that $s[p..q]$ has a period at most $\tau/4$ (unfortunately, property (c) for $\frac{3}{4}\tau$ in place of τ does not hold because, in this case, $s[p..q]$ should have a period at most $\frac{3}{16}\tau$, which is not true in general). If $(p..q) \cap S = \emptyset$, then the string $s[p..q]$ has a period at most $\tau/8$ ($< \tau/4$) because of property (c) of S (with $\frac{\tau}{2}$ in place of τ). Suppose that $(p..q) \cap S \neq \emptyset$. Denote by D the set of all pairs of positions (i, j) such that $i, j \in S$, $0 < j - i \leq \tau/4$, and $s[i..i+\frac{\tau}{2}] = s[j..j+\frac{\tau}{2}]$. The set S' is generated from S by removing, for each pair $(i, j) \in D$, the positions $S \cap (i..j]$. Therefore, all positions of S between p and q are covered by half-intervals $(i..j]$ with $(i, j) \in D$. Further, there is a subcover of $S \cap (p..q)$ consisting of interleaving half-intervals $\{(i_t..j_t]\}_{t=1}^m$ from D , i.e., $i_1 < i_2 < \dots < i_m$, $S \cap (p..q) \subseteq (i_1..j_m]$, and, for any $t \in [1..m)$, $i_{t+1} \leq j_t$. Since, for each $(i, j) \in D$, the string $s[i..j+\frac{\tau}{2}]$ has a period at most $\tau/4$, the period of the substring $s[i_1..j_m+\frac{\tau}{2}]$ is at most $\tau/4$ by Lemma 18. It is easy to see that $i_1 = p$. Hence, if $j_m + \frac{\tau}{2} \geq q$, then property (c) for S' is established: $s[p..q]$ has a period at most $\tau/4$. Otherwise (if $j_m + \frac{\tau}{2} < q$), we have $S \cap (j_m..q) = \emptyset$ and, therefore, $s[j_m..q]$ has a period at most $\tau/8$, by property (c) of S (with $\frac{\tau}{2}$ in place of τ). Then, $s[p..q]$ has a period at most $\tau/4$ by Lemma 18 since it is covered by two overlapping substrings $s[p..j_m+\frac{\tau}{2}]$ and $s[j_m..q]$ with periods at most $\tau/4$.

For the converse of property (c), consider a substring $s[i..j]$ whose minimal period π is at most $\tau/4$. Let $q \in S \cap [i + \frac{3}{4}\tau..j - \frac{3}{4}\tau]$. Denote $p = q - \pi$. Due to periodicity of $s[i..j]$, we obtain $s[q-\frac{\tau}{2}..q+\frac{\tau}{2}] = s[p-\frac{\tau}{2}..p+\frac{\tau}{2}]$. By property (a) of S (with $\frac{\tau}{2}$ in place of τ), we have $p \in S$. Since $q \in (p..p+\tau/4]$, the procedure generating S' must have compared the strings $s[p..p+\frac{\tau}{2}]$ and $s[q..q+\frac{\tau}{2}]$ during the analysis of the position p and, as a result, could not put q into S' . Hence, $S' \cap [i + \frac{3}{4}\tau..j - \frac{3}{4}\tau] = \emptyset$. \blacktriangleleft

D.2 Proof that S^* obtained after the recompression is τ -partitioning

► **Lemma 19.** *If $s[p..p+\frac{7}{8}\tau] = s[q..q+\frac{7}{8}\tau]$, for $p, q \in S'$, then $a_p = a_q$.*

Proof. Since S' is an almost $\frac{3}{4}\tau$ -partitioning set, as stated in Lemma 14, it follows from property (b) for S' that the positions p and q have a common “right context” of length $\tau/8$: more formally, for any $d \in [0..7\tau/8]$, we have $s[p+d..p+d+\tau/2] = s[q+d..q+d+\tau/2]$, and $p+d \in S'$ iff $q+d \in S'$. In order to produce a_p , our algorithm first consecutively computed numbers $\bar{t}, \bar{\bar{t}}, \bar{\bar{\bar{t}}}$ for p . Denote by p_1, p_2, \dots, p_m all positions of $S' \cap (p..p+\tau/2^5]$ in the increasing order. By construction, the number \bar{t} depends on a “right context” of p of length $\tau/2^5$: \bar{t} is produced by comparing $s[p..p+\tau/2]$ to all strings $s[p_1..p_1+\tau/2], \dots, s[p_m..p_m+\tau/2]$ and, thus, \bar{t} coincides with analogously computed numbers at any other positions r such that, for all $d \in [0..7\tau/2^5]$, $s[p+d..p+d+\tau/2] = s[r+d..r+d+\tau/2]$ and $p+d \in S'$ iff $r+d \in S'$. It remains to show that the numbers $\bar{\bar{t}}, \bar{\bar{\bar{t}}}, a_p$ in the same sense depend on “right contexts” of p of lengths $2\tau/2^5, 3\tau/2^5, 4\tau/2^5 = \tau/8$, respectively. The proof is similar for all three cases. Consider, for instance, the number $\bar{\bar{t}}$, assuming that the claim holds for \bar{t} . We obtain $\bar{\bar{t}}$ by comparing \bar{t} to numbers $\bar{\bar{t}}_1, \bar{\bar{t}}_2, \dots, \bar{\bar{t}}_m$ computed for p_1, p_2, \dots, p_m , respectively. By the assumption, the number $\bar{\bar{t}}_m$ corresponding to the rightmost of the positions, p_m , depends on a “right context” of p_m of length $2\tau/2^5$. Therefore, since $p_m - p \leq \tau/2^5$, we obtain the claimed dependency of $\bar{\bar{t}}$ on a “right context” of p with length $\tau/2^5 + 2\tau/2^5 = 3\tau/2^5$. \blacktriangleleft

► **Lemma 17.** *The set S^* is τ -partitioning; also a converse of property (c) holds for S^* : if a substring $s[i..j]$ has a period at most $\tau/4$, then $S^* \cap [i + \tau..j - \tau] = \emptyset$.*

Proof. Since $S^* \subseteq S'$, the converse of property (c) is inherited from the set S' that satisfies it by Lemma 14; we relax the condition $S^* \cap [i + \frac{3}{4}\tau..j - \frac{3}{4}\tau] = \emptyset$ slightly, for aesthetical reasons.


For $h \in [5..\lceil \log^{(4)} n \rceil]$, denote by S_h the set of positions from S' whose corresponding letters remained in R after the algorithm has performed all recompression procedures for all $j > h$. In particular, $S_{\lceil \log^{(4)} n \rceil} = S'$ and $S_5 = S^*$. Note that the size of each set S_h is at most $2^{h+1} \cdot \frac{n}{\tau}$.

For property (a) of S^* , consider p and q such that $s[p-\tau..p+\tau] = s[q-\tau..q+\tau]$. Let us show by induction that, for each $h \in [5..\lceil \log^{(4)} n \rceil]$ and each d such that $|d| \leq \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$, we have $p+d \in S_h$ iff $q+d \in S_h$. In particular, for $h = 5$, $p \in S^*$ iff $q \in S^*$, which is precisely the claim of property (a). The base of the induction is $h = \lceil \log^{(4)} n \rceil$: since, as stated in Lemma 14, S' is an almost $\frac{3}{4}\tau$ -partitioning set, we have $p+d \in S'$ iff $q+d \in S'$, for any d such that $|d| \leq \frac{1}{8}\tau$. By Lemma 19, letters of R corresponding to positions $p+d$ and $q+d$ such that $p+d \in S'$ and $q+d \in S'$ coincide provided $|d| \leq \frac{1}{8}\tau$ since $s[p+d..p+d+\frac{7}{8}\tau] = s[q+d..q+d+\frac{7}{8}\tau]$.

Fix $h \in [6..\lceil \log^{(4)} n \rceil]$ and suppose, by the inductive hypothesis, that $p+d \in S_h$ iff $q+d \in S_h$, for any d such that $|d| \leq \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$. We are to prove the inductive step: $p+d \in S_{h-1}$ iff $q+d \in S_{h-1}$, for any d such that $|d| \leq \frac{1}{8}\tau - \frac{8}{2^h}\tau$. Let R be a string obtained by the algorithm after performing all recompression procedures for all $j > h$. Thus, there is a one-to-one correspondence between the positions S_h and letters of the string R . Consider a (contiguous) sequence of letters $a_i a_{i+1} \dots a_m$ of R corresponding to all positions $p+d \in S_h$ such that $|d| \leq \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$, and, analogously, a sequence $a_{i'} a_{i'+1} \dots a_{m'}$ corresponding to positions $q+d \in S_h$. By the inductive hypothesis and due to Lemma 19, the sequences coincide. The algorithm performs on the string R at most three recompression reductions removing some of the letters until the positions of S_h corresponding to the remained letters constitute the set S_{h-1} . Denote by r and r' the positions of S_h corresponding to the letters a_m and $a_{m'}$, respectively. A discrepancy in the processing of the sequences by the first iteration of recompression may occur only in their last letters: for instance, the letter a_m will be removed whereas $a_{m'}$ will be retained (see an example in Figure 3). Let us analyze this particular case (other cases are similar). This may happen only if $a_m \in \dot{\Sigma}$ and a_m is followed in R by a letter $a \in \dot{\Sigma}$ and the distance between r and the position of S_h corresponding to a is at most $\tau/2^h$; at the same time, either $a_{m'} (= a_m)$ is followed by a different letter $b \in \dot{\Sigma} (\neq a)$ or the distance between r' and the position of S_h corresponding to this following letter is larger than $\tau/2^h$. We therefore deduce that the distance from r to $p + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$ is less than $\tau/2^h$ (for otherwise the letter a following a_m must be a part of the sequence $a_i a_{i+1} \dots a_m$), which implies that $r - p > \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau - \frac{1}{2^h}\tau = \frac{1}{8}\tau - \frac{5}{2^h}\tau$.

Thus, we have shown that two sequences resulting from $a_i a_{i+1} \dots a_m$ and $a_{i'} a_{i'+1} \dots a_{m'}$ after the recompression coincide in all letters whose corresponding positions from S_h are at a distance at most $\frac{1}{8}\tau - \frac{5}{2^h}\tau$ from p and q , respectively. Exactly the same argument can be applied for the second recompression. A discrepancy in the processing of the resulting sequences by the second iteration of recompression (if any) may again occur only in last letters of the sequences: for instance, the last letter c of the first sequence (the letter a_{m-1} in the example of Figure 3) will be retained whereas the corresponding letter c of the second sequence (the letter $a_{m'-1}$ in the example) will be removed. Denote by r'' the position of S_h corresponding to the removed letter c . By analogy to the argument used for the first iteration, we deduce that the distance between r'' and r' is at most $\tau/2^h$. Observe that $r - p = r' - q$. Therefore, $r'' - q \geq r' - q - \frac{1}{2^h}\tau > \frac{1}{8}\tau - \frac{5}{2^h}\tau - \frac{1}{2^h}\tau = \frac{1}{8}\tau - \frac{6}{2^h}\tau$. Thus, two sequences resulting from the second recompression coincide in all letters whose corresponding positions from S_h are at a distance at most $\frac{1}{8}\tau - \frac{6}{2^h}\tau$ from p and q , respectively. Analogously, we deduce that

two sequences resulting from the third recompression (if any) coincide in all letters whose corresponding positions from S_h are at a distance at most $\frac{1}{8}\tau - \frac{6}{2^h}\tau - \frac{1}{2^h}\tau = \frac{1}{8}\tau - \frac{7}{2^h}\tau$ from p and q , respectively. This proves the inductive claim since $\frac{1}{8}\tau - \frac{7}{2^h}\tau \geq \frac{1}{8}\tau - \frac{8}{2^h}\tau$ and the set S_{h-1} consists of all positions from S_h that correspond to the letters of R remained after the (at most) three recompressions.

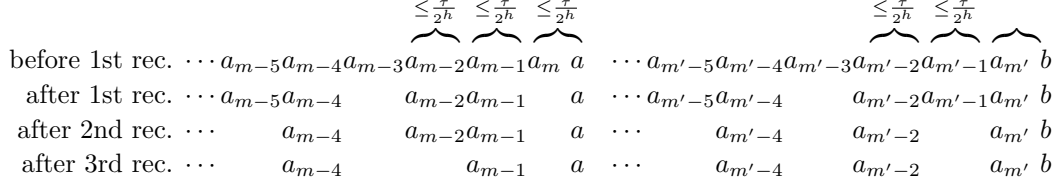

■ **Figure 3** A schematic example of three iterations of recompression (“rec.” on the figure) on equal sequences $a_i a_{i+1} \dots a_m$ and $a_{i'} a_{i'+1} \dots a_{m'}$ ($m-i = m'-i'$ and $a_{i+t} = a_{i'+t}$, for any $t \in [0..m-i]$). The overbraces designate restrictions on distances between positions of S_h corresponding to letters.

For property (b) of S^* , consider $p, q \in S^*$ such that $s[p..p+\ell] = s[q..q+\ell]$, for some $\ell \geq 0$. Clearly, only the case $\ell > \tau$ is interesting. Denote $\tilde{\ell} = \ell - \tau$. It suffices to prove that, for each $h \in [5..\log^{(4)} n]$ and each d such that $0 \leq d < \tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$, we have $p+d \in S_h$ iff $q+d \in S_h$. In particular, for $h=5$, it is precisely the claim of property (b): for any $d \in [0..\tilde{\ell}] = [0..\ell-\tau)$, $p+d \in S^*$ iff $q+d \in S^*$. The proof is essentially by the same inductive argument as for property (a). The base of the induction, $h = \lceil \log^{(4)} n \rceil$, follows from Lemma 14 where it is stated that $S' (= S_{\lceil \log^{(4)} n \rceil})$ is an almost $\frac{3}{4}\tau$ -partitioning set. By Lemma 19, the letters of R corresponding to positions $p+d$ and $q+d$ such that $p+d \in S'$ and $q+d \in S'$ coincide provided $0 \leq d < \tilde{\ell} + \frac{1}{8}\tau$ since $s[p+d..p+d+\frac{7}{8}\tau] = s[q+d..q+d+\frac{7}{8}\tau]$. The proof of the inductive step is very similar to the proof for property (a) above; we therefore only briefly sketch it without diving into details.

Fix $h \in [6..\log^{(4)} n]$ and suppose, by the inductive hypothesis, that $p+d \in S_h$ iff $q+d \in S_h$, for any d such that $0 \leq d < \tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$. Let R be a string produced by the algorithm after performing all recompression procedures for all $j > h$. There is a one-to-one correspondence between S_h and letters of R . Consider a (contiguous) sequence of letters $a_i a_{i+1} \dots a_m$ of R corresponding to all positions $p+d \in S_h$ such that $0 \leq d < \tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$, and, analogously, a sequence $a_{i'} a_{i'+1} \dots a_{m'}$ corresponding to positions $q+d \in S_h$. By the inductive hypothesis and due to Lemma 19, the sequences coincide. The algorithm performs on R at most three recompressions removing some letters until the positions of S_h corresponding to the remained letters constitute the set S_{h-1} . Discrepancies occurring in the two sequences after the recompressions may affect only last positions that are close—at a distance at most $3\tau/2^h$ —to the “right borders”, $p+\tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$ and $q+\tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau$, of the sequences, respectively. Therefore, all positions from $S_h \cap [p..\infty)$ and $S_h \cap [q..\infty)$ that were at a distance at least $3\tau/2^h$ to the left of the “right borders” are “synchronized”, i.e., such a position $p+d \in S_h$ is removed from S_h iff $q+d \in S_h$ is removed too. The “synchronized” positions are exactly $p+d \in S_h$ and $q+d \in S_h$ such that $0 \leq d < \tilde{\ell} + \frac{1}{8}\tau - \frac{8}{2^{h+1}}\tau - \frac{3}{2^h}\tau = \tilde{\ell} + \frac{1}{8}\tau - \frac{7}{2^h}\tau$, so that $p+d \in S_{h-1}$ iff $q+d \in S_{h-1}$. Since $\frac{1}{8}\tau - \frac{7}{2^h}\tau \geq \frac{1}{8}\tau - \frac{8}{2^h}\tau$ and the set S_{h-1} is formed by remained positions of R after the (at most) three recompressions, this proves the inductive step.

For property (c) of S^* , consider $p, q \in S^*$ such that $q-p > \tau$ and $S^* \cap (p..q) = \emptyset$. By construction, a recompression procedure performed on a string R may delete a letter $R[i]$ only if the distance from the position r corresponding to $R[i]$ to the positions r' and r'' of S' corresponding to the letters $R[i-1]$ and $R[i+1]$ is at most $\tau/2^5$. Further, if $R[i]$ is removed,

then neither $R[i-1]$ nor $R[i+1]$ can be removed in the same iteration of recompression. The distance between r' and r'' is at most $\tau/2^4$. Therefore, it is impossible that there was a position of S' from $(p..q)$ that got removed. Thus, $S' \cap (p..q) = \emptyset$. Since S' is a τ -partitioning set, we deduce that the substring $s[p..q]$ has a period at most $\tau/4$ by property (c) of S' . ◀

E Small τ

Assume that $\tau < (\log^{(3)} n)^4$. If $\tau \geq 2^5 \log^{(3)} n$, we perform the procedure of Sections 3–4 generating a $\frac{\tau}{2}$ -partitioning set S of size $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$. If $\tau < 2^5 \log^{(3)} n$, we put $S = [0..n]$, which is a $\frac{\tau}{2}$ -partitioning set of size $\mathcal{O}(\frac{n}{\tau} \log^{(3)} n)$ in this case. All this is done in $\mathcal{O}(n)$ time and $\mathcal{O}(\frac{n}{\tau})$ space (provided the set S is not stored explicitly), which are the time and space bounds we aim for. The problem is in the remaining stages of the algorithm. Specifically, it is in the following “slow” parts:

- (i) the generation of the subset $S' \subseteq S$ requires $\mathcal{O}(n + |S| \log^{(3)} n)$ time;
- (ii) the construction of the string R takes $\mathcal{O}(n + |S'|(\log^{(3)} n)^3)$ time;
- (iii) the initialization of the arrays M_i , for all $i \in [0..|S'|]$, requires $\mathcal{O}(|S'| \log^{(3)} n)$ time;
- (iv) each update of the arrays M_i before shrinking the string R takes $\mathcal{O}(|R| \log^{(4)} n)$ time.

If we optimize all these four bottlenecks to run, respectively, in $\mathcal{O}(n)$, $\mathcal{O}(n)$, $\mathcal{O}(|S'|)$, and $\mathcal{O}(|R|)$ time, then the running time of the whole algorithm will be $\mathcal{O}(n)$. We do all four optimizations by the four russians’ trick [2]. The idea of the trick is that if one has to perform complicated queries on chunks of c bits, then instead of computing the queries explicitly each time, we can precalculate a table of size 2^c with answers for every possible chunk. What are the “chunks” and the “queries” in our case? The easiest is to analyze (iv) to give an example. Let us describe how one can update the arrays M_i in $\mathcal{O}(|R|)$ time before shrinking R .

Part (iv). Suppose that we have marked some letters of R for removal using a bit array $A[0..|R|-1]$ of length R : $R[i]$ is marked iff $A[i] = 1$. Every array $M_i[0..\lceil \log^{(4)} n \rceil]$ occupies $\mathcal{O}((\log^{(4)} n)^2)$ bits (each entry is of size $\mathcal{O}(\log^{(4)} n)$ bits). The naïve updating procedure considers every entry $M_i[j]$ and counts which of the letters $R[i+1], R[i+2], \dots, R[i+M_i[j]]$ were not marked for removal, assigning the result to $M_i[j]$. Recall that each number $M_i[j]$, for $j \in [0..\lceil \log^{(4)} n \rceil]$, is at most $\mathcal{O}(\log^{(3)} n)$. Therefore, the new value for $M_i[j]$ is determined by the old value $M_i[j]$ and the subarray $A[i..i+\mathcal{O}(\log^{(3)} n)]$, for an appropriate constant under the big-O. By storing the bit array A in a sequence of $\mathcal{O}(1 + |R|/\log n)$ machine words of size $\Theta(\log n)$ bits, we can retrieve and pack the subarray $A[i..i+\mathcal{O}(\log^{(3)} n)]$ in $\mathcal{O}(1)$ time into one machine word and can concatenate the subarray to the bit representation of the whole M_i . The bit representation of M_i takes $\mathcal{O}((\log^{(4)} n)^2)$ and, thus, the resulting chunk after the concatenation occupies $\mathcal{O}((\log^{(4)} n)^2) + \mathcal{O}(\log^{(3)} n) = \mathcal{O}(\log^{(3)} n)$ bits. We view this chunk storing the concatenated bit representations of $M_i[0..\lceil \log^{(4)} n \rceil]$ and $A[i..i+\mathcal{O}(\log^{(3)} n)]$ as an integer number x with $\mathcal{O}(\log^{(3)} n)$ bits. It is clear that the chunk determines the state of the updated array M_i . Therefore, we can in advance before the start of the whole algorithm consider all possible valid chunks that encode in the same way arrays $M[0..\lceil \log^{(4)} n \rceil]$ with entries of size $\mathcal{O}(\log^{(4)} n)$ bits concatenated with bit arrays of length $\mathcal{O}(\log^{(3)} n)$ and we can precalculate the updated arrays M in a table B so that the updated array M_i is already stored in the entry $B[x]$. Thus, we simply read $B[x]$, which contains a bit representation for the updated array M_i occupying $\mathcal{O}((\log^{(4)} n)^2)$ bits, and we rewrite M_i with the content of $B[x]$. All is done $\mathcal{O}(1)$ time since all the bit representations take only $\mathcal{O}(1)$ machine words. The size of the table B is $\mathcal{O}(2^{\mathcal{O}(\log^{(3)} n)} \cdot (\log^{(4)} n)^2) = o(\log n)$ bits and, hence, all

precalculations can be performed in $o(n)$ time with $\mathcal{O}(1)$ space (the space is measured in $\mathcal{O}(\log n)$ -bit machine words).

Part (i). Let us describe how the set S' is produced in $\mathcal{O}(n)$ time from the set S , which is fed to our algorithm from left to right in an online fashion. The naïve procedure, for each position $p \in S$, collects all positions from the set $S \cap (p..p+\tau/4]$ and compares $s[p..p+\tau/2]$ to each of the substrings $s[q..q+\tau/2]$ with $q \in S \cap (p..p+\tau/4]$; if $s[p..p+\tau/2] = s[q..q+\tau/2]$, then all the positions $S \cap (p..q]$ are marked for removal and, thus, will not be reported into S' . The idea of a faster solution is that all the comparisons in this algorithm, for the given p , are performed inside a very short substring $s[p..p+\tau/4 + \tau/2]$ (recall that $\tau < (\log^{(3)} n)^4$); we therefore can pack all this string into one small chunk that fits into one machine word specifying which of its positions are from S and, then, we perform the marking for removal in $\mathcal{O}(1)$ time using a precomputed answer. The issue with this idea is that the alphabet can be quite large so that the packing is impossible.

A solution is to “reduce” the alphabet for the substring $s[p..p+\tau/4 + \tau/2]$ by sorting all letters and substituting them by their ordering numbers. The sorting can be performed in linear time using fusion trees [16, 36]. More precisely, during the left-to-right processing of S , we consecutively consider (overlapping) substrings $s[i\tau..(i+2)\tau]$, for $i \in [0..n/\tau - 2]$. Using the fusion tree, we can sort all letters of a given substring $s[i\tau..(i+2)\tau]$ in $\mathcal{O}(\tau)$ time assigning to them their ordering numbers, i.e., reducing the alphabet to $[0..2\tau]$ (see [16, 36]; note that we have $\Omega(n/\tau) = \Omega(n/\log n)$ space). Denote by \hat{s}_i the string $s[i\tau..(i+2)\tau]$ with letters substituted by the ordering numbers (so that all new letters are from $[0..2\tau]$). The string \hat{s} occupies $\mathcal{O}(\tau \log \tau) = o((\log^{(3)} n)^5)$ bits and, thus, can be packed into one machine word. Now in order to process $p \in S$, we first check whether the substring $s[p..p+\tau/4 + \tau/2]$ is contained in the last preprocessed substring \hat{s}_i . If not, we set $i = \lfloor p/\tau \rfloor$ and preprocess $s[i\tau..(i+2)\tau]$ in $\mathcal{O}(\tau)$ time generating \hat{s}_i . Note that in this way we never preprocess the same substring $s[i\tau..(i+2)\tau]$ twice since the positions $p \in S$ are fed to our algorithm from left to right. Next, using standard bit operations on the machine word containing \hat{s}_i , we retrieve the substring $s[p..p+\tau/4 + \tau/2]$ from the string $s[i\tau..(i+2)\tau]$ encoded in \hat{s}_i in which the alphabet is “reduced”, i.e., all letters are substituted with numbers from $[0..2\tau]$. The retrieved substring occupies $\mathcal{O}(\tau \log \tau)$ bits and is stored in one machine word. We concatenate to the bit representation of this substring a bit array a of length $\tau/4$ that indicates which of the positions $i+1, i+2, \dots, i+\tau/4$ belong to S : for $h \in (0..\tau/4]$, we have $i+h \in S$ iff $a[h-1] = 1$. The bit array a is easy to maintain in one machine word during the execution of the algorithm using the bit shift operations. Thus, we obtain a chunk of $\mathcal{O}(\tau \log \tau) + \tau/4 = o((\log^{(3)} n)^5)$ bits that encodes the concatenated bit representations of the substring $s[p..p+\tau/4 + \tau/2]$, with a “reduced” alphabet, and of the bit array a , indicating all positions from $S \cap (p..p+\tau/4]$. We view this chunk as an integer number x with $o((\log^{(3)} n)^5)$ bits.

Clearly, the chunk x determines which of the positions from $S \cap (p..p+\tau/4]$ should be marked for removal during the processing of p . Therefore, we can in advance before the start of the whole algorithm consider all possible valid chunks that encode in the same way strings $t[0..\tau/2 + \tau/4]$ over the alphabet $[0..2\tau]$ concatenated with bit arrays of length $\tau/4$ and we can precalculate which of the positions from $S \cap (p..p+\tau/4]$ will be marked for removal in a table C so that the entry $C[x]$ stores a bit array c of length $\tau/4$ that “masks” positions for removal: for $h \in (0..\tau/4]$, $c[h-1] = 0$ iff the position $q \in S \cap (p..p+\tau/4]$ such that $|S \cap (p..q)| = h$ must be marked for removal because there exists $q' \in S \cap [q..p+\tau/4]$ such that $s[p..p+\tau/2] = s[q'..q'+\tau/2]$. Thus, we simply read $C[x]$ and apply the masking array stored in $C[x]$ to mark for removal some positions from S after p .

Thus, the processing of $p \in S$ is done in $\mathcal{O}(1)$ time since all the bit representations take only $\mathcal{O}(1)$ machine words. The total time for processing all substrings $s[i\tau..(i+2)\tau]$, for $i \in [0..n/\tau - 2]$, is $\mathcal{O}(\frac{n}{\tau}\tau) = \mathcal{O}(n)$. The size of the table C is $\mathcal{O}(2^{o((\log^{(3)} n)^5)} \cdot \tau) = o(\log n)$ bits and, hence, all precalculations can be performed in $o(n)$ time with $\mathcal{O}(1)$ space. As in the original algorithm from Section 5, the computation of S' is executed in an online manner reporting its positions from left to right without storing them (only few are stored for internal purposes).

Part (ii). Let us describe now how the string R can be computed from the set S' , which is fed to our algorithm from left to right in an online fashion. The idea is very similar to what was done for Part (i) to produce the set S' from S . The algorithm starts with an empty string R and considers all $p \in S'$ from left to right generating, for each $p \in S'$, a letter a_p that is then appended to the end of the string R . As is evident from Lemma 19, the construction of a_p requires only the substring $s[p..p+\frac{7}{8}\tau]$ and the positions $S' \cap (p..p+\frac{7}{8}\tau]$. At first glance, the same trick can be applied as in Part (i): we consecutively consider substrings $s[i\tau..(i+2)\tau]$, for $i \in [0..n/\tau - 2]$, reducing their alphabets to $[0..2\tau]$ and encoding them into chunks \hat{s}_i of $\mathcal{O}(\tau \log \tau)$ bits; when a position $p \in S'$ arrives, we retrieve the substring $s[p..p+\frac{7}{8}\tau]$ with a reduced alphabet from the chunk \hat{s}_i with $i = \lfloor p/\tau \rfloor$, constructing \hat{s}_i from scratch if it was not built previously, and then, we concatenate to the chunk a bit array of length $\mathcal{O}(\tau)$ indicating which of the positions from $(p..p+\frac{7}{8}\tau]$ belong to S' . Unfortunately, this scheme does not work since the alphabet reductions lose some essential information required to construct the letters a_p . Precalculations therefore are more involved.

Denote by p_1, p_2, \dots, p_m the set of all positions from $S' \cap (p..p+\tau/2^5]$ in increasing order. Recall that the procedure of Section 5 first generates for p a tuple of numbers $\langle w'_1, w'_2, \dots, w'_\ell \rangle$: for $j \in [1..\ell]$, $w'_j = \text{vbit}(t, t_j)$ if $j \leq m$, and $w'_j = \infty$ otherwise, where $t = \sum_{i=0}^{\tau/2} s[p+i]2^{wi}$ and $t_j = \sum_{i=0}^{\tau/2} s[p_j+i]2^{wi}$, for $j \in [1..m]$. The numbers t and t_j simply represent the substrings $s[p..p+\tau/2]$ and $s[p_j..p_j+\tau/2]$. In order to compute $\text{vbit}(t, t_j)$, it suffices to find the length L of the longest common prefix of $s[p..p+\tau/2]$ and $s[p_j..p_j+\tau/2]$ and, then, compute the lowest bit at which the numbers $s[p+L]$ and $s[p_j+L]$ differ and which of these numbers has 0 and 1 in this differing bit. While the length L can be computed on the substring $s[p..p+\frac{7}{8}\tau]$ with a reduced alphabet, the information about the bits at which the numbers $s[p+L]$ and $s[p_j+L]$ differ is lost after the alphabet reduction. However, it turns out that this information can be stored too in small space without the need to preserve the numbers $s[p+L]$ and $s[p_j+L]$ themselves.

Consider the procedure reducing the alphabet for a substring $s[i\tau..(i+2)\tau]$ with $i \in [0..n/\tau - 2]$. The procedure sorts all letters assigning to them ordering numbers from $[0..2\tau]$. Denote by b_0, b_1, \dots, b_{k-1} all distinct letters of $s[i\tau..(i+2)\tau]$ in increasing order before the reduction. Each letter b_i is an $\mathcal{O}(\log n)$ -bit number that is mapped by the reduction to its index i . Each number b_i can be represented as a bit string \bar{b}_i of length $\mathcal{O}(\log n)$ in which the bits are written from the lowest to the highest. We can construct a compacted trie on the strings \bar{b}_i . Since $k \leq 2\tau + 1$, the compacted trie can be stored in $\mathcal{O}(\tau \log \log n)$ bits: every edge in the trie stores the length of the bit string written on it (which takes $\mathcal{O}(\log \log n)$ bits), each internal node contains pointers to its children (taking $\mathcal{O}(\log \tau)$ bits since the number of nodes is $\mathcal{O}(\tau)$), and each leaf stores the index i of the corresponding number b_i (taking $\mathcal{O}(\log \tau)$ bits). The compacted trie can be built in $\mathcal{O}(k)$ time using a fusion tree [16]; in fact, the fusion tree on the numbers b_0, b_1, \dots, b_{k-1} implicitly constructs precisely this trie (see also [9, 21] where this is emphasized more explicitly). Our idea is that we do not have to store the numbers b_0, b_1, \dots, b_{k-1} in addition to the trie in order to find the lowest bit

at which two numbers b_i and $b_{i'}$ differ: the bit corresponds precisely to the position in the compacted trie at which the corresponding strings \bar{b}_i and $\bar{b}_{i'}$ diverge.

By analogy to the solution for Part (i), when processing $p \in S'$, we first retrieve the substring $s[p..p+\frac{7}{8}\tau]$ with a reduced alphabet from the string $s[i\tau..(i+2)\tau]$ with $i = \lfloor p/\tau \rfloor$ encoded in \hat{s}_i . Then, we concatenate to the bit representation of this substring a bit array a of length $\lfloor \frac{7}{8}\tau \rfloor$ that indicates which of the positions $i+1, i+2, \dots, i+\lfloor \frac{7}{8}\tau \rfloor$ belong to S' : for $h \in (0.. \frac{7}{8}\tau]$, we have $i+h \in S'$ iff $a[h-1] = 1$. The bit array a is easy to maintain in one machine word during the execution of the algorithm using the bit shift operation. Next, we concatenate to the resulting bit chunk a bit representation of the compacted trie on the bit strings $\bar{b}_0, \bar{b}_1, \dots, \bar{b}_{k-1}$ (without storing the letters b_0, b_1, \dots, b_{k-1} themselves), which adds more $\mathcal{O}(\tau \log \log n)$ bits. Thus, we obtain a chunk of $\mathcal{O}(\tau \log \tau) + \frac{7}{8}\tau + \mathcal{O}(\tau \log \log n) = \mathcal{O}((\log^{(3)} n)^4 \log \log n)$ bits that encodes the concatenated bit representations of the substring $s[p..p+\frac{7}{8}\tau]$ with a reduced alphabet, of the bit array a indicating all positions from $S' \cap (p..p+\frac{7}{8}\tau]$, and of the compacted trie. We view this chunk as an integer number x with $\mathcal{O}((\log^{(3)} n)^4 \log \log n)$ bits.

The chunk x determines the letter a_p . Indeed, in order to compute the letter, we first have to compute the numbers $w'_j = \text{vbit}(t, t_j)$: this can be done by first computing the length L of the longest common prefix of the corresponding substrings of $s[p..p+\frac{7}{8}\tau]$ at positions p and p_j and, then, by finding the lowest differing bit of the numbers $s[p+L]$ and $s[p_j+L]$, which can be performed using the compacted trie; similar computations should be executed for other positions from $S' \cap (p..p+\frac{7}{8}\tau]$ but all of them involve only substrings of the string $s[p..p+\frac{7}{8}\tau]$, due to Lemma 19. All further computations can be executed as described in Section 5. Instead of performing all this from scratch, we can in advance consider all possible valid chunks that encode in the same way strings $t[0..\frac{7}{8}\tau]$ over the alphabet $[0..2\tau]$ concatenated with bit arrays of length $\frac{7}{8}\tau$ and with compacted tries on $\mathcal{O}(\tau)$ bit strings of length $\mathcal{O}(\log n)$ (without storing the $\mathcal{O}(\tau)$ strings themselves); for each such chunk, we precalculate the resulting letter in a table D so that the entry $D[x]$ stores a_p . Thus, we simply read $D[x]$ and append it to R .

The processing of $p \in S$ is done in $\mathcal{O}(1)$ time since all the bit representations take only $\mathcal{O}(1)$ machine words. The total time for processing all substrings $s[i\tau..(i+2)\tau]$, for $i \in [0..n/\tau - 2]$, is $\mathcal{O}(\frac{n}{\tau}\tau) = \mathcal{O}(n)$. The size of the table D is $\mathcal{O}(2^{\mathcal{O}((\log^{(3)} n)^4 \log \log n)} \cdot (\log^{(3)} n)^2)$ bits, which fits into $\mathcal{O}(n/\tau)$ space provided $\tau < (\log^{(3)} n)^4$ as can be easily seen since $\log(n/\tau) = \Theta(\log n)$ whereas the logarithm of the space for D is $o(\log \log n)$. Hence, all precalculations can be performed in $o(n)$ time within $\mathcal{O}(n/\tau)$ space.

Part (iii). It remains to describe how all the arrays $M_i[0..\lfloor \log^{(4)} n \rfloor]$ can be initialized in $\mathcal{O}(|S'|)$ time. Given a letter $R[i]$ and a position $p \in S'$ corresponding to it, recall that $M_i[j]$, for $j \in [0..\lfloor \log^{(4)} n \rfloor]$, is equal to the size of the set $S' \cap (p..p+\tau/2^j]$. We receive positions p of S' from left to right and, using the bit shift operation, maintain along the way a bit array a of length τ that is stored in a machine word x of size $\mathcal{O}(\log n)$ bits such that a indicates which of the positions of $(p..p+\tau]$ are from S' , i.e., for $h \in (0..\tau]$, we have $p+h \in S'$ iff $a[h-1] = 1$. Obviously, the array a determines the content of M_i . The array M_i occupies $\mathcal{O}((\log^{(4)} n)^2)$ bits and, therefore, its bit representation can be stored into one machine word. We hence can precompute a table F of size $\mathcal{O}(2^\tau \cdot (\log^{(4)} n)^2) = o(\log n)$ bits such that $F[x]$ stores the bit representation of the array M_i . The content of $F[x]$ is then copied in $\mathcal{O}(1)$ time in place of M_i . The table F can be straightforwardly precalculated in $o(n)$ time and $\mathcal{O}(1)$ space.