

Knowledge-based Review Generation by Coherence Enhanced Text Planning

Junyi Li^{1,2}, Wayne Xin Zhao^{1,2*}, Zhicheng Wei³, Nicholas Jing Yuan³ and Ji-Rong Wen^{1,2}

¹Gaoling School of Artificial Intelligence, Renmin University of China

²Beijing Key Laboratory of Big Data Management and Analysis Methods

³Huawei Cloud

{lijunyi,jrwen}@ruc.edu.cn, {batmanfly, nicholas.jing.yuan}@gmail.com, weizhicheng1@huawei.com

ABSTRACT

As a natural language generation task, it is challenging to generate informative and coherent review text. In order to enhance the informativeness of the generated text, existing solutions typically learn to copy entities or triples from knowledge graphs (KGs). However, they lack overall consideration to select and arrange the incorporated knowledge, which tends to cause text incoherence.

To address the above issue, we focus on improving entity-centric coherence of the generated reviews by leveraging the semantic structure of KGs. In this paper, we propose a novel Coherence Enhanced Text Planning model (CETP) based on knowledge graphs (KGs) to improve both global and local coherence for review generation. The proposed model learns a two-level text plan for generating a document: (1) the document plan is modeled as a sequence of sentence plans in order, and (2) the sentence plan is modeled as an entity-based subgraph from KG. Local coherence can be naturally enforced by KG subgraphs through intra-sentence correlations between entities. For global coherence, we design a hierarchical self-attentive architecture with both subgraph- and node-level attention to enhance the correlations between subgraphs. To our knowledge, we are the first to utilize a KG-based text planning model to enhance text coherence for review generation. Extensive experiments on three datasets confirm the effectiveness of our model on improving the content coherence of generated texts.

CCS CONCEPTS

• Computing methodologies → Natural language generation.

KEYWORDS

Knowledge Graph; Review Generation; Text Planning

ACM Reference Format:

Junyi Li^{1,2}, Wayne Xin Zhao^{1,2*}, Zhicheng Wei³, Nicholas Jing Yuan³ and Ji-Rong Wen^{1,2}. 2021. Knowledge-based Review Generation by Coherence Enhanced Text Planning. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*.

*Corresponding author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions.acm.org.

SIGIR '21, July 11–15, 2021, Virtual Event, Canada

© 2021 Association for Computing Machinery.

ACM ISBN 978-1-4503-8037-9/21/07...\$15.00

<https://doi.org/10.1145/3404835.3462865>

July 11–15, 2021, Virtual Event, Canada. ACM, New York, NY, USA, 10 pages.
<https://doi.org/10.1145/3404835.3462865>

1 INTRODUCTION

With the development of e-commerce in recent years, online reviews play a crucial role in reflecting real customer experiences. Online review information is useful to both users interested in a certain product and sellers concerned about increasing their revenue. However, many users find it tedious to write review text, and a large proportion of users do not post online reviews [4]. To ease the process of review writing, the task of review generation has been proposed and received wide attention from both research and industry communities [9, 22, 32]. Review generation aims to automatically produce review text conditioned on some necessary context inputs (e.g., users, items and ratings), which potentially influences many applications, such as explanation generation for recommendation [23], automatic scientific reviewing for papers [5]. Existing methods mainly make extensions based on sequential neural networks (e.g., recurrent neural network), including attribute awareness [9], aspect enrichment [32], and length enhancement [22]. While, these studies do not explicitly utilize the factual information about items, tending to generate dull and uninformative review text.

To enrich the generated content, we consider incorporating external knowledge graph (KG) to improve review generation. By associating KG entities with e-commerce items, we can obtain rich semantic relations about items from KG. Indeed, there has also been growing interest in the utilization of KG data in other text generation tasks, such as dialog system [33] and document summarization [2]. These approaches typically learn to copy entities or triples from KG when necessary, which improves the informativeness of the generated content to a certain extent. However, they lack overall consideration to select and arrange the incorporated KG data, which is likely to cause the issue of text incoherence [13], such as content discontinuity and logic confusion. Figure 1 presents a comparison between a coherent review and an incoherent review in terms of content continuity. As we can see, although review 2 has incorporated factual information from KG, the entire organization is poor and the review content is discontinuous in terms of semantic structure, i.e., the lead actor and actress, *Leonardo DiCaprio* and *Kate Winslet*, are separated by the genre *romance film*.

To address the above issue, we focus on improving *entity-centric coherence* of the generated reviews by leveraging the semantic structure of KGs. According to [13], entity-centric coherence refers to the entities are closely correlated to the other in text and the

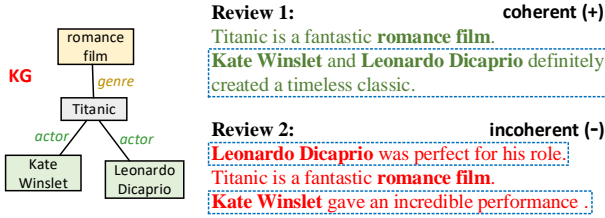


Figure 1: Comparison of coherent and incoherent review texts in terms of content continuity. Review 1 first comments on the movie genre, followed a sentence about two actors; Review 2 introduces the two actors with two separate sentences, interleaved by another sentence on genre.

entity correlations among sentences can be used to create coherence patterns for text. Also, it has been widely recognized that entity graphs (or subgraphs) are a powerful form to characterize the coherent structure in natural language [14]. Compared with the traditional entity-grid method [6] which is restricted to capturing coherent transitions between adjacent sentences, the KG-based entity graphs can easily span the entire text and capture the semantic correlations between different sentences. Following the literature of linguistics [27], we consider two kinds of coherence, namely *global* and *local* coherence. *Global coherence* captures how entities distribute among different sentences through inter-sentence correlations [11]. While *local coherence* means the intra-sentence entities (or keywords) have close correlations through semantic relations or threading words [6]. Our main idea is aimed at utilizing KG subgraphs and their correlations to enhance local and global coherence, respectively. To develop our model, we derive the generation plan before generating the text. Such a way is called *text planning* in text generation [17, 29], which refers to the process of selecting, arranging and ordering content to be produced.

To this end, in this paper, we propose a novel Coherence Enhanced Text Planning model (CETP) for review generation. We utilize KGs for capturing coherence patterns to generate coherent review text. Based on an augmented KG with user-item interaction and entity-keyword co-occurrence, we design a two-level text plan for generating a document: (1) the document plan is modeled as a sequence of sentence plans in order, and (2) the sentence plan is modeled as an entity-based subgraph from KG. In our model, local coherence is naturally enforced by KG subgraphs, since entities from a KG subgraph are tightly associated by semantic relations. To enhance global coherence, we develop a hierarchical self-attentive architecture with both subgraph- and node-level attention to generate a coherent sequence of subgraphs. For sentence realization, we develop a supervised copy mechanism for copying entities (or keywords) from the planned subgraph. It further improves local coherence by enhancing the intra-sentence entity correlation via threading words.

To the best of our knowledge, we are the first to utilize a KG-based text planning model to enhance both global and local coherence for review generation. For evaluation, we construct three review datasets by associating KG entities with e-commerce items to obtain semantic attributes about items. Extensive experiments demonstrate the effectiveness of our model.

2 RELATED WORK

With the striking success of deep neural networks, automatic review generation has received much attention from the research community [9, 22, 32]. Typical methods extend the Sequence-to-Sequence framework [39] by using available side information, including context information [9], sentiment score [47] and user-item interactions [31]. In order to alleviate the repetitiveness of texts caused by the RNN models, Generative Adversarial Nets (GAN) based approaches have been applied to text generation [15, 46]. Moreover, several studies utilize aspect information of products or writing style of users with a more instructive generation process to generate personalized or controllable review text [21, 22, 32]. Although various approaches have emerged, they seldom include structured attribute information about items, thus making the generated review text less informative.

In many applications [2, 21, 33], various approaches utilize structural knowledge data (e.g., Freebase and DBpedia) in the text generation process in order to improve the informativeness and diversity of the generated content. However, most of these studies mainly learn to copy related entities or triples from structural knowledge data while lack overall consideration of semantic structure of text, which have limitation in generating semantically coherent text.

Coherence is a key property of well-organized text. A variety of coherence analysis methods have been developed, such as entity grid model [6], coherence pattern model [35], and neural network model [20]. However, these methods still require considerable experience or domain expertise to define or extract features. Other related approaches include global graph model [14] which projects entities into a global graph and HMM system [26] in which the coherence between adjacent sentences is modeled by a hidden Markov framework and captured by the transition rules of topics.

Text planning is a critical component in traditional data-to-text systems [17, 29]. Typical methods are based on hand-crafted [7] or automatically-learned rules [10], which are unable to capture rich variations of texts. Recent neural approaches mainly rely on well-designed network architectures to learn from training data [17, 37], which is difficult to control the planning process. However, as demonstrated in [43], existing neural methods are still problematic for text generation and often generate incoherent text. Moreover, these text planning methods seldom focus on review generation task, lacking consideration of user-item interaction or personalized characteristics.

3 PROBLEM FORMULATION

In this section, we introduce the notations that will be used throughout the paper, and then formally define the task.

Basic Notations. Let \mathcal{U} , \mathcal{I} and \mathcal{A} denote a user set, an item set and a rating score set, respectively. A review text is written by a user $u \in \mathcal{U}$ about an item $i \in \mathcal{I}$ with a rating score of $a \in \mathcal{A}$. Formally, a review text is denoted by $w^{1:m} = \{\langle w_{j,1}, \dots, w_{j,t}, \dots, w_{j,n_j} \rangle\}_{j=1}^m$, consisting of m sentences, where $w_{j,t}$ denotes the t -th word (from the vocabulary \mathcal{V}) of the j -th sentence and n_j is the length of the j -th sentence. Besides, in our setting, a knowledge graph (KG) \mathcal{T} about item attributes is available for our task. Typically, it organizes facts by triples: $\mathcal{T} = \{\langle h, r, t \rangle\}$, where each triple describes

that there is a relation r between head entity h and tail entity t regarding to some facts. We assume that a KG entity can be aligned to an e-commerce item. For instance, the Freebase movie entity “*Avatar*” (with the Freebase ID *m.0bth54*) has an entry of a movie item in IMDb (with the IMDb ID *tt0499549*). Several studies [21, 48] try to develop heuristic algorithms for item-to-entity alignment and have released public linkage dataset. We add user-item links according to their interactions and entity-keyword links if they frequently co-occur in review sentences, in order to capture personalized entity preference and enhance the entity-word associations, respectively. For unifying the triple form, two kinds of non-KG links are attached with two new relations, *i.e.*, interaction and co-occurrence. As shown in Figure 2(c), such an augmented KG can be referred as *Heterogeneous KG* (HKG), denoted by $\mathcal{G} = \mathcal{T} \cup \{\langle u, r_{int}, i \rangle\} \cup \{\langle e, r_{co}, w \rangle\}$, where r_{int} and r_{co} denote the relations of user-item interaction and entity-word co-occurrence, respectively.

Planning with HKG Subgraphs. To enhance the global and local coherence, we design a two-level text plan for selecting, arranging and ordering the contents in the output text, namely *document plan* and *sentence plan*. Specifically, the document plan is modeled as a sequence of sentence plans in order, denoted by $g^{1:m} = \langle g_1, \dots, g_j, \dots, g_m \rangle$. Each sentence plan is modeled as an entity-based subgraph g_j (short for *subgraph*) from the HKG shown in Figure 2(b), specifying the relations and entities (or keywords) to be verbalized in each sentence. We further introduce the concept of *subgraph schema* denoted by s_j for subgraph g_j , as shown in Figure 2(a), which keeps the structure and relations of subgraphs while replaces nodes with empty slots. Typically, a subgraph schema can be instantiated into different subgraphs by filling empty slots with different entities or keywords.

Task Definition. Review generation task is concerned with how to automatically generate the review text $w^{1:m}$ for a rating record $\langle u, i, a \rangle$ based on other possible side information if any. Different from most of previous works, we incorporate the HKG \mathcal{G} as available resource for review generation. We would like to utilize KG-based text planning model to enhance global and local coherence of the generated text.

4 THE PROPOSED APPROACH

In this section, we present the proposed Coherence Enhanced Text Planning model, named *CETP*, for the review generation task. We first introduce the two-level text plan for selecting, arranging and ordering the contents in the output text, namely *document plan* and *sentence plan*. As discussed earlier, a document plan is modeled as a sequence of sentence plans in order and a sentence plan is modeled as an entity-based subgraph from KG. Subgraphs naturally enforce the *local coherence* of entities in a sentence, since they are originally connected and associated with relations in HKG. Furthermore, subgraph sequence can capture the overall distribution and arrangement of entities, which helps improve *global coherence*. Based on the two-level text plan, we adopt a supervised copy mechanism for sentence realization by copying entities (or keywords) from the planned subgraph. This step further improves local coherence by enhancing the intra-sentence entity correlation via threading words.

Figure 2 presents examples for illustrating the basic notations and coherence enhancement in our model.

4.1 Text Plan Generation

In this step, we study how to generate the text plan, *i.e.*, a subgraph sequence $g^{1:m} = \langle g_1, \dots, g_j, \dots, g_m \rangle$ defined in Section 3.

4.1.1 HKG Embedding. We first learn node representations for the HKG. Let n (n_j and n_k) denote a node placeholder for the HKG, associated with an embedding vector $v_n \in \mathbb{R}^{d_E}$, where d_E denotes the node embedding size. Node embeddings can be initialized with pre-trained KG embeddings or word embeddings [28, 45]. In order to capture the semantic correlations between nodes, we propose to use Relation-Enhanced Graph Transformer [42], which applies a relation-enhanced multi-head attention (MHA) to obtain the node embedding \hat{v}_{n_j} for node n_j as:

$$\hat{v}_{n_j} = \text{MHA}(q_{n_j}, k_{n_k}, v_{n_k}), \quad (1)$$

where $\text{MHA}(Q, K, V)$ follows the implementation of multi-head attention [42] taking a query Q , a key K and a value V as input:

$$\begin{aligned} \text{MHA}(Q, K, V) &= \text{Concat}(\text{head}_1, \dots, \text{head}_H)W^O, \\ \text{head}_h &= \text{Attn}(QW_h^Q, KW_h^K, VW_h^V), \end{aligned} \quad (2)$$

where $W_h^Q, W_h^K, W_h^V \in \mathbb{R}^{d_E \times d_H}$, and d_H denotes the dimension of attention heads. For clarity, we write Eq. 1 in the form of vectors. The key point lies in that we incorporate the semantic relations between nodes into the *query vector* (q_{n_j}) and *key vector* (k_{n_k}):

$$\begin{aligned} q_{n_j} &= v_{n_j} + v_{n_j \rightarrow n_k}, \\ k_{n_k} &= v_{n_k} + v_{n_k \rightarrow n_j}, \end{aligned} \quad (3)$$

where $v_{n_j \rightarrow n_k}$ and $v_{n_k \rightarrow n_j}$ are encodings for the shortest relation path $n_j \rightarrow n_k$ and $n_k \rightarrow n_j$ between nodes n_j and n_k , which are learned by summing the embeddings of the relations in the path.

Finally, we employ a residual connection and fully connected feed-forward network (FFN):

$$\begin{aligned} \tilde{v}_{n_j} &= \hat{v}_{n_j} + \text{FFN}(\hat{v}_{n_j}), \\ \text{FFN}(x) &= \max(0, x^\top W_1 + b_1)W_2 + b_2, \end{aligned} \quad (4)$$

where W_1, W_2, b_1 and b_2 are trainable parameters, and FFN is a linear network with *gelu* activation. The attention block, *i.e.*, MHA and FFN, can be stacked multiple times.

4.1.2 Subgraph Encoder. Since a sentence plan corresponds to a connected subgraph from HKG, it naturally enforces the local coherence of its nodes. The major difficulty lies in how to enhance global coherence in text planning. Let $v_{g_j} \in \mathbb{R}^{d_E}$ denote the embedding of the current subgraph g_j , initialized by an average pooling of the embeddings of all nodes in g_j as $v_{g_j} = \text{AvgPooling}(\tilde{v}_{n_k})$, where \tilde{v}_{n_k} is the embedding of node n_k in g_j learned with Graph Transformer in Section 4.1.1. Specifically, at the first step, the subgraph g_0 is initialized as a *START* graph without any nodes.

As shown in Figure 2(d), the nodes in previous subgraphs have closed semantic correlations with the nodes in subsequent subgraphs. Therefore, we introduce two kinds of multi-head attention to enhance global coherence for subgraph representations.

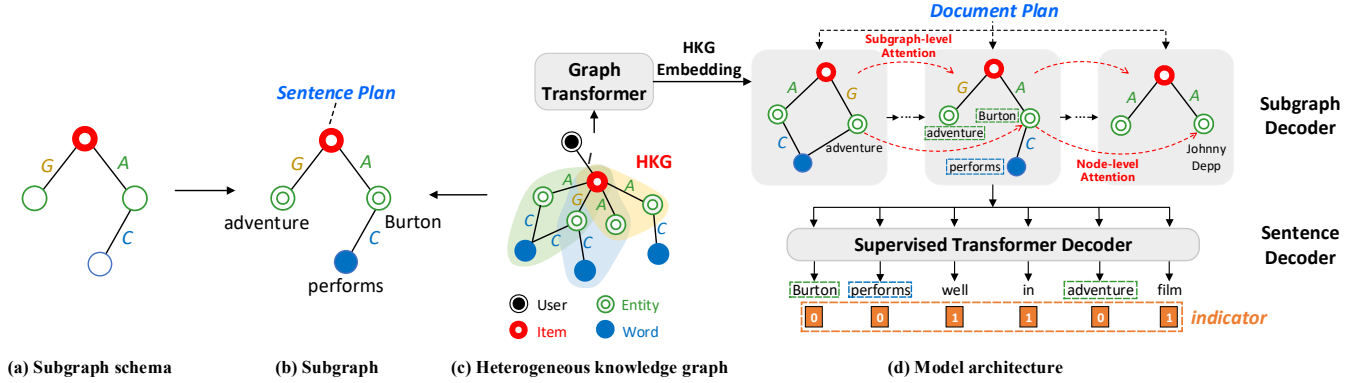


Figure 2: Illustrative examples for our approach: (a) subgraph schema (the capital letters I , A , G and C denote the relations of *interaction*, *actor*, *genre* and *co-occurrence*, respectively); (b) subgraph; (c) heterogeneous knowledge graph; and (d) the overview of the proposed CETP model. The document plan and sentence plan can enhance the global and local coherence, respectively.

Subgraph-level Attention. To make content globally coherent, the basic idea is to refer to previous subgraphs when learning the embedding of current subgraph. For this purpose, we propose a subgraph-level multi-head attention and obtain a subgraph-enhanced subgraph embedding $v_{g_j}^G$ as:

$$v_{g_j}^G = \text{MHA}(v_{g_j}, v_{g_k}, v_{g_k}), \quad (5)$$

where v_{g_k} denotes the embeddings of previous subgraphs g_1, \dots, g_{j-1} . In the subgraph-level multi-head attention mechanism, the embeddings for previous subgraphs are considered as key and value vectors, and the embedding of the current subgraph acts as the query vector. In this way, it incorporates the information of previous subgraphs for encoding the current subgraph.

Node-level Attention. Subgraph-level attention cannot directly reflect the fine-grained entity correlations between different subgraphs. Hence, we further propose to use node-level multi-head attention by considering the effect of nodes from *previous subgraphs*. The node-enhanced subgraph embedding $v_{g_j}^N$ is given as:

$$v_{g_j}^N = \text{MHA}(v_{g_j}^G, \tilde{v}_{n_z}, \tilde{v}_{n_z}), \quad (6)$$

where \tilde{v}_{n_z} is the learned embedding of node n_z in previous subgraphs g_1, \dots, g_{j-1} computed as Eq. 4. Similar to Eq. 5, the node embeddings in previous subgraphs are considered as key and value vectors, and the embedding of the current subgraph acts as the query vector. Hence, the node information of previous subgraphs has been incorporated for encoding the current subgraph.

With the two kinds of multi-head attention, we have enhanced the global coherence by capturing inter-sentence correlations, since the information of previous subgraphs and their nodes can be injected into current subgraph. Finally, we also apply a residual connection and fully connected feed-forward network (FFN) to the node-enhanced subgraph embedding $v_{g_j}^N$ (similar to Eq. 4) and obtain the final subgraph embedding \tilde{v}_{g_j} .

4.1.3 Subgraph Decoder. After obtaining the final embedding of current subgraph \tilde{v}_{g_j} , we further utilize it to generate the next subgraph, i.e., g_{j+1} . General graph generation is a challenging task

in deep learning [40, 41]. While, our task has several important unique characteristics, making the generation task simpler.

Recall that each subgraph g_j is associated with a subgraph schema s_j and a subgraph schema can be instantiated into different subgraphs (Section 3). Thus, to generate a subgraph, we first generate the subgraph schema and then fill in the empty slots with entities or keywords. Usually, a review sentence usually contains only a few entities, and the number of frequent subgraph schemas in corpus is indeed small. We treat schema generation as a classification task over the frequent schema set, which is pre-extracted from training data. Once the schema has been determined, we utilize the relations in the schema as constraints and the entity (keyword) probability predicted by our model as selection criterion. Figure 3 presents an example for the process of subgraph generation.

To enhance the personalized characteristics of subgraphs, following *Attr2Seq* [9], we apply a standard attention mechanism [3] on context information $\langle u, i, a \rangle$, and obtain a context vector \tilde{c}_j for encoding information of users, items and ratings. Finally, we stack the attention block, i.e., subgraph- and node-level attention, by multiple times and compute the selection probabilities for a subgraph schema and an entity (or keyword) node as:

$$\Pr(s_{j+1}|g_1, \dots, g_j) = \text{softmax}(W_4[\tilde{v}_{g_j}; \tilde{c}_j] + b_4), \quad (7)$$

$$\Pr(n_{j+1}|g_1, \dots, g_j) = \text{softmax}(W_5[\tilde{v}_{g_j}; \tilde{c}_j] + b_5), \quad (8)$$

where W_4, W_5, b_4 and b_5 are trainable parameters, and s_{j+1} and n_{j+1} denote a subgraph schema and an entity (or keyword), respectively. In practice, we select the most possible subgraph schema according to Eq. 7. Then, we collect all the entities that satisfy the requirement of the subgraph schema. Finally, each empty slot is filled in with the most probable node according to Eq. 8. Although there might be other combinatorial optimization strategies, our method empirically works well and is more efficient.

4.2 Sentence Realization

Given the inferred subgraph g_j , we next study how to generate the words of the j -th sentence, i.e., $\langle w_{j,1}, \dots, w_{j,t}, \dots, w_{j,n_j} \rangle$.

4.2.1 Base Sentence Decoder. The base sentence generation module adopts Transformer decoder in GPT-2 [36] by stacking multiple

self-attention blocks (similar to Eq. 1-Eq. 4). Based on GPT-2, we can obtain the embedding $\tilde{v}_{w_{j,t}} \in \mathbb{R}^{d_w}$ for the current word $w_{j,t}$ in the j -th sentence, where d_w denotes the embedding size. Also, similar to Eq. 7-8, we follow *Attr2Seq* [9] to encode context information $\langle u, i, a \rangle$ into a context vector $\tilde{c}_{j,t}$ with attention mechanism. We generate the next word via a softmax probability function:

$$\Pr_1(w_{j,t+1}|w_{j,1}, \dots, w_{j,t}) = \text{softmax}(\mathbf{W}_6[\tilde{v}_{w_{j,t}}; \tilde{c}_{j,t}] + \mathbf{b}_6), \quad (9)$$

where \mathbf{W}_6 and \mathbf{b}_6 are trainable parameters.

4.2.2 Supervised Copy Mechanism. To verbalize KG subgraphs, we introduce a supervised copy mechanism that copies nodes from the subgraph. The predictive probability of a word w can be decomposed into two parts, either generating a word from the vocabulary or copying a node from the subgraph:

$$\begin{aligned} \Pr(w_{j,t+1} = w|w_{j,1}, \dots, w_{j,t}, g_j) \\ = \lambda_{j,t} \cdot \Pr_1(w|w_{j,1}, \dots, w_{j,t}) + (1 - \lambda_{j,t}) \cdot \Pr_2(w|g_j), \end{aligned} \quad (10)$$

where $\Pr_1(w|w_{j,1}, \dots, w_{j,t})$ is the generative probability from the base sentence decoder (Eq. 9), and $\Pr_2(w|g_j)$ is the copy probability defined as:

$$\Pr_2(w|g_j) = \frac{\exp(\tanh(\mathbf{W}_7[\tilde{v}_{w_{j,t}}; \tilde{c}_{j,t}; \tilde{v}_w]))}{\sum_{w' \in g_j} \exp(\tanh(\mathbf{W}_7[\tilde{v}_{w_{j,t}}; \tilde{c}_{j,t}; \tilde{v}_{w'}]))}, \quad (11)$$

where \mathbf{W}_7 is the trainable parameter and \tilde{v}_w is the embedding of an entity or a word node w in the current subgraph g_j . Note that we only copy entities or keywords from the predicted subgraph, which dramatically reduces the candidate set. Since subgraph generation has already considered local and global coherence, our candidate set is more meaningful and coherent. In Eq. 10, we use a dynamically learned coefficient $\lambda_{j,t}$ to control the combination between the two parts as:

$$\lambda_{j,t} = \sigma(\mathbf{w}_{gen}^\top [\tilde{v}_{w_{j,t}}; \tilde{c}_{j,t}] + b_{gen}), \quad (12)$$

where \mathbf{w}_{gen} and b_{gen} are trainable parameters. For each word, we add a binary indicator $d_{j,t}$ (0 for *copy* and 1 for *generate*) to provide a supervised signal for the generation and copy. In addition to the word prediction loss, we incorporate a supervised indicator loss with the binary cross entropy:

$$\mathcal{L}_{si} = - \sum_{j,t} d_{j,t} \log(\lambda_{j,t}) - (1 - d_{j,t}) \log(1 - \lambda_{j,t}). \quad (13)$$

Different from traditional copy mechanism, we utilize the loss in Eq. 13 to explicitly guide the switch between copy or generation during decoding, which can further enhance the local coherence via copying threading keywords from subgraphs.

4.3 Discussion and Learning

In this part, we present the model discussion and optimization.

Coherence. For local coherence, we utilize KG subgraphs as sentence plans, since KG subgraphs are tightly associated semantic structures, which naturally enforce the intra-sentence correlations of entities. Supervised copy mechanism (Section 4.2.2) further connects entities in sentences with the copied threading words from subgraphs. For global coherence, we utilize both subgraph- and node-level attention (Section 4.1.2) to enhance inter-sentence correlations of entities. Note that not all sentences include entity mentions, we set up a special sentence plan that directly calls the base

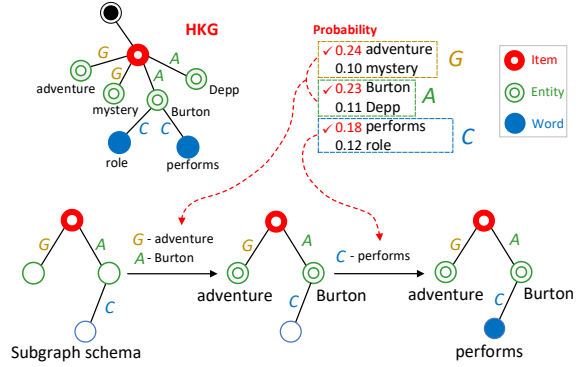


Figure 3: An illustrative example for subgraph generation.

decoder in Section 4.2.1 without copy mechanism. To our knowledge, there are seldom studies that consider both local and global coherence in text generation models. By incorporating KG data, our model provides a principled text planning approach for enhancing the two kinds of coherence of the generated text.

Personalization. Review generation requires to capture personalized user preference and writing styles. We explicitly model personalization through the contextual embeddings of users, items, and ratings during the decoding of subgraphs and words in Eq. 7-8 and Eq. 9-11, respectively. Another point is that HKG embedding (Section 4.1.1) has involved user-item interactions, which can capture user preference over items and associated attributes. In particular, given a $\langle user, item \rangle$ pair, we construct the HKG by involving one-hop entities linked with the item from KG and the associated keywords for entities. Such a method naturally enforces the personalized preference over item attributes for a given user.

Optimization. In our model, there are two sets of trainable parameters in subgraph generation and sentence generation, denoted by $\Theta^{(s)}$ and $\Theta^{(w)}$, respectively. First, we optimize $\Theta^{(s)}$ according to the predictive loss for subgraph schemas and nodes based on cross entropy loss using Eq. 7 and Eq. 8. And then, we optimize $\Theta^{(w)}$ according to the indicator loss in Eq. 13 and word prediction loss that sums negative likelihood of individual words using Eq. 10. We incrementally train the two parts, and fine-tune the shared or dependent parameters in different modules. For training, we directly use the real subgraphs and sentences to optimize the model parameters with Adam optimizer [18]. The same learning rate schedule in [42] is adopted in our training. In order to avoid overfitting, we adopt the dropout strategy with a ratio of 0.2. During inference, we apply our model in a pipeline way: we first infer the subgraph sequence, then predict the sentences using inferred subgraphs. For sentence generation, we apply the beam search method with a beam size of 8. We set the maximum generation lengths for subgraph and sentence sequence to be 5 and 50, respectively.

5 EXPERIMENTS

In this section, we conduct the evaluation experiments for our approach on the review generation task. We first set up the experiments, and then report the results and detailed analysis.

Table 1: Statistics of our datasets after preprocessing.

Dataset		Electronic	Book	Movie
Review	#Users	50,473	71,156	47,096
	#Items	12,352	25,045	21,125
	#Reviews	221,722	853,427	1,152,925
Knowledge Graph	#Entities	30,310	105,834	247,126
	#Relations	30	12	16
	#Triplets	129,254	300,416	1,405,348

5.1 Experimental Setup

5.1.1 Construction of the Datasets. We use three datasets from different domains for evaluation, including AMAZON Electronic, Book datasets [16], and IMDB Movie dataset [1]. We remove users and items occurring fewer than five times, discard reviews containing more than 100 tokens and only keep the top frequent 30,000 words in vocabulary for the three datasets. All the text is processed with the procedures of lowercase and tokenization using NLTK. In order to obtain KG information for these items, we adopt the public KB4Rec [48] dataset to construct the aligned linkage between Freebase [12] (March 2015 version) entities and online items from the three domains. Starting with the aligned items as seeds, we include their one-hop neighbors from Freebase as our KG data. We keep the reverse relations and remove the triples with non-Freebase strings. Note that we only retain the items linked with Freebase entities in our datasets. The statistics of three datasets after preprocessing are summarized in Table 1. Furthermore, for each domain, we randomly split it into training, validation and test sets with a ratio of 8:1:1. To construct the entity-word links in HKG, we employ the Stanford NER package to identify entity mentions in review text, and extract aspect words by following [32]. We select 489, 442 and 440 aspect words, frequently co-occurring with entity mentions in review sentences, for the three domains, respectively. The user-item links in HKG can be constructed according to user-item interactions in review datasets. Finally, we extract the top 30, 30, and 35 frequent subgraph schemas using gSpan algorithm [44] for the three domains, respectively.

5.1.2 Baseline Methods. We consider the following baselines as comparison:

- *Attr2Seq* [9]: It adopts an attention-enhanced attribute-to-sequence framework to generate reviews with input attributes.
- *A2S+KG*: We incorporate the KG embeddings of items as additional inputs into *Attr2Seq*.
- *ExpanNet* [32]: It adopts an encoder-decoder architecture to generate personalized reviews by introducing aspect words.
- *A-R2S* [30]: It employs a reference-based Seq2Seq model with aspect-planning in order to cover different aspects.
- *A-R2S+KG*: We incorporate the KG entities of items as external inputs into *A-R2S*.
- *SeqGAN* [46]: It regards the generative model as a stochastic parameterized policy and uses Monte Carlo search to approximate the state-action value. The discriminator is a binary classifier to evaluate the sequence and guide learning process of the generator.
- *LeakGAN* [15]: It is designed for long text generation through the leaked mechanism. The generator is built upon a hierarchical

reinforcement learning architecture and the discriminator is a CNN-based feature extractor.

- *ACF* [22]: It decomposes the review generation process into three different stages by designing an aspect-aware coarse-to-fine generation model. The aspect semantics and syntactic characteristics are considered in the process.

- *KCGNN* [21]: It proposes a KG-enhanced review generation model based on capsule graph neural network for capturing user preference at both aspect and word levels.

- *PHVM* [38]: It adopts a planning-based hierarchical variational model to capture the inter-sentence coherence of texts.

Among these baselines, *Attr2Seq*, *ExpanNet*, *A-R2S*, *ACF* and *KCGNN* are five recently proposed review generation models; *SeqGAN* and *LeakGAN* are GAN-based text generation models; *A2S+KG* and *A-R2S+KG* incorporate the pre-trained KG item embeddings from DistMult [45] and KG entities of items, respectively; *PHVM* is the state-of-the-art text planning model. We implement it by transferring KG into a list of $\langle relation, entity \rangle$ pairs (e.g., $\langle actor, Burton \rangle$) about items (e.g., movie *Sleepy*) as inputs. We employ validation set to optimize the parameters in each method.

Evaluation Metrics. To evaluate the performance of review generation, we adopt two automatic *generation metrics*, including BLEU-1/4 and ROUGE-1/2/L. BLEU [34] measures the ratios of the co-occurrences of n -grams between the generated and real reviews; ROUGE [25] counts the overlapping n -grams between generated and real reviews. Furthermore, to evaluate the coherence of generated reviews, we adopt two automatic *coherence metrics*, including Sen-Sim proposed in [19] (measuring discourse coherence as an average cosine similarity between any two sentences from the discourse based on sentence embeddings from BERT [8]) and Entity Co-occurrence Ratio (abbreviated as *ECR*, modified based on BLEU-2 and computing the ratio of co-occurrences of entity pairs between generated and real reviews). Compared with [19] which represents the sentence embedding as the mean of embeddings of words in the sentence, BERT adds a special token “[CLS]” as the first token of every sentence and the final representation of this token is used as the sentence embedding. We also try other models (e.g., Word2Vec and ELMo) to acquire sentence embeddings. These models achieve similar results as BERT.

5.2 Main Results

Table 2 presents the results of different methods on the review generation task.

First, by incorporating the KG embeddings or KG entities, *A2S+KG* and *A-R2S+KG* achieve better results for generation metrics while worse results for coherence metrics than original *Attr2Seq* and *A-R2S*. This observation implies that, although KG data is useful for text generation, we should more carefully incorporate it considering the text coherence. Besides, among the GAN-based methods, *LeakGAN* gives better results for both kinds of metrics than *SeqGAN*. A major reason is that *LeakGAN* is specially designed for generating long text, while *SeqGAN* may not be effective in capturing long-range semantic dependency in text generation.

Second, *ACF*, *KCGNN* and *PHVM* overall outperform most of baselines for both kinds of metrics. *ACF* adopts a coarse-to-fine three-stage generation process by considering aspect semantics

Table 2: Performance comparisons of different methods for automatic review generation under three domains. “**” denotes the improvement is statistically significant compared with the best baseline (t-test with p-value < 0.05). “-” denotes this metric is not applicable to this method, since the generated text contains very few entity mentions.

Datasets	Models	Coherence		Generation				
		Sen-Sim	ECR	BLEU-1	BLEU-4	ROUGE-1	ROUGE-2	ROUGE-L
ELECTRONIC	Attr2Seq	0.671	-	24.28	0.88	0.263	0.043	0.214
	A2S+KG	0.652	1.63	25.62	0.93	0.271	0.049	0.223
	ExpanNet	0.653	-	26.56	0.95	0.290	0.052	0.262
	A-R2S	0.667	-	27.04	1.15	0.309	0.065	0.279
	A-R2S+KG	0.650	7.01	29.28	1.69	0.322	0.067	0.288
	SeqGAN	0.625	-	25.18	0.84	0.265	0.043	0.220
	LeakGAN	0.666	-	25.66	0.92	0.267	0.050	0.236
	ACF	0.686	-	28.22	1.04	0.315	0.066	0.280
	KCGNN	0.688	16.50	<u>29.88</u>	1.83	0.323	<u>0.078</u>	0.295
	PHVM	<u>0.690</u>	<u>17.56</u>	29.40	<u>1.93</u>	<u>0.325</u>	0.072	<u>0.301</u>
	CETP	0.707*	20.85*	31.51*	3.12*	0.338*	0.084*	0.312*
BOOK	Attr2Seq	0.677	-	26.93	1.14	0.259	0.047	0.223
	A2S+KG	0.672	2.25	27.69	1.42	0.268	0.053	0.236
	ExpanNet	0.708	-	26.52	1.49	0.301	0.054	0.271
	A-R2S	0.695	-	28.34	1.82	0.318	0.075	0.283
	A-R2S+KG	0.671	9.07	29.00	2.06	0.321	0.077	0.295
	SeqGAN	0.633	-	26.89	1.24	0.255	0.053	0.246
	LeakGAN	0.663	-	28.79	1.94	0.274	0.060	0.285
	ACF	0.715	-	28.96	2.11	0.317	0.068	0.291
	KCGNN	0.733	16.66	<u>30.66</u>	<u>3.08</u>	<u>0.332</u>	0.080	0.306
	PHVM	<u>0.740</u>	<u>18.79</u>	29.33	2.46	0.319	<u>0.085</u>	<u>0.307</u>
	CETP	0.761*	23.89*	31.93*	3.89	0.341*	0.095*	0.317*
MOVIE	Attr2Seq	0.629	-	26.57	1.55	0.271	0.050	0.222
	A2S+KG	0.619	14.96	27.02	1.67	0.278	0.053	0.235
	ExpanNet	0.651	-	27.93	2.00	0.310	0.063	0.266
	A-R2S	0.649	-	29.01	2.12	0.314	0.074	0.306
	A-R2S+KG	0.617	20.06	30.05	2.95	0.325	0.077	0.313
	SeqGAN	0.641	-	27.07	1.63	0.274	0.052	0.221
	LeakGAN	0.672	-	28.10	2.29	0.302	0.064	0.271
	ACF	0.709	-	29.46	2.40	0.322	0.076	0.303
	KCGNN	0.766	23.34	<u>31.39</u>	<u>3.55</u>	<u>0.341</u>	0.096	0.327
	PHVM	<u>0.770</u>	<u>24.70</u>	30.29	3.02	0.331	<u>0.098</u>	<u>0.328</u>
	CETP	0.794*	28.96*	32.37*	4.39*	0.353*	0.114*	0.345*

and syntactic patterns, and KCGNN is a KG-enhanced generation model for capturing user preference on KG attributes. It shows that both aspect semantics and KG information are helpful for review generation, especially KG information. As the most relevant comparison with our model, the recent proposed PHVM yields the best performance among all baselines. It introduces KG entities and verbalizes coherent sentences conditioned on attribute-level planning (a sequence of entity groups).

Finally, we compare the proposed CETP with the baseline methods. It is clear to see that CETP performs better than all the baselines by a large margin. The major difference between our model and baselines lies in that we design a text planning mechanism based on KG subgraphs in the generation process, thus simultaneously improving the global and local coherence of texts. PHVM lacks

the modeling of multi-grained correlations between entity groups, and also neglects the intrinsic structure of an entity group. While, other baselines do not explicitly model the coherence of text or incorporate external KG data.

5.3 Detailed Analysis

Next, we construct detailed analysis experiments on our model. We only report the results on MOVIE dataset due to similar findings in three datasets. We select the two best baselines *KCGNN* and *PHVM* as comparisons.

5.3.1 Ablation Analysis. Our model has three novel designs: HKG incorporation, subgraph-based text planning and supervised copy mechanism. Table 3 shows the results if we ablate these designs.

Table 3: Ablation analysis on MOVIE dataset.

Models	ECR	BLEU-1	ROUGE-1
CETP	28.96	32.37	0.342
w/o HKG, w KG	28.91	31.93	0.335
w/o SA	25.60	30.96	0.317
w/o NA	26.00	31.34	0.330
w/o Copy	25.20	31.03	0.326

Here, we consider four variants for comparison: (1) *w/o HKG*, *w KG* keeping original KG links while removes the interaction and co-occurrence links in HKG; (2) *w/o SA* removing subgraph-level attention (Eq. 5) in subgraph-based text planning; (3) *w/o NA* removing node-level attention (Eq. 6) in subgraph-based text planning; (4) *w/o Copy* removing the supervised copy mechanism during generating words (Section 4.2.2).

In Table 3, we can see that removing user and word nodes (including the associated links) gives a worse result than CETP, which shows that user-item interaction and entity-word co-occurrence are useful to review generation in terms of capturing user preference and entity-keyword association. Second, variants dropping the subgraph- and node-level attention are worse than CETP, especially dropping the subgraph-level attention. This shows that our model benefits from the subgraph-based text planning, which improves the process of content selection, arrangement, and order. Finally, removing the supervised copy mechanism also greatly declines the final performance of our model. In our model, the supervised copy mechanism explicitly guides the switch between generation and copy by selecting highly related entities or words from the planned subgraph, which has a significant effect on the final coherence performance.

5.3.2 Human Evaluation. Above, we have performed automatic evaluation experiments for our model and baselines. For text generation models, it is important to construct human evaluation for further effectiveness verification.


Following previous work [22, 30], we also conduct human evaluation on the generated reviews. We randomly choose 200 samples from test set. A sample contains the input contexts (*i.e.*, user, item and rating), and the texts generated by different models. Three experienced e-commerce users were asked to score the texts with respect to four dimensions of coherence, relevance, fluency and informativeness. *Coherence* evaluates how content is coherent considering both intra- and inter-sentence correlation [38]. *Relevance* measures how relevant the generated review is according to the input contexts. *Fluency* measures how likely the generated review is produced by human. *Informativeness* means that how much the generated text provides specific or different information.

The scoring mechanism adopts a 5-point Likert scale [24], ranging from 1-point (“very terrible”) to 5-point (“very satisfying”). We further average the three scores from the three human judges over the 200 inputs for each method. The results in Table 4 show that CETP produces more coherent texts, which further verifies the effectiveness of the subgraph-based text planning. It is also worth noting that CETP performs better in terms of fluency, since KG subgraphs

Table 4: Human evaluation on MOVIE dataset.

Metrics	Gold	CETP	KCGNN	PHVM
Coherence	4.22	<u>3.51</u>	3.10	3.18
Relevance	4.22	<u>3.42</u>	3.34	3.33
Fluency	4.54	<u>3.49</u>	3.15	3.08
Informativeness	4.33	2.97	2.95	<u>3.03</u>

enforce more fluent and logical expressions. The informativeness of CETP is slightly worse than PHVM. It is possibly because PHVM applies a more greedy strategy to copy entities from KG while our model adopts a more conservative strategy to incorporate highly relevant KG entities. The Cohen’s kappa coefficients for the four factors are 0.78, 0.71, 0.75 and 0.69, respectively, indicating a high agreement between the three human judges.

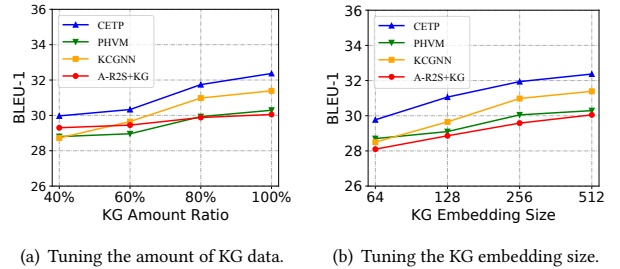











**Figure 4: Performance tuning on MOVIE dataset.**

5.4 Performance Sensitivity Analysis


In our paper, we have shown that KG data is very helpful to our model for both generation and coherence metrics. Here, we would examine how it affects the final performance.

5.4.1 Tuning the amount of KG data. The amount of available KG information directly affects the performance of various KG-enhanced methods. Here we examine how different methods perform with the varying amount of KG data. We select A-R2S+KG, KCGNN and PHVM as comparison methods. We take 40%, 60%, 80% and 100% of the available KG data to generate four new KG training datasets, respectively. We utilize them together with the original review data to train our model and report the performance on the test set. The KG test set is fixed as original. As shown in Figure 4(a), the performance of CETP gradually improves with the increasing of KG data, and CETP has achieved a consistent improvement over the other baselines with more than 40% KG data.


5.4.2 Tuning the KG embedding size. For KG data, the embedding size is an important parameter to tune in real applications, which restricts the capacity of encoding KG information. Here, we vary the embedding size in the set {64, 128, 256, 512} and construct a similar evaluation experiment as that for the amount of KG data. As we can see from Figure 4(b), CETP is substantially better than the other baselines for all the four embedding sizes, which indicates the effectiveness of our model in extracting and encoding useful

Model													MAE	RMSE	
Gold	22.89%	13.15%	12.06%	8.28%	4.91%	3.17%	3.07%	2.78%	2.46%	1.82%	1.84%	1.58%	1.14%	-	-
CETP	27.87%	13.73%	12.31%	16.14%	4.29%	4.03%	3.36%	2.03%	1.56%	1.16%	1.04%	1.43%	0.98%	0.0145	0.0264
PHVM	19.10%	24.46%	11.21%	15.23%	5.36%	2.02%	1.97%	2.19%	1.13%	0.44%	0.97%	1.00%	0.65%	0.0237	0.0392

(a) Subgraph schema visualization and distribution

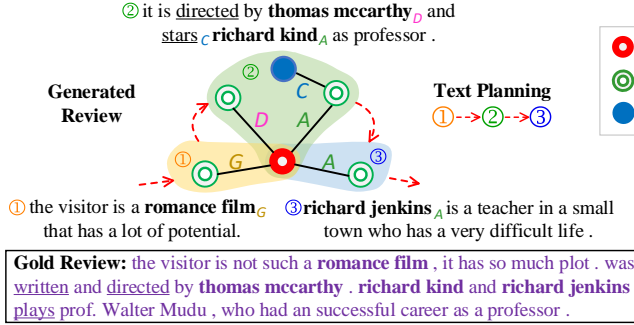

(b) Reviews for movie “The Visitor”

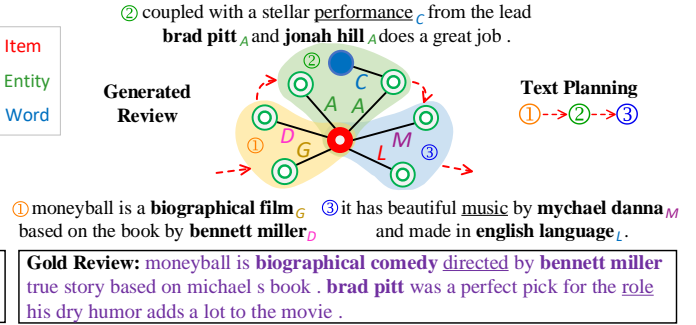

(c) Reviews for movie “Moneyball”

Figure 5: Subgraph schema visualization and sample reviews generated by CETP on MOVIE dataset. The two reviews are about the movies “The Visitor” and “Moneyball” from the same user. The capital letters A, G, D, L, M and C denote the relations of actor, genre, director, language, music and co-occurrence, respectively.

KG information. Another observation is that the performance of CETP gradually increases and the change is relatively stable.

5.5 Qualitative Analysis

Previous experiments have demonstrated the effectiveness of our model in generating semantically coherent review text. In this part, we qualitatively analyze why our model performs well.

In Figure 5(a), we present the top 13 frequent subgraph schemas and their distributions from gold reviews and generated reviews of CETP and PHVM. As we can see, the distribution of subgraph schemas from CETP is closer to the real distribution (smaller MAE and RMSE results) than PHVM, indicating the effectiveness of our text planning mechanism. Furthermore, Figure 5(b) and 5(c) present two movie reviews and corresponding text plans generated by CETP for a sample user. Note that, in Figure 5(b) and 5(c), each generated sentence is verbalized from a generated subgraph (on colored background), and they are labelled with the same number. The number represent the order of the subgraph and sentence in their sequence generated by our model.

As we can see, for global coherence, CETP can capture inter-sentence entity distributions and generate similar aspect and content sketches compared with real reviews (e.g., *romance film (genre) → thomas mccarthy (director) → richard jenkins (actor)*), due to the effective text planning mechanism based on KG subgraphs. For local coherence, the sentences are well verbalized through the intra-sentence correlation between entities in subgraphs (e.g., *thomas mccarthy* and *richard kind*) and the connection of threading words (e.g., *stars* and *performance*). Besides, CETP can capture the preferred relations and entities by the user about the two movies (e.g., *genre* and *romance film*). This implies that the user-augmented KG data can provide important semantics for learning user preference.

6 CONCLUSION

In this paper, we have presented a novel coherence-enhanced text planning model for review generation. Our core idea is to utilize KG subgraphs and their correlations to enhance local and global coherence, respectively. KG subgraphs characterize the semantic structure of intra-sentence entities which can naturally enforce the local coherence since entities are tightly associated in subgraphs, while subgraph sequence can capture complicated inter-sentence correlations of entities to improve global coherence. The two kinds of coherence have been modeled in a unified, principled text planning approach based on the HKG. Furthermore, we developed a supervised copy mechanism to verbalize sentence based on KG subgraphs for further enhancing local coherence via copied threading words. We have constructed extensive experiments on three real-world review datasets. The experimental results have demonstrated the effectiveness of our model on review generation task in a series of evaluation metrics.

As future work, we will consider more kinds of external knowledge (e.g., WordNet) and investigate how our model could be applied to other domains.

ACKNOWLEDGEMENT

This work was partially supported by the National Natural Science Foundation of China under Grant No. 61872369 and 61832017, Beijing Academy of Artificial Intelligence (BAAI) under Grant No. BAAI2020ZJ0301, Beijing Outstanding Young Scientist Program under Grant No. BJJWZYJH012019100020098, the Fundamental Research Funds for the Central Universities, and the Research Funds of Renmin University of China under Grant No.18XNLG22 and 19XNQ047. Xin Zhao is the corresponding author.

REFERENCES

- [1] Amazon. 2020. IMDb (Internet Movie Database). <https://www.imdb.com>.
- [2] Reinald Kim Amplayo, Seonjae Lim, and Seung-won Hwang. 2018. Entity Commonsense Representation for Neural Abstractive Summarization. In *NAACL*. 697–707.
- [3] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2015. Neural Machine Translation by Jointly Learning to Align and Translate. In *ICLR*.
- [4] Liad Bareket-Bojmel, Simone Moran, and Golan Shahrar. 2016. Strategic self-presentation on Facebook: Personal motives and audience response to online behavior. *Computers in Human Behavior* 55 (2016), 788–795.
- [5] Alberto Bartoli, Andrea De Lorenzo, Eric Medvet, and Fabiano Tarlao. 2016. Your paper has been accepted, rejected, or whatever: Automatic generation of scientific paper reviews. In *International Conference on Availability, Reliability, and Security*. Springer, 19–28.
- [6] Regina Barzilay and Mirella Lapata. 2005. Modeling Local Coherence: An Entity-Based Approach. In *ACL*. 141–148.
- [7] Hercules Dalanis and Eduard H. Hovy. 1993. Aggregation in Natural Language Generation. In *EWNLG (Lecture Notes in Computer Science)*, Vol. 1036. Springer, 88–105.
- [8] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *NAACL*. 4171–4186.
- [9] Li Dong, Shaohan Huang, Furu Wei, Mirella Lapata, Ming Zhou, and Ke Xu. 2017. Learning to Generate Product Reviews from Attributes. In *EACL*. 623–632.
- [10] Pablo Ariel Duboué and Kathleen R. McKeown. 2003. Statistical Acquisition of Content Selection Rules for Natural Language Generation. In *EMNLP*.
- [11] Micha Elsner, Joseph L. Austerweil, and Eugene Charniak. 2007. A Unified Local and Global Model for Discourse Coherence. In *NAACL*. 436–443.
- [12] Google. 2016. Freebase Data Dumps. <https://developers.google.com/freebase/data>.
- [13] Barbara J. Grosz, Aravind K. Joshi, and Scott Weinstein. 1995. Centering: A Framework for Modeling the Local Coherence of Discourse. *Comput. Linguistics* 21, 2 (1995), 203–225.
- [14] Camille Guinaudeau and Michael Strube. 2013. Graph-based Local Coherence Modeling. In *ACL*. 93–103.
- [15] Jiaxian Guo, Sidi Lu, Han Cai, Weinan Zhang, Yong Yu, and Jun Wang. 2018. Long Text Generation via Adversarial Training with Leaked Information. In *AAAI*. 5141–5148.
- [16] Ruining He and Julian McAuley. 2016. Ups and Downs: Modeling the Visual Evolution of Fashion Trends with One-Class Collaborative Filtering. In *WWW*. 507–517.
- [17] Xinyu Hua and Lu Wang. 2019. Sentence-Level Content Planning and Style Specification for Neural Text Generation. In *EMNLP-IJCNLP*. 591–602.
- [18] Diederik P. Kingma and Jimmy Ba. 2015. Adam: A Method for Stochastic Optimization. In *ICLR*.
- [19] Mirella Lapata and Regina Barzilay. 2005. Automatic Evaluation of Text Coherence: Models and Representations. In *IJCAI*. 1085–1090.
- [20] Jiwei Li and Eduard H. Hovy. 2014. A Model of Coherence Based on Distributed Sentence Representation. In *EMNLP*, Alessandro Moschitti, Bo Pang, and Walter Daelemans (Eds.). 2039–2048.
- [21] Junyi Li, Siqing Li, Wayne Xin Zhao, Gaole He, Zhicheng Wei, Nicholas Jing Yuan, and Ji-Rong Wen. 2020. Knowledge-Enhanced Personalized Review Generation with Capsule Graph Neural Network. In *CIKM*. ACM, 735–744.
- [22] Junyi Li, Wayne Xin Zhao, Ji-Rong Wen, and Yang Song. 2019. Generating Long and Informative Reviews with Aspect-Aware Coarse-to-Fine Decoding. In *ACL*. 1969–1979.
- [23] Lei Li, Yongfeng Zhang, and Li Chen. 2020. Generate Neural Template Explanations for Recommendation. In *CIKM*, Mathieu d’Aquin, Stefan Dietze, Claudia Hauff, Edward Curry, and Philippe Cudré-Mauroux (Eds.). ACM, 755–764.
- [24] Rensis Likert. 1932. A technique for the measurement of attitudes. *Archives of psychology* (1932).
- [25] Chin-Yew Lin. 2004. ROUGE: A Package for Automatic Evaluation of Summaries. In *Text Summarization Branches Out*.
- [26] Annie Louis and Ani Nenkova. 2012. A Coherence Model Based on Syntactic Patterns. In *EMNLP-CoNLL*. 1157–1168.
- [27] Inderjeet Mani, Eric Bloedorn, and Barbara Gates. 1998. Using cohesion and coherence models for text summarization. In *Intelligent Text Summarization Symposium*. 69–76.
- [28] Tomás Mikolov, Ilya Sutskever, Kai Chen, Gregory S. Corrado, and Jeffrey Dean. 2013. Distributed Representations of Words and Phrases and their Compositionality. In *NIPS*. 3111–3119.
- [29] Amit Moryossef, Yoav Goldberg, and Ido Dagan. 2019. Step-by-Step: Separating Planning from Realization in Neural Data-to-Text Generation. In *NAACL*, Jill Burstein, Christy Doran, and Thamar Solorio (Eds.). 2267–2277.
- [30] Jianmo Ni, Jiacheng Li, and Julian J. McAuley. 2019. Justifying Recommendations using Distantly-Labeled Reviews and Fine-Grained Aspects. In *EMNLP-IJCNLP*. 188–197.
- [31] Jianmo Ni, Zachary C. Lipton, Sharad Vikram, and Julian McAuley. 2017. Estimating Reactions and Recommending Products with Generative Models of Reviews. In *IJCNLP*. 783–791.
- [32] Jianmo Ni and Julian McAuley. 2018. Personalized Review Generation By Expanding Phrases and Attending on Aspect-Aware Representations. In *ACL*. 706–711.
- [33] Zheng-Yu Niu, Hua Wu, Haifeng Wang, et al. 2019. Knowledge Aware Conversation Generation with Explainable Reasoning over Augmented Graphs. In *EMNLP-IJCNLP*. 1782–1792.
- [34] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a Method for Automatic Evaluation of Machine Translation. In *ACL*. 311–318.
- [35] Daraksha Parveen, Mohsen Mesgar, and Michael Strube. 2016. Generating Coherent Summaries of Scientific Articles Using Coherence Patterns. In *EMNLP*. 772–783.
- [36] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners. *OpenAI Blog* 1, 8 (2019), 9.
- [37] Lei Sha, Lili Mou, Tianyu Liu, Pascal Poupart, Sujian Li, Baobao Chang, and Zhifang Sui. 2018. Order-Planning Neural Text Generation From Structured Data. In *AAAI*. 5414–5421.
- [38] Zhihong Shao, Minlie Huang, Jiangtao Wen, Wenfei Xu, and Xiaoyan Zhu. 2019. Long and Diverse Text Generation with Planning-based Hierarchical Variational Model. In *EMNLP-IJCNLP*. 3255–3266.
- [39] Ilya Sutskever, Oriol Vinyals, and Quoc V. Le. 2014. Sequence to Sequence Learning with Neural Networks. In *NIPS*. 3104–3112.
- [40] Aynaz Taheri, Kevin Gimpel, and Tanya Y. Berger-Wolf. 2019. Learning to Represent the Evolution of Dynamic Graphs with Recurrent Models. In *WWW*. 301–307.
- [41] Rakshit Trivedi, Mehrdad Farajtabar, Prasenjeet Biswal, and Hongyuan Zha. 2019. DyRep: Learning Representations over Dynamic Graphs. In *ICLR*.
- [42] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is All you Need. In *NeurIPS*. 5998–6008.
- [43] Sam Wiseman, Stuart M. Shieber, and Alexander M. Rush. 2017. Challenges in Data-to-Document Generation. In *EMNLP*. 2253–2263.
- [44] Xifeng Yan and Jiawei Han. 2002. gSpan: Graph-Based Substructure Pattern Mining. In *ICDM*. IEEE Computer Society, 721–724.
- [45] Bishan Yang, Wen-tau Yih, Xiaodong He, Jianfeng Gao, and Li Deng. 2015. Embedding Entities and Relations for Learning and Inference in Knowledge Bases. In *ICLR*.
- [46] Lantao Yu, Weinan Zhang, Jun Wang, and Yong Yu. 2017. SeqGAN: Sequence Generative Adversarial Nets with Policy Gradient. In *AAAI*. 2852–2858.
- [47] Hongyu Zang and Xiaojun Wan. 2017. Towards Automatic Generation of Product Reviews from Aspect-Sentiment Scores. In *INLG*. 168–177.
- [48] Wayne Xin Zhao, Gaole He, Kunlin Yang, Hongjian Dou, Jin Huang, Siqui Ouyang, and Ji-Rong Wen. 2019. Kb4rec: A data set for linking knowledge bases with recommender systems. *Data Intelligence* 1, 2 (2019), 121–136.