

---

# NEGATIVE SELECTION ALGORITHM RESEARCH AND APPLICATIONS IN THE LAST DECADE: A REVIEW

---

**Kishor Datta Gupta**  
University of Memphis  
Tennessee, USA  
kgupta1@memphis.edu

**Dipankar Dasgupta**  
University of Memphis  
Tennessee, USA  
ddasgupt@memphis.edu

December 10, 2021

## ABSTRACT

The Negative selection Algorithm (NSA) is one of the important methods in the field of Immunological Computation (or Artificial Immune Systems). Over the years, some progress was made which turns this algorithm (NSA) into an efficient approach to solve problems in different domain. This review takes into account these signs of progress during the last decade and categorizes those based on different characteristics and performances. Our study shows that NSA's evolution can be labeled in four ways highlighting the most notable NSA variations and their limitations in different application domains. We also present alternative approaches to NSA for comparison and analysis. It is evident that NSA performs better for nonlinear representation than most of the other methods, and it can outperform neural-based models in computation time. We summarize NSA's development and highlight challenges in NSA research in comparison with other similar models.

**Keywords** Negative Selection Algorithm, Artificial Immune System, Immunological Computation, Negative Data Representation.

## 1 Introduction

Negative Selection Algorithm (NSA) is a bio-inspired approach and a powerful computational tool for some applications where the decision lies in the complementary space of positive profile (data). Existing works showed that NSAs are beneficial for one class classifications, outlier detection, fault and intrusion detection problems. Inspired by the human immune system, NSA variations emerged with different representation, distance measures, coverage estimations for different applications over last three decades. We briefly reviewed these and compared NSA with other ML models such as neural network-based techniques, discussed their advantages and limitations with directions in future research. NSA method is most compared with one class support vector machine (OCSVM). OCSVM[24] and NSA both can work with one class of data. But NSA can work with high dimension data where OCSVM performance fail when data start to become non linear. Some similar other known approaches are Isolation forest (IF) [115], Local outlier factors (LOF) [19], Minimum Co-variance Method (MCM) [78], Gaussian Mixture Model (GMM)[136], Dirichlet Process Mixture Model (DPMM)[18], Kernel Density Estimator (KDE)[123], Robust KDE[96], GWR-Netwok[122], Deep Support Vector Data Description (SVDD), Angle based Outlier Detection (ABOD)[101], Subspace Outlier Detection (SOD) [100], Deep Auto Encoder based Methods[75], Generative Adversarial Net Based approaches (eg: [108, 138]). In this paper, we compared these methods with NSA approaches for outlier detection data-sets and also used a synthetic data set to visualize the comparison.

Contributions of this survey paper are:

- A brief study of NSA research summary for last 30 years.
- Applications of NSA in the last decade.
- A visual comparison of NSA with similar algorithms.

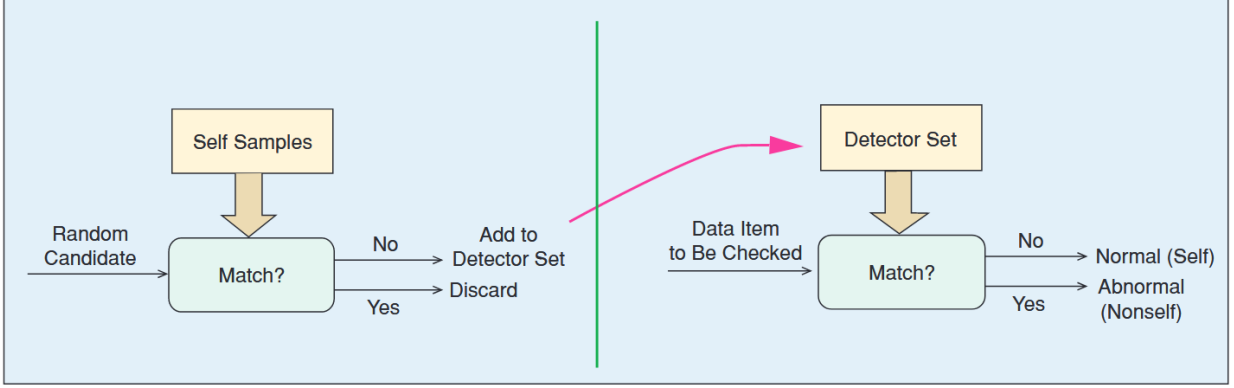


Figure 1: The basic Negative Selection Algorithm (NSA) [29] similar to any two-phase supervised learning algorithms. The left diagram shows detector generation in the complementary space (training phase) and the right illustrates the use of detectors (testing phase).

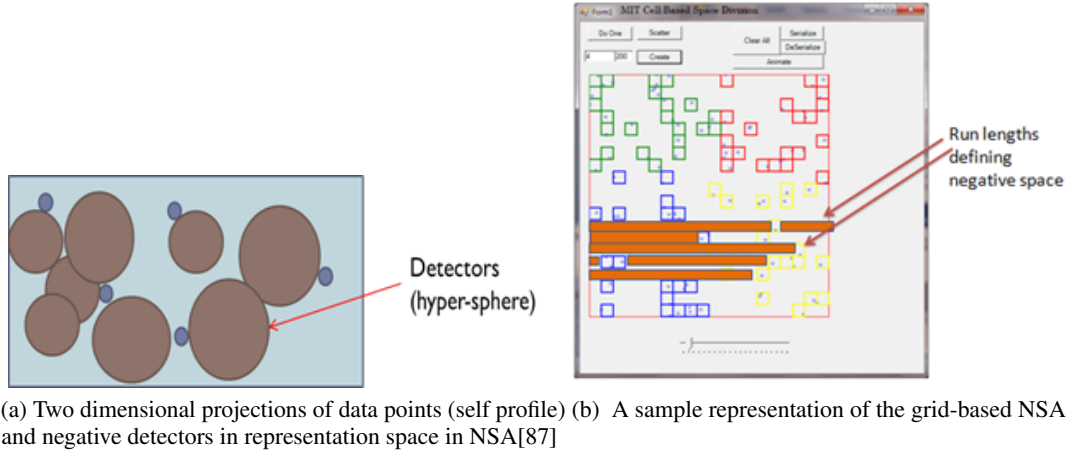


Figure 2: Two different representation of NSA

Following this section, we give a short overview of NSA and related review works. In section 3, we discuss different variants of NSA; NSA applications are discussed in the section 4. The section 5 discusses the alternatives for NSA with some empirical comparisons.

## 2 Immunological Computation:

Immunological Computation a.k.a. Artificial Immune System (AIS) is inspired by the human immune system (HIS) mechanism and utilizes to solve computational problems[36]. One of the fundamental aspects of the HIS is self/non-self discrimination. The Human immune system can identify which cells are own (self) and can differentiate foreign entities (non-self)[149]. Therefore, it can strengthen its defense versus the adversarial rather of hurting the self cell. The most popular AIS research methods include the Negative Selection Algorithm (NSA), clonal selection, immune network theory, danger theory, and positive selection [38].

### 2.1 Basic concepts of NSA

The NSA is one of the most studied and researched algorithms, particularly for anomaly detection[87]. In 1994 [52], introduced NSA for solving computer security problems. As described in figure 1, in traditional NSA implementations, detectors are generated randomly in the representation space. If these detectors are not matched with self (positive) data, they are stored as negative detectors. These detectors later use to classify data from self and non-self. Figure 2

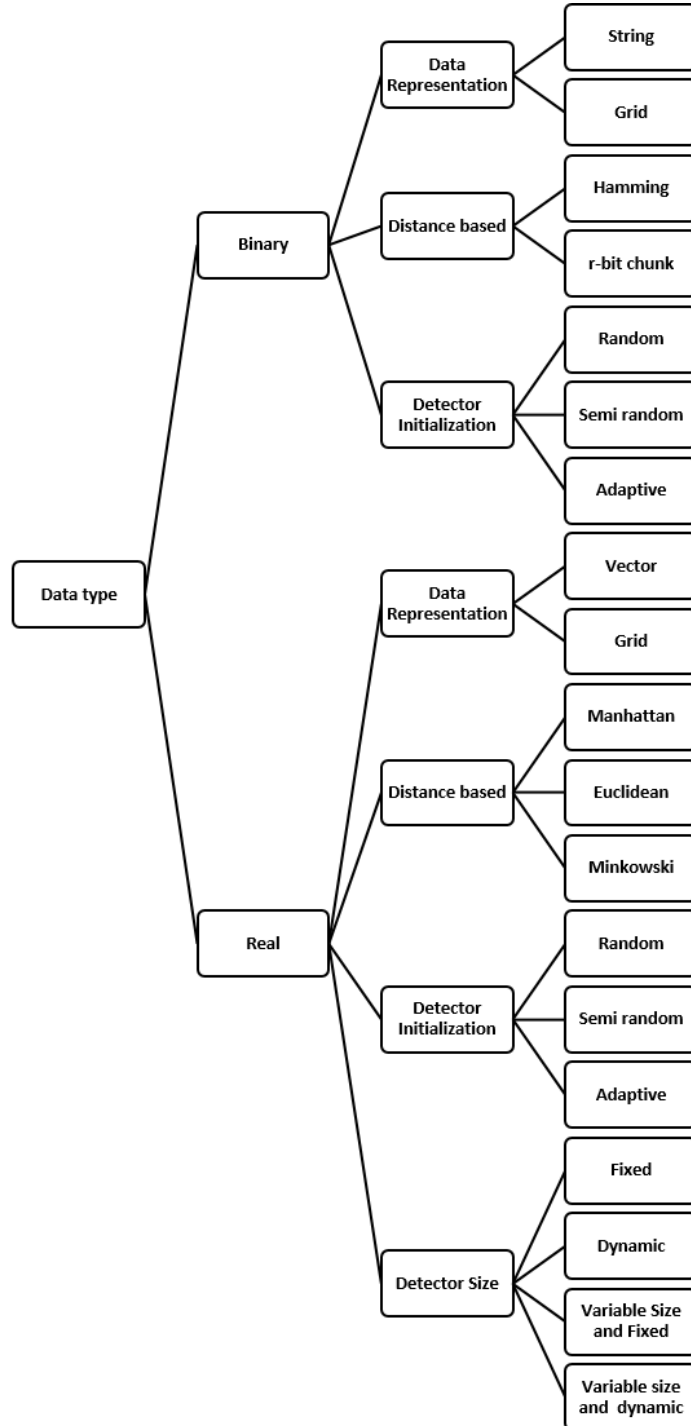


Figure 3: Classifications of NSA

illustrates two different representation of NSA, in particular, Figure 2(a) real-valued V-detector based NSA and Figure 2(b) Grid-Based NSA, detailed discussion of these approaches covered in a later section.

### 2.1.1 NSA Terminology

- Self: Representation of a data class. NSA will identify a given data is from self class or not. This self data can be a set of real values or a set binary value, or a string.
- Detector: A set of data which matched with non-self data.
- Distance Measure/Matching rules: The formula/method used to measure the distance between two data points in representation space. Commonly in the NSA, it was used to measure the detector's distance from a data point. It is also known as matching rules, primarily when data is represented in string representation. Examples are Euclidean distance, Manhattan distance, R-bit chunk matching, hamming Distance, etc.

Most of these terminology and other necessary mathematics related to distance measures have been detailed by the [87] with a statistical explanation.

Based on feature value, we can have two kinds of NSA: the binary NSA (BNSA) and the Real-Value NSA (RNSA). Real-value NSA can be variable size or constant size. The BNSA use r-contiguous bits(rcb), r-chunks, landscape-affinity matching, Hamming distance to match the similarity, where RNSA uses mostly derivations of Euclidean distances. One example of a variable size detector or V-detector, V-detector's aim, deals with constant size detectors' drawbacks. In this algorithm, the size radius of detectors is changing from one to the others[88]. In figure 3, we illustrated the different classifications of NSA. The NSA detectors can be represented by string for (binary) BNSA or by a vector in multidimensional space for real values. Later, grid-based representations were also introduced by Yang[161]. A variation of grid representation [173] is known as matrix representation also introduced as an additional approach. Detector initialization was random in most of the early variations of NSA. Later, researchers tried some heuristic methods to use pseudo-randomness and some evolutionary computation-based adaptiveness technique to initialize detector position. Detector size can be fixed or can change through the generation process. Also, the different detector can take the detector's variable size, and these sizes can be dynamically changes throughout the generation process.

## 2.2 Prior NSA Review Reports

Dasgupta[30] first reviewed NSA as a part of immunity based system, and later [34] discusses NSA for industrial application. In 2000, another paper[40] also review NSA application as a part of artificial immune system and in 2003 other researchers[36, 62] also did similar study. Ji[87] provided a organized review of NSA. In 2014, Lasisi[103] did a survey on the epistemology of generating NSA detectors. Ramdane[133] provided a brief review of recent NSA improvements and its intrusion detection applications. Ahsan[4] wrote a brief report on NSA based works only for cloud security. Most of the other works were mostly outdated or focused on application specific NSA works.

## 3 Evolution's of NSA

The evolution of the NSA can be divided into four periods. In the early period, NSA was limited by string matching; researchers were focused on using different binary matching techniques. After Real Value NSA was introduced, researchers focused on detector size and position. Next was the adaptive methods to improve NSA accuracy and reduce computational cost. In the current period, research was getting more focused on combining NSA with another algorithm to customize NSA focusing specific application area.

### 3.1 String-based NSA (1986-2002)

After Forrest[52] introduced NSA for solving computer security problems, there were several works done by other researchers[32, 33, 42, 34, 98] but mostly these works had some common characteristics, such as:

- Detectors were generated randomly.
- Detectors are string.
- Self data were encoded to string.
- r-contiguous bits (rcb), r-chunks, landscape-affinity matching, Hamming distance were used

These characteristics limited the applications of NSA [30]. Main reason of this limitations are generating efficient detectors are computationally costly. Helman[74] proposed an improvement on original NSA and some other variations were proposed[9]. But Gonzalez[63] identified that binary matching rules are limited the application areas of NSA.

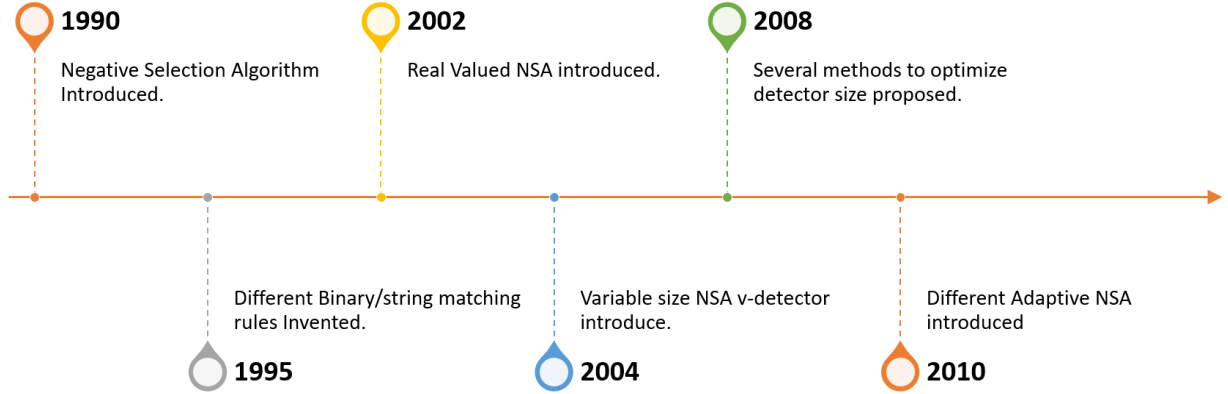


Figure 4: Major events of NSA evolution[36, 62, 103, 133, 87].

### 3.2 Introduction and improvements of Real Value NSA (2002-2006)

Major breakthrough came when Gonzalez[64] proposed real valued NSA. Instead of string matching this new algorithm proposed match using distances among real values. This algorithm brought so many new features in NSA due to its high level representation of data such as radius based matching, Euclidean distance, Minkowski distances etc. Real valued NSA (RNSA) quickly became popular and RNSA started to uses in many different domain and it was observed it is performing better than Binary valued NSA (BNSA)[67]. One of the notable works for RNSA was its use in airplane fault detection[37]. There were many variations of RNSA started to proposed by researchers. Gonzalez[65] Proposed RRNSA which is a Monte-Carlo based random RNSA. However most influential and popular variation of RNSA was proposed by Ji[84], known as V-detector. V-detector supports variable size of detector radius. The V-detector also get improved in subsequent works [90] which limit the detector numbers and [85] proposed a boundary aware method. In this period, it was noticed that NSA still has limitations like choosing the appropriate matching rules is hard and determining how to answer the dimensionality of data[86]. We illustrated the flowchart of v-detector and RNSA in the figure 6, the flowchart shows the basic differences between v-detector and RNSA as in v-detector size of radius is not static.

One of the significant advancements in this era was the starting of negative data representation[46, 28] or negative database based research works. Negative dataset[47] and negative data representation use the NSA. Negative database idea later boldly impacted research on Authentication and data security.

### 3.3 Research towards Adaptive/Dynamic NSA(2006-2012)

In this period, there were different approaches to improve NSA by apply different types of algorithms in various steps of NSA. However, researchers mostly focused on detector size determination and better generation technique. Noticeable methods was Genetic Algorithm (GA) and Fuzzy techniques in this age. Gao[59] proposed GA based NSA, where detectors was optimized by GA. Limitations of this method is higher computational cost. A better GA based approach proposed by Bakicki[13] where a rank based system introduced with multi objective GA but it was also application specific. Jian[92] and Wang[151] was similar GA based optimization approach with combination of fuzzy logic, but these methods also has limited applicability. Gao[57] uses clonal optimization and tehir subsequent works [55] uses particle optimization to determine detector size. One of the novel approach[12] proposes multi shape detector for better coverage, another similar work but using different shapes was proposed by Xia[158]. But both method suffered by higher computational cost. Neural Network based approach to make NSA adaptive also proposed by Gao[54]. A self-adaptive NSA (ANSA) introduced an innovative method to accommodate the self range adaptively and grow the non-self-covering detectors to create a suitable system profile only utilizing a subset of self samples[94]. Another self-adaptive NSA [48] introduced attempted to make detector size and position dynamic. Some different types of the algorithm like chaos theory were applied on NSA by Zhang[168] and a state graph supported NSA was proposed by Luo[120].

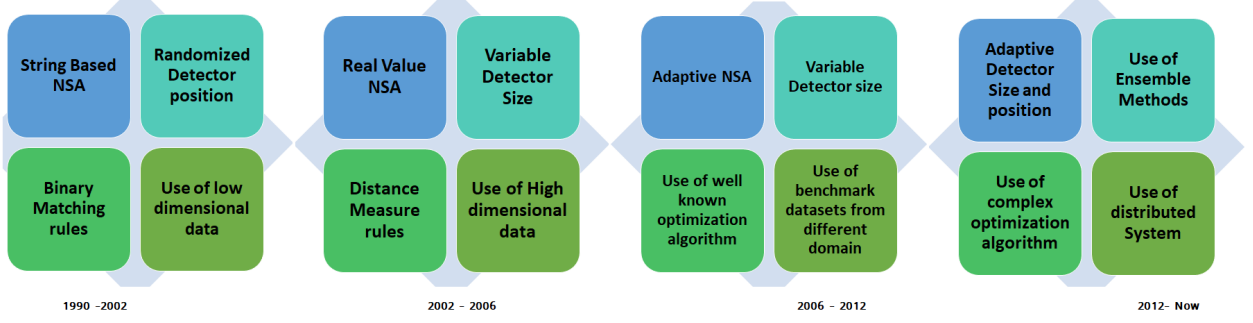


Figure 5: Common characteristics of NSA related research trend over time based on [36, 62, 103, 133, 87].

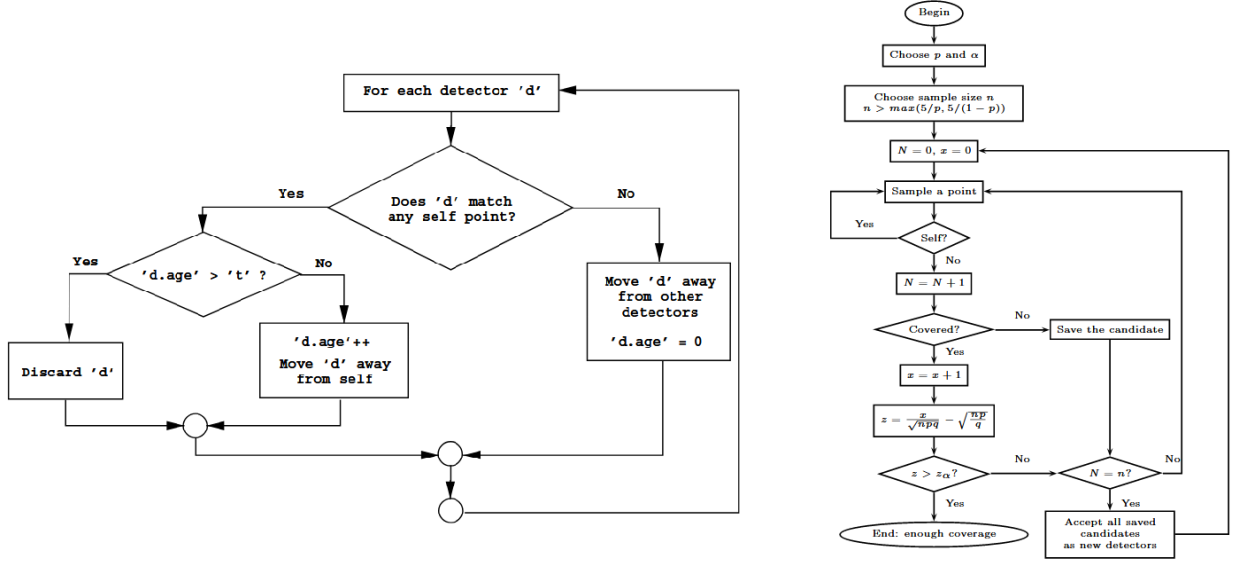


Figure 6: RNSA(left)[65] and V-detector(right)[90] flow chart.

### 3.4 Variations of Adaptive NSA (2012-now)

Different variations of adaptive NSA are being proposed in this period, and research also focuses on the initial detector position optimizations. It was noticeable that researchers started to add different complex algorithms to customize the NSA based on its application. Some of these variations can also be called the ensemble approach. Major characteristics of NSA evolved in this phase are:

- Apply adaptiveness /self learning instead of using pure random generation of detectors.
- Dynamic detector size generation cost was considered a major challenge and research was more focused on cost optimization.
- Multiple algorithm ensembles inside NSA for better optimizations.

NSA method EvoSeedRNSA, utilizes a Genetic Algorithm (GA) to generate the random seeds to make a sufficient detector set. They consider the detector set as a random sequence made by any random seeds [166]. EvoSeedRNSA exceeds the established RNSAs and V-detector algorithm. An improved version of this method EvoSeedRNSAII[167] provided more better detector generation using multi-group random seed encoding scheme. This method focuses more on the generation of detector initialization but has limitations on the optimization of detector size.

Outlier Robust Negative Selection Algorithm (ORNSA) divided the data into three categories. They are into internal selves, boundary selves, and outlier selves. They use robust outlier detection methods to categorize these three groups, [112]. After that, it will join the spaces as a detector space using a positive-negative mechanism. The shortcoming of this method requires self and nonself data to generate detectors. Optimized NSA presents a new NSA adopting an optimization policy stand on re-heating simulated annealing algorithm; this algorithm transforms the position of



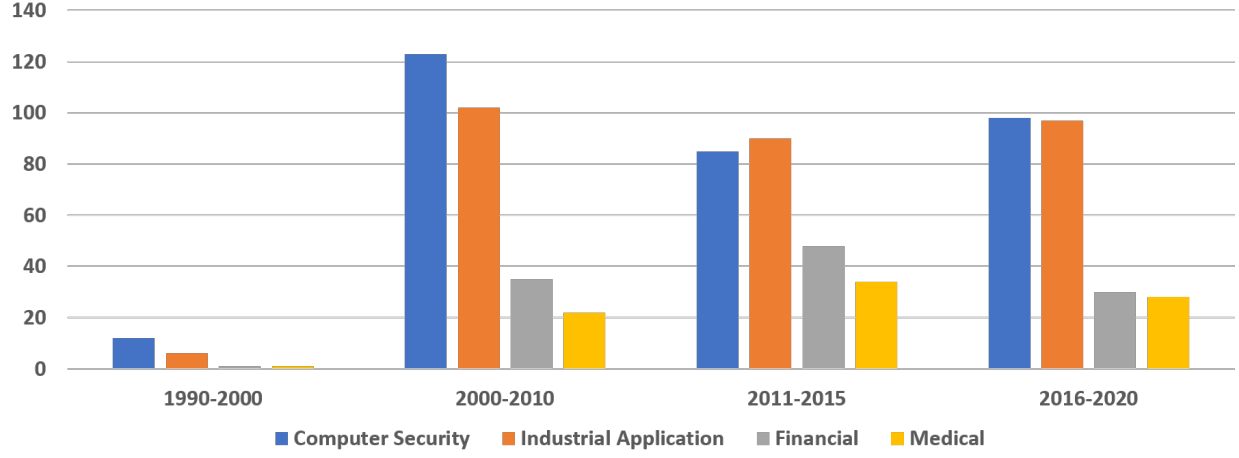


Figure 7: Number of NSA papers found from IEEE Explore and Google Scholar by year and area of Application keyword search.

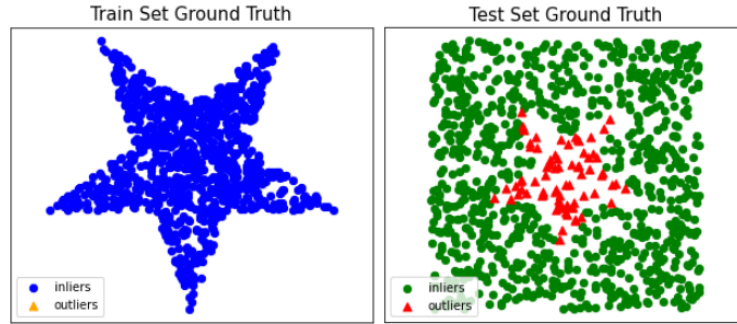

(a) Pentagon

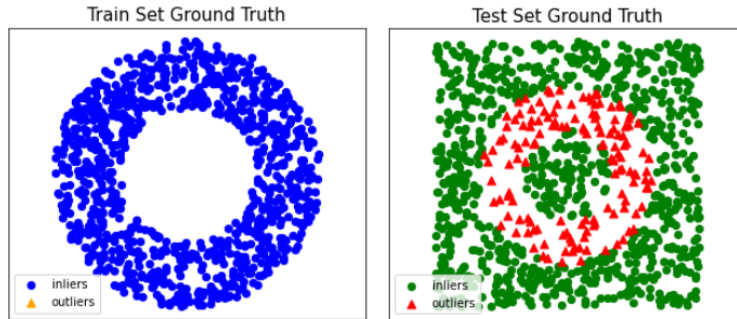

(b) Ring

Figure 8: Ground truth for experimental data

Name	Notes	Type	DM	DS	DI
ANSA[94]	self-adaptive NSA	Real	Minkowski	Dynamic	Random
EvoSeedRNSA[166, 167]	use GA on initial random position selection	Real	Minkowski	Static	Adaptive
ORNSA[112]	use internal selves, boundary selves and outlier selves	Real	Minkowski	Flexible	Random
Optimized NSA[5]	Optimized detector position to reduce overlap	Real	Minkowski	Flexible	Random
FtNSA[50]	Reduce self space	Real	Minkowski	Static	Random
IVRNSA[156]	use mature and non mature set of detector	Real	Minkowski	Static	adaptive
CB-NSA[153]	hierarchical clustering used to create selfplace	Real	Minkowski	Static	semirandom
PRR-2NSA[174]	Reduce dataspace, use clustering before create detector	Real	Minkowski	Static	semirandom
GF-RNSA[154]	Grid based representation	Real/binary	Minkowski/Hamming	Static	Random
NSA-DE[81]	Uses DE to optimize random generation of detector	Real	Minkowski	Static	Random
HNSA-IDSA[132]	Use self and non self detector	Real/binary	Minkowski/Hamming	Flexible	Adaptive
NSA-PSO[80]	Particle Swarm optimization for random generation of detector	Real	Minkowski	Flexible	Adaptive
IO-RNSA[159]	Morphological representation & optimize detector position	Real	Minkowski	Static	Adaptive
BIORV-NSA[27]	self set edge inhibition & detector self-inhibition	Real	Minkowski	Dynamic	Random
NSA-II	Use self and non self detector	Real/binary	Minkowski/Hamming	Static	Random
OALFB-NSA[111]	Use two dataset to detect two set of detector	Real	Minkowski	Dynamic	Adaptive
FB-NSA[109]	Similar to OALFB-NSA	Real	Minkowski	Dynamic	Adaptive
DENSA[152]	Statistical confidence based detector position	Real	Minkowski	Static	Adaptive
MNSA[128]	Uses multiple negative selection	Real	Minkowski	Static	Random
Antigen-NSA[160]	antigen space density to optimize detector position	Real	Minkowski	Flexible	Adaptive
NSNAD[68]	Optimize feature set for better result	Real/binary	Minkowski/Hamming	Static	Adaptive
REN[135]	New formulation to reduce overlap of detector coverage	Real	Minkowski	Dynamic	Random
AINSA[44]	Use adaptive immunology to generate detector position	Real	Minkowski	Flexible	Adaptive
ODNSA[139]	Optimize cost of detector radius	Real	Minkowski	Dynamic	Adaptive
CNSA[25]	uses clustering and fruit fly optimization	Real	Minkowski	Dynamic	Adaptive

Table 1: 2012-2020 Notable NSA Models (DM: Distance Measure, DS: Detector Size, DI: Distance initialization).

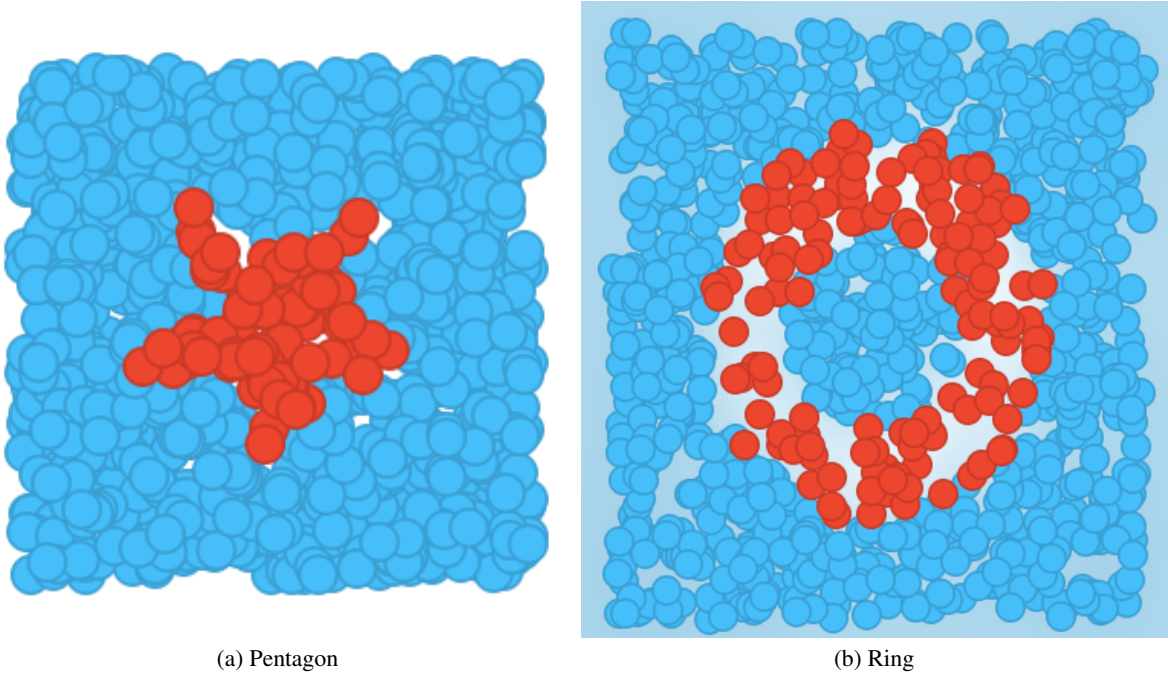


Figure 9: V-detector (NSA) detection results (blue's are outlier, red are inliers).



	Field	Notes
Computer	Spam Detection [79, 81, 137, 25, 53]	Clustered NSA and fruit fly optimization (CNSA-FFO) has best performance with 93% accuracy
	Intrusion Detection [93, 51, 165, 97, 109, 82, 35, 142, 66, 70]	NSALG [147] improved accuracy by using improved feature optimization technique
	Virus Detection [169, 52, 127, 163, 155, 164, 20, 118, 150]	V-NSA with mutation optimize (op-RDVD) outperforms other but not suitable for realtime protection [118]
	Authentication [39, 31, 126, 72, 119]	Grid based NAS provided secure authentication policy which was secure from many authentication attacks
	Vision [121, 89, 60, 17]	NSA can do object classification job with 90%+ accuracy for benchmark datasets.
Industrial	[37, 56, 158, 10, 105, 117, 144, 58, 15, 16, 2, 69, 1, 95, 143, 45, 23, 141, 8, 22, 134, 91]	For fault detection NSA[135] outperforms other NSA based approach.
Financial	[162, 21, 77, 102, 124, 157]	NSA has been used to detect anomaly in financial document [102].
Medical	[11, 125, 104, 26, 129, 107, 14, 113]	NSA exhibits great promises in RNA and DNA sequencing.

Table 2: Notable NSA works in different domain

Type	Abbr	Algorithm
Linear Model	MCD[71]	Minimum Covariance Determinant (use the mahalanobis distances as the outlier scores)
	OCSVM [24]	One-Class Support Vector Machines
	LMDD[7]	Deviation-based Outlier Detection
	LOF[19]	Local Outlier Factor
Proximity-Based	COF[145]	Connectivity-Based Outlier Factor
	CBLOF[73]	Clustering-Based Local Outlier Factor
	HBOS[61]	Histogram-based Outlier Score
	kNN[131]	k Nearest Neighbors (use the distance to the kth nearest neighbor as the outlier score)
	SOD [100]	Subspace Outlier Detection
	ABOD [101]	Angle-Based Outlier Detection
Probabilistic	COPOD[114]	COPOD: Copula-Based Outlier Detection
	SOS[83]	Stochastic Outlier Selection
	IF[146]	Isolation Forest
Outlier Ensembles	FB [106]	Feature Bagging
	LSCP [171]	LSCP: Locally Selective Combination of Parallel Outlier Ensembles
	XGBOD [170]	Extreme Boosting Based Outlier Detection (Supervised)
	LODA [130]	Lightweight On-line Detector of Anomalies
	AutoEncoder[3]	Fully connected AutoEncoder (use reconstruction error as the outlier score)
Neural Networks	VAE[99]	Variational AutoEncoder (use reconstruction error as the outlier score)
	SO_GAAL [116]	Single-Objective Generative Adversarial Active Learning
GAN	MO_GAAL[116]	Multiple-Objective Generative Adversarial Active Learning
	Vdetector	Variable Size negative selection algorithm
NSA	RNSA	Random real value Negative Selection Algorithm
	GNSA	Grid Based Negative Selection Algorithm

Table 3: List of alternate algorithms for NSA ([172]) and NSA variations we compared in our Experiment.

randomly generated detectors to reach optimal distribution without modifying the number of detectors[5]. This approach has computational limitations while with higher dimensional data-sets. An enhanced NSA by integrating a novel different training strategy into the training stage named as FtNSA[50]. A new V-detector model named IVRNSA can avoid the time-consuming self-tolerance method of candidate detector inside the coverage of existing older detectors, thus considerably decreasing detector set size and significantly enhancing efficiency[156]. CB-RNSA is based on the hierarchical clustering of the self-set, the detection rate of CB-RNSA is higher than that of the classic NSA, V-detector algorithms, and the false alarm rate is lower than the same algorithms[153]. PRR-2NSA is a dual NSA based on pattern recognition receptors theory[174]. The real NSA based on the grid file of feature space (GF-RNSA) aims to improve the exponential worst-case complexity of existing NSA algorithms[154]. NSA-DE is an improved NSA using differential evolution (DE) optimization with Local outlier factor (LOF), DE is implemented at the random generation phase of NSA, and the LOF is implemented as a fitness function to maximize the distance of negative and positive space[81]. Another NSA for Adaptive Network Intrusion Detection System termed as HNSA-IDSA. Here, at the training stage of HNSA-IDSA, both types of data (normal and abnormal) are used to generate normal and abnormal self detectors [132]. NSA-PSO is a novel model that uses particle swarm optimization (PSO) with traditional NSA[80]. OALI-detector solves independence difficulty connecting the training stage and testing stage of traditional NSA, and the lack of continuous learning capability makes its detector cannot effectively cover the nonself space[110]. Li[109] proposed a non-random generation of detectors to detect intrusion. They called their method FB-NSA and FFB-NSA. FB-NSA has two types of detectors: constant-sized detector (CFB-NSA) and variable-sized detector (VFB-NSA) but Due to Non Random generation this technique can be easily by passed.

Immune optimization-based real-valued NSA (IO-RNSA) is based on the self-set distribution in morphological space. IO-RNSA proposes the immune optimization mechanism to generate candidate detectors so that they set from far to near in a hierarchical fashion. With self-sets being the center point, that reduces the repetition of detectors and decreases the numbers of detection holes[159]. BIORV-NSA[27] overcome some initial NSA defects, such as having too many detector pockets that cannot be identified, and unnecessary invalid detectors are created. OALFB-NSA[111] brings the online adaptive learning ability to regular NSA and extends its utilization domains. Wen[152] proposed a statistical confidence based detector positioning system to improve NSA, the named it DENSA. [128] used two negative selection algorithm to detect fault in IoT intrusion detection system, their experiment shows that it reduce false positive rates. Another approach[41] did a sentiment analysis on relation between detectors neighborhood radius and the number of detectors in order to detect anomalies in data more efficiently. Guerroumi[68] proposed NSSAD framework which can reduce data-set to improve performance applying a semi-supervised approach and it shows promising results in

network anomaly detection. [160] used antigen characteristics to improve NSA, which is improved by Fan[49], which able to detect coverage using antigen space triangulation, which performed 10x time better in accuracy than V-detector. Ren[135] proposed a new detector overlap calculation model to optimize cost of detector generation. Some notable recent works on NSA include [44] which used adaptive immunology in NSA, Selahshoor[139] used optimize detectors, Song[143] used in high resistance fault detection, Chikh[25] used clustered NSA to improve the classification accuracy.

Some bigdata based approach to make NSA computationally faster is also introduced during this period. Zhu [176] proposed VOR-NSA which can utilize map-reduce efficiently in a distributed system. Hormozi[77] also uses hadoop to faster the NSA detector size estimation. But the main limitation of VorNSA is use of non-random generation of detectors.

## 4 Applications of NSA

In early age, NSA was mostly limited to computer security and fault detection domain. Recently NSA is mostly used to detect anomaly for different types of data-sets.

Researchers over the year utilize NSA for solving many problems in diverse kinds of domains. Prominent areas are computer security and fault defections.

### 4.1 Computer Security

Works of NSA in computer security started with [52] for virus detection and [51] for Unix log anomaly monitor. NSA uses in Computer security domains are mostly specializes on:

- Spam Detection: Isris[79] combined negative selection algorithm and particle swarm optimization (NSA-PSO) and later[81] combined NSA and differential evaluations. Saleh[137] proposed an elimination based NSA to solve Spam detection problem. Chikh[25] attempted combination of fruit fry optimization method with clustered NSA in spam detection.
- Intrusion Detection: Li[109] proposed a non-random generation of detectors to detect intrusion. Another approach[82] utilized NSA for distributed network system and shows promising performance.
- Authentication: Dasgupta[39] proposed negative filtering for authentication purpose. In their subsequent work[31] proposed a grid based representation of NSA for authentication. Negative database scheme inspired by NSA used heavily for Authentication purposes [126, 72, 119]
- Virus/Malware/Ransomware: Several researcher[127, 118, 163, 155, 164, 20, 118] proposed different techniques to detect ransomware, malware or virus. Different data encode method was used along side V-detector provided satisfactory results.

### 4.2 Computer Vision

The researchers relatively neglected the computer vision domain compared to other fields. However, some notable work has been done in this domain with NSA. Mahapatra[121] used the NSA to improve threshold-based segmentation. [89] used NSA to classify dental images. Bendiab[17] shows that NSA can work for skin image classification.

### 4.3 Industrial Engineering

Negative selection algorithm is largely used in fault detection, diagnosis and recovery (FDDR) sector[16]. Most of these works [10, 105, 144, 15] was done using RRNS and V-detector of NSA. Alizadeh[6] Uses sensor fault detection and isolation of wind turbines, similarly [141] uses NSA to detect fault in rotary machines, Abid[2] uses GA to optimize NSA for bearing fault detection, Guo[69] uses a density regulated optimization algorithm with NSA to detect fault in unmanned aerial vehicle sensors, another approach[8] uses multi-layered system for hardware fault detection, [140] for fault in gas valve, [134] for pump-jack fault diagnosis and [158] for fault in power transformer. Anomaly detection approach from computer security domain used successfully to detect power grid management[117] and chemical analysis[22]. [1] provided a improved NSA to detect fault but it requires non self data to generate detectors. [95] uses residual selection and [143] proposed an identification framework for fault detection. Another recent work[45] developed an early warning system for reservoir water release operation using agent-based NSA. The work of Dasgupta[37] proved NSA could work to detect the fault in the aircraft control system. Another aircraft based work [23] also did similar work, but as they did not state the prior research of [37], their contributions are questionable in terms of novelty.

#### 4.4 Financial domain

Ze[162] identify abnormal fluctuation of the stock price using NSA and Butler[21] analyze the behavior of the stock market with NSA. [77] added Hadoop processing for NSA in credit card fraud detection. This approach makes the NSA faster and applicable for real-time deployment. Lakshmi[102] employed NSA to detect false financial reports. Mor[124] uses NSA for stock location data analysis and wu[157] implement NSA to identify hedge fund controls over stock market.

#### 4.5 Medical Domain

NSA's ability to work without non-self data is a great asset for the medical domain as data bias is a challenging problem in this domain. Many interesting works with NSA have been done in this domain. A novel approach[11] utilized particle swarm optimization with NSA to classify EEG signals. Mousavi[125] predicted dengue outbreak detection using NSA. Lasisi[104] provided different Application of Real-Valued NSA to improve medical diagnosis. Creevey[26] proposed an NSA for protein-coding DNA sequences. Perkins[129] applied NSA to identify corrupted Ribo-seq and RNA-seq Samples. Le[107] applied NSA for DNA sequence classification. Other works[14, 113] uses NSA based methodology for online structural health monitoring.

### 5 Experiments and Result Analysis with NSA Alternatives

NSA method has an extensive competition with another alternate approach, which can also work with only self data. One class classifications (OCC) solve problems where the training datasets only contain samples of one class, and learning models have to identify new data whether belong to that class or not. it is also known as unary classification or class-modelling problem. Most common approach for solving one class problem is one class support vector machine (OCSVM[24]). Other similar approaches are Minimum Co-variance Method (MCM) [78], Gaussian Mixture Model (GMM)[136], Dirichlet Process Mixture Model (DPMM)[18], Kernel Density Estimator (KDE)[123], Robust KDE[96], GWR-Netwok[122], Deep Support Vector Data Description (SVDD), Deep Auto Encoder based Methods[75], Generative Adversarial Net Based approaches (eg: [108, 138], etc. These OCC techniques can be classified in 6 types. Minimum Covariance Determinant(MCD[71]), OCSVM, Deviation-based(LMDD[7]) considered as linear model based OCC techniques. Another type is proximity based which includes Local Outlier Factor(LOF)[19], Connectivity-Based (COF[145]), Clustering-Based LOF(CBLOF[73]), Histogram-based (HBOS[61]), K-Nearest Neighbors (kNN[131]), Subspace Outlier Detection( SOD [100]).

Angle-Based (ABOD[101]), Copula-Based (COPOD[114], Stochastic Selection(SOS[83]) are known as probabilistic techniques used for OCC. Combining several methods of OCC are known as ensemble techniques those include Isolation Forest (IF[146]), Locally Selective Combination of Parallel Outlier Ensembles(LSCP [171]), Feature Bagging(FB [106]), Extreme Boosting Based (XGBOD [170]), etc.

With the improvement of deep learning methods, OCC problems were solved using different neural network models such as Fully -connected AutoEncoder (AE[3]), Variational AutoEncoder(VAE[99]), Single-Objective GAN (SO-GAAL [116]), Multiple-Objective GAN(MO-GAAL[116]), etc.

While Negative selection algorithm (NSA) has several variations, in our experiments we used three variants including variable-size negative selection algorithm(V-detector[90]), Random real-valued Negative Selection Algorithm(RNSA[65]), Grid-Based Negative Selection Algorithm(GNSA[39]).

#### 5.1 One class classifications (OCC)

One class classifications (OCC) solve problems where the training datasets only contain samples of one class, and learning models have to identify new data whether belong to that class or not. it is also known as unary classification or class-modelling problem. Most common approach for solving one class problem is one class support vector machine (OCSVM[24]). Other similar approaches are Minimum Co-variance Method (MCM) [78], Gaussian Mixture Model (GMM)[136], Dirichlet Process Mixture Model (DPMM)[18], Kernel Density Estimator (KDE)[123], Robust KDE[96], GWR-Netwok[122], Deep Support Vector Data Description (SVDD), Deep Auto Encoder based Methods[75], Generative Adversarial Net Based approaches (eg: [108, 138], etc. These OCC techniques can be classified in 6 types. Minimum Covariance Determinant(MCD[71]), OCSVM, Deviation-based(LMDD[7]) considered as linear model based OCC techniques. Another type is proximity based which includes Local Outlier Factor(LOF)[19], Connectivity-Based (COF[145]), Clustering-Based LOF(CBLOF[73]), Histogram-based (HBOS[61]), K-Nearest Neighbors (kNN[131]), Subspace Outlier Detection( SOD [100]).



Figure 10: Used Pentagon-shaped dataset for experimenting with different OCC techniques. Upper image contain the test results on training dataset, blues are correctly identified data and yellow's are mistakenly identified as outlier. In the picture below, outliers are labelled by red and green are identified as inlier.

Angle-Based (ABOD[101]), Copula-Based (COPOD[114]), Stochastic Selection(SOS[83]) are known as probabilistic techniques used for OCC. Combining several methods of OCC are known as ensemble techniques those include Isolation Forest (IF[146]), Locally Selective Combination of Parallel Outlier Ensembles(LSCP [171]), Feature Bagging(FB [106]), Extreme Boosting Based (XGBOD [170]), etc.

With the improvement of deeplearning methods, OCC problems were solved using different neural network models such as Fully connected AutoEncoder (AE[3]), Variational AutoEncoder(VAE[99]), Single-Objective GAN (SO-GAAL [116]), Multiple-Objective GAN(MO-GAAL[116]), etc.

While Negative selection algorithm (NSA) has several variations, in our experiments we used three variants including variable-size negative selection algorithm(V-detector[90]), Random real-valued Negative Selection Algorithm(RNSA[65]), Grid-Based Negative Selection Algorithm(GNSA[39]).

## 5.2 Experiment Methodology

We focused to visualize the impact of different OCC methods with NSA variations, and to best visualize, we took shape data-set. Inside the shapes is the true class, and outside the shape would be the false class. We have 2000 data

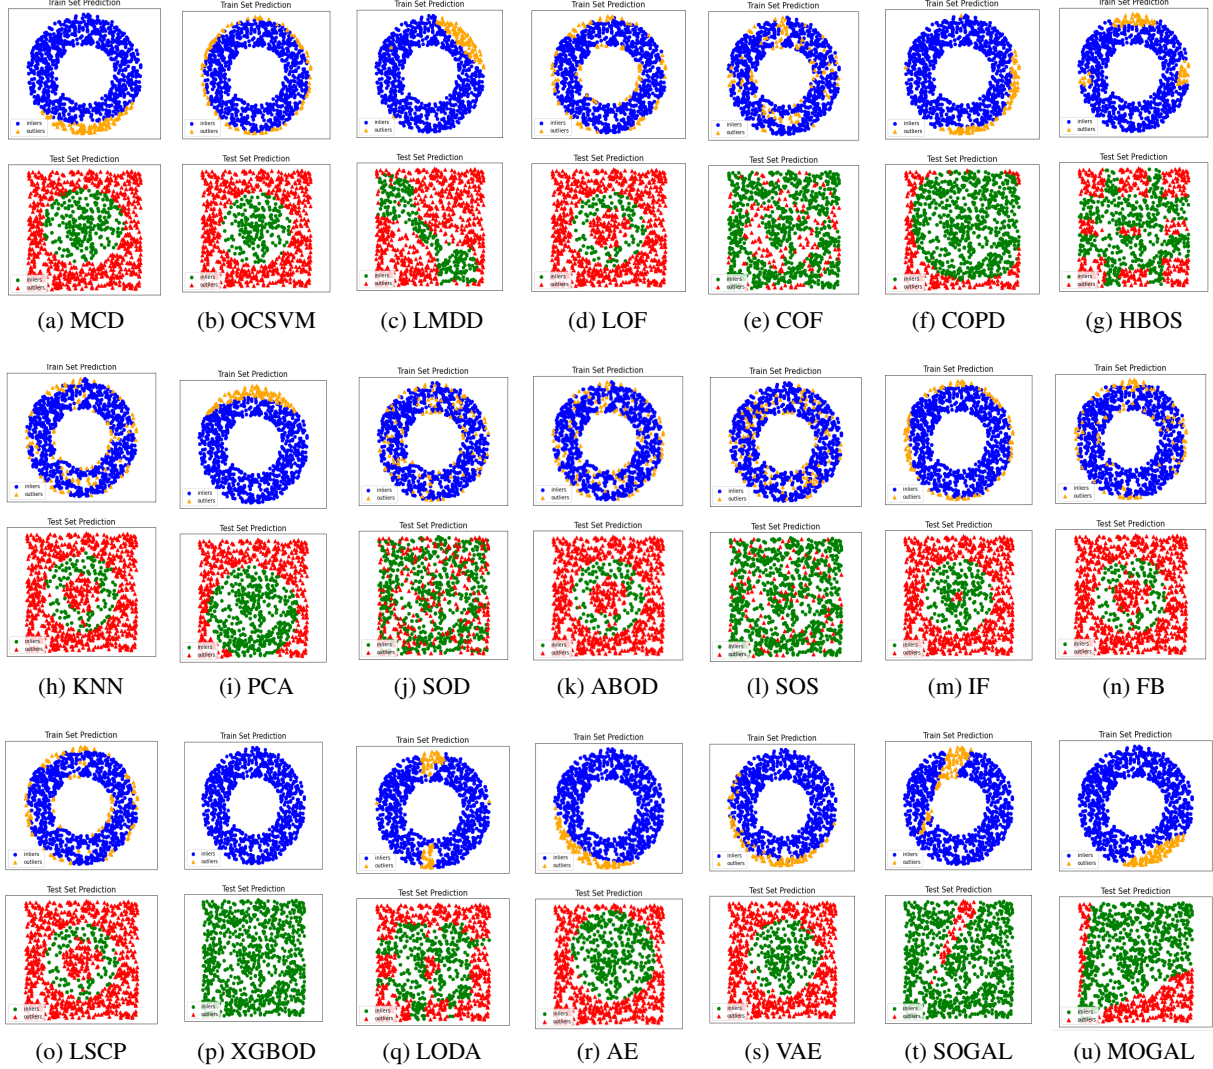


Figure 11: Ring test for different OCC techniques. Upper image contain the test results on train dataset, blues are correctly identified and yellow's are mistakenly identified as outlier, in the below picture red are identified as outlier and green are identified as inlier.

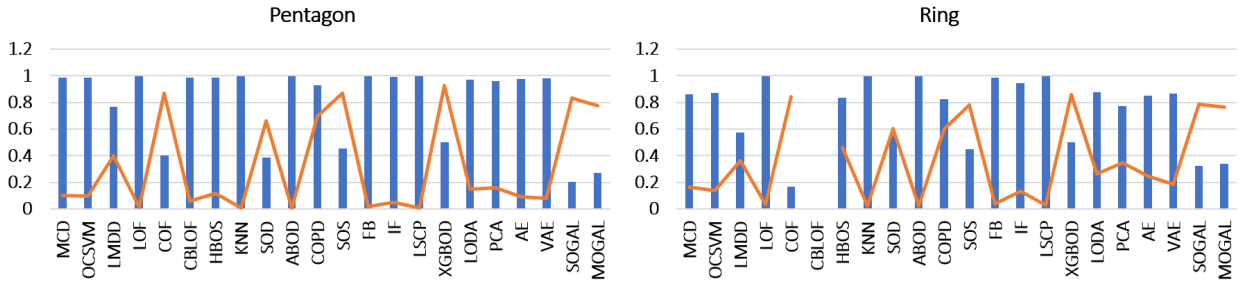


Figure 12: Comparison of different methods error rate (orange line) and ROC (in blue bar)

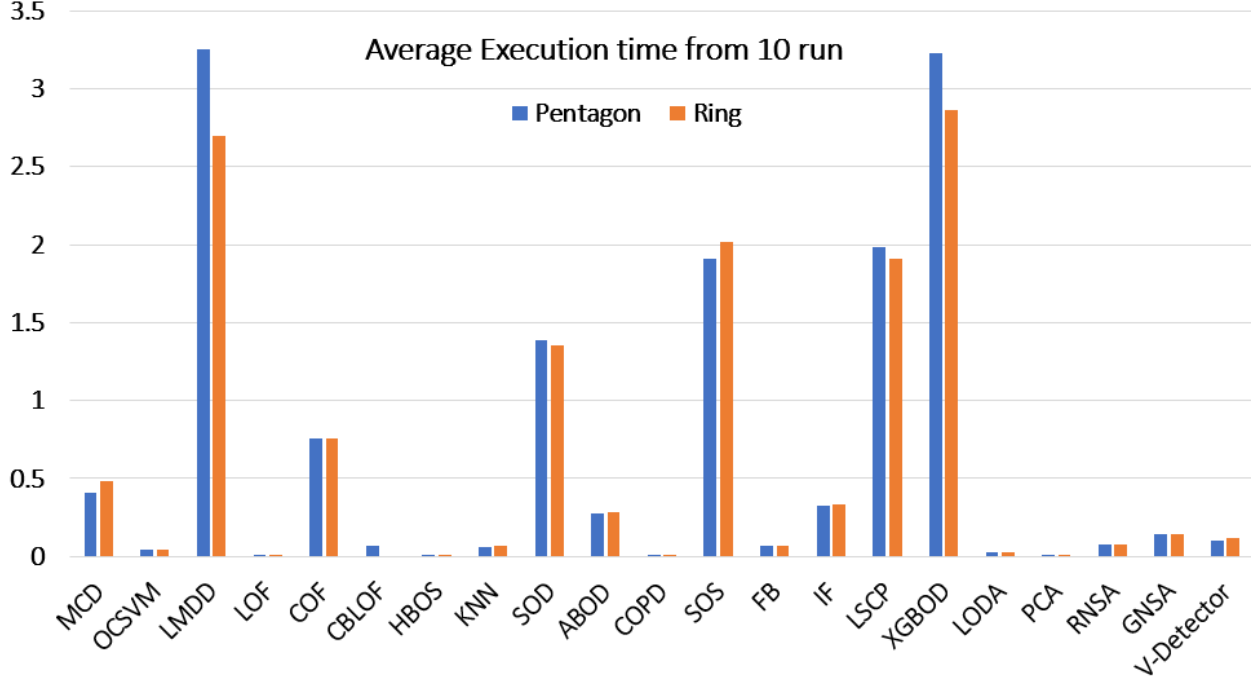


Figure 13: Different methods execution time (neural network and GAN based methods are not presented as they are too high to compare visually)

points inside the shape class. We have another data-set containing 2000 data-point inside and outside shapes for the test. We experimented with two different shapes; Ring and Pentagon. There is inside negative and outside the positive region in the ring, and for the pentagon, outside detection is not linearly separable. In figure 8 illustrated the inlier and outlier position for Ring and Pentagon test and train data. This nature of the shape made it possible to experiment and better visualize. For conducting experiments, we used python pyod library [172], and for NSA variations, we used Zhou-Ji’s developed code[175]. Also used the default configuration of pyod library, and for NSA methods, considered minkowski distance. Our experimental platform was google co-lab with GPU and high ram usage enabled. Also, we used open-source repository of data and source code for reproducibility. For CBLOF, the Ring dataset was not considered. We used pyod built in visualization utility and orange tool[43] for visual image generation.

For more detailed evaluation, we experimented with 17 Outlier Detection DataSets (ODDS) from different domains (collected from odds lab, stonybrook university<sup>1</sup>). These datasets have one record per data point, and each record contains several attributes. As these datasets have a low number of samples, they are not suitable for neural network and GAN-based approaches. We presented other ten different OCC techniques from [172] for comparison with NSA techniques. Before applying NSA, we did t-distributed stochastic neighbourhood embedding (t-SNE [148]) to reduce the dimensionality. We used t-SNE as it provided better visualization and reductions than PCA analysis as PCA works by rotating the vectors for preserving variance, which is suitable for linear, but t-SNE works by minimizing the distance between the point in a Gaussian, and it is a non-linear technique. Unlike PCA, it doesn’t get influenced by outliers as it prioritizes local structure instead of the global structure. We applied V-detector methods to all datasets two-dimensional representation space, which acquire using the t-SNE method. We experimented ten times with different test-train split and provided the average of the experimented result.

### 5.3 Our observations

Results of Pentagon and Ring are illustrated in figure 10 and 11 and in the table 4. A visual comparison chart for performance and time are illustrated in the figure 12 and 13.

From our experimental results (shown in the table 4), we noticed that some methods outperform NSA-based approach in terms of accuracy and time consumption. But a close examination reveals that these methods performed better in pentagon dataset than for Ring dataset, where NSA based methods did better in Ring dataset, indicating that for the

<sup>1</sup><http://odds.cs.stonybrook.edu>



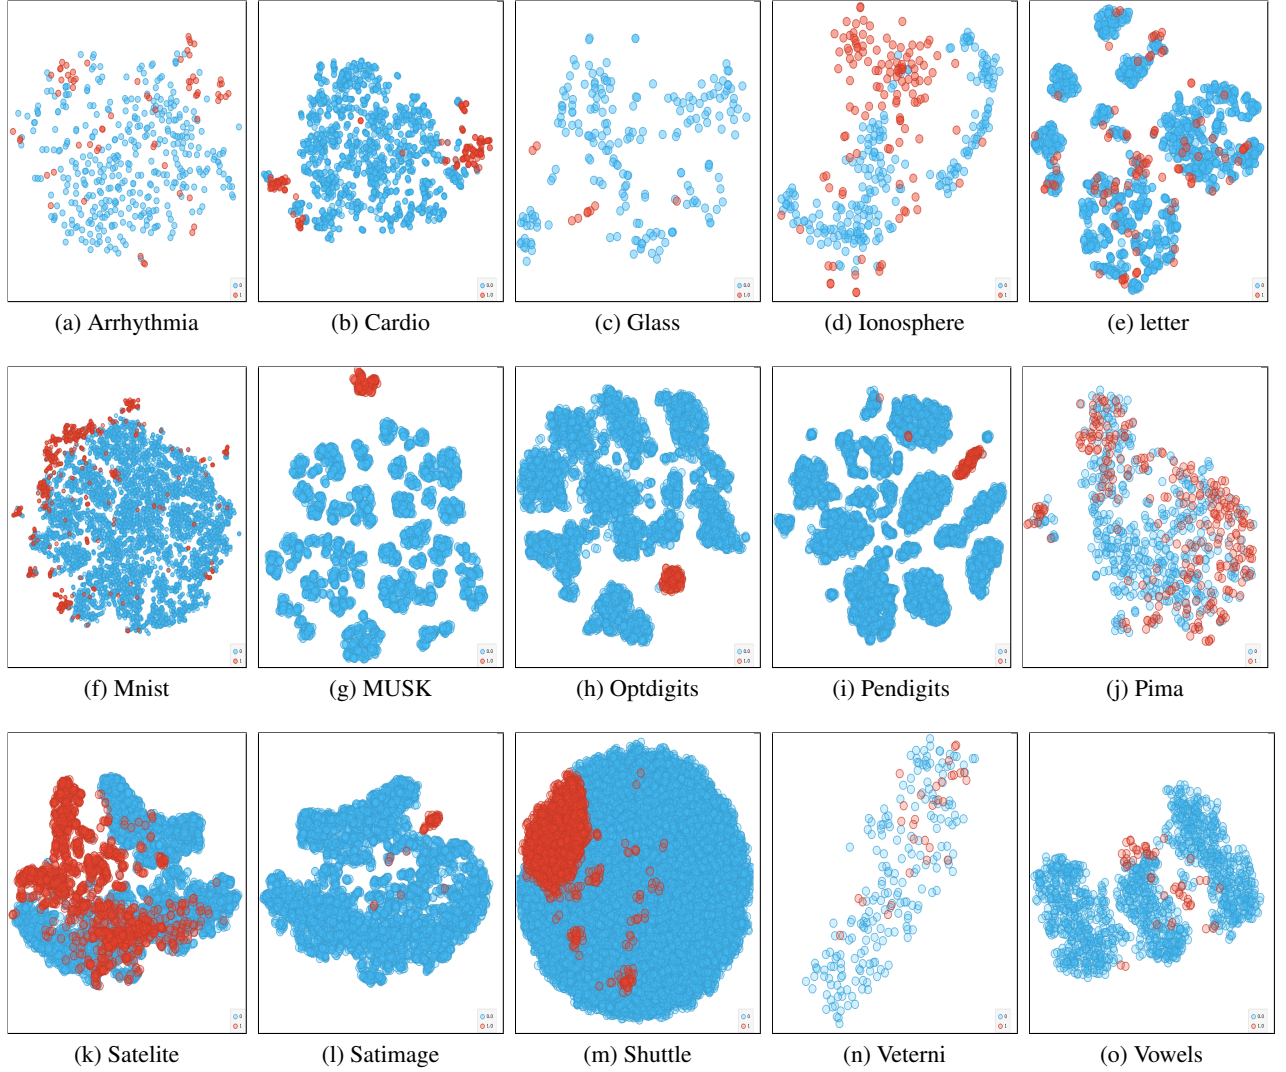


Figure 14: One class classification datasets representation in 2d using t-SNE representation (blue's are inliers , red are outliers).

complex nonlinear representation of data where pockets of an outlier can occur inside inlier or vice versa, that situation NSA can outperform other models. Among the NSA variations, V-detector has better performance. Linear model OCSVM has exhibited good performance in pentagon but performed poorly for Ring. This trend is also consistent with other linear model such as LMDD and MCD. As Ring was less linear than a Pentagon, performance decrease result is expected from linear models. It is also noticeable that OCSVM and MCD have similar execution times as NSA variations, but LMDD has significantly higher time consumption. For visual analysis, in figure 9, V-detector can detect but has slightly skewed in border areas. For the linear models in figure 11 and 10, we can see MCD and LMDD has big miss classification for a specific cluster area (more evident in Ring). OCSVM has small distributed packets of misclassifications around the border.

Proximity-based methods LOF shows similar performance for both data. However, the connectivity-based outlier calculation failed to perform. HBOS and KNN did exceptionally well, and both were consistent for Pentagon and Ring both. The histogram-based outlier method did well will Pentagon but not so well for the Ring. Interesting was SOD, which performs better in Ring than Pentagon, which is opposite trend than other models. In terms of execution time, COF is exceptionally higher than others. For visual analysis, for the RING, we can see HBOS has few large packets of miss classification holes, but in LOF and KNN, very tiny misclassification holes are distributed sparsely.

Model	Pentagon			Ring		
	ROC	ER	ET	ROC	ER	ET
<b>MCD</b>	0.9846	0.099	0.4101	0.8616	0.164	0.4871
<b>OCSVM</b>	0.9851	0.097	0.0421	0.8731	0.135	0.0417
<b>LMDD</b>	0.7673	0.401	3.253	0.5752	0.361	2.6965
<b>LOF</b>	0.997	0.012	0.0083	0.9963	0.032	0.0096
<b>COF</b>	0.3991	0.87	0.7568	0.168	0.841	0.7602
<b>CBLOF</b>	0.9866	0.059	0.0698			
<b>HBOS</b>	0.9865	0.115	0.0015	0.8354	0.459	0.0016
<b>KNN</b>	0.9993	0.009	0.0628	0.9957	0.025	0.0682
<b>SOD</b>	0.3842	0.661	1.3831	0.554	0.603	1.3571
<b>ABOD</b>	0.9994	0.009	0.2776	0.9982	0.022	0.2881
<b>COPD</b>	0.9273	0.696	0.0105	0.8255	0.603	0.0099
<b>SOS</b>	0.4551	0.87	1.9094	0.4504	0.779	2.0156
<b>FB</b>	0.9942	0.019	0.0692	0.9863	0.039	0.0716
<b>IF</b>	0.9933	0.047	0.327	0.9444	0.134	0.3339
<b>LSCP</b>	0.9992	0.009	1.9832	0.9982	0.027	1.9078
<b>XGBOD</b>	0.5	0.926	3.2267	0.5	0.859	2.8597
<b>LODA</b>	0.9703	0.149	0.029	0.8766	0.261	0.0286
<b>PCA</b>	0.9588	0.158	0.0017	0.7747	0.348	0.0019
<b>AE</b>	0.9738	0.093	4.62	0.8511	0.247	4.4478
<b>VAE</b>	0.9833	0.08	5.5	0.8642	0.182	5.1877
<b>SOGAL</b>	0.2002	0.831	11.6	0.3248	0.785	10.683
<b>MOGAL</b>	0.2716	0.774	84	0.3361	0.762	95.4466
<b>RNSA</b>	0.92	0.7	0.08	0.97	0.2	0.08
<b>VDetecor</b>	0.98	0.09	0.14	0.99	0	0.14
<b>GNSA</b>	0.76	0.43	0.1	0.6	0.52	0.13

Table 4: Result Comparison of different models(ER: Error Rate, ET: Execution time)

For the pentagon, it was seen that HBOS is very skewed in the border areas where KNN and LOF have a less uneven distribution of misclassification holes.

In probability-based models, ABOD was consistent where COPD has shown a decline for the Ring dataset. ABOD outperform others in terms of performance, but it took a slightly higher execution time. The SOS method performed very poorly for our dataset, which shows the stochastic method’s limitations; it also carried significantly higher execution time. ABOD has sparsely distributed holes in the visualization, but these are less than the SOS method.

For ensemble methods, Isolation forest has minimal decline from Pentagon to Ring, but feature bagging and LSCP are very consistent where LODA methods show a more considerable drop. However, all of these methods have a decent result (at least for the Pentagon). In terms of execution, LODA and FB outperform others, and LSCP had a much higher execution rate than higher. XGBOD method failed, but it was due to not having proper train data. We also did PCA representation, and it was evident that PCA was unable to perform for nonlinear data as it has shown the highest drop for Ring than Pentagon among all other models. But PCA has lowest execution time than others. LSCP and FB have similar representations in the visualization where both have sparsely distributed holes, but isolation forest holes were all clustered in the boundary region. Interesting was the LODA method where only a specific large cluster of holes was formed for the Ring and the outside border area for the Pentagon.

Both autoencoder based model shows a sharp decline for Ring, VAE did better perform that other AE, and it also took higher execution time. The limitations of this method are higher time consumption to train the model. GAN based model SOGAL and MOGAL were not able to perform, probably due to training failures. Based on their time consumption rate, it is evident that these methods are not applicable for this type of data representation. Both autoencoders have similar representation, and the noticeable thing is they have a single large miss classification cluster in a particular place. GAN based both model also has the same feature, but it misrepresented in testing time.

In the figure 14, we presented 15 datasets in 2d representation space after using the t-SNE method for dimensionality reduction. It is evident that some datasets are linearly separable (MUSK, OPTdigits), and others are hard to distinguish, such as Pima and Letters. We observed that some OCC has a lower variation of performance in all datasets than others. We consider these as good consistencies. In the figure 15, standard deviation indicates this consistency measures.



data	ABOD	CBLOF	FB	HBOS	IForest	KNN	LOF	MCD	OCSVM	PCA	V-NSA
<b>Arrhythmia</b>	0.7688	0.7835	0.7781	0.8219	0.8005	0.7861	0.7787	0.779	0.7812	0.7815	0.7
<b>Cardio</b>	0.5692	0.9276	0.5867	0.8351	0.9213	0.7236	0.5736	0.8135	0.9348	0.9504	0.9
<b>Glass</b>	0.7951	0.8504	0.8726	0.7389	0.7569	0.8508	0.8644	0.7901	0.6324	0.6747	0.9
<b>Ionosphere</b>	0.9248	0.8134	0.873	0.5614	0.8499	0.9267	0.8753	0.9557	0.8419	0.7962	0.9
<b>Letter</b>	0.8783	0.507	0.866	0.5927	0.642	0.8766	0.8594	0.8074	0.6118	0.5283	0.7
<b>Lympho</b>	0.911	0.9728	0.9753	0.9957	0.9941	0.9745	0.9771	0.9	0.9759	0.9847	1
<b>Mnist</b>	0.7815	0.8009	0.7205	0.5742	0.8159	0.8481	0.7161	0.8666	0.8529	0.8527	0.9
<b>Musk</b>	0.1844	0.9879	0.5263	1	0.9999	0.7986	0.5287	0.9998	1	1	1
<b>Optdigits</b>	0.4667	0.5089	0.4434	0.8732	0.7253	0.3708	0.45	0.3979	0.4997	0.5086	0.6
<b>Pendigits</b>	0.6878	0.9486	0.4595	0.9238	0.9435	0.7486	0.4698	0.8344	0.9303	0.9352	0.99
<b>Pima</b>	0.6794	0.7348	0.6235	0.7	0.6806	0.7078	0.6271	0.6753	0.6215	0.6481	0.4
<b>Satellite</b>	0.5714	0.6693	0.5572	0.7581	0.7022	0.6836	0.5573	0.803	0.6622	0.5988	0.7
<b>Satimage-2</b>	0.819	0.9917	0.457	0.9804	0.9947	0.9536	0.4577	0.9959	0.9978	0.9822	0.94
<b>Shuttle</b>	0.6234	0.6272	0.4724	0.9855	0.9971	0.6537	0.5264	0.9903	0.9917	0.9898	0.94
<b>Vertebral</b>	0.4262	0.3486	0.4166	0.3263	0.3905	0.3817	0.4081	0.3906	0.4431	0.4027	0.5
<b>Vowels</b>	0.9606	0.5856	0.9425	0.6727	0.7585	0.968	0.941	0.8076	0.7802	0.6027	0.8
<b>Wbc</b>	0.9047	0.9227	0.9325	0.9516	0.931	0.9366	0.9349	0.921	0.9319	0.9159	1
<b>Average</b>	0.7030	0.7635	0.6766	0.7818	0.8178	0.7758	0.6791	0.8075	0.7934	0.7736	0.77

Table 5: NSA results compared with other OCC methods for different datasets. Here NSA experiments were conducted after t-distributed stochastic neighbourhood embedding (t-SNE [148]) dimension reduction and the results of other methods were reported from [172] experiments.

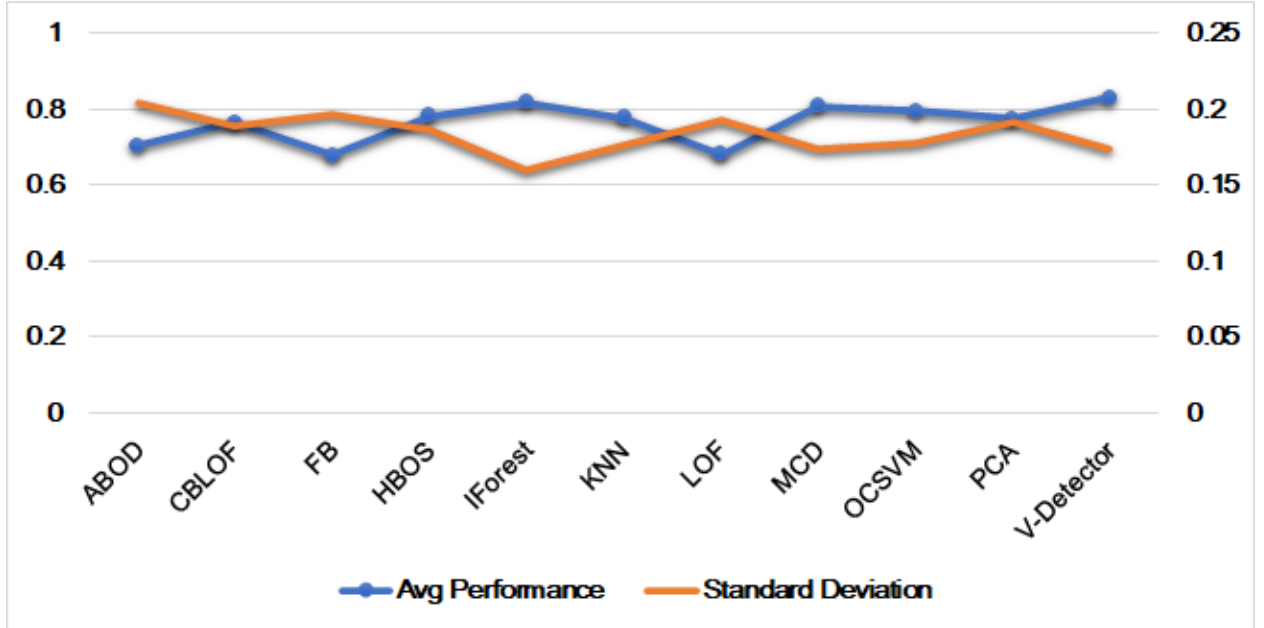


Figure 15: Results of different OCC methods (average and standard deviation) for all 17 datasets in terms of performance accuracy.

In the table 5, we presented the ROC performance of OCC techniques and NSA v-detector. The V-detector was consistent in its performance, where other methods did better in one dataset but not so good for other data. We also noted that V-detector performance is similar to PCA and KNN techniques. One of the ensemble technique FB showed average performance, but another ensemble technique (IF) while outperformed other techniques and was most consistent. Also, the LOF method performed poorly, but clustering-based LOF improved the result. But these proximity-based methods are inconsistent considering all datasets. MCD outperforms OCSVM in performance consistency. On average, V-detector performs lower than Isolation forest and MCD, but it has better consistent performance except Isolation forest. Figure 14, showed that dataset PIMA has outlier and inlier are overlapped because of information loss in t-SNE

dimensionality reduction, and this affected the performance of the V-detector for this dataset. Similarly, excellent performance of t-SNE in optdigits can be attributed to the t-SNE reductions.

Figure 15 illustrated that the isolation forest approach has best consistency in performance for all dataset and LOF has worst performance. The drop of V-detector methods consistency over the dataset were due to limitation of dimensionality reduction technique, Our extended experiments with combination of PCA-transformed dataset and kernel-PCA[76] transformed data-set exhibited that this limitation can be addressed in NSA using V-detector.

## 6 Challenges and Future Direction

Our comparison analysis suggested that NSA alternate models' competitor can be autoencoder based model as they perform consistently as NSA. GAN-based models' current state is not adequate for the representation typically set NSA to perform well. Also, it is not suitable for all use cases. Probabilistic models ABOD also a good contender for NSA in terms of performance, but NSA can edge ABOD in execution time. LSCP is the only other consistent model and takes less time as it runs in parallel. If the NSA model can utilize a distributed system's power, it can be better time-efficient than LSCP.

Most of the NSA based researchers pick OCSVM and IF for the benchmark. Recent alternatives like autoencoder based or GAN based method are often ignored. We suggest researchers compare their result with contemporary alternate methods such as GAN based or autoencoder based algorithms for proper bench-marking. Some of these methods are too computationally expensive to implement, and some are vulnerable to high-level data. That's why it was essential to compare with multiple alternate methods.

There is much research towards dynamic detector size and positions but not much research on self data representation spaces. New ideas on self data representations can open a new door for NSA. Much research on NSA started to use non-self data in the detector generation phase for better optimization. This feature limits the fundamental ability of the NSA as a one-class detector. Uses of a well-establish optimization algorithm can speed up the NSA detector generation process, but these optimization algorithms often need much data, which also backside for NSA applicability. NSA can be benefited by the recent improvement in the distributed bigdata system. There is little research to make NSA compliant with big data, so this remains an open challenge to other researchers. We also think NSA researchers neglect the computer vision domain, and there are enormous potential and space for work in computer vision with NSA.

## 7 Conclusion

This paper showed that the research of the Negative Selection Algorithm could be grouped into four eras, and each period has different research trends. Our study also provided a detailed discussion of the latest Negative Selection models and Negative Selection based applications. From our analysis, it is apparent that NSA operates better for nonlinear representation than most other techniques, and it can beat a neural-based model for time consumption. That is why research for further NSA's advancement to compete with recent models is promising.

## References

- [1] A Abid, MT Khan, IU Haq, S Anwar, and J Iqbal. An improved negative selection algorithm-based fault detection method. *IETE Journal of Research*, pages 1–12, 2020.
- [2] Anam Abid, Muhammad Tahir Khan, and Muhammad Salman Khan. Multidomain features-based ga optimized artificial immune system for bearing fault detection. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 2017.
- [3] Charu C Aggarwal. Outlier analysis. In *Data mining*, pages 237–263. Springer, 2015.
- [4] Md Manjurul Ahsan, Kishor Datta Gupta, Abhijit Kumar Nag, Subash Pouyda, Abbas Z Kouzani, and MA Parvez Mahmud. Applications and evaluations of bio-inspired approaches in cloud security: A review. *IEEE Access*, 2020.
- [5] Xu Aiqiang, Liu Yong, Zhao Xiuli, Yang Chunying, and Li Tingjun. Optimization and application of real-valued negative selection algorithm. *Procedia Engineering*, 23:241–246, 2011.
- [6] Esmaeil Alizadeh, Nader Meskin, and Khashayar Khorasani. A dendritic cell immune system inspired scheme for sensor fault detection and isolation of wind turbines. *IEEE Transactions on Industrial Informatics*, 14(2):545–555, 2017.

- [7] Andreas Arning, Rakesh Agrawal, and Prabhakar Raghavan. A linear method for deviation detection in large databases. In *KDD*, volume 1141, pages 972–981, 1996.
- [8] FAULT TOLERANCE WITHIN AN EMBRYONIC ARRAY. A multilayered immune system for hardware fault tolerance within an embryonic array. 2002.
- [9] Modupe Ayara, Jon Timmis, Rogerio de Lemos, Leandro N de Castro, and Ross Duncan. Negative selection: How to generate detectors. In *Proceedings of the 1st International Conference on Artificial Immune Systems (ICARIS)*, volume 1, pages 89–98. University of Kent at Canterbury Printing Unit University of Kent at Canterbury, 2002.
- [10] Ilhan Aydin, Mehmet Karakose, and Erhan Akin. Chaotic-based hybrid negative selection algorithm and its applications in fault and anomaly detection. *Expert Systems with Applications*, 37(7):5285–5294, 2010.
- [11] Nasser Omer Ba-Karait, Siti Mariyam Shamsuddin, and Rubita Sudirman. Eeg signals classification using a hybrid method based on negative selection and particle swarm optimization. In *International Workshop on Machine Learning and Data Mining in Pattern Recognition*, pages 427–438. Springer, 2012.
- [12] S. Balachandran, D. Dasgupta, F. Nino, and D. Garrett. A framework for evolving multi-shaped detectors in negative selection. In *2007 IEEE Symposium on Foundations of Computational Intelligence*, pages 401–408, 2007.
- [13] Jerzy Balicki. Negative selection with ranking procedure in tabu-based multi-criterion evolutionary algorithm for task assignment. In *International Conference on Computational Science*, pages 863–870. Springer, 2006.
- [14] Alberto Barontini, Maria Giovanna Masciotta, Paulo Amado-Mendes, Luís F Ramos, and Paulo B Lourenço. Negative selection algorithm based methodology for online structural health monitoring. *Engineering Structures*, 229:111662.
- [15] Alberto Barontini, Ricardo Perera, Maria Giovanna Masciotta, Paulo Amado-Mendes, Luis Ramos, and Paulo Lourenço. Deterministically generated negative selection algorithm for damage detection in civil engineering systems. *Engineering Structures*, 197:109444, 2019.
- [16] Nawel Bayar, Saber Darmoul, Sonia Hajri-Gabouj, and Henri Pierreval. Fault detection, diagnosis and recovery using artificial immune systems: A review. *Engineering Applications of Artificial Intelligence*, 46:43–57, 2015.
- [17] Esma Bendiab and Mohamed Kheireddine Kholladi. The negative selection algorithm: a supervised learning approach for skin detection and classification. *International Journal of Computer Science and Network Security*, 10:86–92, 2010.
- [18] David M Blei, Michael I Jordan, et al. Variational inference for dirichlet process mixtures. *Bayesian analysis*, 1(1):121–143, 2006.
- [19] Markus M Breunig, Hans-Peter Kriegel, Raymond T Ng, and Jörg Sander. Lof: identifying density-based local outliers. In *Proceedings of the 2000 ACM SIGMOD international conference on Management of data*, pages 93–104, 2000.
- [20] James Brown, Mohd Anwar, and Gerry Dozier. Detection of mobile malware: an artificial immunity approach. In *2016 IEEE Security and Privacy Workshops (SPW)*, pages 74–80. IEEE, 2016.
- [21] Matthew Butler and Dimitar Kazakov. Modeling the behavior of the stock market with an artificial immune system. In *IEEE Congress on Evolutionary Computation*, pages 1–8. IEEE, 2010.
- [22] Yuehua Cao and Dipankar Dasgupta. An immunogenetic approach in chemical spectrum recognition. In *Advances in evolutionary computing*, pages 897–914. Springer, 2003.
- [23] Jie Chen, Senyao Chen, Cunbao Ma, Zhengdong Jing, and Qingshan Xu. Fault detection of aircraft control system based on negative selection algorithm. *International Journal of Aerospace Engineering*, 2020, 2020.
- [24] Yunqiang Chen, Xiang Sean Zhou, and Thomas S Huang. One-class svm for learning in image retrieval. In *Proceedings 2001 International Conference on Image Processing (Cat. No. 01CH37205)*, volume 1, pages 34–37. IEEE, 2001.
- [25] Ramdane Chikh and Salim Chikhi. Clustered negative selection algorithm and fruit fly optimization for email spam detection. *Journal of Ambient Intelligence and Humanized Computing*, 10(1):143–152, 2019.
- [26] Christopher J Creevey and James O McInerney. An algorithm for detecting directional and non-directional positive selection, neutrality and negative selection in protein coding dna sequences. *Gene*, 300(1-2):43–51, 2002.
- [27] Lin Cui, Dechang Pi, and Chuanming Chen. Biorv-nsa: Bidirectional inhibition optimization r-variable negative selection algorithm and its application. *Applied Soft Computing*, 32:544–552, 2015.

- [28] Carlos Fernando Esponda Darlington and Stephanie Forrest. *Negative representations of information*. PhD thesis, University of New Mexico, 2005.
- [29] Dipankar Dasgupta. Advances in artificial immune systems. *IEEE computational intelligence magazine*, 1(4):40–49, 2006.
- [30] Dipankar Dasgupta and Nii Attah-Okine. Immunity-based systems: A survey. In *1997 IEEE International Conference on Systems, Man, and Cybernetics. Computational Cybernetics and Simulation*, volume 1, pages 369–374. IEEE, 1997.
- [31] Dipankar Dasgupta, Denise Ferebee, Sanjib Saha, Abhijit Kumar Nag, Kul Prasad Subedi, Alvaro Madero, Abel Sanchez, and John Williams. G-nas: A grid-based approach for negative authentication. In *2014 IEEE Symposium on Computational Intelligence in Cyber Security (CICS)*, pages 1–10. IEEE, 2014.
- [32] Dipankar Dasgupta and Stephanie Forrest. Tool breakage detection in milling operations using a negative-selection algorithm. Technical report, Citeseer, 1995.
- [33] Dipankar Dasgupta and Stephanie Forrest. Novelty detection in time series data using ideas from immunology. In *Proceedings of the international conference on intelligent systems*, pages 82–87. Citeseer, 1996.
- [34] Dipankar Dasgupta and Stephanie Forrest. Artificial immune systems in industrial applications. In *Proceedings of the Second International Conference on Intelligent Processing and Manufacturing of Materials. IPMM'99 (Cat. No. 99EX296)*, volume 1, pages 257–267. IEEE, 1999.
- [35] Dipankar Dasgupta and Fabio González. An immunity-based technique to characterize intrusions in computer networks. *IEEE Transactions on evolutionary computation*, 6(3):281–291, 2002.
- [36] Dipankar Dasgupta, Zhou Ji, and Fabio Gonzalez. Artificial immune system (ais) research in the last five years. In *The 2003 Congress on Evolutionary Computation, 2003. CEC'03.*, volume 1, pages 123–130. IEEE, 2003.
- [37] Dipankar Dasgupta, Kalmanje KrishnaKumar, D Wong, and Misty Berry. Negative selection algorithm for aircraft fault detection. In *International Conference on Artificial Immune Systems*, pages 1–13. Springer, 2004.
- [38] Dipankar Dasgupta and Fernando Nino. *Immunological computation: theory and applications*. CRC press, 2008.
- [39] Dipankar Dasgupta and Sudip Saha. Password security through negative filtering. In *2010 International Conference on Emerging Security Technologies*, pages 83–89. IEEE, 2010.
- [40] Leandro Nunes De Castro and Fernando José Von Zuben. Artificial immune systems: Part ii—a survey of applications. *FEEC/Univ. Campinas, Campinas, Brazil*, 2000.
- [41] Júlio César de Lima Costa, Leandro Nunes de Castro, and Calebe de Paula Bianchini. Sensitivity analysis of the negative selection algorithm applied to anomalies identification in builds. In *2019 XLV Latin American Computing Conference (CLEI)*, pages 1–6. IEEE, 2019.
- [42] R Deaton, M Garzon, JA Rose, RC Murphy, SE Stevens, and DR Francheschetti. A dna based artificial immune system for self-nonself discrimination. In *1997 IEEE International Conference on Systems, Man, and Cybernetics. Computational Cybernetics and Simulation*, volume 1, pages 862–866. IEEE, 1997.
- [43] Janez Demšar, Tomaž Curk, Aleš Erjavec, Črt Gorup, Tomaž Hočevar, Mitar Milutinovič, Martin Možina, Matija Polajnar, Marko Toplak, Anže Starič, et al. Orange: data mining toolbox in python. *the Journal of machine Learning research*, 14(1):2349–2353, 2013.
- [44] Hongli Deng and Tao Yang. A negative selection algorithm based on adaptive immunoregulation. In *2020 5th International Conference on Computational Intelligence and Applications (ICCIA)*, pages 177–182. IEEE, 2020.
- [45] Siti Mazura Che Doi, Norita Md Norwawi, and Roesnita Ismail. An early warning system for reservoir water release operation using agent-based negative selection model. In *Journal of Physics: Conference Series*, volume 1551, page 012009. IOP Publishing, 2020.
- [46] F. Esponda, S. Forrest, and P. Helman. Enhancing privacy through negative representations of data. 2004.
- [47] Fernando Esponda, Eric D Trias, Elena S Ackley, and Stephanie Forrest. A relational algebra for negative databases. *University of New Mexico Technical Report*, 2007.
- [48] S. N. S. Fakhari and A. M. E. Moghadam. Nssac: Negative selection-based self adaptive classifier. In *2011 International Symposium on Innovations in Intelligent Systems and Applications*, pages 29–33, 2011.
- [49] Zhang Fan, Chen Wen, Li Tao, Cao Xiaochun, and Peng Haipeng. An antigen space triangulation coverage based real-value negative selection algorithm. *IEEE Access*, 7:51886–51898, 2019.
- [50] Ehsan Farzadnia, Hossein Shirazi, and Alireza Nowroozi. A novel sophisticated hybrid method for intrusion detection using the artificial immune system. 2020.

- [51] Stephanie Forrest, Steven A Hofmeyr, Anil Somayaji, and Thomas A Longstaff. A sense of self for unix processes. In *Proceedings 1996 IEEE Symposium on Security and Privacy*, pages 120–128. IEEE, 1996.
- [52] Stephanie Forrest, Alan S Perelson, Lawrence Allen, and Rajesh Cherukuri. Self-nonsel self discrimination in a computer. In *Proceedings of 1994 IEEE computer society symposium on research in security and privacy*, pages 202–212. Ieee, 1994.
- [53] Ming FU, Xian REN, and Xi CHEN. Application of negative selection mutation algorithm in e-mail filter. *Journal of Computer Applications*, 10, 2006.
- [54] X. Gao, S. Ovaska, X. Wang, and M. Chow. A neural networks-based negative selection algorithm in fault diagnosis. *Neural Computing and Applications*, 17:91–98, 2007.
- [55] Xiao Zhi Gao, Seppo J Ovaska, and Xiaolei Wang. Particle swarm optimization of detectors in negative selection algorithm. In *2007 IEEE International Conference on Systems, Man and Cybernetics*, pages 1236–1242. IEEE, 2007.
- [56] Xiao Zhi Gao, Seppo J Ovaska, Xiaolei Wang, and M-Y Chow. Neural networks-based negative selection algorithm with applications in fault diagnosis. In *2004 IEEE International Conference on Systems, Man and Cybernetics (IEEE Cat. No. 04CH37583)*, volume 4, pages 3408–3414. IEEE, 2004.
- [57] Xiao Zhi Gao, Seppo J Ovaska, Xiaolei Wang, and M-Y Chow. Clonal optimization of negative selection algorithm with applications in motor fault detection. In *2006 IEEE International Conference on Systems, Man and Cybernetics*, volume 6, pages 5118–5123. IEEE, 2006.
- [58] Xiao Zhi Gao, Seppo J Ovaska, Xiaolei Wang, and M-Y Chow. Multi-level optimization of negative selection algorithm detectors with application in motor fault detection. *Intelligent Automation & Soft Computing*, 16(3):353–375, 2010.
- [59] XZ Gao, SJ Ovaska, and X Wang. Genetic algorithms-based detector generation in negative selection algorithm. In *2006 IEEE mountain workshop on adaptive and learning systems*, pages 133–137. IEEE, 2006.
- [60] Utpal Garain, Mangal P Chakraborty, and Dipankar Dasgupta. Recognition of handwritten indic script using clonal selection algorithm. In *International Conference on Artificial Immune Systems*, pages 256–266. Springer, 2006.
- [61] Markus Goldstein and Andreas Dengel. Histogram-based outlier score (hbos): A fast unsupervised anomaly detection algorithm. *KI-2012: Poster and Demo Track*, pages 59–63, 2012.
- [62] Fabio González and Dipankar Dasgupta. *A study of artificial immune systems applied to anomaly detection*. PhD thesis, University of Memphis Memphis, 2003.
- [63] Fabio González, Dipankar Dasgupta, and Jonatan Gómez. The effect of binary matching rules in negative selection. In *Genetic and Evolutionary Computation Conference*, pages 195–206. Springer, 2003.
- [64] Fabio Gonzalez, Dipankar Dasgupta, and Robert Kozma. Combining negative selection and classification techniques for anomaly detection. In *Proceedings of the 2002 Congress on Evolutionary Computation. CEC'02 (Cat. No. 02TH8600)*, volume 1, pages 705–710. IEEE, 2002.
- [65] Fabio Gonzalez, Dipankar Dasgupta, and Luis Fernando Niño. A randomized real-valued negative selection algorithm. In *International Conference on Artificial Immune Systems*, pages 261–272. Springer, 2003.
- [66] Fabio A Gonzalez and Dipankar Dasgupta. An immunogenetic technique to detect anomalies in network traffic. In *Proceedings of the 4th Annual Conference on Genetic and Evolutionary Computation*, pages 1081–1088, 2002.
- [67] Fabio A González and Dipankar Dasgupta. Anomaly detection using real-valued negative selection. *Genetic Programming and Evolvable Machines*, 4(4):383–403, 2003.
- [68] Mohamed Guerroumi, Abdelouahid Derhab, et al. Nsnad: negative selection-based network anomaly detection approach with relevant feature subset. *Neural Computing and Applications*, pages 1–27, 2019.
- [69] Kai Guo, Liansheng Liu, Shuhui Shi, Datong Liu, and Xiyuan Peng. Uav sensor fault detection using a classifier without negative samples: A local density regulated optimization algorithm. *Sensors*, 19(4):771, 2019.
- [70] Xiaoshu Hang and Honghua Dai. An extended negative selection algorithm for anomaly detection. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining*, pages 245–254. Springer, 2004.
- [71] Johanna Hardin and David M Rocke. Outlier detection in the multiple cluster setting using the minimum covariance determinant estimator. *Computational Statistics & Data Analysis*, 44(4):625–638, 2004.
- [72] M Hassan, M Hadhood, and HM Abdulkader. Negative database authentication using sat a like method. In *2012 8th International Conference on Informatics and Systems (INFOS)*, pages DE–29. IEEE, 2012.

- [73] Zengyou He, Xiaofei Xu, and Shengchun Deng. Discovering cluster-based local outliers. *Pattern Recognition Letters*, 24(9-10):1641–1650, 2003.
- [74] Paul Helman and Stephanie Forrest. An efficient algorithm for generating random antibody strings. Technical report, Technical Report CS-94-07, The University of New Mexico, Albuquerque, NM, 1994.
- [75] Geoffrey E Hinton and Ruslan R Salakhutdinov. Reducing the dimensionality of data with neural networks. *science*, 313(5786):504–507, 2006.
- [76] Heiko Hoffmann. Kernel pca for novelty detection. *Pattern recognition*, 40(3):863–874, 2007.
- [77] Hadi Hormozi, Mohammad Kazem Akbari, Elham Hormozi, and Morteza Sargolzaei Javan. Credit cards fraud detection by negative selection algorithm on hadoop (to reduce the training time). In *The 5th Conference on Information and Knowledge Technology*, pages 40–43. IEEE, 2013.
- [78] Mia Hubert, Michiel Debruyne, and Peter J Rousseeuw. Minimum covariance determinant and extensions. *Wiley Interdisciplinary Reviews: Computational Statistics*, 10(3):e1421, 2018.
- [79] Ismaila Idris and Ali Selamat. Improved email spam detection model with negative selection algorithm and particle swarm optimization. *Applied Soft Computing*, 22:11–27, 2014.
- [80] Ismaila Idris, Ali Selamat, Ngoc Thanh Nguyen, Sigeru Omatu, Ondrej Krejcar, Kamil Kuca, and Marek Penhaker. A combined negative selection algorithm–particle swarm optimization for an email spam detection system. *Engineering Applications of Artificial Intelligence*, 39:33–44, 2015.
- [81] Ismaila Idris, Ali Selamat, and Sigeru Omatu. Hybrid email spam detection model with negative selection algorithm and differential evolution. *Engineering Applications of Artificial Intelligence*, 28:97–110, 2014.
- [82] O. Igbe, I. Darwish, and T. Saadawi. Distributed network intrusion detection systems: An artificial immune system approach. In *2016 IEEE First International Conference on Connected Health: Applications, Systems and Engineering Technologies (CHASE)*, pages 101–106, 2016.
- [83] JHM Janssens, Ferenc Huszár, EO Postma, and HJ van den Herik. Stochastic outlier selection. *tech. rep.*, 2012.
- [84] Zhou Ji and Dipankar Dasgupta. Real-valued negative selection algorithm with variable-sized detectors. In *Genetic and Evolutionary Computation Conference*, pages 287–298. Springer, 2004.
- [85] Zhou Ji and Dipankar Dasgupta. Estimating the detector coverage in a negative selection algorithm. In *Proceedings of the 7th annual conference on Genetic and evolutionary computation*, pages 281–288, 2005.
- [86] Zhou Ji and Dipankar Dasgupta. Applicability issues of the real-valued negative selection algorithms. In *Proceedings of the 8th annual conference on Genetic and evolutionary computation*, pages 111–118, 2006.
- [87] Zhou Ji and Dipankar Dasgupta. Revisiting negative selection algorithms. *Evolutionary Computation*, 15(2):223–251, 2007.
- [88] Zhou Ji and Dipankar Dasgupta. V-detector: An efficient negative selection algorithm with “probably adequate” detector coverage. *Information sciences*, 179(10):1390–1406, 2009.
- [89] Zhou Ji, Dipankar Dasgupta, Zhiling Yang, and Hongmei Teng. Analysis of dental images using artificial immune systems. In *2006 IEEE International Conference on Evolutionary Computation*, pages 528–535. IEEE, 2006.
- [90] Zhou Ji et al. A boundary-aware negative selection algorithm. In *Proceedings of the 9th International Conference on Artificial Intelligence and Soft Computing*, ACTA Press, 2005.
- [91] Rong JIA, Xiaoyu WANG, Xingqi LUO, Hui LI, and Zhenhua CAI. Negative selection algorithm of fault diagnosis for hydroelectric generating set. *Journal of Hydroelectric Engineering*, (5):29, 2006.
- [92] FU Hai-dong ZHAO Jian-feng. Negative selection algorithm based on fuzzy control theory and genetic algorithm [j]. *Computer Engineering and Design*, 21, 2007.
- [93] Qi Jin and Ma Ming. A method to construct self set for ids based on negative selection algorithm. In *2011 International Conference on Mechatronic Science, Electric Engineering and Computer (MEC)*, pages 1051–1053. IEEE, 2011.
- [94] Zeng Jinquan, Liu Xiaojie, Li Tao, Liu Caiming, Peng Lingxi, and Sun Feixian. A self-adaptive negative selection algorithm used for anomaly detection. *Progress in natural Science*, 19(2):261–266, 2009.
- [95] Daniel Jung and Christofer Sundström. A combined data-driven and model-based residual selection algorithm for fault detection and isolation. *IEEE Transactions on Control Systems Technology*, 27(2):616–630, 2017.
- [96] JooSeuk Kim and Clayton D Scott. Robust kernel density estimation. *The Journal of Machine Learning Research*, 13(1):2529–2565, 2012.

- [97] Jung Won Kim. *Integrating artificial immune algorithms for intrusion detection*. PhD thesis, UCL (University College London), 2002.
- [98] Jungwon Kim and Peter Bentley. Negative selection and niching by an artificial immune system for network intrusion detection. In *Proc. of GECCO '99*, pages 149–158, 1999.
- [99] Diederik P Kingma and Max Welling. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*, 2013.
- [100] Hans-Peter Kriegel, Peer Kröger, Erich Schubert, and Arthur Zimek. Outlier detection in axis-parallel subspaces of high dimensional data. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining*, pages 831–838. Springer, 2009.
- [101] Hans-Peter Kriegel, Matthias Schubert, and Arthur Zimek. Angle-based outlier detection in high-dimensional data. In *Proceedings of the 14th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 444–452, 2008.
- [102] U Jothi Lakshmi. A novel method to detect false financial statement using negative selection algorithm.
- [103] Ayodele Lasisi, Rozaida Ghazali, and Tutut Herawan. Negative selection algorithm: a survey on the epistemology of generating detectors. In *Proceedings of the First International Conference on Advanced Data and Information Engineering (DaEng-2013)*, pages 167–176. Springer, 2014.
- [104] Ayodele Lasisi, Rozaida Ghazali, and Tutut Herawan. Application of real-valued negative selection algorithm to improve medical diagnosis. In *Applied Computing in Medicine and Health*, pages 231–243. Elsevier, 2016.
- [105] CA Laurentys, G Ronacher, Reinaldo M Palhares, and Walimir M Caminhas. Design of an artificial immune system for fault detection: a negative selection approach. *Expert Systems with Applications*, 37(7):5507–5513, 2010.
- [106] Aleksandar Lazarevic and Vipin Kumar. Feature bagging for outlier detection. In *Proceedings of the eleventh ACM SIGKDD international conference on Knowledge discovery in data mining*, pages 157–166, 2005.
- [107] Dong-Wook Lee and Kwee-Bo Sim. Negative selection algorithm for dna sequence classification. *Int. J. Fuzzy Logic and Intelligent Systems*, 4(2):231–235, 2004.
- [108] Dan Li, Dacheng Chen, Jonathan Goh, and See-kiong Ng. Anomaly detection with generative adversarial networks for multivariate time series. *arXiv preprint arXiv:1809.04758*, 2018.
- [109] Dong Li, Shulin Liu, and Hongli Zhang. Negative selection algorithm with constant detectors for anomaly detection. *Applied Soft Computing*, 36:618–632, 2015.
- [110] Dong Li, Shulin Liu, and Hongli Zhang. A negative selection algorithm with online adaptive learning under small samples for anomaly detection. *Neurocomputing*, 149:515–525, 2015.
- [111] Dong Li, Shulin Liu, and Hongli Zhang. A boundary-fixed negative selection algorithm with online adaptive learning under small samples for anomaly detection. *Engineering Applications of Artificial Intelligence*, 50:93–105, 2016.
- [112] Guiyang Li, Tao Li, Jie Zeng, and Haibo Li. An outlier robust negative selection algorithm inspired by immune suppression. *JCP*, 5(9):1348–1355, 2010.
- [113] R Li and Akira Mita. Hybrid immune algorithm for structural health monitoring using acceleration data. In *8th International Workshop on Structural Health Monitoring 2011: Condition-Based Maintenance and Intelligent Structures*, pages 1095–1102, 2011.
- [114] Zheng Li, Yue Zhao, Nicola Botta, Cezar Ionescu, and Xiyang Hu. Copod: copula-based outlier detection. *arXiv preprint arXiv:2009.09463*, 2020.
- [115] Fei Tony Liu, Kai Ming Ting, and Zhi-Hua Zhou. Isolation forest. In *2008 Eighth IEEE International Conference on Data Mining*, pages 413–422. IEEE, 2008.
- [116] Yezheng Liu, Zhe Li, Chong Zhou, Yuanchun Jiang, Jianshan Sun, Meng Wang, and Xiangnan He. Generative adversarial active learning for unsupervised outlier detection. *IEEE Transactions on Knowledge and Data Engineering*, 2019.
- [117] Yong-juan LIU and Chao-yong QIN. Abnormality detecting and adjusting of power load based on negative selection algorithm. *Computer Simulation*, (6):64, 2007.
- [118] Tianliang Lu, Lu Zhang, Shunye Wang, and Qi Gong. Ransomware detection based on v-detector negative selection algorithm. In *2017 International Conference on Security, Pattern Analysis, and Cybernetics (SPAC)*, pages 531–536. IEEE, 2017.
- [119] Wenjian Luo, Yamin Hu, Hao Jiang, and Junteng Wang. Authentication by encrypted negative password. *IEEE Transactions on Information Forensics and Security*, 14(1):114–128, 2018.

- [120] Wenjian Luo, Xin Wang, and Xufa Wang. A novel fast negative selection algorithm enhanced by state graphs. In *International Conference on Artificial Immune Systems*, pages 168–181. Springer, 2007.
- [121] Prasant Kumar Mahapatra, Mandeep Kaur, Spardha Sethi, Rishabh Thareja, Amod Kumar, and Swapna Devi. Improved thresholding based on negative selection algorithm (nsa). *Evolutionary Intelligence*, 6(3):157–170, 2014.
- [122] Stephen Marsland, Jonathan Shapiro, and Ulrich Nehmzow. A self-organising network that grows when required. *Neural networks*, 15(8-9):1041–1058, 2002.
- [123] Young-Il Moon, Balaji Rajagopalan, and Upmanu Lall. Estimation of mutual information using kernel density estimators. *Physical Review E*, 52(3):2318, 1995.
- [124] Andrew Mor-Yaroslavtsev and Anatoly Levchenkov. Rolling stock location data analysis using an immune algorithm on an intelligent embedded device. In *2011 19th Telecommunications Forum (TELFOR) Proceedings of Papers*, pages 1554–1557. IEEE, 2011.
- [125] Maryam Mousavi, Azuraliza Abu Bakar, Suhaila Zainudin, ZALIZAH AWANG LONG, Mazrura Sahani, and Mohammadmahdi Vakilian. Negative selection algorithm for dengue outbreak detection. *Turkish Journal of Electrical Engineering & Computer Sciences*, 21(Sup. 2):2345–2356, 2013.
- [126] Thanh Trung Ngo, Yasushi Makihara, Hajime Nagahara, Yasuhiro Mukaigawa, and Yasushi Yagi. The largest inertial sensor-based gait database and performance evaluation of gait-based personal authentication. *Pattern Recognition*, 47(1):228–237, 2014.
- [127] Vu Thanh Nguyen, Toan Tan Nguyen, Khang Trong Mai, and Tuan Dinh Le. A combination of negative selection algorithm and artificial immune network for virus detection. In *International Conference on Future Data and Security Engineering*, pages 97–106. Springer, 2014.
- [128] Marin E Pamukov and Vladimir K Poulkov. Multiple negative selection algorithm: Improving detection error rates in iot intrusion detection systems. In *2017 9th IEEE International Conference on Intelligent Data Acquisition and Advanced Computing Systems: Technology and Applications (IDAACS)*, volume 1, pages 543–547. IEEE, 2017.
- [129] Patrick Perkins and Steffen Heber. Using a novel negative selection inspired anomaly detection algorithm to identify corrupted ribo-seq and rna-seq samples. In *Proceedings of the 10th ACM International Conference on Bioinformatics, Computational Biology and Health Informatics*, pages 457–465, 2019.
- [130] Tomáš Pevný. Loda: Lightweight on-line detector of anomalies. *Machine Learning*, 102(2):275–304, 2016.
- [131] Sridhar Ramaswamy, Rajeev Rastogi, and Kyuseok Shim. Efficient algorithms for mining outliers from large data sets. In *Proceedings of the 2000 ACM SIGMOD international conference on Management of data*, pages 427–438, 2000.
- [132] Chikh Ramdane and Salim Chikhi. A new negative selection algorithm for adaptive network intrusion detection system. *International Journal of Information Security and Privacy (IJISP)*, 8(4):1–25, 2014.
- [133] Chikh Ramdane and Salim Chikhi. Negative selection algorithm: recent improvements and its application in intrusion detection system. *Int. J. Comput. Acad. Res. (IJCAR)*, 6(2):20–30, 2017.
- [134] Weijian Ren and Zongyan Yu. Research of pump-jack fault diagnosis method based on the negative selection algorithm. In *2006 6th World Congress on Intelligent Control and Automation*, volume 2, pages 5760–5763. IEEE, 2006.
- [135] Yanheng Ren, Xianghua Wang, and Chunming Zhang. A novel fault diagnosis method based on improved negative selection algorithm. *IEEE Transactions on Instrumentation and Measurement*, 70:1–8, 2020.
- [136] Douglas A Reynolds. Gaussian mixture models. *Encyclopedia of biometrics*, 741, 2009.
- [137] Abdul Jabbar Saleh, Asif Karim, Bharanidharan Shanmugam, Sami Azam, Krishnan Kannoorpatti, Mirjam Jonkman, and Friso De Boer. An intelligent spam detection model based on artificial immune system. *Information*, 10(6):209, 2019.
- [138] Thomas Schlegl, Philipp Seeböck, Sebastian M. Waldstein, Ursula Schmidt-Erfurth, and Georg Langs. Unsupervised anomaly detection with generative adversarial networks to guide marker discovery. In Marc Niethammer, Martin Styner, Stephen Aylward, Hongtu Zhu, Ipek Oguz, Pew-Thian Yap, and Dinggang Shen, editors, *Information Processing in Medical Imaging*, pages 146–157, Cham, 2017. Springer International Publishing.
- [139] Fatemeh Selahshoor, Hamid Jazayeriy, and Hesam Omranpour. Intrusion detection systems using real-valued negative selection algorithm with optimized detectors. In *2019 5th Iranian Conference on Signal Processing and Intelligent Systems (ICSPIS)*, pages 1–5. IEEE, 2019.



- [140] Ji-ye SHAO, Ri-xin WANG, Jin-bo GAO, and Min-qiang XU. Fault diagnosis for gas valve based on negative selection algorithm [j]. *Journal of Vibration Engineering*, 4, 2006.
- [141] Liu Shulin, Zhang Jiazhong, Shi Wengang, and Huang Wenhui. Negative-selection algorithm based approach for fault diagnosis of rotary machinery. In *Proceedings of the 2002 American Control Conference (IEEE Cat. No. CH37301)*, volume 5, pages 3955–3960. IEEE, 2002.
- [142] Kwee-Bo Sim and Dong-Wook Lee. Modeling of positive selection for the development of a computer immune system and a self-recognition algorithm. *International Journal of Control, Automation, and Systems*, 1(4):453–458, 2003.
- [143] Xiaohui Song, Fei Gao, Zhenning Chen, and Wenjing Liu. A negative selection algorithm-based identification framework for distribution network faults with high resistance. *IEEE Access*, 7:109363–109374, 2019.
- [144] Cecilia Surace and Keith Worden. Novelty detection in a changing environment: a negative selection approach. *Mechanical Systems and Signal Processing*, 24(4):1114–1128, 2010.
- [145] Jian Tang, Zhixiang Chen, Ada Wai-Chee Fu, and David W Cheung. Enhancing effectiveness of outlier detections for low density patterns. In *Pacific-Asia Conference on Knowledge Discovery and Data Mining*, pages 535–548. Springer, 2002.
- [146] Maurras Ulbricht Togbe, Mariam Barry, Aliou Boly, Yousra Chabchoub, Raja Chiky, Jacob Montiel, and Vinh-Thuy Tran. Anomaly detection for data streams based on isolation forest using scikit-multiflow. In *International Conference on Computational Science and Its Applications*, pages 15–30. Springer, 2020.
- [147] Salau-Ibrahim Taofeekat Tosin and Jimoh Rasheed Gbenga. Negative selection algorithm based intrusion detection model. In *2020 IEEE 20th Mediterranean Electrotechnical Conference (MELECON)*, pages 202–206. IEEE, 2020.
- [148] Laurens Van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of machine learning research*, 9(11), 2008.
- [149] Harald Von Boehmer and Pawel Kisielow. Self-nonsel self discrimination by t cells. *Science*, 248(4961):1369–1373, 1990.
- [150] Chundong Wang, Li Sun, Junfeng Wei, and Xiuliang Mo. A new trojan horse detection method based on negative selection algorithm. In *2012 IEEE International Conference on Oxide Materials for Electronic Engineering (OMEE)*, 2012.
- [151] Hui WANG, Ke-jun WANG, Li-jun YU, and Xue-lian LI. An immune negative selection algorithm with an adjustable threshold based on fuzzy logic [j]. *Journal of Harbin Engineering University*, 11, 2007.
- [152] Chen Wen and Li Tao. Parameter analysis of negative selection algorithm. *Information Sciences*, 420:218–234, 2017.
- [153] Chen Wen, Li Tao, Liu Xiaojie, and Zhang Bing. A negative selection algorithm based on hierarchical clustering of self set. *Science China-Information Sciences*, 56(8):611–625, 2013.
- [154] Chen Wen, Ding Xiaoming, Li Tao, and Yang Tao. Negative selection algorithm based on grid file of the feature space. *Knowledge-Based Systems*, 56:26–35, 2014.
- [155] Bin Wu, Tianliang Lu, Kangfeng Zheng, Dongmei Zhang, and Xing Lin. Smartphone malware detection model based on artificial immune system. *China Communications*, 11(13):86–92, 2014.
- [156] Peifei WU and Xufei ZHENG. An improved variable-radius real-valued negative selection algorithm. *JOURNAL OF INFORMATION & COMPUTATIONAL SCIENCE*, 9(16):4713–4720, 2012.
- [157] Ze-Jun Wu, XU Wang, and Yi-Wen Liang. An artificial immune method for stock market avoiding control of hedge fund. In *Third International Conference on Natural Computation (ICNC 2007)*, volume 2, pages 523–527. IEEE, 2007.
- [158] Furong Xia, Yongli Zhu, and Yuan Gao. Shape-space based negative selection algorithm and its application on power transformer fault diagnosis. In *2007 IEEE International Conference on Robotics and Biomimetics (ROBIO)*, pages 2149–2154. IEEE, 2007.
- [159] Xin Xiao, Tao Li, and Ruirui Zhang. An immune optimization based real-valued negative selection algorithm. *Applied Intelligence*, 42(2):289–302, 2015.
- [160] Tao Yang, Wen Chen, and Tao Li. An antigen space density based real-value negative selection algorithm. *Applied Soft Computing*, 61:860–874, 2017.
- [161] Tao Yang, Hong Li Deng, Wen Chen, and Zhe Wang. GF-NSA: A Negative Selection Algorithm Based on Self Grid File. *Applied Mechanics and Materials*, 44-47:3200–3203, December 2010.

- [162] Wu Ze-jun, Chen Jia, Yang Huan, Lv Lin, and Wang Xin-an. An artificial immune model for abnormal fluctuation of stock price. In *2008 International Symposium on Computational Intelligence and Design*, volume 1, pages 274–277. IEEE, 2008.
- [163] Jinqian Zeng, Renchao Qin, and Weiwen Tang. An extended negative selection algorithm for unknown malware detection. *Journal of Computational and Theoretical Nanoscience*, 13(6):4010–4017, 2016.
- [164] Fuyong Zhang and Ying Ma. Integrated negative selection algorithm and positive selection algorithm for malware detection. In *2016 International Conference on Progress in Informatics and Computing (PIC)*, pages 605–609. IEEE, 2016.
- [165] Hai-ying ZHANG, Hong-na GUAN, and Yong-xiang PAN. An improved intrusion detection negative selection immune algorithm [j]. *Journal of Xi'an University of Technology*, 3, 2005.
- [166] Jie Zhang and Wenjian Luo. Evoseedrnasai: An improved evolutionary algorithm for generating detectors in the real-valued negative selection algorithms. *Applied Soft Computing*, 19:18–30, 2014.
- [167] Jie Zhang and Wenjian Luo. Evoseedrnasai: An improved evolutionary algorithm for generating detectors in the real-valued negative selection algorithms. *Applied Soft Computing*, 19:18 – 30, 2014.
- [168] Nan Zhang, Zhi-shu Li, and Jian-hua Zhang. A negative selection algorithm based on chaos theory. *JOURNAL-SICHUAN UNIVERSITY ENGINEERING SCIENCE EDITION*, 38(1):124, 2006.
- [169] PengTao ZHANG, Wei WANG, and Ying TAN. A malware detection model based on a negative selection algorithm with penalty factor. *SCIENTIA SINICA Informationis*, 41(7):798–812, 2011.
- [170] Yue Zhao and Maciej K Hryniewicki. Xgbod: improving supervised outlier detection with unsupervised representation learning. In *2018 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8. IEEE, 2018.
- [171] Yue Zhao, Zain Nasrullah, Maciej K Hryniewicki, and Zheng Li. Lscp: Locally selective combination in parallel outlier ensembles. In *Proceedings of the 2019 SIAM International Conference on Data Mining*, pages 585–593. SIAM, 2019.
- [172] Yue Zhao, Zain Nasrullah, and Zheng Li. Pyod: A python toolbox for scalable outlier detection. *Journal of Machine Learning Research*, 20(96):1–7, 2019.
- [173] Zhaoxiang Yi, Xiaodong Mu, Li Zhang, and Peng Zhao. A matrix negative selection algorithm for anomaly detection. In *2008 IEEE Congress on Evolutionary Computation (IEEE World Congress on Computational Intelligence)*, pages 978–983, 2008.
- [174] Xufei Zheng, Yanhui Zhou, and Yonghui Fang. The dual negative selection algorithm based on pattern recognition receptor theory and its application in two-class data classification. *JCP*, 8(8):1951–1959, 2013.
- [175] G. Zhou, J. Lu, C.-Y. Wan, M. D. Yarvis, and J. A. Stankovic. *Body Sensor Networks*. MIT Press, Cambridge, MA, 2008.
- [176] Fangdong Zhu, Wen Chen, Hanli Yang, Tao Li, Tao Yang, and Fan Zhang. A quick negative selection algorithm for one-class classification in big data era. *Mathematical Problems in Engineering*, 2017, 2017.