

PAL: Intelligence Augmentation using Egocentric Visual Context Detection

Mina Khan
MIT Media Lab
75 Amherst St, Cambridge, MA, USA
minakhan01@gmail.com

Pattie Maes
MIT Media Lab
75 Amherst St, Cambridge, MA, USA
pattie@media.mit.edu

Abstract

Egocentric visual context detection can support intelligence augmentation applications. We created a wearable system, called PAL, for wearable, personalized, and privacy-preserving egocentric visual context detection. PAL has a wearable device with a camera, heart-rate sensor, on-device deep learning, and audio input/output. PAL also has a mobile/web application for personalized context labeling. We used on-device deep learning models for generic object and face detection, low-shot custom face and context recognition (e.g., activities like brushing teeth), and custom context clustering (e.g., indoor locations). The models had over 80% accuracy in in-the-wild contexts (~1000 images) and we tested PAL for intelligence augmentation applications like behavior change. We have made PAL is open-source to further support intelligence augmentation using personalized and privacy-preserving egocentric visual contexts.

1. Introduction

Egocentric visual contexts have been useful in context-aware intelligence augmentation [9], e.g., memory augmentation and assistive technology [31, 8]. However, visual context tracking, especially sending user data to the cloud for deep learning, raises privacy concerns and deep learning models also have to be personalized for each user.

We created a wearable system, called PAL (Figure 1), for personalized and privacy-preserving egocentric visual context recognition using on-device, human-in-the-loop, and low-shot deep learning. PAL uses on-device deep learning for real-time and privacy-preserving processing of user data, and includes multimodal sensing, e.g., using camera, heart-rate, physical activity, and geolocation [14]. PAL also supports user input for human-in-the-loop training of personalized visual contexts. We used on-device models for generic object and face detection, personalized and low-shot custom face and recognition, and semi-supervised custom context clustering [19]. Compared to existing wearable systems, which use at least 100 training images per

custom context [21] and do not use privacy-preserving on-device deep learning, PAL’s on-device models for low-shot and continual learning use ~10 training images per context. Also, PAL uses active learning for context clustering so that the users do not have to explicitly train different contexts.

We make three contributions: i. a wearable device for privacy-preserving and personalized egocentric visual context detection using on-device and human-in-the-loop deep learning; ii. a system for recognizing custom contexts, faces, and clusters using low-shot, custom-trainable, and active learning; iii. real-world applications and evaluations.

2. Related Work


PAL is a wearable system for personalized and privacy-preserving egocentric visual context detection using on-device, human-in-the-loop, and low-shot deep learning. PAL also includes multimodal sensors and input/outputs. The existing wearable systems for egocentric visual context detection do not support multimodal sensing and on-device, human-in-the-loop, and low-shot deep learning like PAL.

2.1. Wearable Cameras and Deep Learning

Wearable cameras are commonly used for intelligence augmentation applications [31, 8] and even combined with physiological sensors [11]. Deep learning has also been used with egocentric cameras, e.g., for predicting daily activities [3], eating recognition [2], visual assistance [26, 27], visual guides [30], and face recognition [5]). However, none use on-device deep learning, especially for personalized and privacy-preserving egocentric visual contexts. On-device deep learning systems have also been used for computer vision [25], but they do not support personalized, low-shot, and human-in-the-loop visual context detection.

2.2. Privacy-preserving Deep Learning

Privacy-preserving approaches include privacy-preserving collaborative deep learning for human activity recognition [24] and image distort or modification [7, 1]. However, none of these systems use on-device deep learning to avoid sending data to the cloud for processing.

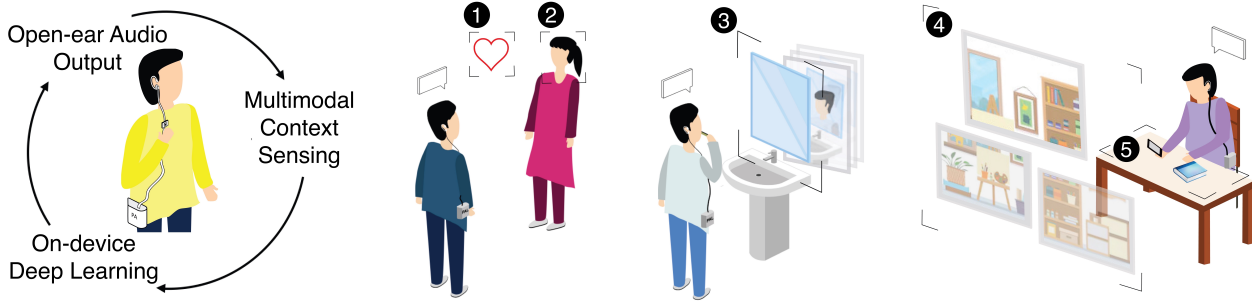

Contexts: 1. Heart Rate; 2. Generic and Custom Faces; 3. Custom Contexts; 4. Context Clusters; 5. Generic Objects

Figure 1. Wearable system using multimodal sensors and on-device deep learning for context-aware support in egocentric visual contexts.

2.3. Personalized Deep Learning

Wearable deep learning-based egocentric visual context recognition has been used for personalized object and face recognition [20, 21]. However, they do not use on-device deep learning for privacy-preserving context detection and also need ~ 100 images for training each personalized class, whereas our custom context and face recognition models use 1 to 10 images. There are also approaches for low-shot and continual deep learning [28] and active deep learning [12], including for image clustering [4]. However, none have been deployed in in-the-wild wearable settings, especially for on-device and personalized deep learning.

3. Design and Implementation

We created a wearable system, called PAL, with multimodal sensing (camera, geolocation, heart-rate, and physical activity), on-device deep learning, and audio input/output. PAL’s wearable device, on-device deep learning models, and mobile/web app are described below.

We made 3 design decisions to enable personalized and privacy-preserving egocentric visual context detection. First, we decided to use a head-mounted egocentric camera to capture the user’s visual context, but decided to keep the camera small, light, and non-conspicuous. Second, we decided to use on-device deep learning for model training and inference so that user images were not sent to the cloud for processing and can be processed on-device for privacy-preserving sensing, e.g., hiding bystander’s faces. Third, we decided to enable human-in-the-loop and active learning to learn personalized contexts for intelligence augmentation.

3.1. Wearable Device

PAL’s wearable device has an ear-hook and an on-body component (Figure 2). The ear-hook has a camera, heart-rate sensor, and open-ear audio output. The on-body component has a microprocessor and a deep learning accelerator. The device takes periodic pictures, has a 5-hour battery life (0.3A at 5.25V, 2500mAh battery). The device supports

audio input/output and the users can press a button for starting/stopping custom face and context training sessions.

3.2. On-device Deep Learning Models

We added on-device visual context detection models for three tasks: i. generic object and face detection; ii. low-shot custom face and context recognition; iii. context clustering for efficient active learning of visually-similar contexts. All models are trained and inferred on the wearable device.

Object and Face Detection: The *Object Detection* model is trained on 90-item Common Objects in Context (COCO) dataset [22] and *Face Detection* on Open Images v4. Both models use the MobileNet SSD v2 architecture [13, 23].

Low-shot Custom Face and Context Recognition: We use MobileNetv1 architectures [13] for both. *Custom Face Recognition* models using FaceNet [29] and needs 1-2 custom training images per face. *Custom Context Recognition* model recognizes custom activities, e.g., brushing teeth, using weight imprinting [28]. Weight imprinting adds new classes to the existing list of classes for continual learning and needs ~ 10 training images per class. We used weight imprinting on embeddings from an Image Classification model pre-trained on the 1000-class ImageNet dataset [6].

Context Clustering for Active Learning: We cluster visually-similar contexts, separated by geolocations, using an image embedding generator combined with clustering. We generated embeddings using an Image Classification model (MobileNet v1), pre-trained on 1000-class ImageNet dataset. We use Density-based Spatial Clustering of Applications with Noise (DBSCAN) [10] for clustering as DBSCAN does not require a predetermined number of clusters.

3.3. Mobile/Web Application

The mobile/web application supports geolocation and physical activity tracking, personalized data labeling and visualization, and custom intervention-setting, e.g., just-in-time reminders for habit-formation support [18]. Custom contexts, context clusters, and faces are shown on the mobile app for labeling. Figure 3 shows the labeling interface.



Figure 2. Wearable device with on-device deep learning, camera, open-ear audio output, microphone, and heart-rate sensor.

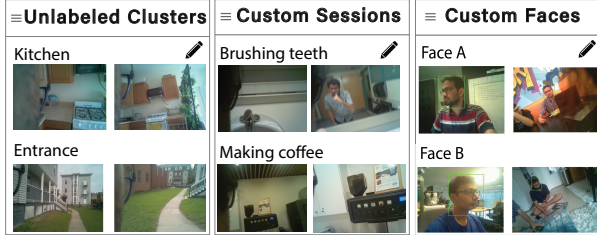


Figure 3. Interface for custom cluster, context, and face labeling.

4. Evaluations, Applications, and Future Work

We performed technical evaluations of PAL. We tested PAL’s deep learning models with 4 participants for 2 days each (~1000 in-the-wild images) [19]. Each model had over 80% accuracy – Object Detection: 98.8% (F1 = 0.79, ~1000 instances); Face Detection: 88.8% (F1 = 0.9, ~180 instances); Custom Face Recognition: 86.9% (4 faces, 120 instances); Custom Contexts: 87.2% (7 activities, ~350 images); Custom Clusters: 82% (19 contexts, ~300 images). Even images partially occluded by cheeks or hair were accurately predicted. Inference time was ~3 sec per model and ~15 sec for 5 models. Moreover, the camera captured ~70% of the user’s visual contexts and the heart-rate sensor accuracy was also comparable to state-of-the-art sensors [14].

We used PAL for real-world habit formation support and showed that habit support in egocentric visual contexts can double habit-formation compared to state-of-the-art techniques [18, 15]. We also built applications for language learning and memory support using PAL [17].

Users want behavior change support in multimodal contexts [16], and we envision that PAL can be used for context-aware behavior change support. PAL’s egocentric visual context detection can also be deployed for other intelligence augmentation applications, e.g., memory support for Alzheimer’s patients and caretakers. More sensors can be also added to PAL’s open-source platform and further work on on-device deep learning will enable better context detection using PAL, e.g., audio-visual context detection.

5. Conclusion

Context-awareness is key for intelligence augmentation and egocentric visual contexts can provide rich informa-

tion about a user’s environmental and behavioral contexts. We created a wearable system, called PAL, for personalized and privacy-preserving egocentric visual context detection. PAL uses on-device deep learning for privacy-preserving processing, and we also added multimodal sensing (heart-rate, geolocation, and physical activity) and seamless audio input/output to PAL. We deployed on-device, low-shot, and human-in-the-loop deep learning models on PAL to recognize generic faces and objects as well as custom faces, contexts (e.g., activities like brushing teeth), and context clusters (e.g. indoor locations). We tested PAL in in-the-wild wearable settings and also used it for real-world language learning, behavior change, and memory augmentation applications. Thus, using on-device, low-shot, and human-in-the-loop deep learning, PAL paves the way for intelligence augmentation applications using personalized and privacy-preserving egocentric visual contexts.

References

- [1] Rawan Alharbi, Mariam Tolba, Lucia C Petito, Josiah Hester, and Nabil Alshurafa. To mask or not to mask? balancing privacy with visual confirmation utility in activity-oriented wearable cameras. *Proceedings of the ACM on interactive, mobile, wearable and ubiquitous technologies*, 3(3):1–29, 2019. 1
- [2] Abdelkareem Bedri, Diana Li, Rushil Khurana, Kunal Bhuvalka, and Mayank Goel. Fitbyte: Automatic diet monitoring in unconstrained situations using multimodal sensing on eyeglasses. In *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*, pages 1–12, 2020. 1
- [3] Daniel Castro, Steven Hickson, Vinay Bettadapura, Edison Thomaz, Gregory Abowd, Henrik Christensen, and Irfan Essa. Predicting daily activities from egocentric images using deep learning. In *Proceedings of the 2015 ACM International Symposium on Wearable Computers, ISWC ’15*, pages 75–82, New York, NY, USA, Sept. 2015. Association for Computing Machinery. 1
- [4] Luiz F. S. Coletta, Moacir Ponti, Eduardo R. Hruschka, Ayan Acharya, and Joydeep Ghosh. Combining clustering and active learning for the detection and learning of new image classes. *Neurocomputing*, 358:150–165, Sept. 2019. 2
- [5] Ovidiu Daescu, Hongyao Huang, and Maxwell Weinzierl. Deep learning based face recognition system with smart glasses. In *Proceedings of the 12th ACM International Conference on Pervasive Technologies Related to Assistive Environments, PETRA ’19*, pages 218–226, New York, NY, USA, June 2019. Association for Computing Machinery. 1
- [6] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009. 2
- [7] Mariella Dimiccoli, Juan Marín, and Edison Thomaz. Mitigating bystander privacy concerns in egocentric activity recognition with deep learning and intentional image degra-

- dation. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 1(4):1–18, 2018. 1
- [8] Aiden R. Doherty, Steve E. Hodges, Abby C. King, Alan F. Smeaton, Emma Berry, Chris JA Moulin, Siân Lindley, Paul Kelly, and Charlie Foster. Wearable cameras in health: the state of the art and future possibilities. *American journal of preventive medicine*, 44(3):320–323, 2013. Publisher: Elsevier. 1
- [9] Douglas C Engelbart. Augmenting human intellect: A conceptual framework. *Menlo Park, CA*, 1962. 1
- [10] Martin Ester, Hans-Peter Kriegel, Jörg Sander, Xiaowei Xu, et al. A density-based algorithm for discovering clusters in large spatial databases with noise. In *Kdd*, volume 96, pages 226–231, 1996. 2
- [11] Jennifer Healey and Rosalind W Picard. Startlecam: A cybernetic wearable camera. In *iswc*, volume 1998, pages 42–49, 1998. 1
- [12] H M Sajjad Hossain and Nirmalya Roy. Active Deep Learning for Activity Recognition with Context Aware Annotator Selection. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '19, pages 1862–1870, New York, NY, USA, July 2019. Association for Computing Machinery. 2
- [13] Andrew G Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam. MobileNets: Efficient convolutional neural networks for mobile vision applications. Apr. 2017. 2
- [14] Mina Khan, Glenn Fernandes, and Pattie Maes. Pal: Privacy-preserving audio, visual, and physiological contexts for wearable context-aware behavior change support. In *Joint Proceedings of the ACM IUI 2021 Workshops*, 2021. 1, 3
- [15] Mina Khan, Glenn Fernandes, and Pattie Maes. Pal: Wearable and personalized habit-support interventions in egocentric visual and physiological contexts. In *Proceedings of the Augmented Humans International Conference*, 2021. 3
- [16] Mina Khan, Glenn Fernandes, and Pattie Maes. Users want diverse, multiple, and personalized behavior change support: Need-finding survey. In *International Conference on Persuasive Technology*. Springer, 2021. 3
- [17] Mina Khan, Glenn Fernandes, Utkarsh Sarawgi, Prudhvi Rampey, and Pattie Maes. Pal: A wearable platform for real-time, personalized and context-aware health and cognition support. *arXiv preprint arXiv:1905.01352*, 2019. 3
- [18] Mina Khan, Glenn Fernandes, Akash Vaish, Mayank Manuja, Agnis Stibe, and Pattie Maes. Improving context-aware habit-support interventions using egocentric visual contexts. In *International Conference on Persuasive Technology*. Springer, 2021. 2, 3
- [19] Mina Khan, Glenn Fernandes, Akash Vaish, Mayank Manuja, Agnis Stibe, and Pattie Maes. Wearable system for personalized and privacy-preserving egocentric visual context detection using on-device deep learning. In *Adjunct Publication of the 28th ACM Conference on User Modeling, Adaptation and Personalization*, 2021. 1, 3
- [20] Hosub Lee, Cameron Upright, Steven Eliuk, and Alfred Kobsa. Personalized object recognition for augmenting human memory. In *Proceedings of the 2016 ACM International Joint Conference on Pervasive and Ubiquitous Computing: Adjunct*, pages 1054–1061, 2016. 2
- [21] Hosub Lee, Cameron Upright, Steven Eliuk, and Alfred Kobsa. Personalized visual recognition via wearables: A first step toward personal perception enhancement. In *Personal Assistants: Emerging Computational Technologies*, pages 95–112. Springer, 2018. 1, 2
- [22] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pages 740–755. Springer, 2014. 2
- [23] Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and Alexander C Berg. Ssd: Single shot multibox detector. In *European conference on computer vision*, pages 21–37. Springer, 2016. 2
- [24] Lingjuan Lyu, Xuanli He, Yee Wei Law, and Marimuthu Palaniswami. Privacy-Preserving Collaborative Deep Learning with Application to Human Activity Recognition. In *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management, CIKM '17*, pages 1219–1228, New York, NY, USA, Nov. 2017. Association for Computing Machinery. 1
- [25] Akhil Mathur, Nicholas D Lane, Sourav Bhattacharya, Aidan Boran, Claudio Forlivesi, and Fahim Kawsar. Deepeye: Resource efficient local execution of multiple deep vision models using wearable commodity hardware. In *Proceedings of the 15th Annual International Conference on Mobile Systems, Applications, and Services*, pages 68–81, 2017. 1
- [26] Davide Mulfari. A TensorFlow-based Assistive Technology System for Users with Visual Impairments. In *Proceedings of the Internet of Accessible Things, W4A '18*, pages 1–2, New York, NY, USA, Apr. 2018. Association for Computing Machinery. 1
- [27] A Nishajith, J Nivedha, Shilpa S Nair, and J Mohammed Shaffi. Smart cap-wearable visual guidance system for blind. In *2018 International Conference on Inventive Research in Computing Applications (ICIRCA)*, pages 275–278. IEEE, 2018. 1
- [28] Hang Qi, Matthew Brown, and David G Lowe. Low-shot learning with imprinted weights. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 5822–5830, 2018. 2
- [29] Florian Schroff, Dmitry Kalenichenko, and James Philbin. Facenet: A unified embedding for face recognition and clustering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 815–823, 2015. 2
- [30] Lorenzo Seidenari, Claudio Baecchi, Tiberio Uricchio, Andrea Ferracani, Marco Bertini, and Alberto Del Bimbo. Deep Artwork Detection and Retrieval for Automatic Context-Aware Audio Guides. *ACM Transactions on Multimedia Computing, Communications, and Applications*, 13(3s):35:1–35:21, June 2017. 1
- [31] Cassandra Xia and Pattie Maes. The design of artifacts for augmenting intellect. In *Proceedings of the 4th Augmented Human International Conference, AH '13*, pages 154–161, New York, NY, USA, Mar. 2013. Association for Computing Machinery. 1