

Quantum Algorithms and Simulation for Parallel and Distributed Quantum Computing

Rhea Parekh
Indian Institute of Technology Roorkee
rheaparekh12@gmail.com

Andrea Ricciardi
Deep Blue Capital
andrea.ricciardi@live.com

Ahmed Darwish, Stephen DiAdamo
Technische Universität München
{a.darwish, stephen.diadamo}@tum.de

Abstract—A viable approach for building large-scale quantum computers is to interlink small-scale quantum computers with a quantum network to create a larger distributed quantum computer. When designing quantum algorithms for such a distributed quantum computer, one can make use of the added parallelization and distribution abilities inherent in such a system. An added difficulty to consider for distributed quantum computing is that a complex control system to orchestrate the various components is required. In this work, we present distributed and parallel versions of quantum algorithms and discuss potential benefits and we propose a general scheme for controlling the system. Further, we present the Interlin-q simulation platform which aims to simplify designing and simulating parallel and distributed quantum algorithms. Interlin-q’s main features are generating and executing control instructions across a simulated quantum network of simulated quantum computers. We demonstrate a simulation of a proposed parallelized algorithm using Interlin-q and discuss steps for developing Interlin-q into a control system for distributed quantum computers.

Index Terms—Distributed quantum computing, distributed quantum algorithms, quantum software, quantum multi-computing, networked control systems

I. INTRODUCTION

Scaling quantum computers up to levels where practical quantum algorithms can be executed will require a number of technological breakthroughs. In the present state of technology, scaling quantum computers past the 100 qubit mark has proven challenging [1]. Even when quantum computers can support a large number of qubits in a single system, if current methods error correction methods like surface codes are used, the amount of control signals required to perform error correction will scale with the number of qubits, potentially bottlenecking logical instructions for an algorithm’s execution [2]. To overcome these obstacles, a potential solution is to instead create smaller-scale quantum computers and interlink them using a quantum network to perform quantum algorithms over a distributed system. The benefit of using smaller, interlinked quantum processors is the ability to perform larger quantum circuits on more robust and controllable quantum processors using distribution methods. In addition the ability to use parallelism in algorithm design is enabled.

When moving from monolithic to distributed quantum computers a variety of challenges arise. Indeed, there are many technological challenges to overcome towards building distributed quantum computers. A naturally arising problem to consider in this perspective is performing two-qubit operations between qubits that are physically separated between two

quantum computers. To perform two-qubit operations with monolithic quantum technologies, generally the two qubits are physically near each other, whereas for two-qubit operations between distributed qubits, one needs a new technique for transporting the control information. Possible options are to physically transmit qubits via a potentially noisy and lossy medium, using quantum teleportation, transferring control information to a flying qubit as in the recent experiment [3], or using the method introduced in [4] using one entangled pair and a two bits of classical communication as seen in Fig. 1.

With the ability to perform distributed two-qubit gates, quantum circuits designed for monolithic systems need to be remapped to the logically equivalent distributed version. Additionally, the control system for a monolithic system needs to be modified to support a network interface to communicate control instructions within the distributed network. The ability to synchronize and control a distributed system of quantum computers to orchestrate them on a very precise time schedule will also be required. Proposals to solve these problems have been developed [5]–[8], where communication protocols and distributed circuit compilation are considered. With the ability to generate equivalent non-local circuits, one can then start to consider quantum algorithms that can benefit from being distributed and parallelized. Such examples of distributed Shor’s algorithm [4], Quantum Phase Estimation (QPE) [9], and α -VQE [5] have been considered.

In this work, we investigate two angles for distributed quantum computing. We consider firstly a formalization of parallel and distributed quantum programs and consider a collection of quantum algorithms fitting this formalization, all gaining a potential run-time speed up when parallelized. Next, we introduce a novel simulation tool for simulating distributed quantum algorithms. We introduce our software framework Interlin-q that enables the simulation of distributed algorithms. Interlin-q is a Python library built on top of QuNetSim [10], which generates and simulates the control steps needed in an asynchronous setting to simulate distributed quantum algorithms. We provide an overview of the software library in its current state and a demonstration overview. Interlinking quantum computers to perform distributed quantum algorithms will inevitably be an important part of quantum computing in the coming future. This work aims to shed light on the open challenges and foreseeable benefits of distributed quantum computing, an increasingly important topic currently seeing relatively little research attention.

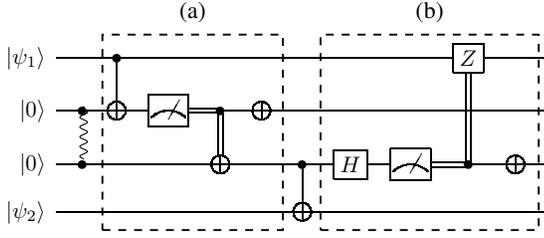


Fig. 1. Circuit diagram for a non-local CNOT gate between $|\psi_1\rangle$ and $|\psi_2\rangle$ where (a) is the cat-entangler sequence and (b) the cat-disentangler sequence.

II. MONOLITHIC TO DISTRIBUTED ALGORITHMS

To start, we generalize the concept of mapping monolithic quantum algorithms to distributed quantum programs and scheduling them for execution. Good candidate quantum algorithms for parallelization have similar preparation and execution stages: 1) Allocate logical qubits within the network of quantum computers; 2) Remap circuits for the possibly distributed qubit assignment; 3) Generate a schedule for the control operations; 4) Execute the schedule and merge parallel outputs. To model this, we start with a QPU structure as collection of integers $Q = [q_1, \dots, q_k]$ representing a network of k QPUs where each QPU i has $q_i \in \mathbb{N}$ qubits. With this, we define a quantum parallel program.

Definition 1 (Parallel Program): A program P is the instructions needed to perform a *monolithic* execution of a quantum circuit including the logical circuit and the number of circuit repetitions. A schedule $S(i)$ is a mapping from an execution-round number i to sets of integers, where $|S(i)|$ is always the number of QPUs in the network. The k -th set of $S(i)$ represents the programs from a collection of programs $\{P_i\}_{i=1}^n$ executing at time i on QPU k where two distinct sets in $S(i)$ are not necessarily disjoint. A collection of programs $\{P_i\}_{i=1}^n$, a function $M : O^n \mapsto O$ for O the output of a program which acts as a central merging function, and a schedule form a parallel program $\mathcal{P} = \{\{P_1, \dots, P_n\}, S(i), M\}$.

Definition 2 (Distributed Program): Given QPUs $Q = [q_1, \dots, q_k]$, a distributed program dP is a program P where the circuit execution instructions of P are assigned to qubits from multiple distinct QPUs from Q .

Example 1: Let $\{P_1, \dots, P_{10}\}$ be a collection of programs that run circuits with width $w = 4$ and $Q = [10, 10]$. If \mathcal{A} is an algorithm that greedily allocates qubits, then the output of Alg. 1 is: $S(0) = \{\{1, 2, 3\}, \{3, 4, 5\}\}$, $S(1) = \{\{6, 7, 8\}, \{8, 9, 10\}\}$ and $\{dP_1, \dots, dP_{10}\}$, where dP_3 and dP_8 are distributed between the two QPUs and the other programs run monolithically.

To generate the collection of programs and schedule \mathcal{P} , Alg. 1 is used. Input to Alg. 1 is 1) The specifications of the distributed quantum computers $Q = [q_1, \dots, q_n]$; 2) the circuit input to the program with width w , that is, the number of qubits simultaneously needed to run the circuit; 3) An algorithm \mathcal{A} which takes Q as input and determines an allocation for w logical qubits or determines no allocation exists; 4) A collection of monolithic programs $\{P_i\}_{i=1}^n$. The output of the algorithm is a schedule for executing a distributed

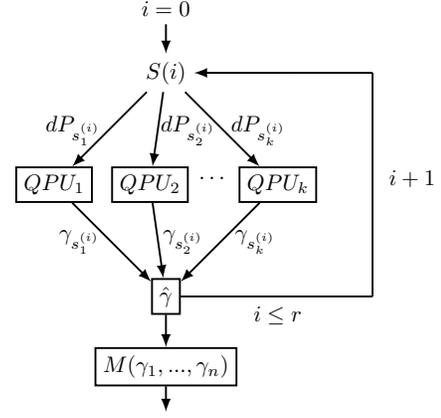


Fig. 2. A depiction executing a parallel program. The system starts at time $i = 0$, loading the programs specified by $S(i)$ to the respective QPUs until all r rounds are ran. The outputs of the distributed programs are accumulated in an output vector $\hat{\gamma}$ during execution. Finally M maps the collection of n outputs $\hat{\gamma}$ to a single output.

program $\{\{dP_i\}_{i=1}^n, S(i), M\}$. In Fig. 2 is a depiction of how such a system could perform.

Algorithm 1 Distributed Quantum Algorithm Scheduler

Input: QPUs $Q = [q_1, q_2, \dots, q_k]$, w the circuit width, qubit allocation algorithm \mathcal{A} , programs $\{P_1, \dots, P_n\}$. Assume $\forall i \leq k, w \leq q_i$.

Output: $\mathcal{P} = \{\{dP_1, \dots, dP_n\}, S(i)\}$, dP_j the distributed program for circuit execution j , $S(i)$ the schedule for r rounds.

- 1: $a \leftarrow 0; i \leftarrow 0; dP \leftarrow \{\}; A \leftarrow \{\};$
 - 2: **for** circuit $c \leq n$ **do**
 - 3: Allocate w qubits within current Q with \mathcal{A}
 - 4: **if** allocation exists **then**
 - 5: $A \leftarrow$ allocation \triangleright Append to A
 - 6: update current Q
 - 7: $a \leftarrow a + 1$
 - 8: **else if** no allocation or $c = n$ **then**
 - 9: Use allocations A to distribute a circuits [5, Alg. 3]
 - 10: $dP \leftarrow$ Generate a distributed programs [5, Alg. 7]
 - 11: $S(i) \leftarrow \{c - a, \dots, c\}$
 - 12: Reset Q ; $A \leftarrow \{\}; a \leftarrow 0; i \leftarrow i + 1;$
-

Iterative quantum algorithms mapped to this model and scheduled using Alg. 1 stand to face the same “horizontal speedup”—a run-time speedup achieved by allocating more quantum processors to run in parallel. Influencing the speedup is the algorithm used to allocate qubits— \mathcal{A} Alg. 1—for distributed processing. For example, an allocation algorithm that simply chooses qubit allocations randomly will likely introduce more non-local gates, potentially diminishing potential speedups due to the needed additional logic, whereas one which considers the topology and connectivity of the quantum processor can minimize the number of non-local gates. With an optimal allocation algorithm, the speedup of the parallelization for the algorithms we investigate is not found by a reduction in algorithm complexity, but from running multiple iterations of an algorithm simultaneously reducing

the run-time of execution. This type of speedup is commonly defined as the ratio between the run-time of one process running an algorithm and the run-time of p parallel processes running a parallelized version [11]. Indeed, much of theory of parallel classical computing potentially carries over into parallel quantum computing and determining the depth of carryover is a topic for future investigation.

III. PARALLEL AND DISTRIBUTED QUANTUM ALGORITHMS

In this section we describe quantum algorithms that can be mapped to the parallelized model from the previous section. Each of these algorithms thus all stand to gain a horizontal speedup as described.

A. Variational Quantum Eigensolver

Computing the eigenvalues of certain quantum operators can be challenging for classical computers due to the exponential scaling in the dimensions of the operators with the increase in the number of quantum states of the system. QPE allows one to compute such eigenvalues in a much more efficient manner, but requires a coherent fully-connected quantum system to produce the correct results. Consequently, the Variational Quantum Eigensolver [12] (VQE) was proposed as a low-depth alternative with tolerance to environmental noise. As per the name, VQE belongs to the family of Variational Quantum Algorithms (VQA) [13], a group of hybrid algorithms that include a quantum circuit as a subroutine. VQE uses a classical computer to fine-tune the parameters of the “ansatz” preparation circuit. In VQE, by tuning the parameters to the ansatz circuit one can minimize an expectation value and use this as an estimate for the minimum eigenvalue. The algorithm is built on the fact that certain Hamiltonian operators can be decomposed into a polynomial number of terms of simpler Pauli operators. As a result, the evaluation of the expectation value of such Hamiltonians reduces to a linear combination of the expectation values of these simpler operators. Therefore, one can simply measure the different qubits as per the observables in each term to obtain the term’s expectation value in constant time and then recombine to find an overall estimate.

VQE can benefit from a cluster of quantum processors in two different ways. The general workflow would be to dispatch some terms as well as the respective parameters to each quantum processor, which would then compute the expectation value of the terms, and then the dispatcher/allocator node would aggregate all results from the different processors. After carrying out the optimization step, the dispatcher would then send the new parameters to the processor. We can again frame this in the setting of the previous section. For a Hamiltonian $H = \sum_{i=1}^n c_i L_i$, where each $c_i \in \mathbb{R}$ and $L_i \in \{I, \sigma_x, \sigma_y, \sigma_z\}^{\otimes w}$ is a tensor product of w Pauli matrices (or identity), we can form a collection of programs $\{P_i\}_{i=1}^n$ where each P_i is the combined w width ansatz preparation circuit prepended before the respective circuit for L_i with N repetitions. The merging function M is simply to reassemble

the linear combination, where M applies the respective the coefficient c_i . Indeed many variational quantum algorithms have this same structure [13] and many such algorithms can be parallelized in a similar fashion.

B. Low-Depth Quantum Amplitude Estimation

Already considered in 2002 by Bassard et al. [14] QAE remains one of the fundamental algorithms for quantum computing as it adds, for one, a significant performance speedup for Monte-Carlo methods [15]. An issue to overcome in order to use QAE with near-term quantum computers is to greatly limit the circuit depth. In its original form, QAE uses a combination of QPE and Grover’s search [16], where QPE, with no additional assumptions, uses circuits that deepen proportionally to the inverse of the precision [14]. Moreover, QPE requires an application of the inverse-QFT algorithm requiring a high-depth and highly-connected quantum processor. To overcome these issues, proposals for low-depth, QFT-free QAE have been proposed [17]–[19].

From these approaches, we focus on the algorithm called the “power law amplitude estimation” (PLAE) algorithm proposed in [18, Algorithm 2.1]. PLAE works by using a maximum likelihood estimation routine where for each number of queries $m_k \in \mathcal{K} \equiv \{ \lfloor k^{(1-\beta)/2\beta} \rfloor : k \leq K \}$, K bounded above with respect to the desired accuracy and $\beta \in (0, 1]$, a circuit making m_k sequential oracle calls is executed. The circuit executes N times and afterwards a Bayesian update step is performed iteratively on the statistics output from the N executions. In the framework of the previous section, we can define a program P_k for each $k \leq K$ to be the oracle circuit of width w with m_k oracle queries and N repetitions. The output γ_k of P_k is the accumulated statistics of performing m_k oracle queries. The Bayesian update task is used for the merging function M . Once all $\{\gamma_k\}_{k=1}^K$ are collected, a phase estimate is made based on the original algorithm.

C. Quantum k -Means Clustering

Clustering data into groups based on the properties of the data can be used to find correlations between the data features. k -Means clustering is an unsupervised machine learning algorithms used to perform such clustering [20]. The k -Means algorithm takes as input a collection of unlabeled data, or feature vectors, and outputs k clusters, where in each cluster are the data points that minimize the distance to a computed centroid point. The algorithm runs for a number of iterations, improving the centroid locations in order to minimize the average distance between the points in the cluster at each step. A distance metric is used to determine how far apart two data points are from each other. Classically, the usual method for measuring the distance is to simply take the Euclidean distance. For feature vectors of length N , computing Euclidean distance requires $O(N)$ steps. Using the quantum encoding known as amplitude encoding, one can encode N length vectors into $O(\log_2 N)$ qubits, an exponential decrease for encoding, assuming one can load quantum states into a quantum random access memory [21]. With this encoding,

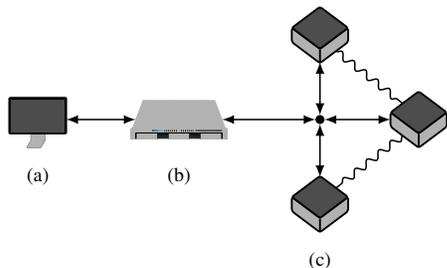


Fig. 3. The architecture used in Interlin-q: The client (a) constructs a circuit designed for a monolithic quantum computer and sends it to the controller (b). The controller remaps the circuit for the distributed system and constructs an execution schedule. Once complete, the respective control instructions are sent to each of the quantum computers in (c). The quantum computers execute the schedule and send the results back to the controller who processes the results to send back to the client.

one can perform a swap test to compute an estimate for the Euclidean distance between two feature vectors. The swap test performs proportionally to the number of qubits, and can lead, in theory, to an exponential speed up. Quantum k -means clustering is especially interesting as it is suitable for near-term quantum devices [22].

Because each feature vector is compared to each of the k clusters based on the algorithm of [20], n distance estimates are made for each of the k centroids. To parallelize this we can consider programs $\{P_{ij}\}_{i=1, j=1}^{n, k}$ where each program computes the distance between feature vector i and centroid j . The circuit for each P_{ij} is the one described in [23], which loads two feature vectors using amplitude encoding and an additional ancilla qubit for performing the swap test. The merging function M collects the outputs of $i \cdot j$ programs grouping the circuit outputs in i vectors of length j such that the closest centroid can be determined.

IV. THE INTERLIN-Q SIMULATION FRAMEWORK

In this section, we introduce our novel distributed quantum algorithm simulation framework Interlin-q. Interlin-q is a Python framework allowing the simulation of networked quantum computers executing a quantum algorithm distributed over a user-specified topology using a multi-threaded environment to mimic a distributed quantum computer. Here we summarize the architecture of Interlin-q and explain its inner-workings.

A. Design Overview

The simulated architecture of Interlin-q consists of three types of network nodes: The client node, the controller node, and the computing node. In Fig. 3 is a depiction of the assumed architecture of Interlin-q. The responsibilities of each node type are as follows:

Client Node: The client is a user terminal node where the user of the system inputs the program information in a similar way as described in the previous section. A monolithic circuit is specified along with the merging function. This information is then passed forward to the controller node which continues the execution process. Once execution is complete, the controller node returns the results of the program after performing the merging function to the client node. This

isolation of the client node removes the need for the user of the system to know the underlying architecture of the distributed quantum computer.

Controller Node: The controller node is the conductor which orchestrates the distributed system of quantum computers. It is aware of the distributed topology and the quantum processor architecture of each node in the network and therefore can define allocations for qubits for circuit execution. Once the program information from the client node is provided, the controller node can perform Alg. 1 to prepare for execution and awaits outputs from each program. Once outputs are received, the controller merges the results accordingly and responds to the client node.

Computing Nodes: The computing nodes simulate quantum algorithms based on the instructions provided by the controller node. A computing node has the ability to prepare and perform logical operations on qubits, store qubits and shared EPR pairs, and also perform any classical post-processing. Computing nodes further can communicate with other computing nodes in the network to share EPR pairs or transmit classical information. Computing nodes are networked via both a classical network for transmitting purely classical data and a quantum network for generating entanglement amongst themselves. Networked computing nodes also share a clock in order to remain synchronized. Once execution is complete, the measurement results are sent back to controller node.

B. Simulated Setup and Preprocessing

Interlin-q has Python classes to represent the controller and client nodes specified in the previous subsection and the client node is assumed to be the user of Interlin-q. To create the simulated environment up, a user creates the computing nodes using its respective class and specifies the number of qubits for each one, and optionally the duration of the various quantum gates, or gate times, that the quantum computer supports. The latter is especially useful when connecting a network of quantum computers each realized using different qubit technologies, for example connecting a QPU based on superconducting with one using trapped ions. With gate times known, precise algorithm execution schedules can be generated [5]. Both the nodes and the qubits are all assigned unique IDs to be used for circuit creation. A controller node is also initialized by the user and the collection of computing nodes is passed to the controller as a initialization parameter. All of the computing nodes are assumed to be connected to each other via a classical and quantum channel forming a distributed quantum computing network. This network is simulated via the quantum network simulation framework QuNetSim [10]. To start the simulation, a user passes the program information to the controller.

In Interlin-q, a user generates a monolithic circuit such that the controller can later automatically—a feature of Interlin-q—distribute it. In the current state of development of Interlin-q, a custom circuit class is used to both enable the distribution of the circuit but also to simplify user input process. The circuit model we used is composed of qubits and layers. To

create a circuit in Interlin-q, a user, acting as the client node, specifies the gates for circuit qubit by qubit, as one would do when drawing a circuit in a circuit model for example. The distributed quantum architecture of Interlin-q is such that the computing nodes form a completely connected network and their qubits have a unique identifier. This information known to the controller node is used to then distribute the circuit. The controller firstly performs an allocation algorithm to determine which qubit in the abstract representation of the circuit is mapped to which physical qubit in the distributed quantum computer. The current allocation is a generalized algorithm that takes parameters of the circuit and greedily allocates qubits in the distributed system, where future work is left to find more optimal allocations. With this, Interlin-q firstly converts a user entered circuit into a series of “layers” where a new layer is created for each $i \leq w$ where w is the depth of the circuit. With the layering, the controller having the distributed quantum computer topology information can perform an algorithm equivalent to [5, Alg. 3]. To summarize the referenced algorithm, Interlin-q processes the layers one by one and determines if any of the gates are distributed across physically separated QPUs. If found, the necessary logic to create an equivalent distributed circuit is filled. This is done repeatedly until all non-local control gates are generated, forming an equivalent distributed circuit.

With the now remapped circuit, the controller node generates an execution schedule, creating the control operations to distribute to send to each computing node. To generate the list of control operation, an equivalent algorithm to [5, Alg. 7] is implemented. For each gate in the remapped circuit, the algorithm maps it to a logical instruction, including any gate parameters, and also marks the control instruction with a timestamp. In practice, the networked QPUs would use a reference clock to execute instructions to maintain the needed synchrony for distributed instructions. This logic is simulated in Interlin-q using a custom shared clock class. The collection of control instructions are given an integer timestamp so that during execution the multi-threaded simulation performs according to the control instruction order. To complete the pre-processing stage, the controller then complete the generation of the execution schedule according with Alg. 1 and prepares a broadcast message to each of the computing nodes.

C. Execution

Execution begins when the controller node broadcasts the instruction sets to the computation nodes. The controller node and the computation nodes run in a multi-threaded environment awaiting incoming control messages. Once the specific scheduling message is received by the computing nodes, they begin carrying out the instructions chronologically depending on the timestamp of the instructions. An instruction is either completely local or can be non-local. A non-local instruction is performed according to Fig. 1, where entanglement is generated between two computing nodes and used to transmit control information. The schedule will be such that at the same time instance one node will wait for an EPR pair to arrive

followed by a classical bit, performing their part of the entangler while the other will send the EPR pair, measure their half and send the results onward. Once the instructions are all carried out by each computing node, the time moves forward by one unit. In reality, this clock will be independent of computing nodes, and gate times will known such that precise time schedules can be generated. When the set of instructions is completed, the computing nodes transmit their measurement outcomes back to the controller and receive a new set of instructions if there are more to receive, otherwise the controller proceeds to merge the outputs.

V. DISTRIBUTED GROUND-STATE ESTIMATION OF H_2

To demonstrate the current abilities of Interlin-q, we review a demonstration simulation of estimating the ground state energy of the H_2 molecule using VQE over a distributed quantum computer. More example demonstrations are available in the Interlin-q source code [24]. To get started with Interlin-q, we import the necessary libraries. Interlin-q is built on the QuNetSim [10] framework, and uses the QuTiP [25] Python backend of QuNetSim for qubit simulations. For this example, we use the PennyLane library [26] for its chemistry features. Here we highlight the structure of the simulation, and the full simulation with all the details is found in the source code [24].

```

1 # QuNetSim Components
2 from qunetsim.components import Network
3 from qunetsim.backends import QuTipBackend
4 # Interlin-q Components
5 from interlinq import (ControllerHost, Circuit,
6                       ComputingHost, Constants, Clock, Qubit)
7 # Xanadu's PennyLane Python package
8 from pennylane import GradientDescentOptimizer
9 # A wrapper for PennyLane's qchem library
10 from hamiltonian_decomposition import decompose

```

Once all libraries are imported, we can initialize the network. The network is composed of extended Hosts from QuNetSim for the computing and controller nodes and added to a QuNet-Sim Network.

```

1 # Initializing network objects
2 network = Network.get_instance()
3 qutip = QuTipBackend()
4 network.start(backend=qutip)
5 clock = Clock()
6 controller_host = ControllerHost(
7     host_id="controller",
8     clock=clock,
9     backend=qutip
10 )
11 # Create a network of distributed QPUs
12 # Generates 3 computing nodes each with 4 qubits
13 # q_map is the distributed network topology metadata
14 computing_hosts, q_map = controller_host \
15     .create_distributed_network(
16     num_computing_hosts=3,
17     num_qubits_per_host=4
18 )
19 # Start the controller and create the network
20 controller_host.start()
21 network.add_host(controller_host)
22 network.add_hosts(computing_hosts)

```

We define the parameters for the H_2 molecule and generate the Hamiltonian decomposition.

```

1 geom = "h2.xyz"
2 charge = 0
3 mult = 1
4 basis_set = "sto-3g"
5 name = "h2"
6 # Decompose the Hamiltonian to a sum
7 coefficients, observables, qubit_num = \
8     decompose(name, geom, charge, mult, basis_set)
9 # Create tuples for the observable and coefficients
10 terms = zip(coefficients, observables)

```

In the case of H_2 , there are 15 terms in the decomposition and they are distributed evenly to the 3 computing nodes. The controller instructions are broken into two parts. The first part signals the computing nodes to receive the ansatz circuit. Next, the information for each computing node for computing the expectation value terms are distributed evenly amongst the computing nodes, and the instructions for sending back the results are provided. The computing nodes are programmed to simply await instructions and execute.

```

1 # Protocols for the controller node
2 def ctrl_preparation_ansatz(node, q_map, params):
3     # Define the operations for the ansatz circuit
4     ops = init_ops(q_map) + ansatz_ops(q_map, params)
5     # Create a single circuit as if one large QPU
6     ansatz_circuit = Circuit(q_map, ops)
7     # Distribute the circuit and sends execution schedules
8     node.generate_and_send_schedules(ansatz_circuit)
9
10 def ctrl_expectation_values(node, q_map, terms):
11     # Prepare the expected expectation value
12     node.schedule_expectation_terms(terms, q_map)
13     # Generate Pauli string circuits
14     expvals_compute = hamilton_ops(node, q_map)
15     # Request expectation values
16     expvals_collect = request_expvals_ops(q_map)
17     # Create single circuit
18     circ = Circuit(q_map, expvals_compute + expvals_collect)
19     # Distribute the circuit and sends execution schedules
20     node.generate_and_send_schedules(circ)
21     # Await results from computing nodes
22     node.receive_results()
23
24 # Protocol for computing nodes
25 def cpu_task(node, send_exp):
26     node.receive_schedule()
27     if send_exp:
28         node.send_results("expectation")

```

To execute the simulation for one parameterized ansatz, a series of threads are created so all instructions can perform in parallel. For each part of the instructions, the termination of each thread is monitored before beginning the next part of instructions.

```

1 # Trigger the distribution of the ansatz circuit
2 t1 = controller_host.run_protocol(ctrl_preparation_ansatz,
3     (q_map, params))
4 threads = [t1]
5 for host in computing_hosts:
6     # Trigger the retrieval of the ansatz circuit
7     threads.append(host.run_protocol(cpu_task, (False,)))
8 # Await all threads to terminate
9 for thread in threads:
10     thread.join()
11 # Trigger the expectation value calculation instructions
12 t1 = controller_host.run_protocol(ctrl_expectation_values,
13     (q_map, terms))
14 threads = [t1]
15 for host in computing_hosts:
16     # Await the expectation value calculation instructions
17     threads.append(host.run_protocol(cpu_task, (True,)))
18 # Await all threads to terminate

```

```

18 for thread in threads:
19     thread.join()
20 # Expectation value results ready
21 print(controller_host.results)

```

To reduce communication resources for this example, the computing hosts are programmed to compute the partial summation of their assigned terms multiplied by the respective coefficient. To then collect the expectation value estimates, the computing nodes send their partial summations to the controller node who receives:

```

1 {
2     "QPU_0": {..., "out": 0.32072},
3     "QPU_1": {..., "out": -0.15644},
4     "QPU_2": {..., "out": -0.36714}
5 }

```

The final step is for the controller to sum the three outputs generating an energy estimate for one set of parameters for the ansatz. To complete the optimization procedure, we use the simulation with a Python optimization library, where the variable `params` is the variable to optimize over.

VI. CONCLUSIONS AND OUTLOOK

In summary, we formalized—in a mathematical sense—parallel and distributed quantum algorithms and provided a high-level algorithm for scheduling parallel and distributed programs in a network of distributed quantum processors. Within this formalism we analyzed three quantum algorithms that have a structure that maps straight-forwardly into the framework we proposed. Lastly, we introduced the Interlin-q software platform for distributed quantum algorithms, a first of its kind. We described its current features and showed a demonstration for how one can use it to simulate a parallelized version of VQE.

Future directions coming from this work will be to compare the theory of classical parallelized computing to quantum parallelized computing. In this regard, studying the advantages and disadvantages of quantum parallel computing will be highly important, especially as scaling quantum computers via quantum networks becomes more viable. For the Interlin-q platform, we aim to further develop its features. As we study the parallelization of quantum algorithms further, it will become important to ensure Interlin-q remains easy to use but also has all of the features needed to simulate various classes of parallelized quantum algorithms. Moreover, qubit allocation for distributed computing can be optimized so that the most robust qubits are used for the hardest parts of the computation and we aim to integrate this as a feature. Lastly, we will work on setting Interlin-q into an emulation environment with distributed devices. Overall, exploring parallel and distributed quantum computing via theory and simulation as this work begins will be an important step on the path towards large-scale quantum computing.

ACKNOWLEDGMENTS

This work was completed under the Quantum Open Source Foundation Mentorship program and all authors thank the organizers. R.P. and S.D. thank the Unitary Fund for supporting

and funding this project. A.R. and S.D. thank Will Zeng for discussions regarding parallelization of QAE.

REFERENCES

- [1] J. Preskill, “Quantum computing in the nisq era and beyond,” *Quantum*, vol. 2, p. 79, 2018.
- [2] E. Campbell, A. Khurana, and A. Montanaro, “Applying quantum algorithms to constraint satisfaction problems,” *Quantum*, vol. 3, p. 167, 2019.
- [3] S. Daiss, S. Langenfeld, S. Welte, E. Distanto, P. Thomas, L. Hartung, O. Morin, and G. Rempe, “A quantum-logic gate between distant quantum-network modules,” *Science*, vol. 371, no. 6529, pp. 614–617, 2021. [Online]. Available: <https://science.sciencemag.org/content/371/6529/614>
- [4] A. Yimsiriwattana and S. J. Lomonaco Jr, “Distributed quantum computing: A distributed shor algorithm,” in *Quantum Information and Computation II*, vol. 5436. International Society for Optics and Photonics, 2004, pp. 360–372.
- [5] S. DiAdamo, M. Ghibaudi, and J. Cruise, “Distributed quantum computing and network control for accelerated vqe,” *IEEE Transactions on Quantum Engineering*, vol. 2, pp. 1–21, 2021.
- [6] T. Häner, D. S. Steiger, T. Hoefler, and M. Troyer, “Distributed quantum computing with qmpi,” *arXiv preprint arXiv:2105.01109*, 2021.
- [7] D. Ferrari, A. S. Cacciapuoti, M. Amoretti, and M. Caleffi, “Compiler design for distributed quantum computing,” *IEEE Transactions on Quantum Engineering*, vol. 2, pp. 1–20, 2021.
- [8] J. Eisert, K. Jacobs, P. Papadopoulos, and M. B. Plenio, “Optimal local implementation of nonlocal quantum gates,” *Physical Review A*, vol. 62, no. 5, p. 052317, 2000.
- [9] N. M. Neumann, R. van Houte, and T. Attema, “Imperfect distributed quantum phase estimation,” in *International Conference on Computational Science*. Springer, 2020, pp. 605–615.
- [10] S. DiAdamo, J. Nötzel, B. Zanger, and M. M. Beşe, “Qunetsim: A software framework for quantum networks,” *arXiv preprint arXiv:2003.06397*, 2020.
- [11] M. J. Quinn, *Parallel computing theory and practice*. McGraw-Hill, Inc., 1994.
- [12] A. Peruzzo, J. McClean, P. Shadbolt, M.-H. Yung, X.-Q. Zhou, P. J. Love, A. Aspuru-Guzik, and J. L. O’Brien, “A variational eigenvalue solver on a photonic quantum processor,” *Nature communications*, vol. 5, no. 1, pp. 1–7, 2014.
- [13] M. Cerezo, A. Arrasmith, R. Babbush, S. C. Benjamin, S. Endo, K. Fujii, J. R. McClean, K. Mitarai, X. Yuan, L. Cincio, and P. J. Coles, “Variational quantum algorithms,” 2020.
- [14] G. Brassard, P. Hoyer, M. Mosca, and A. Tapp, “Quantum amplitude amplification and estimation,” *Contemporary Mathematics*, vol. 305, pp. 53–74, 2002.
- [15] A. Montanaro, “Quantum speedup of monte carlo methods,” *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, vol. 471, no. 2181, p. 20150301, 2015.
- [16] L. K. Grover, “A fast quantum mechanical algorithm for database search,” in *Proceedings of the twenty-eighth annual ACM symposium on Theory of computing*, 1996, pp. 212–219.
- [17] Y. Suzuki, S. Uno, R. Raymond, T. Tanaka, T. Onodera, and N. Yamamoto, “Amplitude estimation without phase estimation,” *Quantum Information Processing*, vol. 19, no. 2, pp. 1–17, 2020.
- [18] T. Giurgica-Tiron, I. Kerenidis, F. Labib, A. Prakash, and W. Zeng, “Low depth algorithms for quantum amplitude estimation,” *arXiv preprint arXiv:2012.03348*, 2020.
- [19] D. Grinko, J. Gacon, C. Zoufal, and S. Woerner, “Iterative quantum amplitude estimation,” *npj Quantum Information*, vol. 7, no. 1, pp. 1–6, 2021.
- [20] S. Lloyd, “Least squares quantization in pcm,” *IEEE transactions on information theory*, vol. 28, no. 2, pp. 129–137, 1982.
- [21] S. Lloyd, M. Mohseni, and P. Rebentrost, “Quantum algorithms for supervised and unsupervised machine learning,” *arXiv preprint arXiv:1307.0411*, 2013.
- [22] S. U. Khan, A. J. Awan, and G. Vall-Llosera, “K-means clustering on noisy intermediate scale quantum computers,” *arXiv preprint arXiv:1909.12183*, 2019.
- [23] D. Kocczyk, “Quantum machine learning for data scientists,” *arXiv preprint arXiv:1804.10068*, 2018.
- [24] R. Parekh, S. DiAdamo, and A. Darwish, “Interlin-q,” <https://github.com/Interlin-q/Interlin-q>, 2021.
- [25] J. R. Johansson, P. D. Nation, and F. Nori, “Qutip: An open-source python framework for the dynamics of open quantum systems,” *Computer Physics Communications*, vol. 183, no. 8, pp. 1760–1772, 2012.
- [26] V. Bergholm, J. Izaac, M. Schuld, C. Gogolin, M. S. Alam, S. Ahmed, J. M. Arrazola, C. Blank, A. Delgado, S. Jahangiri *et al.*, “PennyLane: Automatic differentiation of hybrid quantum-classical computations,” *arXiv preprint arXiv:1811.04968*, 2018.